

Distributed Lustre activity tracking

Henri Doreau - CEA/DAM
CEA, DAM, DIF, F-91297 Arpajon, France
Email: henri.doreau@cea.fr

Abstract—Numerous administration tools and techniques require near real time vision of the activity occurring on a distributed filesystem. The changelog facility provided by Lustre to address this need suffers limitations in terms of scalability and flexibility. We have been working on reducing those limitations by enhancing Lustre itself and developing external tools such as *Lustre ChangeLog Aggregate and Publish (LCAP) proxy*. Beyond the ability to distribute changelog processing, this effort aims at opening new perspectives by making the changelog stream simpler to leverage for various purposes.

I. INTRODUCTION

The Lustre filesystem provides external tools with activity tracking facility. It is implemented as a stream of records, describing every modifying metadata operation. Administrators have to enable this feature and manually register each reader. Those readers then asynchronously poll the metadata servers for new records in order to follow the filesystem activity.

Though already proven valuable for tools like *Robinhood Policy Engine*, this mechanism had to be modified for its usages to be further expanded. Robinhood reads changelogs to replicate filesystem changes into a database and take decisions based on the observed events [1].

The first encountered issue was scalability: Robinhood reads changelogs to update its database near real time, but with features like *Distributed NamespacE (DNE)* [2] and more generally with the increasing ability of Lustre to scale, it will be necessary to distribute the processing of the changelog stream. Preferably, this could be done without assigning an instance of robinhood per MDT [3] but in a load-balanced fashion. Our tool LCAP (for *Lustre Changelog Aggregate and Publish*) is a proxy that aims at doing so.

A second area of concern is the ability of the changelog stack to handle emerging usages. We have been focusing on two aspects: enriching the records, by introducing a compatible and extensible format, and supporting new kinds of changelog consumers, such as ephemeral readers. This work will be described in the final section of this paper.

II. EXISTING INFRASTRUCTURE

Changelogs were introduced with Lustre 2.0. To leverage the feature, an administrator must manually enable it, then register readers manually. As soon as there is a registered reader, metadata operations are logged in a persistent journal. The administrator can select which operations to log. The records are kept on MDT disks, until read and acknowledged by all registered readers [4]

Changelog records are exported to userland programs running on Lustre clients. They have to do a four phase loop.

First register to a given MDT, to open a communication channel and indicate the index of the first desired record. Then receive a single record. Once processed, the record has to be acknowledged (this can be delayed and batched). For this operation the process identifies itself with its reader ID. Finally, on demand or after having reached the end of stream, the process closes the pipe, to possibly start again.

- Register
 - 1) Start
 - 2) Receive/Consume/Free record
 - 3) Acknowledge consumed record(s)
 - 4) Stop
- Deregister

Two limitations of Lustre changelogs are visible: first, the start command is not issued for a given reader ID but for a changelog index on a given MDT. Second, registration of a new reader has to be made manually, server-side.

The changelog storage and distribution stack mainly relies on two internal Lustre mechanisms, namely *Lustre log (LLOG)*, and *kernel-userland communication (KUC)*. Both subsystems offer room for improvement in term of efficiency and flexibility.

III. DISTRIBUTED CHANGELOG PROCESSING

Since version 2.4, Lustre offers the ability to work with several metadata servers. A typical robinhood configuration consists of a single instance, with one thread per MDT and a centralized database. This will eventually be unable to keep up with the pace of changes occurring in the namespace. To address this, we are working on distributing its database and distributing the processing of the changelog stream. This document focuses on the second aspect.

A. LCAP

Assuming we have multiple instances of robinhood operating on a shared database, we want the changelog streams originating from the MDTs to be aggregated and spread evenly among the instances.

Our approach is to develop a changelog proxy, called LCAP (for *Lustre Changelog Aggregate and Publish*) which behaves like a regular changelog reader but maintains lists of consumers and redistribute the records to them in versatile ways.

LCAP proxy uses a client/server architecture to aggregate, pre-process and redistribute Lustre changelog records. Its goal is to act as a broker between one or multiple producers (the Lustre MDTs) and consumers (like instances of robinhood).

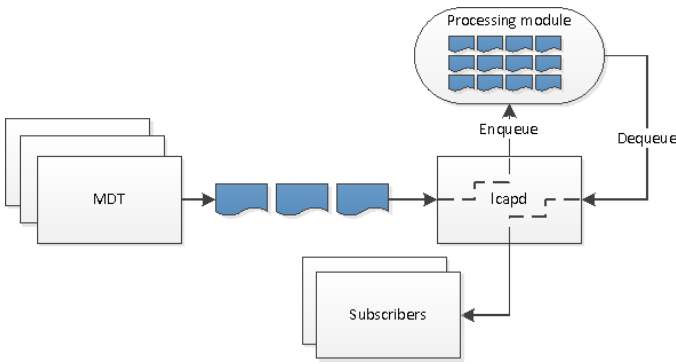


Fig. 1. LCAP high level architecture

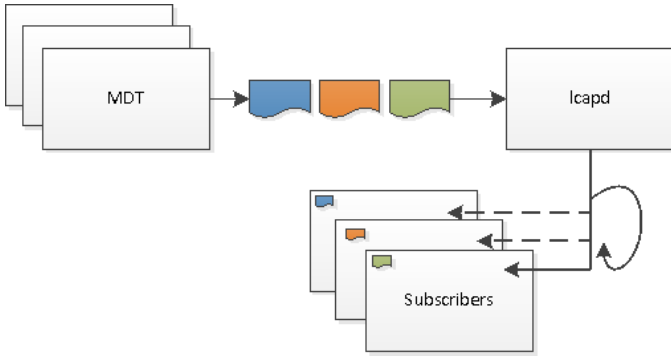


Fig. 2. Load balanced processing with LCAP

The system must deal with a potential imbalance between the number of actors and variable rates of the incoming and outgoing streams: burst of records emitted, sudden slowdown of a consumer. . . Thus LCAP has to be a load balancer.

It introduces the concept of consumer group. Multiple processes start reading changelogs and identify themselves as members of a same group. The stream is spread among instances of a single group, thus load-balancing record processing. If multiple groups co-exist, every record will be delivered to each group. Records will be acknowledged upstream to Lustre only once acknowledged by every group. This means we use a *at least once* delivery strategy.

LCAP adopts a *greedy* behavior, to read records as soon as possible and load them into memory. Persistence of records is left to Lustre, since we accept an *at least once* delivery strategy. Along with batching, these aspects are crucial in LCAP performances.

LCAP is written in C, and distributed under the terms of the GNU LGPLv3+ license. It is fully lockless, and uses the ZeroMQ library for internal and external communications [5]. The server relies on modules, implemented as shared libraries, to pre-process the stream as desired. For instance, records can be dropped for operations that compensate each others (creat/unlink) or re-ordered to optimize downchain processing.

IV. TOWARDS NEW USAGES OF CHANGELOGS

Though it was proven robust for some uses, the current changelog reader registration model is very rigid and thus not well suited for other applications. With new usages come

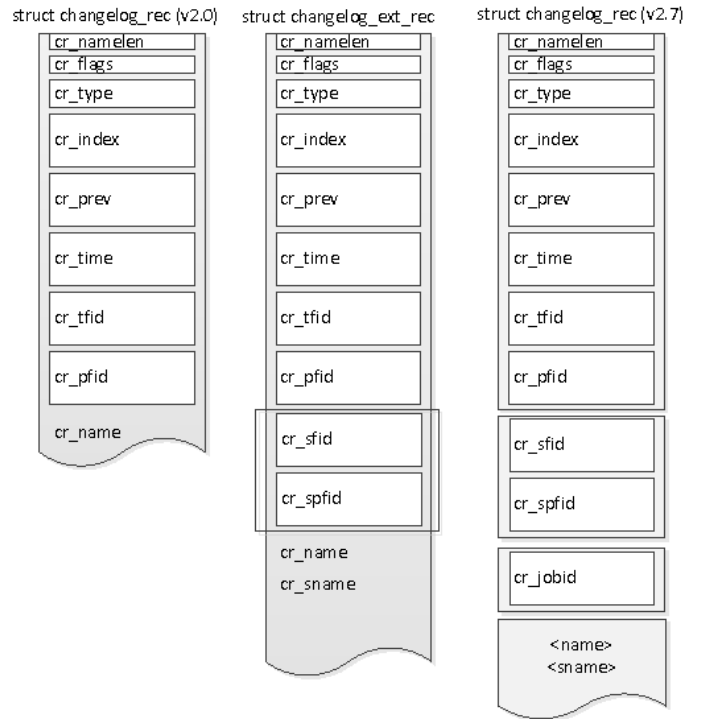


Fig. 3. Changelog structures, before and after

new requirements, and we have identified the need to add information to the emitted changelog records. Second, we wanted to relax the constraints related to registration and more generally, make it easy to implement new changelog distribution patterns.

A. Extensible changelog format

While exploring the use of Lustre changelogs as a notification mechanism for other tools working on top of Lustre, we faced the need to enhance the records and make them carry other information. Typically, the JobID of the process from which the described operation originated. Such an enhancement had already been done (as of LU-1331) to emit a single *extended* record after a rename but it was neither fully compatible with existing applications nor easy to further extend due to the chosen approach of a second data structure.

The work done along with intel as of LU-1996 introduces flexibility, demonstrated by the addition of a new jobid field in the records, while preserving compatibility between newer and older versions of applications, clients and servers. It introduces the required infrastructure to add new fields to the changelog records in an easy and compatible way.

Changelog consumers express through flags the list of extra fields that they need, and records get remapped to fit this format. Remapping happens locally or remotely, depending on whether fields are to be added (expected by a recent client but not available on the server) or removed (not expected by an older client but present on the server). This work has been made available as of Lustre 2.7.

Extensions and final variable-length fields are accessed via inline functions which compute the right offsets according

to the structure format as described by flags. The figure 3 illustrates the two older record formats along with the new one we introduced.

Within lustre, where no assumptions are being made on the format of the records, it is already possible to leverage this to manipulate heterogeneous records efficiently spending neither disk space nor bandwidth to store/send oversized records with empty fields.

B. Versatile distribution patterns

The existing changelog infrastructure enforces strict distribution scheme. We want to be able to loosen that to adapt it to our needs.

First comes the need for ephemeral changelog consumers. Reader which would only be interested in records emitted during their execution time. In other words, consumers that do not want to receive anything that has happened before they started or that could happen after they have stopped (in case of a restart). Similar to a listener following a radio broadcast. This is difficult to implement efficiently using only the liblustreapi infrastructure.

Then comes the need for distributed workers processing the changelog stream collaboratively. The changelog reading API as exposed by lustre requires consumers to indicate at which offset of the llog they want to start, then dequeue records sequentially until EOF. This is not well-suited to distributed processing. Especially in the case of Robinhood, where proper load balancing would make sense. In this particular case, and unlike the one above, not losing any record is fundamental.

LCAP proxy implements such distribution patterns. Actual changelog readers (LCAP clients) can identify themselves as ephemeral or persistent. Ephemeral readers do not receive records emitted before their connection to the proxy and they are not expected to acknowledge records. Persistent readers receive everything and acknowledgement is made upstream based on what they have actually acknowledged collectively.

C. Usage examples

1) *pNFS servers*: The userland NFS/9P server *Ganesha* [6] can act as a LCAP client to receive changelogs and get notified of what other instances (based on the JOBID field) did on the filesystem. Such notifications are a NFSv4.1 requirement as stated by RFC 5661 [7]. *Ganesha* uses Lustre changelogs as a loose metadata cache invalidation mechanism. Thanks to LCAP allowing ephemeral readers, I/O proxies can be spawned on demand at a very low price. This forms the core of a high efficiency I/O delegation system on top of Lustre.

2) *Fast lustre object index traversal*: Regular POSIX scans such as the ones used to initially populate robinhood database become difficult to run against filesystems of hundreds of millions of inodes or more. We are considering the use of a special changelog stream, filled with entries from the MDT object index, and consumed by instances of the policy engine. We believe that this could significantly improve the scanning time. This might require new extensions of the record format, and would certainly benefit from being consumed by multiple LCAP clients.

V. CONCLUSION

With the increase of scalability of Lustre, up to billions of entries, being able to efficiently and reliably report the filesystem activity to external tools is becoming critical for monitoring, administrative or applicative purposes. The existing changelog infrastructure is undoubtedly a sturdy basis for such tasks but it suffers limitations. We propose a changelog proxy, called LCAP, to help designing userland solutions relying on changelogs, with relaxed conditions where needed, and improved scalability. Additionally, we have made changes to the changelog distribution stack so that records are easily extensible over time and versions of Lustre. These efforts, combined, allow us to envision new fields of applications for changelogs.

REFERENCES

- [1] T. Leibovici, "Robinhood policy engine," in *Lustre User Group*. San Diego, CA, USA: CEA,DAM, 2013.
- [2] A. Dilger, "Lustre 2.4 and beyond," in *Lustre Administrators and Developers Workshop*. Paris, France: Intel High Performance Data Division, 2012.
- [3] Whamcloud Inc., "Components of a lustre filesystem," <http://wiki.whamcloud.com>, Intel High Performance Data Division.
- [4] Nathan Rutman, "Architecture - changelogs, lustre design document," http://wiki.old.lustre.org/index.php/Architecture_-_Changelogs.
- [5] P. Hintjens, "Zeromq: The guide," 2010.
- [6] P. Deniel, T. Leibovici, and J.-C. Lafoucrière, "Ganesha, a multi-usage with large cache nfsv4 server," in *Linux Symposium*, 2007, p. 113.
- [7] D. N. S. Shepler, M. Eisler, and D. Noveck, "Rfc5661-network file system (nfs) version 4 minor version 1 protocol," URL: <http://tools.ietf.org/pdf/rfc5661.pdf>; j an, 2010.