

# Learning with hidden variables

Yasser Roudi

*Kavli Institute & Centre for Neural Computation, NTNU, Trondheim, Norway*

*Nordita, Stockholm, Sweden*

Graham Taylor

*School of Engineering, University of Guelph, Guelph, Canada*

---

## Abstract

Learning and inferring features that generate sensory input are crucial information processing tasks continuously performed by cortical networks. In recent years, novel algorithms and learning rules have been proposed that allow neuronal networks to learn such features from complex datasets. These networks involve layers of hidden neurons leading to a remarkable increase in their ability to explain complex sensory inputs. Here we review recent advancements in this line of research emphasizing, amongst other things, the processing of dynamical inputs by networks with hidden nodes. We identify issues which in our view should be explored to achieve a better understanding of the relationship between machine learning approaches to learning in networks with hidden nodes and learning in cortical circuits.

*Keywords:* statistical models, deep learning, dynamics

---

## 1. Introduction

Learning the fundamental features that generate sensory signals and having the ability to infer these features once given the sensory input is a crucial aspect of information processing. It would not be far fetched to hypothesize that the organization of cortical circuitry is largely evolved for performing such tasks, or to put it slightly differently, that our evolutionary history has stored memories of such features in the connections that form a large part of our brains. But how can a neuronal network learn and extract features that cause the experiences of our sensory organs, in a supervised or unsupervised manner? Answering this question has been, and still is, a fundamental task of theoretical and experimental neuroscientists and those interested in artificial intelligence. And as one can imagine, it is a question

that can lead, and in fact already has contributed, to deep insights about the organization of cortical microcircuitry and the way organisms understand their surrounding environment.

This question of learning and inferring features of sensory input in a neuronal network can best be examined and answered as a hierarchy of processing stages, each performing probabilistic inference as depicted in the cartoon in Fig. 1 A. In this setting, one can consider that the sensory stimuli in the world received by the sensory organs are generated through a probabilistic process as a combination of usually hidden causes which are then transmitted to the brain and need to be interpreted. By interpretation here, we mean the ability to use the sensory input to assign likelihoods to various combinations of causes that could have generated the input. The problem requires us to understand how in a cortical network, or as described more below, a hierarchy of cortical networks, the synaptic weights can be adjusted so that the probabilistic mapping from sensory input to underlying hidden causes that generated the input could be accomplished. In what follows we review a number of critical steps that in particular in the past 10 years have influenced our understanding of this process. We emphasize a number of important problems most relevant to biological plausibility of the existing algorithms and also other issues that could provide fruitful directions for future research.

## **2. Learning hidden structure with hidden neurons**

A large body of early work in the neuroscience of learning hidden structures is focused on using networks with less emphasis on the probabilistic and unsupervised nature of the processing that what is common today and that we will discuss in the next section. In this previous work, one considers neuronal networks with potentially multiple hidden layers that progressively extract information about the input to perform an action, usually rewarded by a supervisory signal. The job of the learning rule was to adjust the synaptic weights such that the last stages of processing can e.g. identify different input patterns as belonging to different categories as exemplified by a set of training data. In the 80s, the backpropagation algorithm [3] provided significant excitement in the field as a potential mechanism for performing this task: the error between the present output and the desired output of a neuron is calculated starting from the final layer, propagated backwards in the network and used to adjust the weights. The algorithm, however, proved to be time consuming and easily stuck in unfavorable configurations of weights, let alone that its biological implementation was questionable. Consequently, there was a shift to other machine learning frameworks, such as support vector machines, with even more questionable biological implementations

but ultimately useful for machine learning tasks.

In addition to back-propagation and other supervised learning algorithms, unsupervised learning, in particular in probabilistic settings, also emerged in the 80s and the 90s. The Boltzmann Machine was proposed by Ackley, Hinton and Sejnowsky in 1985 [4] as a model for learning to extract features from probabilistic sensory input with a particularly simple learning rule. Yet this also proved to be a very time consuming network, although faster approximations were also proposed. For instance, Kappen and Rodrigues [5] and Tanaka [6] employed the susceptibility-response theorem from statistical physics combined with the mean-field solutions of the Ising model to devise algorithms for learning the weights in a fully observed Boltzmann Machine. Although the results were very promising, this line did not continue to the case with hidden nodes, and the use of mean-field methods (without any linear response considerations) have not been as successful [7].

Probably the first influential network architecture that was proposed for unsupervised learning of structure from data which used a computationally and biologically relevant learning algorithm is the Helmholtz Machine [8, 9]. In the Helmholtz Machine, there is no supervised signal, and one takes the view that the stuff in the world are samples drawn from a probability distribution, the generative model, and the job of the nervous system is to learn this distribution via learning features to represent the data. This was carried out by a simplified model of Fig. 1A, shown in Fig. 1B which is comprised of a layer of observed neurons coupled to one or more layers of hidden neurons but without intra-layer connections. The inter-layer connections are divided into two sets of connections: a set going in the top-down direction called the generative weights, and a set going the opposite way called the recognition weights. As the name suggests, when the system is run by the generative weights, samples generated in the bottom visible layer are aimed to be samples from a distribution in the real world. To learn the generative weights, one uses the recognition mode to generate samples given data from the real world, and adjust the generative weights according to these samples. The opposite is done for learning the recognition weights. Although the Helmholtz machine is a powerful model both practically and conceptually, training it with many hidden layers is not easy. It can, however, be considered as a predecessor of the Deep Belief Network which proved to be a very successful and easily learnable model of complex data by employing a smart pre-training regime followed by fine tuning of the weights using the wake-sleep algorithm. We elaborate on this model below.

### 3. Modern ways of learning

Although the previous attempts in building learning rules for networks with hidden layers were all faced with some difficulties, more recent work on the subject, starting from the seminal work in 2006 [10], employed better understanding of the dynamics of networks with hidden nodes, combined with faster computers and larger data sets to successfully learn networks with hidden layers to extract hidden features in data. New learning algorithms have been proposed for using Deep Belief Networks and Deep Boltzmann Machines to extract information about the sensory signals in unsupervised, supervised, and semi-supervised learning tasks achieving unprecedented performance levels on industrially-relevant applications. After briefly reviewing these architectures and the learning rules used for training them we review some of the success stories most relevant to neuroscience in recent years.

The introduction of Deep Belief Networks (DBNs) (Fig. 1C) by Hinton et al. [10] is widely viewed as the breakthrough that stimulated the modern view of *Deep Learning*. Up to this point, classical multi-layer architectures such as deep neural networks were known to the machine learning community but were universally accepted as difficult to train in practice for all but the simplest of problems. Hinton and colleagues showed that a deep neural network could be grown incrementally, by composing single-layer models called Restricted Boltzmann Machines (RBMs). This simple symmetric neural network had been introduced many years earlier [11] but did not receive much attention until the early 2000's when the contrastive divergence learning algorithm was introduced [12] making approximate learning tractable.

To train a DBN, the individual RBMs were trained in sequence, each model learning to represent the one before it. Once this *greedy* initialization strategy completed, the model could be *fine-tuned* end-to-end. Labels could be introduced in this second stage of learning. By first discovering representations, learning became effective and efficient. This pre-training strategy has been empirically shown to lead to models with better generalization that seems to be more robust to random initializations [13]. While Hinton's group at the University of Toronto focused on RBMs as a basic building block, other groups proposed different unsupervised architectures. Bengio's group at the University of Montreal considered types of autoencoders, explained in more detail below [14, 15]. LeCun's group at New York University (NYU) focused on sparsity as an alternative feature learning strategy [16, 17, 18].

Once a Deep Belief Network has been composed by stacking, it is what is called a *hybrid* directed-undirected model. That is because its topmost two layers which form an auto-associative memory are symmetrically connected like an RBM, but the lower layers are connected via directed links. Together,

they form the *generative* model. The DBM also contains a set of separate, bottom-up connections for fast approximate inference. They are not part of the generative model, but, similar to the Helmholtz machine, form a recognition model. It is this fast approximate inference which made DBNs very popular for several years, but it is also what limits them. It is well-known that the brain’s wiring consists of feedforward, lateral and feedback connections. However, inference and generation in a DBN involves no feedback at all.

Salakhutdinov and Hinton [19] showed how to train a related but different model called a Deep Boltzman Machine (DBM), in which feedback connections are important. In contrast to the hybrid DBN, the DBM is completely undirected. Like the DBN, its posterior distribution is intractable and must be approximated, however, the approximation is more powerful and more complicated than feed-forward recognition model of the DBN. Training the DBM involves a multi-step approach. It is first pre-trained, initialized from RBMs, much like the DBN. It is then generatively fine-tuned using a variational approximation to log-likelihood. Though the DBM has been shown to be useful in several applications, such as multi-modal learning [20] and one-shot learning with Bayesian priors [21], the standard approach to training a DBM is cumbersome. It requires training multiple models using different objective functions. Avoiding pre-training fails to learn a good model of the data. Goodfellow et al. have recently proposed an alternative training strategy for DBMs dubbed “joint multi-prediction” training [22]. The DBM is trained explicitly to predict any subset of variables given the complement of that subset. This work is among the first to show an effective method for joint training of all layers of a deep unsupervised learning model.

The last few years have seen a shift away from unsupervised learning back towards supervised learning, with an emphasis on an architecture called a convolutional network (convnet)[23]: a multi-layer neural architecture, inspired by Hubel and Wiesel’s model of the visual cortex. The architecture mainly consists of repeated stages of filtering (efficiently implemented by convolutions) and pooling, akin to the operation of simple and complex cells, respectively. Although proposed in the 1980’s, the model had not reached widespread success. Up until recently, the challenge of training convnets was commonly thought to be the fact that they would get stuck in local minima. It is now understood that the local minima are nearly all similar, and the difficulty of training such networks results from saddle points surrounded by long plateaus along the error surface which can dramatically slow learning [24]. Larger datasets and faster computers – specialized hardware accelerators called Graphics Processing Units (GPUs) have played a key role in the resurgence of convnets [25]. Architectural improvements, such as units that do not saturate

and the use of normalization layers have also been important. Convnets have seen application to video [26, 27], image captioning [28, 29, 30] and labeling entire scenes [31]. The ImageNet dataset continues to be used as a means of supervised pre-training of filters to use on tasks for which large labeled datasets are not available [32].

Despite the massive popularity of convnets, and the motivation for unsupervised pretraining tempered by success in pure supervised learning, unsupervised learning has not been abandoned. Following the dominance of RBMs in the mid-2000's, an unsupervised learning architecture known as the autoencoder has received increasing attention. An autoencoder is simply a feed-forward neural network which performs unsupervised learning by training it to reconstruct its input from a learned representation. Classical autoencoders use a bottleneck hidden layer, where the number of hidden units is less than the input, in order to avoid learning a trivial representation: simply a copy of the input which can be perfectly reconstructed. Recent work has explored alternative types of autoencoders which regularize, or restrict the hidden representation, for example by injecting noise: Denoising Autoencoders [15], making the hidden units sparse [33], or making the hidden units less sensitive to their input: Contracting Autoencoders [34]. Another body of work has generalized autoencoders to generative models [35]. Generative Stochastic Networks define a generative model through a Markov Chain that injects noise at every stage of an iterated reconstruction. Like autoencoders, the model is easily trained with backpropagation yet is more capable of modeling multi-modal data distributions. A more recent line of work has revised the Helmholtz Machine architecture but improves on the inference procedure by correcting the gradient of the approximating posterior distribution. Several such deep variational networks [36, 37, 38] were proposed concurrently by different groups and are considered the state-of-the-art in deep generative models.

Due to the growing popularity of deep neural networks, many improvements have been proposed both at an architectural level, as well as in training methodology. However, two such discoveries, described in more details in Box 1, stand out in terms of their widespread adoption in modern deep neural networks both of which give insight into potential biological implementations: (1) the effect of the non-linearities used by individual neurons, (2) a regularization technique called dropout.

#### **4. Learning kinetics with hidden nodes**

Sensory signals are rarely static in real life and the learning of relevant features has to be done by taking this dynamics into account. Although, the overwhelming majority of the works we discussed above

are focused on static data, as we describe below, more recent work has been focused on learning models in which these kinetic aspects are taken into account.

Recognizing a practical need to model kinetics in light of the discovery of DBNs, Restricted Boltzmann Machines were extended to capture temporal dependencies. The key insight was to condition both the observed and latent variables on fixed-length windows of the past instances of these variables. However, exact inference in such models is extremely hard and therefore it is computationally intractable to learn such models exactly. Sutskever and Hinton [39], focusing on modeling synthetic video, proposed an approximate training strategy. Taylor et al. [40], focusing on modeling human motion capture, proposed an architecture that avoided explicit temporal connections among latent variables. Sutskever et al. later proposed a third option which was a type of recurrent RBM architecture for which exact inference straightforward while maintaining full connections among latent variables [41]. Temporal variants of RBMs have been applied to 3-d tracking of people in video [42], autotagging music [43], and facial expression transfer [44].

Dynamical generative models are the same mathematical objects as kinetic models used in statistical physics to describe the dynamics of complex systems, e.g. spin glasses, particles in random media etc. In particular, the kinetic Ising model studied in spin glass physics is essentially a generalized linear model with a logit link function. It can also be thought as a system whose dynamics samples the state space of a belief network. In recent years, the problem of learning the weights in a kinetic Ising model given samples as well as predicting the statistics of the samples given the weights has been a very active area of research in statistical physics [45, 46, 47], leading several new approximate techniques to solve both the learning and inference problems either analytically or through very efficient computational methods. Most recently, some people have focused on the problem of learning and inference in kinetic Ising models with hidden nodes [48, 49, 50, 51]. In particular, Battistin et al [51] have studied a model in which hidden factors are conditionally independent of each other given the observed ones, and have shown that both learning the weights and inference of the hidden states can be efficiently done using a message passing algorithm. For the kinetic Ising model, the Bayes optimal performance of the inference of the hidden spin configurations can be calculated using methods from statistical mechanics [50], something that would be interesting to do also for the equilibrium models.

The last three years have seen an explosion of activity studying recurrent neural networks (RNNs), a generalization of feedforward neural networks which can map sequences to sequences. Training RNNs using backpropagation through time can be difficult, and was thought up until recently to be hopeless due

to vanishing and exploding gradients [52]. Recent advances in optimization [53], gated (multiplicative) units in the architecture [54, 55] careful initialization [56, 57] and tricks such as gradient clipping [58] have led to impressive results in modeling speech, handwriting and language [59, 60, 61, 28, 30, 29, 62, 63].

## 5. Open problems and implications for cortical organization and plasticity

Most of the work so far in deep learning has been focused on either the theoretical aspects of the problem and its applications to practical machine learning problems. However, this body of work has been originally inspired by the hierarchical organization of the cortical circuitry and can provide deep insight about the computational principles that underlie the cortical organizations. One very important message from this body of work is that deep neural architectures can indeed be trained once enough data is available; at least if one does not restrict oneself to biologically plausible learning rules. This takes us to the issue of biological plausibility: can any of the algorithms developed so far be implemented by a biologically plausible learning rule? In what follows we briefly review two recent papers, aiming at the biological implementation of learning with hidden variables

In a recent study, Bengio et al. [64] suggest that deep learning is possible using biologically plausible synaptic learning rules (e.g. STDP) by performing approximate expectation-maximization (EM) like algorithms. What sets this work apart from other papers from the deep learning community is that, instead of starting from an algorithmic view and arguing for biological plausibility, it starts from the main learning rule observed in biological synapses (STDP) and reverse-engineers some objective function that the phenomenon could improve. The main finding is that the objective comes from a variational bound on the log likelihood of the data which leads to a variational EM learning algorithm. A further contribution of this paper is in connecting variational EM with noise injection, to training a denoising auto-encoder over both visible and latent variables. The architecture considered is a deep denoising autoencoder trained with Target Propagation [65], an alternative to backpropagation that computes targets rather than gradients at each layer. Compared to Boltzmann machines which are perhaps the best-known biologically plausible method for learning deep architectures, this technique completely avoids the need to avoid representative samples from the stationary distribution using (expensive) MCMC, which is both a practical advantage and more satisfactory from the point of biological plausibility.

In another recent study, Pavel and Miller [66] implemented the learning rules for a Helmholtz Machine in a network of spiking neurons. The Helmholtz Machine is particularly suitable for neural implementation



because its learning rules are indeed local. To implement the synaptic learning rule for the Helmholtz Machine, the delta rule, Pavel and Miller design a neural microcircuit of spiking neurons which act as the nodes of a Helmholtz Machine. Upon receiving the inputs from other units or from the external world, the different pools in each microcircuit follow a dynamics that leads to the required synaptic changes between the nodes as prescribed by the delta rule. This idea of considering local microcircuits for the implementation of learning rules is one that can potentially be exploited further, maybe even for the implementation of back-propagation like algorithms: one criticism against the back-propagation is that the error signals should travel backwards along the axons. However, if individual nodes are not single neurons but microcircuits with both afferent and efferent connections to and from the neurons from the next layer and an internal mechanism to combine these signals for changing the effective connectivity between nodes such a problem may be avoided.

## 6. Acknowledgement

Financial support from the Kavli Foundation and the Norwegian Research Council through Centre for Neural Computation are gratefully acknowledged.

### Box 1: Important modification with biological relevance

As mentioned in the text, following the explosion of interest in deep neuronal networks, various new methods have been proposed to improve learning. Among these, the following have been of particular practical significance and appear to have clear implications for understanding biological neuronal networks.

1. **Single neuron transfer function:** The first important observation that has led to significant improvement in the learning is the use of non-saturating non-linearities in the individual neurons. In almost all cortical areas, single neurons operate far from their saturation regime, and this has led to the use of non-saturating units (e.g. threshold-linear units) in biological neuronal network models and the study of the effect of saturation or lack of it in the function of such models [67, 68, 69]. In the deep learning side, it has been shown that non-saturating non-linearities, in particular, the rectified linear unit (ReLU) [70] significantly improve convergence, both in unsupervised and supervised variants of deep neural networks. A generalized parametric form of the ReLU has led to the first result which surpasses human-level performance on the ImageNet classification challenge [71].

**2. Dropout:** The other notable discovery is the “dropout” regularization technique [72], which aims to prevent co-adaptation of hidden units by randomly shutting off a collection of units at each presentation of an input. This method has another interpretation of training multiple networks, one per example, but sharing all of their parameters. Obtaining a prediction amounts to taking the geometric mean of the probability distributions over all labels specified by the individual models. Dropout is partially motivated by a theory of the role of sex in evolution: the ability of a set of genes to be able to work well with another random set of genes makes them more robust. Similarly, each hidden unit in a dropout-trained network must learn to work with a randomly chosen set of other units. This encourages the hidden units to model useful features on their own rather than co-operating with other units.

## References

## References

- [1] B. A. Olshausen, D. J. Field, Sparse coding with an overcomplete basis set: A strategy employed by v1?, *Vision research* 37 (23) (1997) 3311–3325.
- [2] D. L. Ringach, Spatial structure and symmetry of simple-cell receptive fields in macaque primary visual cortex, *Journal of neurophysiology* 88 (1) (2002) 455–463.
- [3] D. Rummelhart, Learning representations by back-propagation errors, *Nature* 323 (1986) 533–536.
- [4] D. H. Ackley, G. E. Hinton, T. J. Sejnowski, A learning algorithm for boltzmann machines, *Cognitive Science* 9 (1985) 147–169.
- [5] H. J. Kappen, F. B. Rodriguez, Efficient learning in boltzmann machines using linear response theory, *Neur. Comp.* 10 (1998) 1137–1156.
- [6] T. Tanaka, Mean-field theory of boltzmann machine learning, *Phys. Rev. E* 58 (1998) 2302–2310.
- [7] C. C. Galland, The limitations of deterministic boltzmann machine learning, *Network: Computation in Neural Systems* 4 (3) (1993) 355–379.
- [8] P. Dayan, G. E. Hinton, R. M. Neal, R. S. Zemel, The helmholtz machine, *Neural computation* 7 (5) (1995) 889–904.

- [9] G. E. Hinton, P. Dayan, B. J. Frey, R. M. Neal, The "wake-sleep" algorithm for unsupervised neural networks, *Science* 268 (5214) (1995) 1158–1161.
- [10] G. Hinton, S. Osindero, Y.-W. Teh, A fast learning algorithm for deep belief nets, *Neural computation* 18 (7) (2006) 1527–1554.
- [11] P. Smolensky, Information processing in dynamical systems: Foundations of harmony theory, in: *Parallel Distributed Processing: Volume 1: Foundations*, MIT Press, 1986, pp. 194–281.
- [12] G. E. Hinton, Training products of experts by minimizing contrastive divergence, *Neural Computation* 14 (2002) 1771–1880.
- [13] D. Erhan, Y. Bengio, A. Courville, P.-A. Manzagol, P. Vincent, S. Bengio, Why does unsupervised pre-training help deep learning?, *The Journal of Machine Learning Research* 11 (2010) 625–660.
- [14] H. Larochelle, D. Erhan, A. Courville, J. Bergstra, Y. Bengio, An empirical evaluation of deep architectures on problems with many factors of variation, in: *Proc. of the 24th Annual International Conference on Machine Learning (ICML)*, 2007, pp. 473–480.
- [15] P. Vincent, H. Larochelle, Y. Bengio, Pierre-Antoine Manzagol, Extracting and composing robust features with denoising autoencoders, in: *Proc. of the 25th Annual International Conference on Machine Learning (ICML)*, 2008, pp. 1096–1103.
- [16] M. Ranzato, C. S. Poultney, S. Chopra, Y. LeCun, Efficient learning of sparse representations with an energy-based model, in: *Advances in Neural Information Processing Systems (NIPS)* 19, 2007, pp. 1137–1144.
- [17] M. Ranzato, Y. Boureau, Y. LeCun, Sparse feature learning for deep belief networks, in: *Advances in Neural Information Processing Systems (NIPS)* 20, 2008.
- [18] K. Kavukcuoglu, M. Ranzato, Y. LeCun, Fast inference in sparse coding algorithms with applications to object recognition, Tech. rep., Computational and Biological Learning Lab, Courant Institute, NYU, cBLL-TR-2008-12-01 (2008).
- [19] R. Salakhutdinov, G. E. Hinton, Deep boltzmann machines, in: *International Conference on Artificial Intelligence and Statistics*, 2009, pp. 448–455.

- [20] N. Srivastava, R. R. Salakhutdinov, Multimodal learning with deep boltzmann machines, in: Advances in neural information processing systems, 2012, pp. 2222–2230.
- [21] R. Salakhutdinov, J. B. Tenenbaum, A. Torralba, Learning with hierarchical-deep models, Pattern Analysis and Machine Intelligence, IEEE Transactions on 35 (8) (2013) 1958–1971.
- [22] I. Goodfellow, M. Mirza, A. Courville, Y. Bengio, Multi-prediction deep boltzmann machines, in: Advances in Neural Information Processing Systems, 2013, pp. 548–556.
- [23] Y. LeCun, L. Bottou, Y. Bengio, P. Haffner, Gradient-based learning applied to document recognition, Proceedings of the IEEE 86 (11) (1998) 2278–2324.
- [24] Y. N. Dauphin, R. Pascanu, C. Gulcehre, K. Cho, S. Ganguli, Y. Bengio, Identifying and attacking the saddle point problem in high-dimensional non-convex optimization, in: Z. Ghahramani, M. Welling, C. Cortes, N. Lawrence, K. Weinberger (Eds.), Advances in Neural Information Processing Systems 27, 2014, pp. 2933–2941.
- [25] A. Krizhevsky, I. Sutskever, G. Hinton, Imagenet classification with deep convolutional neural networks, in: Advances in Neural Information Processing Systems 25, 2012, pp. 1106–1114.
- [26] A. Karpathy, G. Toderici, S. Shetty, T. Leung, R. Sukthankar, F.-F. Li, Large-scale Video Classification with Convolutional Neural Networks, in: CVPR, 2014.
- [27] K. Simonyan, A. Zisserman, Two-stream convolutional networks for action recognition in videos, in: Advances in Neural Information Processing Systems, 2014.
- [28] J. Mao, W. Xu, Y. Yang, J. Wang, A. Yuille, Deep captioning with multimodal recurrent neural networks (m-rnn), arXiv preprint arXiv:1412.6632.
- [29] K. Xu, J. Ba, R. Kiros, A. Courville, R. Salakhutdinov, R. Zemel, Y. Bengio, Show, attend and tell: Neural image caption generation with visual attention, arXiv preprint arXiv:1502.03044.
- [30] O. Vinyals, A. Toshev, S. Bengio, D. Erhan, Show and tell: A neural image caption generator, arXiv preprint arXiv:1411.4555.
- [31] C. Farabet, C. Couprie, L. Najman, Y. LeCun, Learning hierarchical features for scene labeling, Pattern Analysis and Machine Intelligence, IEEE Transactions on 35 (8) (2013) 1915–1929.

- [32] A. S. Razavian, H. Azizpour, J. Sullivan, S. Carlsson, Cnn features off-the-shelf: an astounding baseline for recognition, in: Computer Vision and Pattern Recognition Workshops (CVPRW), 2014 IEEE Conference on, IEEE, 2014, pp. 512–519.
- [33] K. Kavukcuoglu, M. Ranzato, Y. LeCun, Fast inference in sparse coding algorithms with applications to object recognition, arXiv preprint arXiv:1010.3467.
- [34] S. Rifai, Contractive auto-encoders: Explicit invariance during feature extraction, in: ICML, 2011.
- [35] Y. Bengio, E. Laufer, G. Alain, J. Yosinski, Deep generative stochastic networks trainable by back-prop, in: Proceedings of the 31st International Conference on Machine Learning (ICML-14), 2014, pp. 226–234.
- [36] D. J. Rezende, S. Mohamed, D. Wierstra, Stochastic backpropagation and approximate inference in deep generative models, Tech. rep., arXiv:1401.4082 (2014).
- [37] D. P. Kingma, M. Welling, Auto-encoding variational bayes, in: Proceedings of the International Conference on Learning Representations (ICLR), 2014.
- [38] A. Mnih, K. Gregor, Neural variational inference and learning in belief networks, in: ICML’2014, 2014.
- [39] I. Sutskever, G. E. Hinton, Learning multilevel distributed representations for high-dimensional sequences, in: Proceedings of the 11th International Conference on Artificial Intelligence and Statistics (AISTATS), 2007, pp. 548–555.
- [40] G. W. Taylor, G. E. Hinton, S. T. Roweis, Modeling human motion using binary latent variables, in: Advances in neural information processing systems, 2006, pp. 1345–1352.
- [41] I. Sutskever, G. E. Hinton, G. W. Taylor, The recurrent temporal restricted boltzmann machine, in: Advances in Neural Information Processing Systems, 2009, pp. 1601–1608.
- [42] G. W. Taylor, L. Sigal, D. J. Fleet, G. E. Hinton, Dynamical binary latent variable models for 3d human pose tracking, in: Computer Vision and Pattern Recognition (CVPR), 2010 IEEE Conference on, IEEE, 2010, pp. 631–638.

- [43] M. I. Mandel, R. Pascanu, D. Eck, Y. Bengio, L. M. Aiello, R. Schifanella, F. Menczer, Contextual tag inference, *ACM Transactions on Multimedia Computing, Communications, and Applications (TOMM)* 7 (1) (2011) 32.
- [44] M. D. Zeiler, G. W. Taylor, L. Sigal, I. Matthews, R. Fergus, Facial expression transfer with input-output temporal restricted boltzmann machines, in: *Advances in Neural Information Processing Systems*, 2011, pp. 1629–1637.
- [45] Y. Roudi, J. Hertz, Mean field theory for nonequilibrium network reconstruction, *Phys. Rev. Lett.* 106 (2011) 048702.
- [46] H.-L. Zeng, M. Alava, H. Mahmoudi, E. Aurell, Network inference using asynchronously updated kinetic ising model, *Phys. Rev. E.* 83 (2011) 041135.
- [47] M. Mezard, J. Sakellariou, Exact mean-field inference in asymmetric kinetic Ising systems, *J Stat Mech: Theory and Exp.*
- [48] B. Dunn, Y. Roudi, Learning and inference in a nonequilibrium Ising model with hidden nodes, *Physical Review E* 87 (2) (2013) 022127.
- [49] J. Hertz, J. Tyrcha, Network inference with hidden nodes, *Math. Biosci. and Eng.* 11 (1) (2014) 149–156.
- [50] L. Bachschmid-Romano, M. Opper, Inferring hidden states in a random kinetic Ising model: replica analysis, *Journal of Statistical Mechanics: Theory and Experiment* 2014 (6) (2014) P06013.
- [51] C. Battistin, J. Hertz, J. Tyrcha, Y. Roudi, Belief propagation and replicas for inference and learning in a kinetic ising model with hidden spins, *J. Stat. Mech* P05021.
- [52] S. Hochreiter, Y. Bengio, P. Frasconi, J. Schmidhuber, Gradient flow in recurrent nets: the difficulty of learning long-term dependencies (2001).
- [53] J. Martens, I. Sutskever, Learning recurrent neural networks with hessian-free optimization, in: *Proceedings of the 28th International Conference on Machine Learning (ICML-11)*, 2011, pp. 1033–1040.

- [54] S. Hochreiter, J. Schmidhuber, Long short-term memory, *Neural computation* 9 (8) (1997) 1735–1780.
- [55] J. Chung, C. Gulcehre, K. Cho, Y. Bengio, Empirical evaluation of gated recurrent neural networks on sequence modeling, arXiv preprint arXiv:1412.3555.
- [56] I. Sutskever, J. Martens, G. Dahl, G. Hinton, On the importance of initialization and momentum in deep learning, in: *Proceedings of the 30th International Conference on Machine Learning (ICML-13)*, 2013, pp. 1139–1147.
- [57] Q. V. Le, N. Jaitly, G. E. Hinton, A simple way to initialize recurrent networks of rectified linear units, arXiv preprint arXiv:1504.00941.
- [58] R. Pascanu, T. Mikolov, Y. Bengio, On the difficulty of training recurrent neural networks, arXiv preprint arXiv:1211.5063.
- [59] A. Graves, A.-R. Mohamed, G. Hinton, Speech recognition with deep recurrent neural networks, in: *Acoustics, Speech and Signal Processing (ICASSP), 2013 IEEE International Conference on*, IEEE, 2013, pp. 6645–6649.
- [60] A. Graves, Generating sequences with recurrent neural networks, arXiv preprint arXiv:1308.0850.
- [61] I. Sutskever, O. Vinyals, Q. V. Le, Sequence to sequence learning with neural networks, in: *Advances in Neural Information Processing Systems*, 2014, pp. 3104–3112.
- [62] T. Mikolov, A. Joulin, S. Chopra, M. Mathieu, M. Ranzato, Learning longer memory in recurrent neural networks, arXiv preprint arXiv:1412.7753.
- [63] A. Hannun, C. Case, J. Casper, B. Catanzaro, G. Diamos, E. Elsen, R. Prenger, S. Satheesh, S. Sengupta, A. Coates, et al., Deepspeech: Scaling up end-to-end speech recognition, arXiv preprint arXiv:1412.5567.
- [64] Y. Bengio, D.-H. Lee, J. Bornschein, Z. Lin, Towards biologically plausible deep learning, arXiv preprint arXiv:1502.04156.
- [65] D.-H. Lee, S. Zhang, A. Biard, Y. Bengio, Target propagation, arXiv preprint arXiv:1412.7525.

- [66] P. Sountsov, P. Miller, Spiking neuron network helmholtz machine, *Front. Comput. Neurosci* 9 (2015) 46.
- [67] A. Treves, Graded-response neurons and information encodings in autoassociative memories, *Physical Review A* 42 (4) (1990) 2418.
- [68] O. Shriki, D. Hansel, H. Sompolinsky, Rate models for conductance-based cortical neuronal networks, *Neural computation* 15 (8) (2003) 1809–1841.
- [69] Y. Roudi, A. Treves, Localized activity profiles and storage capacity of rate-based autoassociative networks, *Physical Review E* 73 (6) (2006) 061904.
- [70] X. Glorot, A. Bordes, Y. Bengio, Deep sparse rectifier networks, in: *Proceedings of the 14th International Conference on Artificial Intelligence and Statistics. JMLR W&CP Volume, Vol. 15, 2011*, pp. 315–323.
- [71] K. He, X. Zhang, S. Ren, J. Sun, Delving deep into rectifiers: Surpassing human-level performance on imagenet classification, *arXiv preprint arXiv:1502.01852*.
- [72] G. E. Hinton, N. Srivastava, A. Krizhevsky, I. Sutskever, R. R. Salakhutdinov, Improving neural networks by preventing co-adaptation of feature detectors, *arXiv preprint arXiv:1207.0580*.



## Highlights

- Recent work in the machine learning community has led to ways of modifying synaptic weights such that supervised and unsupervised learning in deep neuronal architectures are made possible
- Aspects of neuronal networks, such as single neuron non-linearities with strong impact on successful learning with biological counterparts are being identified.
- Biological implementation and efficient approximations for learning connections in networks with hidden neurons are being suggested and provide a fruitful area of research.
- Dynamical extensions of deep neuronal networks which can capture long-term dependencies are effective in practical machine learning applications, and are of particular relevance for understanding learning in deep biological architectures where the data naturally comes in a dynamic format.

## Highlighted Papers

- Hinton et al. [10]\*\*: This paper is widely thought to have launched the field of Deep Learning. It demonstrates how a generative model called a Deep Belief Network can be constructed by incrementally training and stacking Restricted Boltzmann Machines. It also introduces the idea of greedy layer-wise pre-training, an effective technique for initializing deep neural networks.
- Salakhutdinov and Hinton [19]\*: This paper demonstrates a tractable method for training Deep Boltzmann Machines (DBMs). Feedback connections play an important role in DBM inference, making them more consistent with biological architectures.
- Pavel and Miller [66]\*: This is the first paper to propose an implementation of the the Helmholtz Machine in a spiking neuronal network. Taking an intricate neuronal microcircuit as an individual node in a simple two-layer Helmholtz Machine, the authors show that the Helmholtz Machine learning rule can be implemented in the network.
- Glorot and Bengio [70]\*\*: This paper shows that the use of non-saturating non-linear units has a very positive effect on the training of deep neuronal networks. Given the fact that cortical networks operate far from their saturating regime, this observation can be of great importance for understanding the success of learning from complex data in hierarchical cortical networks.

- Hinton et al. [72]\*: This paper introduces the regularization technique known as Dropout. Dropout and related methods are currently the most effective means of regularizing large neural networks. The technique amounts to efficiently visiting a large number of related models at training time, while aggregating them to a single predictor at test time.
- Taylor et al. [40]\*: This is the first paper to extend the Restricted Boltzmann Machine to unsupervised learning of sequences. It also demonstrates the advantages of using depth in sequence modeling.

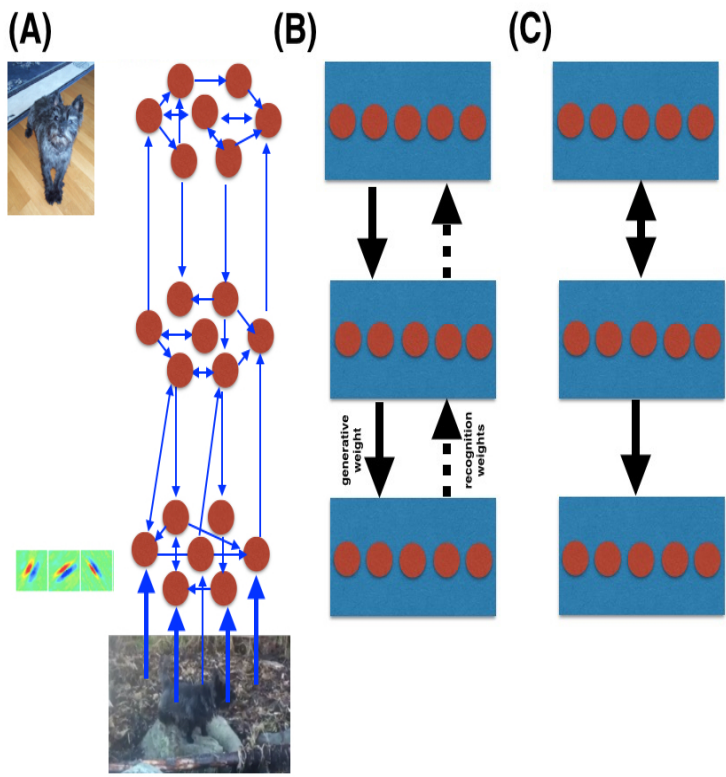


Figure 1: **(A)** The external world generates activity in the early sensory areas which then transfer it to higher cortical layers. Learning changes the connections between neurons such that the system learns the generative distribution of the observed images. This usually leads to layers gradually discovering features with various levels of complexity: simpler features such as edge detectors in the early sensory areas [1, 2] and more complex and abstract features, e.g. a dog, appearing at the top level away from sensory organs. In this cartoon, the network does not necessarily represent a probabilistic graphical model, but more a stochastic dynamical system in which the connections reflect the anatomical connection between neurons. **(B)** The Helmholtz Machine is a graphical model which aims at modeling the function of the hierarchical cortical organization in a simplified probabilistic language. The full arrows indicates the set of generative weights while the dashed ones indicated the collection of recognition weights. Note that, although in general there is no reasons for not having connections between nodes in the same layer, and that this is certainly not the case in the brain, efficient learning considerations usually leads to models without intera-layer connections, and this is the case for the Helmholtz Machine and the related architectures. **(C)** The Deep Belief Network architecture. The double arrow between the last two layers indicate reciprocal and symmetric connections leading to an architecture called the Restricted Boltzmann Machine.