

The Online Coupon-Collector Problem and Its Application to Lifelong Reinforcement Learning

Emma Brunskill

Department of Computer Science
Carnegie Mellon University
Pittsburgh, PA 15213
ebrunskill@cs.cmu.edu

Lihong Li

Microsoft Research
One Microsoft Way
Redmond, WA 98052
lihongli@microsoft.com

Abstract

Transferring knowledge across a sequence of related tasks is an important challenge in reinforcement learning (RL). Despite much encouraging empirical evidence, there has been little theoretical analysis. In this paper, we study a class of lifelong RL problems: the agent solves a sequence of tasks modeled as finite Markov decision processes (MDPs), each of which is from a finite set of MDPs with the same state/action sets and different transition/reward functions. Motivated by the need for cross-task exploration in lifelong learning, we formulate a novel *online coupon-collector problem* and give an optimal algorithm. This allows us to develop a new lifelong RL algorithm, whose overall sample complexity in a sequence of tasks is much smaller than single-task learning, even if the sequence of tasks is generated by an adversary. Benefits of the algorithm are demonstrated in simulated problems, including a recently introduced human-robot interaction problem.

Introduction

Transfer learning, the ability to take prior knowledge and use it to perform well on a new task, is an essential capability of intelligence. Tasks themselves often involve multiple steps of decision making under uncertainty. Therefore, lifelong learning across multiple reinforcement-learning (RL) (Sutton and Barto 1998) tasks, or LLRL, is of significant interest. Potential applications are broad, from leveraging information across customers, to speeding robotic manipulation in new environments. In the last decades, there has been much previous work on this problem, which predominantly focuses on providing promising empirical results but with little formal performance guarantees (*e.g.*, Ring (1997), Wilson et al. (2007), Taylor and Stone (2009), Schmidhuber (2013) and the many references therein), or in the offline/batch setting (Lazaric and Restelli 2011), or for multi-armed bandits (Azar, Lazaric, and Brunskill 2013).

In this paper, we focus on a special case of lifelong reinforcement learning which captures a class of interesting and challenging applications. We assume that all tasks, modeled as finite Markov decision processes or MDPs, have the same state and action spaces, but may differ in their transition

probabilities and reward functions. Furthermore, the tasks are elements of a finite collection of MDPs that are initially unknown.¹ Such a setting is particularly motivated by applications to user personalization, in domains like education, health care and online marketing, where one can consider each “task” as interacting with one particular individual, and the goal is to leverage prior experience to improve performance with later users. Indeed, partitioning users into several groups with similar behavior has found uses in various application domains (Chu and Park 2009; Fern et al. 2014; Liu and Koedinger 2015; Nikolaidis et al. 2015): it offers a form of partial personalization, allowing the system to more quickly learn good interactions with the user (than learning for each user separately) but still offering much more personalization than modeling all individuals as the same.

A critical issue in transfer or lifelong learning is how and when to leverage information from previous tasks in solving the current one. If the new task represents a different MDP with a different optimal policy, then leveraging prior task information may actually result in substantially worse performance than learning with no prior information, a phenomenon known as *negative transfer* (Taylor and Stone 2009). Intuitively, this is partly because leveraging prior experience can prevent an agent from visiting states with different rewards in the new task, and yet would be visited under the optimal policy of the new task. In other words, in lifelong RL, in addition to exploration typically needed to obtain optimal policies in single-task RL (*i.e.*, single task exploration), the agent also needs sufficient exploration to uncover *relations among tasks* (*i.e.*, task-level transfer).

To this end, the agent faces an online discovery problem: the new task may be the same as one of prior tasks, or may be a novel one. The agent can treat it as a task that has been seen before (therefore transferring prior knowledge to solve it), or try to discover whether it is novel. Failing to correctly treat a novel task as new, or treating an existing task as the same as a prior task, will lead to sub-optimal performance.

The main contributions are three-fold. First, inspired by the need for online discovery in LLRL, we formulate and study a novel online coupon-collector problem (OCCP), pro-

¹Given *finite* sets of states and action, MDPs with similar transition/reward parameters have similar value functions. Thus, finitely many policies suffice to represent near-optimal policies.

viding algorithms with optimal regret guarantees. These results are of independent interest, given the wide application of the classic coupon-collector problem. Second, we propose a novel LLRL algorithm, which essentially is an OCCP algorithm that uses sample-efficient single-task RL algorithms as a black box. When solving a sequence of tasks, compared to single-task RL, this LLRL algorithm is shown to have a substantially lower sample complexity of exploration, a theoretical measure of learning speed in online RL. Finally, we provide simulation results on a simple gridworld simulation, and a simulated human-robot collaboration task recently introduced by Nikolaidis et al. (2015), in which there exist a finite set of different (latent) human user types with different preferences over their desired robot collaboration interaction. Our results illustrate the benefits and relative advantage of our new approach over prior ones.

Related Work. There has been substantial interest in lifelong learning across sequential decision making tasks for decades; *e.g.*, Ring (1997), Schmidhuber (2013), and White, Modayil, and Sutton (2012). Lifelong RL is closely related to transfer RL, in which information (or data) from source MDPs is used to accelerate learning in the target MDP (Taylor and Stone 2009). A distinctive element in lifelong RL is that every task is both a target and a source task. Consequently, the agent has to explore the current task once in a while to allow better knowledge to be transferred to better solve future tasks—this is the motivation for the online coupon-collector problem we formulate and study here.

Our setting, of solving MDPs sampled from a finite set, is related to Konidaris and Doshi-Velez (2014)’s hidden parameter MDPs, which cover our setting and others where there is a latent variable that captures key aspects of a task. Wilson et al. (2007) tackle a similar problem with a hierarchical Bayesian approach to modeling task-generation processes. Most prior work on lifelong/transfer RL has focused on algorithmic and empirical innovations, with little theoretical analysis for *online* RL. An exception is a two-phase algorithm (Brunskill and Li 2013), which has provably lower sample complexity than single-task RL, but makes a few critical assumptions. Our setting is more general: tasks may be selected adversarially, instead of stochastically (Wilson et al. 2007; Brunskill and Li 2013). Consequently, we do not assume a minimum task sampling probability, or knowledge of the cardinality of the (latent) set of MDPs. This allows our algorithm to be applied in more realistic problems such as personalization domains where the number of user “types” is typically unknown in advance. In addition, Bou Ammar, Tutunov, and Eaton (2015) recently introduced and provided regret bounds (as a function of the number of tasks) of a policy-search algorithm for LLRL. Each task’s policy parameter is represented as a linear combination of shared latent variables, allowing it to be used in continuous domains. However, in addition to local optimality guarantees typical in policy-search methods, lack of sufficient exploration in their approach may also lead to suboptimal policies.

In addition to the original coupon-collector problem, to be described in the next section, our online coupon-collector problem is related to bandit problems (Bubeck and Cesa-

Bianchi 2012) that also require efficient exploration. In bandits every action leads to an observed loss, while in OCCP only one action has observable loss. Apple tasting (Helmhold, Littlestone, and Long 2000) has a similar flavor as OCCP, but with a different structure in the loss matrix; furthermore, its analysis is in the mistake-bound model that is not suitable here. Langford, Zinkevich, and Kakade (2002) study an abstract model for exploration, but their setting assumes a non-decreasing, deterministic reward sequence, while we allow non-monotonic and stochastic (or even adversarial) reward sequences. Consequently, an explore-first strategy is optimal in their setting but not in OCCP. Furthermore, they analyze competitive ratios, while we focus on excessive loss. Bubeck, Ernst, and Garivier (2014) tackle a very different problem called “optimal discovery”, for quick identification of hidden elements assuming access to different sampling distributions. Finally, compared to the missing mass problem (McAllester and Schapire 2000), which is about pure predictions, OCCP involves decision making, thus requires balancing exploration and exploitation.

The Online Coupon-Collector Problem

Motivated by the need for cross-task exploration to discover novel MDPs in LLRL, we formulate and study a novel problem that is an online version of the classic Coupon-Collector Problem, or CCP (Von Schelling 1954). Solutions to online CCP play a crucial role in developing a new lifelong RL algorithm in the next section. Moreover, the problem may be of independent interest in many disciplines like optimization, biology, communications, and cache management in operating systems, where CCP has found important applications (Boneh and Hofri 1997; Berenbrink and Sauerwald 2009), as well as in other meta-learning problems that require efficient exploration to uncover cross-task relation.

Formulation

In the Coupon-Collector Problem, there is a multinomial distribution μ over a set \mathcal{M} of C coupon types. In each round, one type is sampled from μ . Much research has been done to study probabilistic properties of the (random) time when all C coupons are first collected, especially its expectation (*e.g.*, Berenbrink and Sauerwald (2009) and references therein).

In our *Online Coupon-Collector Problem* or OCCP, $C = |\mathcal{M}|$ is unknown. Given a coupon, the learner may probe the type or skip; thus, $\mathcal{A} = \{P \text{ (“probe”)}, S \text{ (“skip”)}\}$ is the binary action set. The learner is also given four constants, $\rho_0 < \rho_1 \leq \rho_2 < \rho_3$, specifying the loss matrix L in Table 1.

Table 1: OCCP loss matrix: rows indicate actions; columns indicate whether the current item is novel or not. The known constants, $\rho_0 < \rho_1 \leq \rho_2 < \rho_3$, specify costs of actions in different situations.

	$\mathbb{I}\{M_t \in \mathcal{M}_t\}$	$\mathbb{I}\{M_t \notin \mathcal{M}_t\}$
S	ρ_0	ρ_3
P	ρ_1	ρ_2

The game proceeds as follows. Initially, the set of discovered items \mathcal{M}_1 is \emptyset . For round $t = 1, 2, \dots, T$:

- Environment selects a coupon $M_t \in \mathcal{M}$ of unknown type.

- The learner chooses action $A_t \in \mathcal{A}$, and suffers loss L_t as specified in the loss matrix of Table 1. The learner observes L_t if $A_t = \text{P}$, and \perp (“no observation”) otherwise.
- If $A_t = \text{P}$, $\mathcal{M}_{t+1} \leftarrow \mathcal{M}_t \cup \{M_t\}$; else $\mathcal{M}_{t+1} \leftarrow \mathcal{M}_t$.

At the beginning of round t , define the *history* up to t as $H_t := (\mathcal{M}_1, A_1, L_1, \mathcal{M}_2, A_2, L_2, \dots, \mathcal{M}_{t-1}, A_{t-1}, L_{t-1})$. An algorithm is *admissible*, if it chooses actions A_t based on H_t and possibly an external source of randomness. We distinguish two settings. In the *stochastic* setting, environment samples M_t from an unknown distribution μ over \mathcal{M} in an i.i.d. (independent and identically distributed) fashion. In the *adversarial* setting, the sequence $(M_t)_t$ can be generated by an adversarial in an arbitrary way that depends on H_t .

If the learner *knew* the type of M_t , the optimal strategy would be to choose $A_t = \text{P}$ if $M_t \notin \mathcal{M}_t$, and $A_t = \text{S}$ otherwise. The loss is ρ_2 if M_t is a new type, and ρ_0 otherwise. Hence, after T rounds, if $C^* \leq C$ is the number of distinct items in the sequence $(M_t)_t$, this ideal strategy has the loss:

$$L^*(T) := \rho_2 C^* + \rho_0 (T - C^*). \quad (1)$$

The challenge, of course, is that the learner does not know M_t 's type before choosing A_t . She thus has to balance exploration (taking $A_t = \text{P}$ to see if M_t is novel) and exploitation (taking $A_t = \text{S}$ to yield small loss ρ_0 if it is likely that $M_t \in \mathcal{M}_t$). Clearly, over- and under-exploration result in suboptimal strategies. We are therefore interested in finding algorithms \mathbf{A} to have smallest cumulative loss as possible.

Formally, an OCCP algorithm \mathbf{A} is a possibly stochastic function that maps histories to actions: $A_t = \mathbf{A}(H_t)$. The total T -round loss suffered by \mathbf{A} is $L(\mathbf{A}, T) := \sum_{t=1}^T L_t$. The T -round *regret* of an algorithm \mathbf{A} is $R(\mathbf{A}, T) := L(\mathbf{A}, T) - L^*(T)$, and its expectation by $\bar{R}(\mathbf{A}, T) := \mathbb{E}[R(\mathbf{A}, T)]$, where the expectation is taken with respect to any randomness in the environment as well as in \mathbf{A} .

Explore-First Strategy

In the *stochastic* case, it can be shown that if an algorithm chooses P for a total of E times, its expected regret is smallest if these actions are chosen at the very beginning. The resulting strategy is sometimes called `EXPLORE-FIRST`, or `EXPFIRST` for short, in the multi-armed bandit literature.

With knowledge of $\mu_m := \min_{M \in \mathcal{M}} \mu(M)$, one may set E so that all types in \mathcal{M} will be discovered in the first (probing) phase consisting of E rounds with high probability. This results in a high-probability regret bound, which can be used to establish an expected regret bound, as summarized below. A proof is given in Appendix A.

Proposition 1. *For any $\delta \in (0, 1)$, let $E = \mu_m^{-1} \ln \frac{1}{\mu_m \delta}$ where $\mu_m = \min_{M \in \mathcal{M}} \mu(M)$. Then, with probability $1 - \delta$, $R(\text{EXPFIRST}, T) \leq \frac{\rho_1 - \rho_0}{\mu_m} \ln \frac{1}{\mu_m \delta}$. Moreover, if $E = \frac{1}{\mu_m} \ln \frac{(\rho_3 - \rho_0)T}{\rho_1 - \rho_0}$, then the expected regret is $\bar{R}(\text{EXPFIRST}, T) \leq \frac{\rho_1 - \rho_0}{\mu_m} \left(\ln \frac{(\rho_3 - \rho_0)T}{\rho_1 - \rho_0} + 1 \right)$.*

Forced-Exploration Strategy

While `EXPFIRST` is effective in stochastic OCCP, it requires to know μ_m , and the probing phase may be too long for

small μ_m . Moreover, in many scenarios, the sampling process may be non-stationary (e.g., different types of users may use the Internet at different time of the day) or even adversarial (e.g., an attacker may present certain MDPs in earlier tasks in LLRL to cause an algorithm to perform poorly in future ones). We now study a more general algorithm, `FORCEDEXP`, based on forced exploration, and prove a regret upper bound. The next subsection will present a matching lower bound, indicating the algorithm's optimality.

Before the game starts, the algorithm chooses a *fixed* sequence of “probing rates”: $\eta_1, \dots, \eta_T \in [0, 1]$. In round t , it chooses actions accordingly: $\mathbb{P}\{A_t = \text{S}\} = 1 - \eta_t$ and $\mathbb{P}\{A_t = \text{P}\} = \eta_t$. The main result in this subsection is as following, proved in Appendix B.

Theorem 2. *Let $\eta_t = t^{-\alpha}$ (polynomial decaying rate) for some parameter $\alpha \in (0, 1)$. Then, for any given $\delta \in (0, 1)$,*

$$R(\text{FORCEDEXP}, T) \leq C^* \rho_3 \left(T^\alpha \ln \frac{C^*}{\delta} + 1 \right), \quad (2)$$

with probability $1 - \delta$. The expected regret is $\bar{R}(\text{FORCEDEXP}, T) \leq C^ \rho_3 T^\alpha + \frac{\rho_1}{1-\alpha} T^{1-\alpha}$. Both bounds are $O(\sqrt{T})$ by choosing $\alpha = 1/2$.*

The results show that `FORCEDEXP` eventually performs as well as the *hypothetical* optimal strategy that knows the type of M_t in every round t , no matter how M_t is generated. Moreover, the per-round regret decays on the order of $1/\sqrt{T}$, which we will show to be optimal shortly.

Lower Bounds

The main result in this subsection, Theorem 3, shows the $O(\sqrt{T})$ regret bound for `FORCEDEXP` is essentially not improvable, in term of T -dependence, even in the stochastic case. The idea of the proof, given in Appendix C, is to construct a hard instance of stochastic OCCP. On one hand, $\Omega(\sqrt{T})$ regret is suffered unless all C types are discovered. On the other hand, most of the types have small probability μ_m of being sampled, requiring the learner to take the exploration action P many times to discover all C types. The lower bound follows from an appropriate value of μ_m .

Theorem 3. *There exists an OCCP where every admissible algorithm has an expected regret of $\Omega(\sqrt{T})$, and for sufficiently small δ , the regret is $\Omega(\sqrt{T})$ with probability $1 - \delta$.*

Note our goal here is to find a matching lower bound in terms of T . We do not attempt to match dependence on other quantities like C , which are often less important than T .

The lower bound may seem to contradict `EXPFIRST`'s logarithmic upper bound in Proposition 1. However, that upper bound is problem specific and requires knowledge of μ_m . Without knowing μ_m , the algorithm has to choose $\mu_m = \Theta(\frac{1}{\sqrt{T}})$ in the probing phase; otherwise, there is a chance it may not be able to discover a type M with $\mu(M) = \Omega(\frac{1}{\sqrt{T}})$, suffering $\Omega(\sqrt{T})$ regret. With this value of μ_m , the bound in Proposition 1 has an $\tilde{O}(\sqrt{T})$ dependence.

Application to PAC-MDP Lifelong RL

Building on the OCCP results established in the previous section, we now turn to lifelong RL.

Preliminaries

We consider RL (Sutton and Barto 1998) in discrete-time, finite MDPs specified by a five-tuple: $\langle \mathcal{S}, \mathcal{A}, P, R, \gamma \rangle$, where \mathcal{S} is the set of states ($S := |\mathcal{S}|$), \mathcal{A} the set of actions ($A := |\mathcal{A}|$), P the transition probability function, $R : \mathcal{S} \times \mathcal{A} \rightarrow [0, 1]$ the reward function, and $\gamma \in (0, 1)$ the discount factor. Initially, P and R are unknown. Given a policy $\pi : \mathcal{S} \rightarrow \mathcal{A}$, its state and state-action value functions are denoted by $V^\pi(s)$ and $Q^\pi(s, a)$, respectively. The optimal value functions are V^* and Q^* . Finally, let V_{\max} be a known upper bound of $V^*(s)$, which is at most $1/(1 - \gamma)$ but can be much smaller.

Various frameworks have been studied to capture the learning speed of single-task online RL algorithms, such as regret analysis (Jaksch, Ortner, and Auer 2010). Here, we focus on another useful notion known as *sample complexity of exploration* (Kakade 2003), or *sample complexity for short*. Some of our results, especially those related to cross-task exploration and OCCP, may also find use in regret analysis.

Any RL algorithm \mathbf{A} can be viewed as a nonstationary policy, whose value functions, $V^{\mathbf{A}}$ and $Q^{\mathbf{A}}$, are defined similarly to the stationary-policy case. When \mathbf{A} is run on an unknown MDP, we call it a mistake at step t if the algorithm chooses a suboptimal action, namely, $V^*(s_t) - V^{\mathbf{A}t}(s_t) > \epsilon$. We define the sample complexity of \mathbf{A} , $\zeta(\epsilon, \delta)$ as the maximum number of mistakes, with probability at least δ . If ζ is polynomial in S , A , $1/(1 - \gamma)$, $1/\epsilon$, and $\ln(1/\delta)$, then \mathbf{A} is called *PAC-MDP* (Strehl, Li, and Littman 2009).

Most PAC-MDP algorithms (Kearns and Singh 2002; Brafman and Tennenholtz 2002; Strehl, Li, and Littman 2009) work by assigning maximum reward to state-action pairs that have not been visited often enough to obtain reliable transition/reward parameters. The FINITE-MODEL-RL algorithm used for LLRL (Brunskill and Li 2013) leverages a similar idea, where the current RL task is close to one of a finite set of known MDP models.

Cross-task Exploration in Lifelong RL

In lifelong RL, the agent seeks to maximize total reward as it acts in a sequence of T tasks. If the tasks are related, learning speed is expected to improve by transferring knowledge obtained from prior tasks. Following previous work (Wilson et al. 2007; Brunskill and Li 2013), and motivated by many applications (Chu and Park 2009; Fern et al. 2014; Nikolaidis et al. 2015; Liu and Koedinger 2015), we assume a finite set \mathcal{M} of possible MDPs. The agent solves a sequence of T tasks, with $M_t \in \mathcal{M}$ denoting the (unknown) MDP of task t . Before solving the task, the agent does not know whether or not M_t has been encountered before. It then acts in M_t for H steps, where H is given, and can take advantage of any information extracted from solving prior tasks $\{M_1, \dots, M_{t-1}\}$. Our setting is more general, allowing tasks to be chosen *adversarially*, in contrast to prior work that focused on the stochastic case (Wilson et al. 2007; Brunskill and Li 2013).

In comparison to single-task RL, performing additional exploration in a task (potentially beyond that needed for reward maximization in the current task), may be advantageous in the LLRL setting, since such information may

Algorithm 1 Lifelong RL based on FORCEDEXP

```

1: Input:  $\alpha \in (0, 1)$ ,  $m \in \mathbb{N}$ ,  $L \in \mathbb{N}$ 
2: Initialize  $\hat{\mathcal{M}} \leftarrow \emptyset$ 
3: for  $t = 1, 2, \dots$  do
4:   Generate a random number  $\xi \sim \text{Uniform}(0, 1)$ 
5:   if  $\xi < t^{-\alpha}$  (probing to discover new MDP) then
6:     Run PAC-EXPLORE with parameters  $m$  and  $L$  to
       fully explore all states in  $M_t$ , so that every action
       is taken in every state for at least  $m$  times.
7:   After PAC-EXPLORE finishes, choose actions by
       an optimal policy of the empirical model  $\hat{M}_t$ .
8:   if for all existing models  $\hat{M} \in \hat{\mathcal{M}}$ ,  $\hat{M}_t$  has a non-
       overlapping confidence intervals in some state-
       action pair's transition/reward parameters then
9:      $\hat{\mathcal{M}} \leftarrow \hat{\mathcal{M}} \cup \{\hat{M}_t\}$ 
10:  end if
11: else
12:   Run FINITE-MODEL-RL with  $\hat{\mathcal{M}}$ 
13: end if
14: end for

```

help the agent perform better in future tasks. Indeed, prior work (Brunskill and Li 2013) has demonstrated that learning the latent structure of the possible MDPs that may be encountered can lead to significant reductions in the sample complexity in later tasks. We can realize this benefit by explicitly identifying this latent shared structure.

This observation inspired our abstraction of OCCP, which we now formalize its relation to LLRL. Here, the probing action (P) corresponds to doing full exploration in the current task, while the skipping action (S) corresponds to applying transferred knowledge to accelerate learning. We use our OCCP FORCEDEXP algorithm resulting in Algorithm 1; overloading terminology, we refer to this LLRL algorithm as FORCEDEXP. In contrast, the two-phase LLRL algorithm of Brunskill and Li (2013) essentially uses EXPFIRST to discover new MDPs, and is referred to as EXPFIRST.

At round t , if probing is to happen, FORCEDEXP performs PAC-EXPLORE (Guo and Brunskill 2015), outlined in Algorithm 2 of Appendix D, to do full exploration of M_t to get an accurate empirical model \hat{M}_t . To determine whether M_t is new, the algorithm checks if \hat{M}_t 's parameters' confidence intervals are disjoint from every $\hat{M} \in \hat{\mathcal{M}}$ in at least one state-action pair. If so, we add \hat{M}_t to the set $\hat{\mathcal{M}}$.

If probing is *not* to happen, the agent assumes $M_t \in \hat{\mathcal{M}}$, and follows the FINITE-MODEL-RL algorithm (Brunskill and Li 2013), which is an extension of RMAX to work with finitely many MDP models. With FINITE-MODEL-RL, the amount of exploration scales with the number of models, rather than the number of state-action pairs. Therefore, the algorithm gains in sample complexity by reducing unnecessary exploration from transferring prior knowledge, *if* the current task is already in $\hat{\mathcal{M}}$.

Note that Algorithm 1 is a meta-algorithm, where single-task-RL components like PAC-EXPLORE and FINITE-MODEL-RL may be replaced by similar algorithms.

Remark. FORCEDEXP may appear naïve or simplistic, as it decides whether to probe a new task before seeing any data in M_t . It is easy to allow the algorithm to switch from non-probing (S) to probing (P) while acting in M_t , whenever M_t appears different from all MDPs in $\hat{\mathcal{M}}$ (again, by comparing confidence intervals of model parameters). Although this change can be beneficial in practice, it does *not* improve worst-case sample complexity: if we are in the non-probing case running FINITE-MODEL-RL in a MDP not in $\hat{\mathcal{M}}$, there is no guarantee to identify the current task as a new one. This is because by assuming that the current MDP is one of the models in $\hat{\mathcal{M}}$, the learner may follow a policy that never sufficiently explores *informative* state–action pair(s) that could have revealed the current MDP is novel. Therefore, from a theoretical (worst-case) perspective, it is not critical to allow the algorithm to switch to the probing mode.

Similarly, switching from probing to non-probing in the middle of a task is in general not helpful, as shown in the following example. Let $\mathcal{S} = \{s\}$ contain a single state, so $P(s|s, a) \equiv 1$ and MDPs in \mathcal{M} differ only in the reward function. Suppose at round t , the learner has discovered a set of MDPs $\hat{\mathcal{M}}$ from the past, and chooses to probe, thus running PAC-EXPLORE. After some steps in M_t , if the learner switches to non-probing before trying every action m times in all states, there is a risk of *under-exploration*: M_t may be a new MDP not in $\hat{\mathcal{M}}$; it has the same rewards on optimal actions for some $M \in \hat{\mathcal{M}}$, but has even higher reward for another action that is not optimal for any $M' \in \hat{\mathcal{M}}$. By terminating exploration too early, the learner may fail to identify the optimal action in M_t , ending up with a poor policy.

Sample-Complexity Analysis

This section gives a sample-complexity analysis for Algorithm 1. For convenience, we use θ_M to denote the dynamics of an MDP $M \in \mathcal{M}$: for each (s, a) , $\theta_M(\cdot|s, a)$ is an $(S+1)$ -dimensional vector, with the first S components giving the transition probabilities to corresponding next states, $P(s'|s, a)$, and the last component the average immediate reward, $R(s, a)$. The model difference in (s, a) between M and M' , denoted $\|\theta_M(\cdot|s, a) - \theta_{M'}(\cdot|s, a)\|$, is the ℓ_2 -distance between the two vectors. Finally, we let N be an upper bound on the number of next states in the transition models in all MDPs $M \in \mathcal{M}$; note that N is no larger than S but can be much smaller in many problems.

The following assumptions are made in the analysis:

1. There exists a known quantity $\Gamma > 0$ such that for every two distinct MDPs $M, M' \in \mathcal{M}$, there exists some (s, a) so that $\|\theta_M(\cdot|s, a) - \theta_{M'}(\cdot|s, a)\| > \Gamma$;
2. There is a known diameter D , such that: for any $M \in \mathcal{M}$, any states s and s' , there is a policy π that takes an agent to navigate from s to s' in at most D steps *on average*;
3. There are $H \geq H_0$ steps to solve each task M_t , where $H_0 = O(SAN \log \frac{SAT}{\delta} \max\{\Gamma^{-2}, D^2\})$.

The first assumption requires two distinct MDPs differ by a sufficient amount in their dynamics in at least one state–action pair, and is made for convenience to encode prior knowledge about Γ . Note that if Γ is not known beforehand, one can set Γ to $\Gamma_0 = O(\epsilon(1 - \gamma)/(\sqrt{N}V_{\max}))$: if two

MDPs differ by no more than Γ_0 in every state–action pair, an ϵ -optimal policy in one MDP will be an $O(\epsilon)$ -optimal policy in another. The second and third assumptions are the major ones needed in our analysis. The diameter D , introduced by Jaksch, Ortner, and Auer (2010), is typically not needed in *single-task* sample-complexity analysis, but it seems non-trivial to avoid in a *lifelong* learning setting. Without the diameter or the long-horizon assumption, a learner can get stuck in a subset of states that prevent it from identifying the current MDP. In such situations, it is unclear how the learner can *reliably* transfer knowledge to better solve future tasks.

With these assumptions, the main result is as follows. Note that it is possible to use refined single-task analysis such as Lattimore and Hutter (2012) to get better constants for ρ_0 and ρ_3 below. We defer that to future work, and instead focus on showing the benefits of lifelong learning.

Theorem 4. *Let Algorithm 1 with proper choices of parameters be run on a sequence of T tasks, each from a set \mathcal{M} of C MDPs. Then, with prob. $1 - \delta$, the number of steps in which the algorithm is not ϵ -optimal across all T tasks is $\tilde{O}(\rho_0 T + C\rho_3\sqrt{T} \ln \frac{C}{\delta})$, where $\rho_0 = CD/\Gamma^2$ and $\rho_3 = H$.*

While single-task RL typically has a per-task sample complexity ζ_s that at least scales linearly with SA , Algorithm 1 converges to a per-task sample complexity of $\tilde{O}(\rho_0)$, which is often much lower. Furthermore, a bound on the *expected* sample complexity can be obtained in a similar way, by the corresponding expected-regret bound in Theorem 2. Intuitively, in the OCCP setting, we quantified the loss (equivalently, regret); in LLRL, the loss corresponds to number of non- ϵ -optimal steps, and so a loss bound translates directly into a sample-complexity bound.

The proof (Appendix E) proceeds by analyzing the sample complexity bounds for all four possible cases (corresponding to the four entries in the OCCP loss matrix in Table 1) when solving the M_t , and then combining them with Theorem 2 to yield the desired results. A key step is to ensure that when probing happens, the type of M_t will be discovered successfully with high probability. This is achieved by a couple of key technical lemmas below, which also elucidate where our assumptions are used in the analysis.

The first lemma ensures all state–actions can be visited sufficiently often in finite steps, when the MDP has a small diameter. For convenience, define $H_0(m) := O(SADm)$.

Lemma 5. *For a given MDP, PAC-EXPLORE with input $m \geq m_0$ and $L = 3D$ will visit all state–action pairs at least m times in no more than $H_0(m)$ steps with probability $1 - \delta$, where $m_0 = O(ND^2 \log \frac{N}{\delta})$ is some constant.*

The second lemma establishes the fact that when PAC-EXPLORE is run on a sequence of T tasks, with high probability, it successfully infers whether M_t has been included in $\hat{\mathcal{M}}$, for every t . This result is a consequence of Lemma 5 and the assumption involving Γ .

Lemma 6. *With input parameters $H \geq H_0(m)$ and $m = 72N \log \frac{4SAT}{\delta} \max\{\Gamma^{-2}, D^2\}$ in Algorithm 1, the following holds with probability $1 - 2\delta$: for every task in the sequence, the algorithm detects it is a new task if and only if the corresponding MDP has not been seen before.*

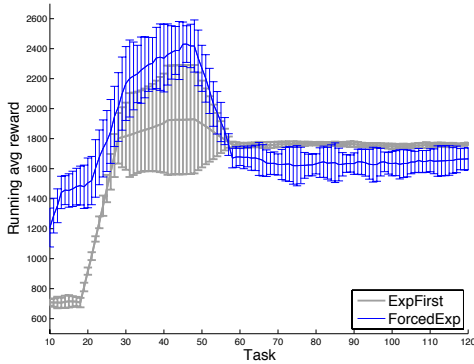


Figure 1: Gridworld: nonstationary task selection. 10-task smoothed running average of reward per task with 1 std error bars.

Experiments

Our simulation results illustrate that our lifelong RL setting can capture interesting domains, and to demonstrate the benefit of our introduced approach over a prior algorithm with formal sample-complexity guarantees (Brunskill and Li 2013) that is based on EXPFIRST. Due to space limitations, full details are provided in Appendix F.

Gridworld. We first consider a simple 5 by 5 stochastic grid-world domain with 4 distinct MDPs to illustrate the salient properties of FORCEDEXP. In each of the 4 MDPs one corner offers high reward (sampled from a Bernoulli with parameter 0.75) and all other rewards are 0. In MDP 4 both the same corner as MDP 3 is rewarding, and the opposite corner is a Bernoulli with parameters 0.99.

In the stochastic setting when all tasks are sampled with equal probability, we compared EXPFIRST, FORCEDEXP and HMTL—a Bayesian hierarchical multi-task RL algorithm (Wilson et al. 2007). As expected, all approaches did well in this setting. We next focus on comparing EXPFIRST and FORCEDEXP which have finite sample guarantees.

We first consider tasks sampled from *nonstationary* distributions. Across 100 tasks all 4 MDPs have identical frequencies, but an adversary chooses to only select from MDPs 1–3 during the first (probing-only) phase of EXPFIRST before switching MDP 4 for 25 tasks, and then switching back to randomly selecting the first three MDPs. MDP 4 can obtain similar rewards as MDP 1 using the same policy as for MDP 1, but can obtain higher rewards if the agent explicitly explores to discover the state with higher reward. FORCEDEXP will randomly probe MDP 4, thus identifying this new optimal policy, which is why it eventually picks up the new MDP and obtains higher reward (See Figure 1). EXPFIRST sometimes successfully infers the task belongs to a new MDP, but only if it happens to encounter the state that distinguished MDPs 1 and 4. This illustrates the benefit of continued active exploration in nonstationary or adversarial settings.

Simulated Human-Robot Collaboration. We next consider a more interesting human-robot collaboration problem studied by Nikolaidis et al. (2015). In this work, the authors learned 4 models of user types based on prior data collected about a paired interaction task in which a human collaborates with a robot to paint a box. Using these types as a latent state in a mixed-observability MDP enabled significant im-

Table 2: Average per-task reward (and std. deviation) in each phase and overall. Gains with statistical significance are highlighted.

	Phase 1	Phase 2	Overall (80 tasks)
EXPFIRST	18305(1609)	19428(1960)	18543(1683)
FORCEDEXP	18745 (482)	19012(1904)	18801 (1923)

provements over not modeling such types in an experiment with real human robot collaborations.

In our LLRL simulation each task was randomly sampled from the 4 MDP models learned by Nikolaidis et al. (2015). This domain was much larger than our grid world environment, involving 605 states and 27 actions. It is typical in such personalization problems that not all user types have the same frequency. Here, we chose the sampling distribution $\mu = (0.07, 0.31, 0.31, 0.31)$. The length of EXPFIRST’s initial proving period is dominated by $\frac{1}{\mu_m} = \frac{1}{0.07}$. Experiments were repeated 30 runs, each consisting of 80 tasks.

The long probing phase of EXPFIRST is costly, especially if the total number of tasks is small, since too much time is spent on discovering new MDPs. This is shown in Table 2, where our FORCEDEXP demonstrates a significant advantage by leveraging past experience much earlier than EXPFIRST, leading to significantly higher reward both during phase 1 and overall (Mann-Whitney U test, $p < 0.001$ in both cases). Of course, eventually EXPFIRST will exhibit near-optimal performance in its second (non-probing) phase, whereas FORCEDEXP will continue probing with diminishing probability. However, FORCEDEXP can exhibit substantial jump-start benefit when the underlying MDPs are drawn from a stationary but nonuniform distribution.

These results suggest FORCEDEXP achieves comparable or substantially better performance than prior methods, especially in nonuniform or nonstationary LLRL problems.

Conclusions

In this paper, we consider a class of lifelong RL problems that capture a broad range of interesting applications. Our work emphasizes the need for efficient cross-task exploration that is unique in lifelong learning. This led to a novel online coupon-collector problem, for which we give optimal algorithms with matching upper and lower regret bounds. With this tool, we develop a new lifelong RL algorithm, and analyze its total sample complexity across a sequence of tasks. Our theory quantifies how much gain is obtained by lifelong learning, compared to single-task learning, even if the tasks are adversarially generated. The algorithm was empirically evaluated in two simulated problems, including a simulated human-robot collaboration task, demonstrating its relative strengths compared to prior work.

In the future, we are interested in extending our work to LLRL with continuous MDPs. It is also interesting to investigate the empirical and theoretical properties of Bayesian approaches, such as Thompson sampling (Osband, Russo, and Van Roy 2013), in lifelong RL. These algorithms allow rich information to be encoded into a prior distribution, and empirically are often effective at taking advantage of such prior information.

References

- Azar, M. G.; Lazaric, A.; and Brunskill, E. 2013. Sequential transfer in multi-armed bandit with finite set of models. In *NIPS 26*, 2220–2228.
- Berenbrink, P., and Sauerwald, T. 2009. The weighted coupon collector’s problem and applications. In *COCOON*, 449–458.
- Boneh, A., and Hofri, M. 1997. The coupon-collector problem revisited — a survey of engineering problems and computational methods. *Communications in Statistics. Stochastic Models* 13(1):39–66.
- Bou Ammar, H.; Tutunov, R.; and Eaton, E. 2015. Safe policy search for lifelong reinforcement learning with sublinear regret. In *ICML*, 2361–2369.
- Brafman, R. I., and Tennenholtz, M. 2002. R-max—a general polynomial time algorithm for near-optimal reinforcement learning. *JMLR* 3:213–231.
- Brunskill, E., and Li, L. 2013. Sample complexity of multi-task reinforcement learning. In *UAI*, 122–131.
- Bubeck, S., and Cesa-Bianchi, N. 2012. Regret analysis of stochastic and nonstochastic multi-armed bandit problems. *Foundations and Trends in Machine Learning* 5(1):1–122.
- Bubeck, S.; Ernst, D.; and Garivier, A. 2014. Optimal discovery with probabilistic expert advice: Finite time analysis and macroscopic optimality. *JMLR* 14(1):601–623.
- Chu, W., and Park, S.-T. 2009. Personalized recommendation on dynamic content using predictive bilinear models. In *WWW*, 691–700.
- Chung, K. L. 2000. *A Course in Probability Theory*. Academic Press, 3rd edition.
- Fern, A.; Natarajan, S.; Judah, K.; and Tadepalli, P. 2014. A decision-theoretic model of assistance. *JAIR* 50(1):71–104.
- Guo, Z., and Brunskill, E. 2015. Concurrent PAC RL. In *AAAI*, 2624–2630.
- Helmbold, D. P.; Littlestone, N.; and Long, P. M. 2000. Apple tasting. *Information and Computation* 161(2):85–139.
- Jaksch, T.; Ortner, R.; and Auer, P. 2010. Near-optimal regret bounds for reinforcement learning. *JMLR* 11:1563–1600.
- Kakade, S. 2003. *On the Sample Complexity of Reinforcement Learning*. Ph.D. Dissertation, Gatsby Computational Neuroscience Unit, University College London, UK.
- Kearns, M. J., and Singh, S. P. 2002. Near-optimal reinforcement learning in polynomial time. *MLJ* 49(2–3):209–232.
- Konidaris, G., and Doshi-Velez, F. 2014. Hidden parameter markov decision processes: An emerging paradigm for modeling families of related tasks. In *2014 AAAI Fall Symposium Series*.
- Langford, J.; Zinkevich, M.; and Kakade, S. 2002. Competitive analysis of the explore/exploit tradeoff. In *ICML*, 339–346.
- Lattimore, T., and Hutter, M. 2012. PAC bounds for discounted MDPs. In *ALT*, 320–334.
- Lazaric, A., and Restelli, M. 2011. Transfer from multiple MDPs. In *NIPS 24*, 1746–1754.
- Li, L. 2009. *A Unifying Framework for Computational Reinforcement Learning Theory*. Ph.D. Dissertation, Rutgers University, New Brunswick, NJ.
- Liu, R., and Koedinger, K. 2015. Variations in learning rate: Student classification based on systematic residual error patterns across practice opportunities. In *EDM*.
- McAllester, D. A., and Schapire, R. E. 2000. On the convergence rate of Good-Turing estimators. In *COLT*, 1–6.
- Nikolaïdis, S.; Ramakrishnan, R.; Gu, K.; and Shah, J. 2015. Efficient model learning from joint-action demonstrations for human-robot collaborative tasks. In *HRI*, 189–196.
- Osband, I.; Russo, D.; and Van Roy, B. 2013. (More) efficient reinforcement learning via posterior sampling. In *NIPS*, 3003–3011.
- Ring, M. B. 1997. CHILD: A first step towards continual learning. *MLJ* 28(1):77–104.
- Schmidhuber, J. 2013. PowerPlay: Training an increasingly general problem solver by continually searching for the simplest still unsolvable problem. *Frontiers in Psychology* 4.
- Strehl, A. L.; Li, L.; and Littman, M. L. 2009. Reinforcement learning in finite MDPs: PAC analysis. *JMLR* 10:2413–2444.
- Sutton, R. S., and Barto, A. G. 1998. *Reinforcement Learning: An Introduction*. Cambridge, MA: MIT Press.
- Taylor, M. E., and Stone, P. 2009. Transfer learning for reinforcement learning domains: A survey. *JMLR* 10(1):1633–1685.
- Von Schelling, H. 1954. Coupon collecting for unequal probabilities. *The American Mathematical Monthly* 61(5):306–311.
- White, A.; Modayil, J.; and Sutton, R. S. 2012. Scaling life-long off-policy learning. In *IEEE ICDL-EPIROB*, 1–6.
- Wilson, A.; Fern, A.; Ray, S.; and Tadepalli, P. 2007. Multi-task reinforcement learning: a hierarchical Bayesian approach. In *ICML*, 1015–1022.

A Proof for Proposition 1

For convenience, statements of theorems, lemmas and propositions from the main text will be repeated when they are proved in the appendix.

Proposition 1. For any $\delta \in (0, 1)$, let $E = \mu_m^{-1} \ln \frac{1}{\mu_m \delta}$ where $\mu_m = \min_{M \in \mathcal{M}} \mu(M)$. Then, with probability $1 - \delta$, $R(\text{EXPFIRST}, T) \leq \frac{\rho_1 - \rho_0}{\mu_m} \ln \frac{1}{\mu_m \delta}$. Moreover, if $E = \frac{1}{\mu_m} \ln \frac{(\rho_3 - \rho_0)T}{\rho_1 - \rho_0}$, then the expected regret is $\bar{R}(\text{EXPFIRST}, T) \leq \frac{\rho_1 - \rho_0}{\mu_m} \left(\ln \frac{(\rho_3 - \rho_0)T}{\rho_1 - \rho_0} + 1 \right)$.

Proof. We start with the high-probability bound. Fix any $M \in \mathcal{M}$. The probability that it is *not* sampled in the first E rounds can be bounded as follows:

$$\begin{aligned} & \mathbb{P}\{M \notin \{M_1, \dots, M_E\}\} \\ &= (1 - \mu(M))^E \\ &\leq \exp(-\mu(M)E) \quad (\text{by inequality } 1 - x \leq e^{-x}) \\ &\leq \exp(\ln(\delta \mu_m)) \quad (\text{by definition, } \mu_m \leq \mu(M)) \\ &= \mu_m \delta. \end{aligned} \quad (3)$$

Consequently, we have

$$\mathbb{P}\{\exists M \in \mathcal{M}, M \notin \{M_1, \dots, M_E\}\} \leq C\delta\mu_m \leq \delta,$$

where the first inequality is due to Equation 3 and a union bound applied to all $M \in \mathcal{M}$, and the second inequality follows from the observation that $C \leq 1/\mu_m$.

We have thus proved that, with probability at least $1 - \delta$, all types in \mathcal{M} will be sampled at least once in the first E rounds, and EXPFIRST will have the minimal loss ρ_0 for all $t > E$. Thus, with probability $1 - \delta$, we have

$$L(\text{EXPFIRST}, T) = \rho_2 C^* + \rho_1(E - C^*) + \rho_0(T - E), \quad (4)$$

where the first two terms correspond to loss incurred in the first E rounds, and the last term corresponds to loss incurred in the remaining $T - E$ rounds. Subtracting the optimal loss of Equation 1 from Equation 4 above gives the desired high-probability regret bound:

$$\begin{aligned} R(\text{EXPFIRST}, T) &= (\rho_1 - \rho_0)(E - C^*) \\ &\leq (\rho_1 - \rho_0)E. \end{aligned} \quad (5)$$

We now prove the expected regret bound. Since Equation 5 holds with probability at least $1 - \delta$, the expected total regret of EXPFIRST can be bounded as:

$$\begin{aligned} \bar{R}(\text{EXPFIRST}, T) &\leq (\rho_1 - \rho_0)(E - C^*) + (\rho_3 - \rho_0)\delta T \\ &\leq (\rho_1 - \rho_0)E + (\rho_3 - \rho_0)\delta T \\ &\leq \frac{\rho_1 - \rho_0}{\mu_m} \ln \frac{1}{\mu_m \delta} + (\rho_3 - \rho_0)\delta T, \end{aligned} \quad (6)$$

The right-hand side of the last equation is a function of δ , in the form of $f(\delta) := a - b \ln \delta + c\delta$, for $a = \frac{\rho_1 - \rho_0}{\mu_m} \ln \frac{1}{\mu_m}$, $b = \frac{\rho_1 - \rho_0}{\mu_m}$, and $c = (\rho_3 - \rho_0)T$. Because of convexity of f , its minimum is found by solving $f'(\delta) = 0$ for δ , giving

$$\delta^* = \frac{b}{c} = \frac{\rho_1 - \rho_0}{(\rho_3 - \rho_0)\mu_m T}.$$

Substituting δ^* for δ in Equation 6 gives the desired bound. \blacksquare

B Proofs for FORCEDEXP

This subsection gives complete proofs for theorems about FORCEDEXP. We start with a few technical results that are needed in the main theorem's proofs.

B.1 Technical Lemmas

The following general results are the key to obtain our expected regret bounds for FORCEDEXP.

Lemma 7. Fix $M \in \mathcal{M}$, and let $1 \leq t_1 < t_2 < \dots < t_m \leq T$ be the rounds for which $M_t = M$. Then, the expected total loss incurred in these rounds is bounded as:

$$\bar{L}_M < (m\rho_0 + \rho_2 - \rho_3)\bar{L}_1 + (\rho_3 - \rho_0)\bar{L}_2 + \rho_1\bar{L}_3,$$

where

$$\begin{aligned} \bar{L}_1 &:= \sum_i \prod_{j < i} (1 - \eta_{t_j}) \eta_{t_i}, \\ \bar{L}_2 &:= \sum_i \prod_{j < i} (1 - \eta_{t_j}) \eta_{t_i} \cdot i, \\ \bar{L}_3 &:= \sum_i \left(\prod_{j < i} (1 - \eta_{t_j}) \eta_{t_i} \sum_{j > i} \eta_{t_j} \right). \end{aligned}$$

Proof. Let $\bar{L}_M(\text{FORCEDEXP})$ be the expected total loss incurred in the rounds t where $M_t = M$: $1 \leq t_1 < t_2 < \dots < t_m \leq T$ for some $m \geq 0$. Let $I \in \{1, 2, \dots, m, m+1\}$ be the random variable, so that M is first discovered in round t_I . That is,

$$A_{t_j} = \begin{cases} 0, & \text{if } j < I \\ 1, & \text{if } j = I. \end{cases}$$

Note that $I = m+1$ means M is never discovered; such a notation is for convenience in the analysis below. The corresponding loss is given by

$$(I-1)\rho_3 + \rho_2 + \sum_{j > I} (\rho_0 \mathbb{I}\{A_{t_j} = 0\} + \rho_1 \mathbb{I}\{A_{t_j} = 1\}),$$

whose expectation, conditioned on I , is at most

$$(I-1)\rho_3 + \rho_2 + \sum_{j > I} (\rho_0 + \rho_1 \eta_{t_j}).$$

Since FORCEDEXP chooses to probe in round t with probability η_t , we have that

$$\mathbb{P}\{I = i\} = \prod_{j < i} (1 - \eta_{t_j}) \eta_{t_i}.$$

Therefore, $\bar{L}_M(\text{FORCEDEXP})$ can be bounded by

$$\begin{aligned} & \bar{L}_M \\ &\leq \sum_{i=1}^{m+1} \mathbb{P}\{I = i\} \left((I-1)\rho_3 + \rho_2 + \sum_{j > I} (\rho_0 + \rho_1 \eta_{t_j}) \right) \\ &= (m\rho_0 + \rho_2 - \rho_3)\bar{L}_1 + (\rho_3 - \rho_0)\bar{L}_2 + \rho_1\bar{L}_3, \end{aligned}$$

where \bar{L}_1 , \bar{L}_2 and \bar{L}_3 are given in the lemma statement. \blacksquare

Now we can obtain the following proposition:

Proposition 8. *If we run FORCEDEXP with non-increasing exploration rates $\eta_1 \geq \dots \geq \eta_T > 0$, then*

$$\mathbb{E}[L(\text{FORCEDEXP}, T)] \leq \rho_0 T + \frac{C^* \rho_3}{\eta_T} + \rho_1 \sum_{t=1}^T \eta_t.$$

Proof. For each $M \in \mathcal{M}$, Lemma 7 gives an upper bound of loss incurred in rounds t for which $M_t = M$:

$$\bar{L}_M \leq (m\rho_0 + \rho_2 - \rho_3)\bar{L}_1 + (\rho_3 - \rho_0)\bar{L}_2 + \rho_1\bar{L}_3,$$

where \bar{L}_1 , \bar{L}_2 and \bar{L}_3 are given in Lemma 7. We now bound the three terms of $\bar{L}_M(\text{FORCEDEXP})$, respectively.

To bound \bar{L}_1 , we define a random variable I , taking values in $\{1, 2, \dots, m, m+1\}$, whose probability mass function is given by

$$\mathbb{P}\{I = i\} = \begin{cases} \prod_{j < i} (1 - \eta_{t_j}) \eta_{t_i}, & \text{if } i \leq m \\ \prod_{j \leq m} (1 - \eta_{t_j}), & \text{if } i = m+1. \end{cases} \quad (7)$$

Therefore, I is like a geometrically distributed random variable, except that the parameter for the i th draw is not the same and is η_{t_i} . Consequently,

$$\bar{L}_1 = \sum_i \mathbb{P}\{I = i\} \leq 1.$$

To bound \bar{L}_2 , we use the same random variable I :

$$\begin{aligned} \bar{L}_2 &= \sum_{i=1}^m \mathbb{P}\{I = i\} \cdot i \\ &\leq \sum_{i=1}^m \mathbb{P}\{I \geq i\} \quad (\text{Corollary of Theorem 3.2.1 of (Chung 2000)}) \\ &= \sum_{i=1}^m \prod_{j < i} (1 - \eta_{t_j}) \quad (\text{By definition of } I \text{ in Equation 7}) \\ &\leq \sum_{i=1}^m \prod_{j < i} (1 - \eta_{t_T}) \quad (\text{By assumption that } \eta_1 \geq \dots \geq \eta_T) \\ &= \frac{1}{\eta_T} (1 - (1 - \eta_T)^m) \leq \frac{1}{\eta_T}. \end{aligned}$$

To bound \bar{L}_3 , we have

$$\bar{L}_3 \leq \sum_{i=1}^m \prod_{j < i} (1 - \eta_{t_j}) \eta_{t_i} \sum_{j=1}^m \eta_{t_j} = \bar{L}_1 \sum_{j=1}^m \eta_{t_j} \leq \sum_{j=1}^m \eta_{t_j}.$$

Putting all three bounds above, we have

$$\bar{L}_M(\text{FORCEDEXP}) \leq m\rho_0 + \frac{\rho_3 - \rho_0}{\eta_T} + \rho_1 \sum_{j=1}^m \eta_{t_j}.$$

Now sum up all $\bar{L}_M(\text{FORCEDEXP})$ over all $M \in \mathcal{M}$ that appear in the sequence $(M_t)_t$, and we have

$$\mathbb{E}[L(\text{FORCEDEXP}, T)] \leq \rho_0 T + \frac{C^* \rho_3}{\eta_T} + \rho_1 \sum_{i=1}^T \eta_{t_i}. \quad \blacksquare$$

B.2 Proof for Theorem 2

Theorem 2. *Let $\eta_t = t^{-\alpha}$ (polynomial decaying rate) for some parameter $\alpha \in (0, 1)$. Then, for any given $\delta \in (0, 1)$,*

$$R(\text{FORCEDEXP}, T) \leq C^* \rho_3 \left(T^\alpha \ln \frac{C^*}{\delta} + 1 \right), \quad (8)$$

with probability $1 - \delta$. The expected regret is $\bar{R}(\text{FORCEDEXP}, T) \leq C^ \rho_3 T^\alpha + \frac{\rho_3}{1-\alpha} T^{1-\alpha}$. Both bounds are $O(\sqrt{T})$ by choosing $\alpha = 1/2$.*

Proof. The proof is split into two parts, for the two stated bounds.

High-probability Regret Bound. Fix any $M \in \mathcal{M}$, and let $1 \leq t_1 < t_2 < \dots < t_m \leq T$ be the rounds for which $M_t = M$. Then, for any $m' \leq m$, we can upper-bound the probability that M remains undiscovered after the first m' rounds for which $M_t = M$:

$$\mathbb{P}\{M \notin \mathcal{M}_{t_{m'+1}}\} = \prod_{i=1}^{m'} (1 - \eta_{t_i}) < \exp\left(-\sum_{i=1}^{m'} \eta_{t_i}\right),$$

where the inequality is due to the fact that $1 - x \leq e^{-x}$. We will show that for sufficiently large m' , the right-hand side above, $\exp(-\sum_{i=1}^{m'} \eta_{t_i})$, is at most δ/C^* ; in other words, with probability at least $1 - \delta/C^*$, item M will be discovered after appearing m' times for sufficiently large m' . Indeed,

$$\begin{aligned} \sum_{i=1}^{m'} \eta_{t_i} &\geq \sum_{t=T-m'+1}^T \eta_t \quad (\text{monotonicity of } (\eta_t)_t) \\ &= \sum_{t=T-m'+1}^T t^{-\alpha} \quad (\text{definition of } \eta_t) \\ &\geq \int_{T-m'+1}^T t^{-\alpha} dt \\ &= \frac{1}{1-\alpha} (T^{1-\alpha} - (T-m'+1)^{1-\alpha}) \\ &\geq \frac{1}{1-\alpha} \frac{d}{dt} t^{1-\alpha} \Big|_{t=T} \cdot (T - (T-m'+1)) \\ &\quad (\text{concavity of } t^{1-\alpha}) \\ &= T^{-\alpha}(m' - 1). \end{aligned}$$

Therefore, we will have $\mathbb{P}\{M \notin \mathcal{M}_{t_{m'+1}}\} \leq \delta/C^*$ if $T^{-\alpha}(m' - 1) \geq \ln \frac{C^*}{\delta}$, or equivalently, $m' \geq T_0$, where

$$T_0 = T^\alpha \ln \frac{C^*}{\delta} + 1.$$

It follows that, with probability at least $1 - \delta/C$, the total loss associated with item M (that is, the total loss accumulated in $\{t_1, t_2, \dots, t_m\}$) is at most

$$\rho_3 \min\{m, T_0\} + \rho_0(m - T_0)_+, \quad (9)$$

where $(x)_+ := \max\{x, 0\}$.

Define $\mathcal{M}^* := \{M_1, \dots, M_T\} \subseteq \mathcal{M}$ be the set of types that appear in the sequence $(M_t)_t$. Clearly, $C^* = |\mathcal{M}^*|$.

Summing Equation 9 over all $M \in \mathcal{M}^*$ and applying a union bound, we have the following that holds with probability at least $1 - \delta$:

$$\begin{aligned} & L(\text{FORCEDEXP}, T) \\ & \leq \sum_{M \in \mathcal{M}^*} (\rho_3 \min\{m(M), T_0\} + \rho_0(m(M) - T_0)_+) \\ & \leq C^* \rho_3 T_0 + \sum_{M \in \mathcal{M}^*} \rho_0(m(M) - T_0)_+, \end{aligned} \quad (10)$$

where $m(M) := |\{1 \leq t \leq T \mid M_t = M\}|$ is the number of times M appears in T rounds. Now consider the optimal yet hypothetical strategy, whose total loss, given in Equation 1, can be written as

$$L^*(T) = \sum_{M \in \mathcal{M}^*} (\rho_2 + \rho_0(\min\{m(M), T_0\} - 1) + \rho_0(m(M) - T_0)_+). \quad (11)$$

In Equation 11, for each $M \in \mathcal{M}^*$, the first two terms correspond to the loss accumulated in the first $\min\{m(M), T_0\}$ times where $M_t = M$, and the last term for the remaining rounds where $M_t = M$. It then follows from Equations 10 and 11 that, with probability at least $1 - \delta$,

$$R(\text{FORCEDEXP}, T) \leq C^* \rho_3 T_0 = C^* \rho_3 (T^\alpha \ln \frac{C^*}{\delta} + 1),$$

as stated in the theorem.

Expected Regret Bound. Given polynomial exploration rates $\eta_t = t^{-\alpha}$, we have

$$\begin{aligned} \sum_{t=1}^T \eta_t &= 1 + \sum_{t=2}^T t^{-\alpha} \\ &\leq 1 + \int_1^T t^{-\alpha} dt \\ &= 1 + \frac{1}{1-\alpha} t^{1-\alpha} \Big|_{t=1}^T \\ &= 1 + \frac{1}{1-\alpha} (T^{1-\alpha} - 1) \\ &\leq \frac{T^{1-\alpha}}{1-\alpha}. \end{aligned}$$

The total regret follows immediately from Proposition 8. Furthermore, if one sets $\alpha = 1/2$, the regret bound becomes $(C^* \rho_3 + 2\rho_1)\sqrt{T} = O(\sqrt{T})$. ■

C Proof for Theorem 3

Theorem 3. *There exists an OCCP where every admissible algorithm has an expected regret of $\Omega(\sqrt{T})$, and for sufficiently small δ , the regret is $\Omega(\sqrt{T})$ with probability $1 - \delta$.*

Proof. We construct a stochastic OCCP with $\mathcal{M} = \{1, 2, \dots, C\}$ and distribution μ so that

$$\mu(M) = \begin{cases} \mu_m, & \text{if } M < C \\ 1 - C\mu_m, & \text{if } M = C, \end{cases}$$

where $\mu_m = 1/\sqrt{T} \ll 1$. For every $M \in \mathcal{M}$, define $T_M \in \{1, \dots, T, \infty\}$ as the first time M is collected; that is

$$T_M := \min\{t \mid M_t = M, A_t = P\},$$

with the convention that $T_M = \infty$ if $\{t \mid M_t = M, A_t = P\} = \emptyset$. Furthermore, let $1 \leq t_1 < t_2 < \dots < t_E \leq T$ be the rounds in which probing ($A_t = P$) happens; denote by \mathcal{E} the set $\{t_1, t_2, \dots, t_E\}$. Since the two random variables M_t and A_t are independent, we have for any $i \in \{1, 2, \dots, E\}$ and any $M \in \mathcal{M}$ that

$$\mathbb{P}\{M_{t_i} = M\} = \mu(M).$$

We start with the expected-regret lower bound and let \mathbf{A} be any admissible algorithm. Conditioning on \mathcal{E} being the rounds of probing, we want to lower bound the number E of exploration rounds so that the probability of *not* discovering *all* items in \mathcal{M} is at most δ (which is necessary for the expected regret to be $O(\sqrt{T})$). First, note that the events $\{T_M < \infty\}_{M \in \mathcal{M}}$ are negatively correlated, since discovering some M_1 in \mathcal{E} can only decrease the probability of discovering $M_2 \neq M_1$ in \mathcal{E} . Therefore, we have

$$\begin{aligned} \mathbb{P}\{\forall M, T_M < \infty\} &\leq \prod_{M \in \mathcal{M}} \mathbb{P}\{T_M < \infty\} \\ &\leq \prod_{C=1}^{C-1} \mathbb{P}\{T_M < \infty\} \\ &\leq (1 - (1 - \mu_m)^E)^{C-1}. \end{aligned}$$

Making the last expression to be $1 - \delta$, we have

$$\begin{aligned} E &= \frac{\ln(1 - (1 - \delta)^{\frac{1}{C-1}})}{\ln(1 - \mu_m)} \\ &= \Omega\left(\frac{\ln(1 - (1 - \frac{\delta}{C}))}{-\mu_m}\right) \\ &= \Omega\left(\frac{1}{\mu_m} \ln \frac{C}{\delta}\right), \end{aligned}$$

for sufficiently small μ_m and δ .

For simplicity, assume $\rho_0 = 0$ without loss of generality; otherwise, we can just define a related problem with $\rho'_i := \rho_i - \rho_0$, where the loss is just shifted by a constant and the regret remains unchanged. With this assumption, the optimal expected loss given in Equation 1 becomes $L^*(T) = C^* \rho_2$.

With $\rho_0 = 0$, the expected loss of \mathbf{A} is at least $(E - C^*)\rho_1 + C^* \rho_2 + \delta(T - E)\mu_m \rho_3$, where the first two terms are for the loss incurred during the E probing rounds; and the last term for the δ -probability event that some item is not discovered in the probing rounds, which leads to ρ_3 loss when it is encountered in any of the remaining $T - E$ rounds.

The regret of \mathbf{A} , by comparing its loss to $L^*(T)$, can be lower bounded by

$$(E - C^*)\rho_1 + \delta(T - E)\mu_m \rho_3 = \Omega\left(\rho_3 T \mu_m + \frac{\rho_1}{\mu_m} \ln \frac{C^*}{\delta}\right),$$

giving an expected-regret lower bound by observing the fact that $\mu_m = 1/\sqrt{T}$.

The high-probability lower bound can be proved by very similar calculations, with the observation that all C types need to be collected in order to have a regret bound that holds with probability $1 - \delta$, for sufficiently small δ . ■

D Algorithm Pseudocode

The following algorithm, PAC-EXPLORE of Guo and Brunskill (2015), is a key component in Algorithm 1. It takes as input two parameters: threshold m for determining a state–action pair is known or not, and planning horizon L that is used to compute an exploration policy.

Algorithm 2 PAC-EXPLORE of Guo and Brunskill (2015)

```

0: Input:  $m$  (known threshold),  $L$  (planning horizon)
1: while some  $(s, a)$  has not been visited at least  $m$  times
   do
2:   Let  $s$  be the current state
3:   if all  $a$  have been tried  $m$  times then
4:     Start a new  $L$ -step episode
5:     Construct an empirical known-state MDP  $\hat{M}_K$ 
       with the reward of all known  $(s, a)$  pairs set to
       0, all unknown set to 1 (maximum reward value),
       the transition model of all known  $(s, a)$  pairs set to
       the estimated parameters and the unknown to self
       loops
6:     Compute an optimistic  $L$ -step policy  $\hat{\pi}$  for  $\hat{M}_K$ 
7:     From the current state, follow  $\hat{\pi}$  for  $L$  steps, or until
       an unknown state is reached
8:   else
9:     Execute  $a$  that has been tried the least
10:  end if
11: end while

```

E Proofs for LLRL Sample Complexity

This section provides details of the sample-complexity analysis of Algorithm 1, leading to the main result of Theorem 4.

E.1 Proof of Lemma 5

Lemma 5. For a given MDP, PAC-EXPLORE with input $m \geq m_0$ and $L = 3D$ will visit all state–action pairs at least m times in no more than $H_0(m)$ steps with probability $1 - \delta$, where $m_0 = O(ND^2 \log \frac{N}{\delta})$ is some constant.

Proof. The proof follows closely to that of Guo and Brunskill (2015). Consider the beginning of an episode, and let K be the set of known state–action pairs which have been visited by the agent at least m times. For each $(s, a) \in k$, the ℓ_1 distance between the empirical estimate and the actual next-state distribution is at most (Lemma 8.5.5 of Kakade (2003)): $\alpha = \sqrt{\frac{8N}{m} \log \frac{2N}{\delta}}$. Let M_K be the known-state MDP, which is identical to \hat{M}_K except that the transition probabilities are replaced by the true ones for known state–action pairs. Following the same line of reasoning as Guo and Brunskill (2015), one may lower-bound the probability that an unknown state is reached within the episode by $p_e \geq 1/6 - 3\alpha D$. Therefore, p_e is bounded by $1/12$ as long as $\alpha D \leq 1/36$. The latter is guaranteed if $m \geq m_0 = O(ND^2 \log \frac{N}{\delta})$. The rest of the proof is the same as Guo and Brunskill (2015), invoking Lemma 56 of Li (2009) to get an upper bound of H , stated in the lemma as $H_0(m)$. ■

E.2 Proof of Lemma 6

Lemma 6. With input parameters $H \geq H_0(m)$ and $m = 72N \log \frac{4SAT}{\delta} \max\{\Gamma^{-2}, D^2\}$ in Algorithm 1, the following holds with probability $1 - 2\delta$: for every task in the sequence, the algorithm detects it is a new task if and only if the corresponding MDP has not been seen before.

Proof. For task M_t , let \mathcal{E}_t be the event that all state–action pairs become known after H steps; Lemma 5 with a union bound shows all events $\{\mathcal{E}_t\}_{t \in \{1, 2, \dots, T\}}$ hold with probability at least $1 - \delta$. For every fixed t , under event \mathcal{E}_t , every state–action pair has at least m samples to estimate its transition probabilities and average reward after H steps. Applying Lemma 8.5.5 of Kakade (2003) on the transition distribution, we can upper bound, with probability at least $1 - \frac{\delta}{2SAT}$, the ℓ_1 error of the transition probability estimates by:

$$\epsilon_T = \sqrt{\frac{8N}{m} \log \frac{4SAT}{\delta}} \leq \frac{\Gamma}{3}.$$

Similarly, an application of Hoeffding’s inequality gives the following upper bound, with probability at least $1 - \frac{\delta}{2SAT}$, on the reward estimate:

$$\epsilon_R = \sqrt{\frac{2}{m} \log \frac{4SAT}{\delta}} \leq \frac{\Gamma}{6\sqrt{N}}.$$

Applying a union bound over all states, actions, and tasks, the above concentration results hold with probability at least $1 - \delta$ for an agent running on T tasks. The rest of the proof is to show that task identification succeeds when the above concentration inequalities hold.

To do this, consider the following two mutually exclusive cases:

1. If M_t is new, then, by assumption, for every $M' \in \hat{\mathcal{M}}$, there exists some (s, a) for which the two models differ by at least Γ in ℓ_2 distance; that is, $\|\theta_{M_t}(\cdot|s, a) - \theta_{M'}(\cdot|s, a)\|_2 \geq \Gamma$. It follows from the equality,

$$\begin{aligned} & \|\theta_{M_t}(\cdot|s, a) - \theta_{M'}(\cdot|s, a)\|_2^2 \\ &= \sum_{1 \leq s' \leq S} (\theta_{M_t}(s'|s, a) - \theta_{M'}(s'|s, a))^2 \\ & \quad \text{(error in transition probability estimates)} \\ & \quad + (\theta_{M_t}(S+1|s, a) - \theta_{M'}(S+1|s, a))^2, \\ & \quad \text{(error in reward estimate)} \end{aligned}$$

that at least one of two terms on the right-hand side above is at least $\Gamma^2/2$.

If the first term is larger than $\Gamma^2/2$, then the ℓ_1 distance between the two next-state transition distributions is at least $\Gamma/\sqrt{2}$, which is larger than $2\epsilon_T = 2\Gamma/3$. It implies that the ℓ_1 -balls of transition probability estimates for (s, a) between M_t and M' do not overlap, and we will identify M_t as a new MDP. Similarly, if the second term is larger than $\Gamma^2/2$, then using ϵ_R we can still identify M_t as a new MDP.

2. If M_t is not new, we claim that the algorithm will correctly identify it as some previously solved MDP, say

$M'' \in \hat{\mathcal{M}}$. In particular, confidence intervals of its estimated model in every state–action pair must overlap with M'' , since both models’ confidence intervals contain the true model parameters. On the other hand, for any $M' \in \hat{\mathcal{M}} \setminus \{M''\}$, its model estimate’s confidence intervals do not have overlap with that of M_t ’s in at least one state–action pair, as shown in case 1. Therefore, the algorithm can find the unique and correct $M'' \in \hat{\mathcal{M}}$ that is the same as M_t .

Finally, the lemma is proved with a union bound over all tasks, states and actions, and with the probability that E_t fails to hold for some t . ■

E.3 Proof of Theorem 4

Theorem 4. Let Algorithm 1 with proper choices of parameters be run on a sequence of T tasks, each from a set \mathcal{M} of C MDPs. Then, with prob. $1 - \delta$, the number of steps in which the algorithm is not ϵ -optimal across all T tasks is $\tilde{O}(\rho_0 T + C\rho_3\sqrt{T}\ln\frac{C}{\delta})$, where $\rho_0 = CD/\Gamma^2$ and $\rho_3 = H$.

Proof. We consider each possible case when solving the t th task, M_t . As shown in Lemma 6, with probability $1 - \delta$, the following event \mathcal{E}_t hold for all $t \in [T]$: after PAC-EXPLORE is run on M_t , Algorithm 1 will discover the identity of M_t correctly. That is, if M_t is a new MDP, it will be added to $\hat{\mathcal{M}}$; otherwise, $\hat{\mathcal{M}}$ remains unchanged. In the following, we assume \mathcal{E}_t holds for every t , and consider the following cases:

(a) Exploitation in discovered tasks: we choose to exploit (line 12 in Alg 1) and M_t has been already discovered. In this case, FINITE-MODEL-RL is used to do model elimination (within $\hat{\mathcal{M}}$) and to transfer samples from previous tasks that correspond to the same MDP as the current task M_t . Therefore, with a similar analysis, we can get a per-task sample complexity of at most $O(CDm) = \tilde{O}(\frac{CD}{\Gamma^2}) = \rho_0$.

(b) Exploitation in undiscovered tasks: we choose to exploit and M_t has *not* been discovered. Running FINITE-MODEL-RL in this case can end up with an arbitrarily poor policy which follows a non- ϵ -optimal policy in every step. Therefore, the sample complexity can be as large as $H = \rho_3$.

(c) Exploration: we choose to explore using PAC-EXPLORE (lines 6–9 in Alg 1). In this case, with high probability, it takes at most $H_0(m)$ steps to make every state known, so that the model parameters can be estimated to within accuracy $O(\Gamma)$. After that, we can reliably decide whether M_t is a new MDP or not. With sample transfer, the additional steps where ϵ -sub-optimal policies are taken in the MDP corresponding to M_t (accumulated across all tasks in the T -sequence) is at most ζ_s , the single-task sample complexity. The total sample complexity for tasks corresponding to this MDP is therefore at most $H_0(m)T(M_t) + \zeta_s = \rho_2 T(M_t) + \zeta_s$, where $T(M_t)$ is the number of times this MDP occurs in the T -sequence.

Finally, when Algorithm 1 is run on a sequence of T tasks, the total sample complexity—the number of steps in all tasks

for which the agent does not follow an ϵ -optimal policy—is given by one of the three cases above. The sample complexity of exploration can therefore be upper bounded by adding Equation 1 to Equation 8 in Theorem 2, completing the proof with an application of union bound that takes care of error probabilities (those involved in Lemma 6, in upper-bounding sample complexity in individual tasks in the proof above, and in Theorem 2). ■

F Experiment Details

F.1 Gridworld

For the grid world domain, all four MDPs had the same 25-cell square grid layout and 4 actions (up, down, left, right). State $s1$ is in the upper left hand corner, state $s5$ is the upper right hand corner, $s20$ is the lower left hand corner, and $s25$ is the lower right hand corner. All other states are labeled sequentially between these. Actions succeed in their intended direction with probability 0.85 and with probability 0.05 go in each the other three directions (unless halted by a wall when the agent stays in the same state). For all actions corner states $s5$, $s20$, and $s25$ stay in the same state with probability 0.95 or transition back to the start state (for all actions). The start state is at the center of the square grid ($s13$). The dynamics of all MDPs are identical. All rewards are sampled from Bernoulli distributions. All rewards have parameter 0.0 unless otherwise noted:

In MDP 1, corner state $s20$ has a reward parameter of 0.75. In MDP 2, corner state $s5$ has a reward parameter of 0.75. In MDP 3, corner state $s25$ has a reward parameter of 0.75. In MDP 4, corner state $s25$ has a reward parameter of 0.75, and corner state $s1$ has a reward parameter of 0.99.

EXPFIRST is given an upper bound on the number of MDPs (4) and the minimum probability of any of the MDPs across the 100 tasks. When we compared to the Bayesian hierarchical multi-task learning algorithm HMTL for the stochastic setting, we also provided it with an upper bound on the number of MDPs, though HMTL is also capable of learning this directly. We used HMTL with a two-level hierarchy (e.g. a class consists of a single MDP). We ran a variant of FORCEDEXP labeled “ForcedExp” in the figures which uses a polynomially decaying exploration rate, t^α with $\alpha = 0.5$, for all experiments. Performance does vary with the choice of α but $\alpha = 0.5$ gave good results in our preliminary investigations. Interestingly, this is consistent with the theoretical result that $\alpha = 0.5$ minimizes dependence on T for polynomially decaying exploration rates (*c.f.*, Theorem 2).

We also explored the FORCEDEXP algorithm using a constant exploration rate $\frac{2}{\sqrt{T}}$ for some earlier experiments: as expected performance was similar but slightly worse generally than using a decaying exploration rate, and so we focus all comparisons on the decaying exploration rate variant.

F.2 Simulated Human-Robot Collaboration

Our abstracted human-robot collaboration simulation comes from the recent work of Nikolaidis et al. (2015). The authors showed significant benefits in a human-robot collaboration problem, by assuming that user preference models

over human-robot collaboration could be clustered into a small set of types. In their work, they took a previously collected set of data, and clustered it using the Expectation-Maximization (EM) algorithm into a set of 4 user types. Then, for each new user, they treated the problem as a mixed observability Markov decision process, where the (static) hidden state is the type of the user. In contrast to their work, we handle online lifelong learning across tasks, and our central contribution is a formal analysis of the sample complexity and performance, as opposed to Nikolaidis et al. (2015) that present exciting empirical results on real human-robot interactions, without a theoretical analysis.

To demonstrate that our approach could also achieve good performance for this setting, we performed simulation experiments by constructing a lifelong learning domain in which each task is sampled from the four MDP models learned by Nikolaidis et al. (2015).²

The domain involves a human and robot collaborating to paint a box. The box is defined by its location along the horizontal (5 positions) and vertical (11 positions) axes, as well as its tilt angle (11 values), for a total of 605 states. The possible actions of the robot are to change each of the three dimensions of the box’s location (to stay the same or move forward or backward along that axis), resulting in $3^3 = 27$ actions. The transition dynamics are deterministic and identical for all 4 MDP models. The MDP models differ in their (deterministic) reward models. Nikolaidis et al. (2015) learned the MDP models using the EM algorithm and inverse reinforcement learning from a set of 15 humans performing 4 different variants of the human-robot box painting task (varying by which position the human performed the task in) where the robot annotates actions for the robot.³ We introduced a small amount of Gaussian noise (with 0.01 standard deviation and zero mean) to the rewards. Note that even if the models are known to be deterministic, an agent learning with no prior information must still visit all $S \times A = 16335$ state–action pairs at least once to learn their dynamics, and of course it is not always possible to directly reach any other state in a single action.

In our simulation, for each task one of the 4 MDPs was randomly selected, and the agent executed in it for H steps without a priori knowledge of its identity. We set the horizon length by $H = 3SA = 49005$, so that it was feasible to visit all state–action pairs at least once.

We tested our EXPFIRST algorithm on this domain with a total number of tasks per “run” as 80. We report results averaged over 30 runs.

²We thank those authors for sharing their models.

³Inverse reinforcement learning is then used to infer a reward function of the human user that would make the actions prescribed by the human for the robot optimal.