Evaluating color texture descriptors under large variations of controlled lighting conditions

Claudio Cusano (University of Pavia)
Paolo Napoletano (University of Milano-Bicocca)
Raimondo Schettini (University of Milano-Bicocca)

Abstract—The recognition of color texture under varying lighting conditions is still an open issue. Several features have been proposed for this purpose, ranging from traditional statistical descriptors to features extracted with neural networks. Still, it is not completely clear under what circumstances a feature performs better than the others. In this paper we report an extensive comparison of old and new texture features, with and without a color normalization step, with a particular focus on how they are affected by small and large variation in the lighting conditions. The evaluation is performed on a new texture database including 68 samples of raw food acquired under 46 conditions that present single and combined variations of light color, direction and intensity. The database allows to systematically investigate the robustness of texture descriptors across a large range of variations of imaging conditions.

1 Introduction

The role of color in texture classification has been widely debated in the literature. Despite the number and the depth of the experimental verifications, it is still not completely clear how much and under what circumstances color information is beneficial. Notable examples of this kind of analysis are the work by Mäenpää and Pietikäinen [1], and that by Bianconi et al. [2]. They both observed how color can be effective, but only in those cases where illumination conditions do not vary too much between training and test sets. In fact, methods that exploit color information greatly suffer variations in the color of the illuminant. Under these circumstances the best result is often achieved simply by disregarding color, that is, by reducing all the images to gray scale. The degree of intra-class variability of the images in Fig. 1 suggests why color information, if not properly processed, can easily be deceptive.

A possible strategy to exploit color in texture classification consists in the extraction of image features that are invariant (or at least robust) with respect to changes in the illumination. In scene and object recognition the approach of specially designing invariant features is rapidly becoming obsolete in favor of features automatically learned from a large amount of data with methods based on deep learning [3]. It is not clear if the same is going to happen in texture recognition as well. A recent work [4] suggests that a hybrid approach (local features extracted from a convolutional neural network and then aggregated as Fisher vectors) can be the most successful.

The availability of suitable databases of texture images is of primary importance for the research in this field. Therefore, in the past several texture databases have been collected to asses the performance of texture recognition methods under a variety of conditions. These databases are often focused on the exploration of the variability of texture images under specific variations of imaging conditions [5], [6], mostly related to variations in the geometry of the acquisition setup (with little or no variation about the characteristics of the illuminant). For instance, several texture databases include images where the same samples are taken from different point of views. As a result, the images depict the same textures taken at different scales and orientations. By contrast, a more recent work proposed a database of "textures in the wild" [7] to allow texture analysis in completely uncontrolled environments. This approach allows to implicitly verify the robustness against a multitude of source of variations simultaneously. Even though, the results on this kind of dataset may provide a better indication about the 'average' performance of texture recognition methods in several real-world applications, they do not allow a clear analysis of their strengths and weaknesses for specific setups. In fact, there are several application domains where acquisition conditions are indeed very controlled (medical imaging, industrial inspection...) and for which the uncertainty inherent to the experimentation in the wild is a serious liability.

In this paper we address the problem of texture classification under controlled, large variations of lighting conditions. We have evaluated and compared several texture and color descriptors with respect to single and combined changes in the lighting conditions. We selected three classes of visual descriptors. The first class includes *traditional* (*hand crafted*) descriptors specially designed for *texture analysis*. The second one includes features that were specially designed for *object recognition*. The third class includes those features that correspond to intermediate representations computed by *Convolutional Neural Networks* (CNNs).

Since we addressed the problem of texture classification under varying lighting conditions, we also investigated the use of color normalization methods as a preprocessing, so quantifying how much their application influences the performance of the different descriptors.

Existing texture databases [5], [6] do not include, in

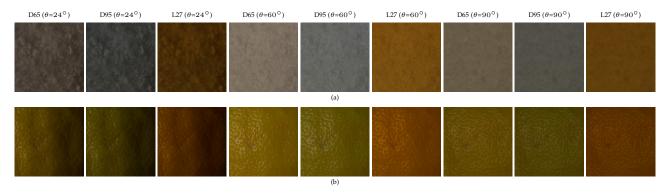


Fig. 1. Examples of 2 different textures acquired under 9 different light conditions. (a) Salt. (b) Grapefruit.

general, large variations of lighting conditions and, in particular, they do not allow to evaluate the goodness of visual descriptors with respect to both single and combined lighting condition changes, such as only direction or temperature of the light, direction and temperature of the light, etc. Due to these reasons, we collected a new texture database, that we named Raw Food Texture database (RawFooT). This database includes several samples of raw food acquired under 46 conditions differing in the light color, direction and intensity. We choose to focus on raw food because, similarly to other natural surfaces, its color is an intrinsic property. Therefore, the task of classifying this kind of textures does not include the semantic ambiguities that, instead, may arise when dealing with artificial surfaces, where it is possible to argue that samples of different color may be instances of the same class of "textures". As far as we know the proposed database is the one featuring the largest amount of variations in the lighting conditions, and the only one where color, direction and intensity of light are subject to systematic and independent changes.

In this paper we address the following issues:

- How effective are hand-crafted texture descriptors when acquisition condition variations are so large?
- Can object recognition descriptors achieve high classification accuracy on pure texture images?
- Do CNN-based descriptors confirm to be powerful also on texture classification tasks?
- Can CNN-based descriptors handle large variations in lighting conditions?
- Is color normalization helpful for texture analysis in case of changes in lighting conditions?

The rest of the paper is organized as follows: Section 2 describes the proposed RawFooT database and compares it against other publicly available data sets; Section 3 reviews the main texture descriptors in the state of art; Section 4 describes the experimental setup and Section 5 reports the results obtained; finally, Section 6 presents our final considerations and discusses some new directions for our future research on this topic.

2 TEXTURE DATABASES

In the last years, different research groups developed a number of databases of texture images ranging from natural textures to man-made materials [5], [6], [8]. Each database has been designed to study one or several aspects about textures: invariance to acquisition device, invariance to lighting conditions, invariance to image rotation or scale, 3D reconstruction, computer graphics, classification, segmentation, etc. The problems of texture classification and of material recognition are closely related. In this paper we mainly focused on the former since the two problems may require different strategies [9].

We considered the most important texture databases that have been presented in the literature [5], [6], and we compiled the Table 1 where we have highlighted the most important features of each database. Amongst the features, the most important are those related to the acquisition setup, such as: illumination conditions, sensor's angle, image rotation, scaling and color of the illuminant. In particular, we highlighted four different sources of variations in illumination conditions. One related to the *direction* of the light, one to the intensity of the light, another to the color temperature of the light, and the fourth related to a mixture of variations, such as: temperature and direction, temperature and intensity, etc. As you can see from the table, several databases consider a mixture of variations. The most notable is the OuTex database [10] which is, in fact, the most used in the study of descriptors invariant to lighting conditions [1]. The OuTex collection includes the OuTex-14 test suite that contains images that depict textures of 68 different classes acquired under three different light sources, each positioned differently: the 2856 K incandescent CIE A, the 2300 K horizon sunlight and the 4000 K fluorescent TL84.

Few databases consider variations of light direction, intensity or temperature separately. In particular, the only database that provides a good number of this kind of variations is the ALOT database [21]. This collection provides 250 classes of textures acquired under several conditions obtained combining five illumination directions (at 3075 K) and one semi-hemispherical illumination (at 2175 K). Each object was recorded with only one out of five lights turned on, yielding five different illumination angles. One image is recorded with all lights turned on, yielding a sort of hemispherical illumination. All the images are acquired by four cameras positioned differently.

As far as we know, no publicly available texture database has been designed to assess the performance in texture classification under a broad range of variations in the illumination color, direction and intensity. This is why we collected the Raw Food Texture database.

TABLE 1

Main features of existing texture databases [11], [12]. The filled circle indicates that the given feature is present, the empty circle indicates its absence, the minus sign indicates that information on that feature is not available.

Database	Type of surface	#Classes #Images	Image size	Color repr.	Rotation	Scaling	Light di- rections	Light in- tensity	Light tem- perature	Lighting vari- ability	Sensor's angle	Camera sensor
Brodatz [13]	natural, artificial	112 classes 112 images	512×512	gray-scale	•	0	0	0	0	 controlled unknown 	scanned	-
CUReT [14]	natural, artificial	61 classes over 14 000 images	512×512	color RGB	•	0	• 55	0	0	0	7 positions	3 separate CCD
VisTex [15]	natural, artificial	54 classes 864 images	512×512	_	0	•	unknown directions	0	0	 uncon- trolled: daylight, fluorescent, incandescent 	frontal, oblique	_
MeasTex [16]	natural, artificial	4 classes 944 images	512×512	gray-scale	•	0	0	0	0	 daylight di- rect and indi- rect, flash 	frontal, oblique	scanned from 35mm film
PhoTex [17]	rough surfaces	64 classes	1280×1024	gray-scale	•	0	• 4	0	0	0	12 positions	Vosskuhler CCD 1300LN
OuTex [10]	natural, artificial	320 classes 51 840 im- ages	516×716	color RGB	•	•	0	0	0	• fluorescent, tl84, incandescent at 3 positions	frontal	3 CCD, Sony DXC-755P
DynTex [18]	natural, artificial	36 classes 345 sequences	720×576 25fps	color RGB	•	0	0	0	0	0	-	3 CCD, Sony DCR-TRV890E TRV900E
UIUC [19]	natural, artificial	25 classes 1000 images	640×480	gray-scale	0	•	0	0	0	0	various	_
KTH- TIPS2 [20]	natural, food, artificial	44 classes 4608 images	1280×960	color RGB	•	•	• 3	0	0	 incan- descent, fluorescent 	frontal, oblique	Olympus C-3030ZOOM
ALOT [21]	natural, food, artificial	250 classes, over 27 500		color RGB	•	0	• 5	0	• 2	0	4 positions	Foveon X3 3CMOS
Mondial Marmi [22]	granite	12 classes	$544\!\times\!544$	color RGB	•	0	0	0	0	• white HB LEDs	frontal	Samsung S850
STex [23]	natural, artificial	476 classes	1024×1024	color RGB	0	0	0	0	0	0	0	_
USPTex [24]	natural, artificial	191 classes, 2292 images	512×384	color RGB	0	0	0	0	0	0	-	-
Proposed RawFooT	natural, food	68 classes, 3128 images	800×800	color RGB	0	0	• 9	• 5	• 18	• 12	frontal	Canon 40D

2.1 The Raw Food Texture database (RawFooT)

The Raw Food Texture database (RawFooT) has been specially designed to investigate the robustness of descriptors and classification methods with respect to variations in the lighting conditions, with a particular focus on variations in the color of the illuminant. The database includes images of samples of textures, acquired under 46 lighting conditions which may differ in the light direction, in the illuminant color, in its intensity, or in a combination of these factors.

Psycho-physical studies [25] suggest that, in the human visual system, color and pattern information are processed separately. However, it has been observed that their combination can be very effective for texture classification. For certain classes of materials the two kind of information are clearly independent (e.g. fabrics and other artificial materials). For this reason, we considered samples of texture where the relationship between pattern information and color has not been explicitly designed. Our classes correspond to 68 samples of raw food, including various kind of meat, fish, cereals, fruit etc. Therefore, the whole database includes $68 \times 46 = 3128$ images. Fig. 2 shows an image of each sample.

Pictures have been acquired in a dark room with a Canon EOS 40D DSLR camera. The camera was placed 48cm above the sample to be acquired, with the optical axis perpendicular to the surface of the sample. The lenses used had a focal length of 85mm, and a camera aperture of f/11.3; each picture has been taken with four seconds of exposition




Fig. 3. The setup used to acquire the Raw Food Texture database.

time. As illuminants, we used a pair of monitors (22 inches Samsung SyncMaster LED monitor) positioned above the sample and tilted by 45 degrees, with about 20cm of space between their upper edges to make room for the camera. By illuminating different regions of the monitors, and by using different colors (inspired by [26]) we simulated natural and artificial illuminants coming from different directions and at various intensity levels. The two monitors have been colorimetrically characterized using a X-Rite i1 spectral colorimeter, in such a way that the device RGB coordinates can be used to accurately render the desired chromaticites. Daylight at 6500 K (D65) has been specified as a white point. Fig. 3 shows the setup used for the acquisitions.

For each sample a program of 46 shots has been fol-



Fig. 2. Overview of the 68 classes included in the Raw Food Texture database. For each class it is shown the image taken under D65 at direction θ =24°.

lowed:

intensity variations: four shots have been taken while illuminating the whole monitors with neutral light (D65) at different levels of intensity (100%, 75%, 50% and 25% of the maximum achievable level);

light direction: nine shots have been taken with the light (D65) coming from different angles. In the first eight of these shots only a band covering 40% of a single monitor has been lit. The angle between the direction of the light coming from the center of the illuminated band and the surface of the sample are 24, 30, 36, 42, 48, 54, 60, and 66 degrees. For the last shot two bands covering the upper 20% of each monitor have been lit (since on average the light comes exactly from above the sample, we count it as an angle of 90 degrees).

Daylight: 12 shots have been taken while simulating natural daylight at different color temperatures. To do so, given a color temperature T we applied the following equations to obtain the corresponding xy chromaticities:

$$x = a_0 + a_1 \frac{10^3}{T} + a_2 \frac{10^6}{T^2} + a_3 \frac{10^9}{T^3},$$

$$y = -3x^2 + 2.87x - 0.275,$$
(1)

where $a_0=0.244063$, $a_1=0.09911$, $a_2=2.9678$, $a_3=-4.6070$ if $4000\,\mathrm{K} \le T \le 7000\,\mathrm{K}$, and $a_0=0.23704$, $a_1=0.24748$, $a_2=1.9018$, $a_3=-2.0064$ if $7000\,\mathrm{K} < T \le 25\,000\,\mathrm{K}$ [27]. Chromaticities have been converted in the RGB space with a scaling of the color channels ensuring that their largest value is 255. We considered 12 color temperatures in the range from $4000\,\mathrm{K}$ to $9500\,\mathrm{K}$ with a step of $500\,\mathrm{K}$ (we will refer to these as D40, D45, ..., D95). The whole monitors have been lit during these shots.

Indoor illumination: six shots have been taken while simulating an artificial light with a color temperature of 2700 K,

 $3000\,\mathrm{K}$, $4000\,\mathrm{K}$, $5000\,\mathrm{K}$, $5700\,\mathrm{K}$ and $6500\,\mathrm{K}$ on the two whole monitors. We considered LED lights produced by OSRAM and we computed the corresponding RGB values starting from the chromaticities indicated in the data sheets from the producer's web site¹. We will refer to these as L27, L30, ..., L65.

Color and direction: nine shots have been taken by varying both the color and the direction of the illuminant. The combinations of three colors (D65, D95 and L27) and of three directions (24, 60 and 90 degrees) have been considered.

Multiple illuminants: three shots have been taken while the sample is illuminated by two illuminants with different colors (D65, D95 or L27). Bands covering the lower 40% of both the monitors have been lit, using two different colors on the two monitors.

Primary colors: three shots have been taken under pure red, green and blue illuminants.

Each 3944×2622 picture in the camera space has been converted to standard sRGB and the final texture images have been obtained by cropping the central region of 800×800 pixels. Fig. 4 shows the 46 shots taken for two of the 68 samples. To allow the estimate of the illuminants we have carried out the program of 46 shots of a 24 squares Macbeth ColorChecker.

3 TEXTURE DESCRIPTORS

A huge variety of texture descriptors have been proposed in the literature. These were traditionally divided into statistical, spectral, structural and hybrid approach [28]. Among traditional methods the most popular are probably those

1. http://www.osram-os.com

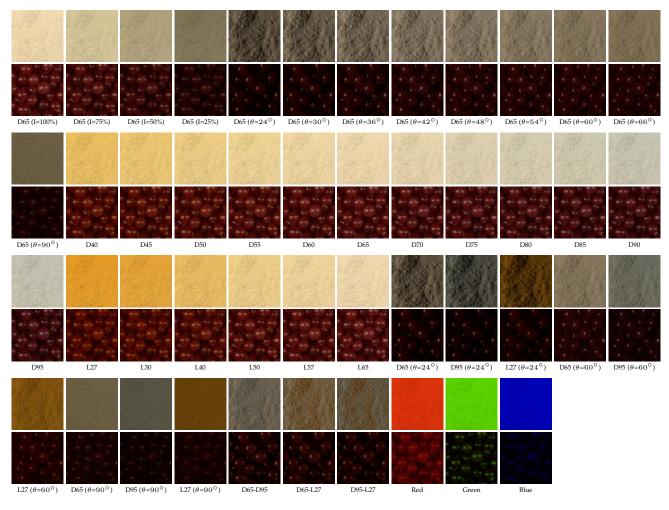


Fig. 4. Overview of the 46 lighting conditions in the Raw Food Texture database: the top rows represent the *flour* class while bottom rows represent the *currant* class.

based on histograms, Gabor filters [29], cooccurrence matrices [30], and Local Binary Patterns [31]. These descriptors display different strengths and weaknesses in particular concerning their invariance with respect to the acquisition conditions.

Traditional descriptors are often designed to capture texture information in uncluttered images taken under controlled conditions. To address those cases where the conditions cannot be controlled, a few attempts have been made to adapt features used for scene or object recognition to the domain of texture classification. For instance, Sharan et al. [9] used SIFT and HOG descriptors for material classification, while Sharma et al. [32] used a variation of the Fisher Vector approach for texture and face classification. Cimpoi et al. [7] shown how SIFT descriptors aggregated with the improved Fisher vector method greatly outperform previous descriptors in the state of the art on a variety of texture classification tasks, including the classification of "textures in the wild."

Following the trend in image recognition, features extracted from Convolutional Neural Networks (CNNs) have been adopted for texture classification as well. CNNs allow to leverage very large datasets of labeled images, by learning intermediate image representations that can be used for various image classification problems [33]. For instance,

Cimpoi et al. [4] used Fisher Vectors to pool features computed by a CNN trained for object recognition.

In addition to these general purpose texture descriptors, a variety of descriptors have been specially designed to be robust with respect to specific variations in the acquisition conditions. Khan et al. [34], for instance, considered a diagonal/offset model for illumination variations, deduced from it an image normalization transformation, and finally extracted Gabor features from the normalized images. Other color normalization techniques can be used for this purpose. Finlayson et al. proposed rank-based features obtained from invariant color representations [35]. Seifi et al., instead, proposed to characterize color textures by analyzing the rank correlation between pixels located in the same neighborhood. They obtained a correlation measure which is related to the colors of the pixels, and is not sensitive to illumination changes [36]. Cusano et al. [37] proposed a texture descriptor specially designed to deal with the case of variations in the color of the illuminant. The reader can refer to the work of Drbohlav et al. [38] for a comparative analysis of texture methods under varying viewpoint and illumination, and to the work of Kandaswamy et al. [39] for a comparison among texture analysis schemes under nonideal conditions.

In this work we compared several descriptors from the

state of the art, by taking a few representative descriptors for each of the approaches mentioned above. Several descriptors have been applied to both color and gray-scale images, where the gray-scale image is defined as the luminance of the image and is obtained by using the standard formula: L=0.299R+0.587G+0.114B.

In order to make the results readable we consider, here, only a selection of all the descriptors evaluated.

3.1 Traditional descriptors

- 256-dimensional gray-scale histogram;
- 512-dimensional Hue and Value marginal histogram obtained from the HSV color representation of the image;
- 768-dimensional RGB and rgb marginal histograms [40];
- 10-dimensional feature vector composed of normalized *chromaticity moments* as defined in [41];
- 15-dimensional feature vector composed of contrast, correlation, energy, entropy and homogeneity extracted from the *co-occurrence matrices* of each color channel [42], [43];
- 144-dimensional *Gabor* features composed of mean and standard deviation of six orientations extracted at four frequencies for each color channel [44], [29];
- 264-dimensional opponent Gabor feature vector extracted as Gabor features from several inter/intra channel combinations: monochrome features extracted from each channel separately and opponent features extracted from couple of colors at different frequencies [45];
- 54-dimensional *Dual Tree Complex Wavelet Transform* (DT-CWT) features obtained considering four scales, mean and standard deviation, and three color channels [44], [46];
- 26-dimensional feature vector obtained calculating morphological operators (granulometries) at four angles and for each color channel [47];
- 512-dimensional *Gist* features obtained considering eight orientations and four scales for each channel [48];
- 81-dimensional Histogram of Oriented Gradients (HOG) feature vector [49]. Nine histograms with nine bins are concatenated to achieve the final feature vector;
- 243-dimensional *Local Binary Patterns* (LBP) feature vector computed with 16 neighbors, radius two and uniform patterns. We applied LBP to gray-scale images and then also to the color channels RGB, CIE-Lab and Ohta's I₁I₂I₃ spaces (in these cases the vector will be 729-dimensional) [1];
- Combination of LBP computed on pairs of color channels, namely the Opponent Color LBP (OCLBP) [50];
- LBP combined with the Local Color Contrast descriptor, as described in [37];
- 499-dimensional Local Color Contrast feature vector. It is obtained by concatenating the LBP on the gray images with a quantized measure of color contrast [37];

3.2 Descriptors for object recognition

The features considered here consists in the aggregation of local descriptors according to the quantization defined by a codebook of visual words. As local descriptors we used 128-dimensional dense SIFT obtained from the gray-scale image by considering a spatial histogram of local gradient orientations. The spatial bins have an extent of 6×6 . The descriptors have been sampled every two pixel and at scales $2^{i/3}$, $i=0,1,2,\ldots$

The object recognition features differ for the aggregation method, but all of them are based on a codebook of 1024 visual words built on images from external sources. In particular we downloaded $20\,000$ images from Flickr containing various content, such as sunset, countryside, etc. and we used k-means to find 1024 representative vectors.

The object recognition features considered here are:

- 1024-dimensional bag of visual words (BoVW).
- 25 600-dimensional vector of locally aggregated descriptors (vlad) [7].
- 40 960-dimensional Fisher's vectors (fv) of locally aggregated descriptors [51].

3.3 CNN-based descriptors

The CNN-based features have been obtained as the intermediate representations of deep convolutional neural networks originally trained for object recognition. The networks are used to generate a texture descriptor by removing the final softmax nonlinearity and the last fully-connected layer, resulting in feature vectors which are L^2 normalized before being used for classification. We considered the most representative CNN architectures in the state of the art [52], each exploring a different accuracy/speed trade-off. All the CNNs have been trained on the ILSVRC-2012 dataset using the same protocol as in [53]. In particular we considered 4096, 2048, 1024 and 128-dimensional feature vectors as follows [33]:

- BVLC AlexNet (BVLC AlexNet): AlexNet trained on ILSVRC 2012 [53].
- BVLC Reference CaffeNet (BVLC Ref): AlexNet trained on ILSVRC 2012, with a minor variation from the version as described in [53].
- Fast CNN (Vgg F): it is similar to the one presented in [53] with a reduced number of convolutional layers and the dense connectivity between convolutional layers. The last fully-connected layer is 4096-dimensional [54].
- Medium CNN (Vgg M): it is similar to the one presented in [55] with a reduced number of filters in the convolutional layer four. The last fully-connected layer is 4096-dimensional [54].
- Medium CNN (Vgg M-2048-1024-128): three modifications of the Vgg M network, with lower dimensional last fully-connected layer. In particular we used a feature vector of 2048, 1024 and 128 size [54].
- *Slow CNN* (Vgg S): it is similar to the one presented in [56] with a reduced number of convolutional layers, less filters in the layer five and the Local Response Normalization. The last fully-connected layer is 4096-dimensional [54].

Vgg Very Deep 19 and 16 layers (Vgg VeryDeep 16 and 19): the configuration of these networks has been achieved by increasing the depth to 16 and 19 layers, that results in a substantially deeper network than what has been used in previous studies [57].

3.4 Color normalization

Invariance with respect to specific changes in acquisition conditions, such as those caused by variations in the illumination, is an important property of visual descriptors. Illumination variations can be also compensated by preprocessing images with a color normalization method. Color normalization methods try to assign a constant color to objects acquired under different illumination conditions.

In order to evaluate this strategy, we have preprocessed the RawFooT database by using several existing normalization methods and next we have extracted features by using the best color descriptors from the set of descriptors evaluated in table 2. More precisely, we considered two implementations of the Retinex method described in [58] that improve the computational efficiency while preserving the underlying principles: the *McCann99* [59] and the *Frankle-McCann* [60]. Furthermore, we considered the Gray World [61], two variants of edge based algorithm, the Gray-Edge [62] and the weighted Gray-Edge method [63].

4 EXPERIMENTS

In all the experiments we used the nearest neighbor classification strategy: given a patch in the test set, its distance with respect to all the training patches is computed. The prediction of the classifier is the class of the closest element in the training set. For this purpose, after some preliminary tests with several descriptors in which we evaluated the most common distance measures, we decided to use the L1 distance: $d(\mathbf{x}, \mathbf{y}) = \sum_{i=1}^{N} |\mathbf{x}_i - \mathbf{y}_i|$, where \mathbf{x} and \mathbf{y} are two feature vectors. All the experiments have been conducted under the maximum ignorance assumption, that is, no information about the lighting conditions of the test patches is available for the classification method and for the descriptors. Performance is reported as classification rate (i.e., the ratio between the number of correctly classified images and the number of test images). Note that more complex classification schemes (e.g. SVMs) would have been viable. We decided to adopt the simplest one in order to focus the evaluation on the features themselves and not on the classifier.

4.1 RawFooT database setup

For each of the 68 classes we considered 16 patches obtained by dividing the original texture image, that is of size 800×800 pixels, in 16 non-overlapping squares of size 200×200 pixels. For each class we selected eight patches for training and eight for testing alternating them in a chessboard pattern. We form subsets of $68 \times (8+8) = 1088$ patches by taking the training and test patches from images taken under different lighting conditions.

In this way we defined several subsets, grouped in nine texture classification tasks.

- 1) **No variations**: 46 subsets. Each subset is composed of training and test patches taken under the same lighting condition.
- 2) **Light intensity**: 12 subsets obtained by combining the four intensity variations. Each subset is composed of training and test patches with different light intensity values.
- 3) **Light direction**: 72 subsets obtained by combining the nine different light directions. Each subset is composed of training and test patches with different light direction.
- 4) **Daylight temperature**: 132 subsets obtained by combining all the 12 daylight temperature variations. Each subset is composed of training and test patches with different light temperatures.
- 5) LED temperature: 30 subsets obtained by combining all the six LED temperature variations. Each subset is composed of training and test patches with different light temperatures.
- Daylight vs. LED: 72 subsets obtained by combining 12 daylight temperatures with six LED temperatures.
- 7) Temperature or direction: 72 subsets obtained by combining all the nine combinations of color temperatures and light directions. Each subset is composed of training and test patches where either the color or the direction (or both) change.
- 8) Temperature and direction: 36 subsets obtained by combining all the nine combinations of color temperatures and light directions. Each subset is composed of training and test patches where both the color and the direction change.
- Multiple illuminant: six subsets obtained by combining the three acquisitions with multiple illuminants.

5 RESULTS

Table 2 reports the performance obtained by the descriptors considered as average and minimum accuracy over the nine classification tasks. For the four main tasks (same illuminant, light intensity, light direction and daylight temperature) the results are shown in greater detail in Figure 5, but only for some representative methods. When training and test are taken under the same lighting conditions the classification rates are generally high, regardless the specific conditions. CNN features perform very well, with a peak of 98.2% of accuracy obtained with the features extracted by the Vgg Very Deep 16 network. Other, more traditional features perform very well in this scenario (OCLBP at 95.9% Opp. Gabor at 96.2%...) and even simple rgb histograms achieve an accuracy of 97.2%. It is clear that under fixed conditions, texture classification is not a very challenging problem, see also Figure 5(a).

When training and test patches are taken under variable intensity, the behavior of CNN features and of the descriptors taken from the object recognition literature (*BoVW*) is very stable. Surprisingly, traditional *hand-crafted* features are heavily affected by this kind of variations even when they are supposed to be robust to them, as should be the case of LBP and Gabor-based features. This behavior is more

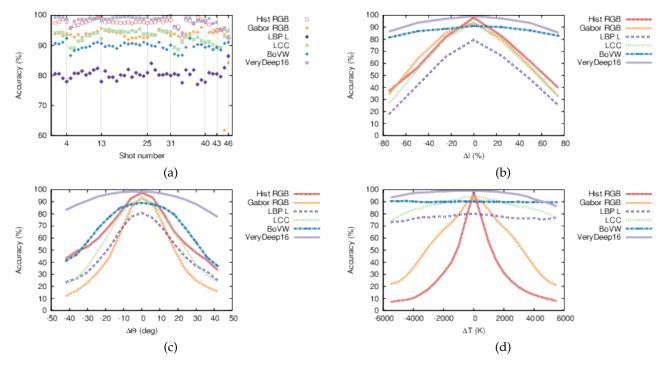


Fig. 5. Detail of the classification rates as functions of the amount of variability in the illumination conditions between the training and test set. (a) Accuracy obtained in the *no variations* classification task (each point corresponds to one of the 46 shots). (b) Accuracy with respect to the difference ΔI of *light intensity*. (c) Accuracy obtained varying the difference between the direction of the light. (d) Accuracy with respect to the difference ΔT of *Daylight temperature*.

evident looking at Figure 5(b), where only *Vgg VeryDeep 16* and *BoVW* have flat curves over changes in the intensity of the light.

Perhaps one of the most challenging variation to take into account is that related to the direction of the light, see Figure 5(c). In this task all the descriptors suffered a noticeable decrease in performance. However, some CNN features remained, on average, above 90% of accuracy. The performance of all the other features dropped below 70%.

When the illuminant color is allowed to vary between train and test images, the achromatic features are the least affected. In particular, the features from the object recognition literature obtained the same performance of the *same illumination* task. For other features, such as LBP-L, we observed a decrease in the performance, probably due to the variation in intensity caused by the change of the color temperature. Features that use color information greatly suffer this kind of variability (see Figure 5(d)). The most important exception is represented by the CNN features that have been trained to exploit color, but in such a way to be robust with respect to the large amount of variability in the object categories they were supposed to discriminate.

Very low performance have been obtained when both direction and color change simultaneously. In this case the best results have been obtained by, again, features from CNNs. However, the highest classification rate is quite low (about 63.6%) and most networks do not allow to achieve more than 50%. The results for the other features are even worse than that.

The last task involved the presence of multiple illuminants. Since their position was stable, we obtained similar results of those of the case of variable color temperature.

Summing up, the challenges of recognizing textures under variable illumination conditions greatly depends on the type of variability involved in the experiments. Features extracted by CNNs significantly outperform the other descriptors considered. Features from the object recognition literature clearly outperform traditional hand-crafted texture features in all the scenarios considered. Only under some specific circumstances these last ones outperformed CNN features. For instance, in Figure 5 (d) it can be observed that CNN features fall below the bag of visual words descriptor for extreme variations in the color temperature. This circumstances can be better understood by looking at Fig. 6(a). This figure compares the behavior of Vgg Very Deep 16 and BoVW over the 68 classes. Here the training and test images have been taken under different lights but all directed with the same angle. In particular we averaged the accuracy obtained in three sets of experiments, one for each angle (24,60,90 deg) all including three lights: D65, D95 and L27. It is quite evident that in this case object recognition features outperform CNNs especially for those classes whose appearance is most sensitive to color changes and that contain a more fine-grained texture, such as (3) salt, (12) sliced bread, (36) flour, (53) mango, (61) coconut flakes, (66) sugar, etc. This result is due to the fact the CNNs have mainly been trained on images of objects and thus containing more coarse details. In contrast, when the training and test images have been taken under the same light but with different light directions, CNN features demonstrate to be more robust than object recognition features, see Fig. 6(b). Here the worst results are obtained by BoVW on coarse-grained texture images, such as (1) chickpeas, (20) basmati rice, (62) chicory, etc.

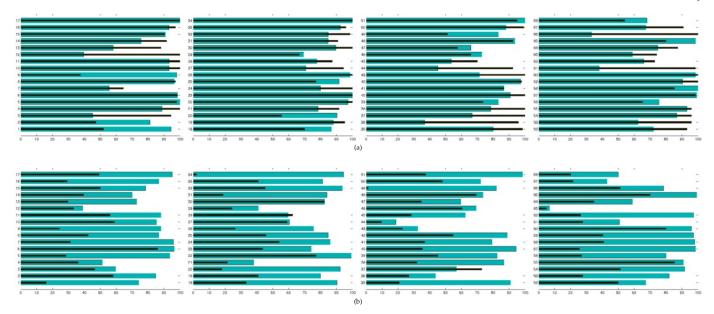


Fig. 6. Accuracy of the *Vgg VeryDeep 16* (turquoise) and *BoVW* (black) over the 68 classes. (a) training and test images are under different lights and same angle. (b) training and test images are under the same light and different angles. To map the numbers to the corresponding classes see Figure 2.

5.1 Preprocessing with color normalization

We have preprocessed all the images with five state-of-theart color normalization methods. Examples of preprocessing applied to two different samples are represented in Figure 7.

Table 3 reports the performance obtained by these color normalization methods combined with a selection of descriptors. It is clear that color normalization helps to improve performance in the case of CNNs. In particular, the combination of *Vgg VeryDeep 16* with *Retinex Frankle* achieves an improvement of 5% in both the cases of temperature and/or direction variations. This result confirms the fact that CNNs have been trained on images without considering changes in illumination conditions. In contrast, the combination of hand-crafted features with pre-processing methods, in most of the cases, does not bring any improvements in terms of classification rate. This is due to the fact that those features, except for color histogram, have been designed to be more robust to changes in the temperature of the light.

6 SUMMARY

In order to obtain reliable classification of color textures under uncontrolled conditions, we believe that the descriptors performance should be assessed under a large set of carefully controlled variations of lighting conditions. We described RawFooT, a database of texture images acquired under variable light direction, color, and intensity. The images of the database will be made publicly available together with all the scripts used in our experimentation. We will also disclose the detailed technical specifications of the hardware and software used to acquire the database; this will allow the researchers in this area to extend RawFooT or to acquire their own database.

RawFooT allowed us to conduct a variety of experiments in which traditional texture, object recognition and CNNbased descriptors have been evaluated in terms of their capabilities in dealing with single and combined variations in the lighting conditions. These experiments made very clear the strengths and the weaknesses of the investigated approach and clearly outlined open issues that should be addressed to actually design color texture descriptors robust with respect to unknown variations in the imaging conditions

In extreme summary, we can conclude that:

- Traditional texture descriptors are effective only when images have no-variations in lighting conditions.
- Object recognition descriptors demonstrated to perform, in most of the cases, better than the traditional ones.
- CNN-based descriptors confirmed to be powerful also on texture classification tasks outperforming the hand-crafted traditional and object-oriented features.
- CNN-based descriptors handle most of the variations in lighting conditions. However for large variations in both color and direction of the light, CNN-based descriptors have demonstrated to be less effective than object recognition descriptors, especially on these classes that are more fine grained.
- The use of Color normalization did not improve any of the hand-crafted descriptors, while for CNN-based descriptors they demonstrated to be helpful in dealing with complex variations in illumination conditions.

REFERENCES

- [1] T. Mäenpää and M. Pietikäinen, "Classification with color and texture: jointly or separately?" *Pattern Recognition*, vol. 37, no. 8, pp. 1629–1640, 2004.
- [2] F. Bianconi, R. Harvey, P. Southam, and A. Fernández, "Theoretical and experimental comparison of different approaches for color texture classification," J. of Electronic Imaging, vol. 20, no. 4, pp. 043 006–043 006, 2011.
- [3] Y. LeCun, Y. Bengio, and G. Hinton, "Deep learning," *Nature*, vol. 521, no. 7553, pp. 436–444, 2015.

TABLE 2
Classification rates (%) of the texture descriptors considered. For each classification task, the best result is reported in bold.

Features	No variations avg (min)	Light intensity avg (min)	Light direction avg (min)	Daylight temp. avg (min)	LED temperature avg (min)	Daylight vs. LED avg (min)	Temp. OR Dir. avg (min)	Temp. & Dir. avg (min)	Multi-illum avg (min)
Hist. L	78.32 (60.66)	6.77 (1.47)	20.97 (2.21)	49.94 (11.95)	27.18 (5.88)	38.05 (6.43)	10.45 (1.29)	7.98 (1.29)	47.33 (30.15)
Hist. H V	96.38 (84.56)	31.45 (14.52)	51.01 (13.97)	49.11 (9.93)	51.56 (23.35)	44.39 (9.19)	16.47 (4.23)	11.36 (4.23)	49.82 (38.42)
Hist. RGB	94.93 (87.13)	15.89 (3.12)	40.82 (5.70)	56.45 (18.20)	37.51 (12.68)	43.44 (8.00)	15.53 (2.76)	10.21 (2.76)	53.83 (42.28)
Hist. <i>rgb</i>	97.24 (92.46)	67.08 (36.95)	64.07 (24.63)	37.35 (6.43)	17.38 (3.31)	25.71 (5.15)	20.16 (2.39)	12.57 (2.39)	45.25 (16.36)
Chrom. mom.	82.54 (58.46)	68.43 (48.90)	53.68 (22.24)	33.41 (4.96)	18.66 (3.68)	24.16 (5.06)	17.03 (2.21)	10.63 (2.21)	33.92 (20.77)
Coocc. matr.	35.33 (9.93)	7.20 (2.02)	9.39 (0.55)	23.02 (9.74)	19.01 (6.62)	19.88 (5.61)	3.30 (0.18)	2.89 (0.18)	10.48 (6.07)
Coocc. matr. L	18.68 (1.47)	3.32 (0.00)	5.63 (0.55)	16.99 (6.99)	9.49 (3.31)	12.94 (2.85)	2.49 (0.00)	2.57 (0.00)	6.86 (2.57)
DT-CWT	92.26 (81.62)	21.68 (1.65)	49.48 (12.32)	66.29 (25.92)	42.31 (14.34)	49.77 (15.44)	19.23 (3.12)	13.22 (3.12)	65.93 (55.33)
DT-CWT L	72.85 (58.09)	10.65 (1.29)	29.29 (5.15)	60.13 (27.39)	32.70 (4.04)	44.06 (5.06)	14.70 (1.47)	12.92 (1.47)	52.73 (37.13)
Gabor RGB	93.02 (61.76)	66.96 (32.35)	51.66 (11.95)	64.81 (20.77)	38.13 (12.13)	48.03 (12.59)	27.18 (3.49)	16.43 (3.49)	75.18 (59.93)
Gabor L	72.91 (70.04)	46.57 (18.75)	29.34 (3.86)	68.94 (59.56)	67.62 (58.82)	66.86 (53.40)	27.58 (2.57)	16.09 (2.57)	74.33 (72.79)
Opp. Gabor RGB	96.15 (59.38)	21.51 (3.49)	50.61 (12.13)	67.75 (22.98)	41.78 (14.34)	50.80 (15.07)	20.22 (3.86)	13.47 (3.86)	58.58 (43.01)
Gist RGB	66.20 (62.50)	55.06 (31.99)	45.75 (10.85)	55.49 (28.31)	36.78 (13.24)	43.41 (13.79)	25.13 (2.76)	17.30 (2.76)	60.36 (54.78)
Granulometry	91.98 (51.65)	63.73 (27.76)	48.65 (10.66)	69.80 (21.51)	33.58 (6.80)	48.79 (6.34)	22.20 (1.65)	12.86 (1.65)	74.23 (64.34)
HoG	46.74 (43.20)	37.52 (24.82)	27.48 (8.46)	41.14 (29.60)	35.29 (22.24)	36.30 (19.30)	16.99 (3.49)	11.71 (3.49)	43.66 (40.62)
LBP L	80.37 (77.02)	51.15 (17.83)	47.09 (9.19)	77.76 (72.24) 72.40 (24.63) 70.61 (24.08) 70.58 (25.92) 67.92 (19.67) 88.78 (73.71)	70.77 (54.60)	73.15 (55.06)	29.54 (5.51)	18.66 (5.51)	76.99 (74.26)
LBP RGB	93.55 (90.81)	68.87 (33.46)	59.48 (13.60)		48.39 (15.07)	56.08 (16.82)	23.72 (0.55)	14.19 (0.55)	76.81 (67.10)
LBP Lab	92.90 (88.42)	71.88 (32.54)	61.74 (17.28)		51.53 (21.69)	56.00 (19.49)	27.55 (3.31)	18.06 (3.31)	77.21 (71.32)
LBP I ₁ I ₂ I ₃	91.40 (82.90)	66.28 (28.12)	63.05 (17.10)		49.90 (18.38)	54.76 (17.00)	27.05 (1.10)	18.39 (1.10)	75.55 (64.89)
OCLBP	95.92 (92.28)	78.75 (51.47)	65.70 (14.52)		49.94 (15.81)	53.93 (15.81)	25.73 (1.65)	16.99 (1.65)	76.53 (50.00)
LCC	92.92 (88.60)	62.64 (26.84)	56.15 (12.13)		74.25 (46.88)	78.82 (50.64)	31.13 (5.15)	19.85 (5.15)	85.91 (84.38)
BoVW	89.73 (86.58)	87.38 (81.43)	67.38 (16.18)	90.02 (88.05)	88.87 (86.76)	89.53 (87.68)	51.59 (12.68)	39.34 (12.68)	88.60 (87.68)
VLAD	79.29 (75.18)	76.87 (70.22)	64.73 (20.77)	78.70 (76.65)	77.87 (73.90)	78.31 (75.74)	51.44 (18.20)	42.62 (18.75)	80.58 (79.78)
FV	85.59 (80.51)	81.02 (71.32)	69.31 (27.39)	86.57 (84.38)	84.58 (78.68)	85.51 (82.35)	55.26 (20.04)	45.95 (20.04)	85.69 (84.56)
Vgg F	96.94 (89.34)	88.07 (72.61)	83.23 (47.06)	96.27 (86.95)	87.94 (65.26)	89.40 (62.96)	54.89 (13.42)	45.62 (13.42)	95.59 (94.49)
Vgg M	97.50 (89.89)	89.94 (76.29)	86.14 (52.02)	97.30 (88.97)	90.64 (69.85)	91.91 (71.60)	60.25 (20.04)	51.13 (20.04)	96.23 (94.49)
Vgg M S	97.53 (91.36)	90.93 (74.82)	86.24 (51.10)	96.16 (85.66)	89.90 (68.75)	90.33 (69.21)	59.02 (16.73)	49.48 (16.73)	95.53 (93.57)
Vgg M 2048	97.27 (89.89)	89.08 (72.43)	84.74 (48.35)	97.38 (90.81)	90.06 (64.34)	91.41 (69.58)	57.18 (14.15)	47.89 (14.15)	95.01 (93.38)
Vgg M 1024	96.79 (87.87)	88.53 (69.67)	84.15 (49.08)	96.90 (90.07)	90.14 (63.42)	91.47 (69.76)	56.26 (14.15)	47.26 (14.15)	93.75 (91.91)
Vgg M 128	93.50 (78.31)	81.54 (59.93)	78.04 (45.04)	93.01 (82.35)	79.72 (46.69)	83.20 (50.92)	49.13 (13.79)	40.75 (13.79)	89.00 (87.50)
BVLC Ref	95.22 (84.56)	83.23 (60.66)	79.00 (40.81)	94.51 (80.33)	85.11 (58.64)	86.52 (58.00)	49.50 (9.38)	40.63 (9.38)	91.24 (89.15)
BVLC AlexNet	94.88 (82.17)	85.00 (65.07)	80.25 (43.57)	95.79 (86.03)	88.56 (66.36)	89.64 (65.99)	48.08 (9.38)	39.37 (9.38)	90.44 (88.24)
Vgg VeryDeep 16	98.21 (92.83)	94.10 (85.48)	91.23 (66.73)	97.41 (86.21)	93.69 (77.57)	93.67 (75.83)	70.81 (33.82)	63.64 (33.82)	96.60 (94.85)
Vgg VeryDeep 19	97.69 (92.10)	93.01 (82.90)	90.32 (62.50)	96.98 (85.85)	93.94 (79.23)	93.53 (74.82)	69.64 (37.68)	62.35 (37.68)	95.59 (94.49)

- [4] M. Cimpoi, S. Maji, and A. Vedaldi, "Deep filter banks for texture recognition and segmentation," in Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, 2015, pp. 3828– 3836.
- [5] S. Hossain and S. Serikawa, "Texture databases—a comprehensive survey," *Pattern Recognition Letters*, vol. 34, no. 15, pp. 2007–2022, 2013.
- [6] F. Bianconi and A. Fernández, "An appendix to "texture databases—a comprehensive survey"," Pattern Recognition Letters, vol. 45, pp. 33–38, 2014.
- [7] M. Cimpoi, S. Maji, I. Kokkinos, S. Mohamed, and A. Vedaldi, "Describing textures in the wild," in *Computer Vision and Pattern Recognition (CVPR)*, 2014 IEEE Conference on, 2014, pp. 3606–3613.
- [8] S. Bell, P. Upchurch, N. Snavely, and K. Bala, "Material recognition in the wild with the materials in context database," arXiv preprint arXiv:1412.0623, 2014.
- [9] L. Sharan, C. Liu, R. Rosenholtz, and E. H. Adelson, "Recognizing materials using perceptually inspired features," *Int'l J. of Computer Vision*, vol. 103, no. 3, pp. 348–371, 2013.
- [10] T. Ojala, T. Maenpaa, M. Pietikainen, J. Viertola, J. Kyllonen, and S. Huovinen, "Outex-new framework for empirical evaluation of texture analysis algorithms," in *Pattern Recognition*, 2002. Proceedings. 16th International Conference on, vol. 1. IEEE, 2002, pp. 701– 706.
- [11] S. Hossain and S. Serikawa, "Texture databases—a comprehensive survey," Pattern Recognition Letters, vol. 34, no. 15, pp. 2007–2022, 2013
- [12] F. Bianconi and A. Fernández, "An appendix to texture databases a comprehensive survey," *Pattern Recognition Letters*, vol. 45, pp. 33–38, 2014.
- [13] P. Brodatz, Textures: a photographic album for artists and designers. Dover New York, 1966, vol. 66.
- [14] K. Dana, B. Van-Ginneken, S. Nayar, and J. Koenderink, "Reflectance and Texture of Real World Surfaces," ACM Transactions on Graphics (TOG), vol. 18, no. 1, pp. 1–34, Jan 1999.

- [15] Media Laboratory at Heriot-Watt University, "Vistex database," Online at http://vismod.media.mit.edu/vismod/imagery/VisionTexture.
- [16] G. Smith, "Meastex image texture database and test suite," Online at http://www.texturesynthesis.com/meastex/meastex.html.
- [17] Texturelab Edinburgh at Massachusetts Institute of Technology, "Photex database," Online at http://www.macs.hw.ac.uk/texturelab/resources/databases/photex/.
- [18] R. Péteri, S. Fazekas, and M. J. Huiskes, "Dyntex: A comprehensive database of dynamic textures," *Pattern Recognition Letters*, vol. 31, no. 12, pp. 1627–1632, 2010.
 [19] S. Lazebnik, C. Schmid, and J. Ponce, "A sparse texture repre-
- [19] S. Lazebnik, C. Schmid, and J. Ponce, "A sparse texture representation using local affine regions," *Pattern Analysis and Machine Intelligence, IEEE Transactions on*, vol. 27, no. 8, pp. 1265–1278, 2005.
 [20] B. Caputo, E. Hayman, and P. Mallikarjuna, "Class-specific ma-
- [20] B. Caputo, E. Hayman, and P. Mallikarjuna, "Class-specific material categorisation," in Computer Vision, 2005. ICCV 2005. Tenth IEEE International Conference on, vol. 2. IEEE, 2005, pp. 1597–1604.
- [21] G. J. Burghouts and J.-M. Geusebroek, "Material-specific adaptation of color invariant features," *Pattern Recognition Letters*, vol. 30, no. 3, pp. 306–313, 2009.
- [22] A. Fernández, O. Ghita, E. González, F. Bianconi, and P. F. Whelan, "Evaluation of robustness against rotation of lbp, ccr and ilbp features in granite texture classification," *Machine vision and Ap*plications, vol. 22, no. 6, pp. 913–926, 2011.
- [23] R. Kwitt and P. Meerwald, "Stex: Salzburg texture image database," http://www.wavelab.at/sources/STex/.
- [24] A. R. Backes, D. Casanova, and O. M. Bruno, "Color texture analysis based on fractal descriptors," *Pattern Recognition*, vol. 45, no. 5, pp. 1984–1992, 2012.
- [25] A. Poirson and B. Wandell, "Pattern-color separable pathways predict sensitivity to simple colored patterns," Vision Research, vol. 36, pp. 515–526, 1996.
- [26] R. Khan, J. Van De Weijer, D. Karatzas, D. Muselet et al., "Towards multispectral data acquisition with hand-held devices." in ICIP, 2013, pp. 2053–2057.
- [27] G. Wyszecki and W. S. Stiles, Color science. Wiley New York, 1982, vol. 8.

TABLE 3
Classification rates (%) of a selection of color descriptors combined with different preprocessing methods.

Features	No variations avg (min)	Light intensity avg (min)	Light direction avg (min)	Daylight temp. avg (min)	LED temperature avg (min)	Daylight vs. LED avg (min)	Temp. OR Dir. avg (min)	Temp. & Dir. avg (min)	Multi-illum avg (min)
VGG VeryDeep 16	98.21 (92.83)	94.10 (85.48)	91.23 (66.73)	97.41 (86.21)	93.69 (77.57)	93.67 (75.83)	70.81 (33.82)	63.64 (33.82)	96.60 (94.85)
Retinex McCann	98.84 (94.67)	94.04 (86.40)	92.83 (67.65)	96.72 (80.88)	93.43 (78.68)	93.04 (77.11)	72.47 (33.46)	65.70 (33.46)	96.97 (96.14)
Retinex Frankle	98.91 (94.49)	94.47 (87.32)	93.49 (70.22)	97.13 (83.46)	94.20 (79.41)	93.96 (79.87)	75.33 (40.81)	68.96 (40.81)	97.40 (96.32)
Gray-World	98.24 (87.32)	98.35 (95.59)	91.30 (62.13)	96.26 (83.09)	78.20 (46.51)	83.57 (45.96)	59.85 (24.26)	50.20 (24.26)	96.17 (94.49)
Gray-Edge	98.64 (89.52)	90.87 (81.43)	90.93 (66.18)	97.56 (92.28)	93.21 (81.43)	94.09 (81.43)	73.82 (41.18)	66.76 (41.18)	96.78 (95.77)
Weighted Gray-Edge	98.37 (85.11)	91.18 (78.31)	90.69 (65.26)	97.62 (93.01)	93.24 (81.99)	94.18 (81.16)	73.57 (41.36)	66.45 (41.36)	96.51 (94.49)
LBP RGB	93.55 (90.81)	68.87 (33.46)	59.48 (13.60)	72.40 (24.63)	48.39 (15.07)	56.08 (16.82)	23.72 (0.55)	14.19 (0.55)	76.81 (67.10)
Retinex McCann	94.07 (91.18)	69.61 (38.24)	60.77 (13.60)	76.21 (31.80)	56.59 (26.47)	61.71 (23.71)	28.42 (2.94)	18.16 (2.94)	82.69 (76.47)
Retinex Frankle	94.21 (90.62)	68.37 (33.64)	58.37 (14.71)	71.99 (24.45)	47.73 (16.54)	55.40 (16.54)	24.71 (2.21)	14.92 (2.21)	75.46 (64.71)
Gray-World	93.63 (90.81)	80.91 (62.68)	61.94 (13.42)	77.88 (37.68)	47.09 (12.68)	58.19 (13.51)	27.10 (0.74)	17.11 (0.74)	72.40 (63.05)
Gray-Edge	94.03 (91.18)	62.96 (27.02)	58.66 (14.15)	72.79 (30.33)	44.01 (10.66)	54.02 (13.60)	22.75 (0.37)	13.30 (0.37)	75.80 (65.99)
Weighted Gray-Edge	93.93 (81.62)	63.45 (26.65)	58.87 (13.97)	72.83 (27.76)	44.09 (10.85)	53.98 (14.25)	22.95 (0.55)	13.40 (0.55)	76.29 (67.28)
Hist rgb	97.24 (92.46)	67.08 (36.95)	64.07 (24.63)	37.35 (6.43)	17.38 (3.31)	25.71 (5.15)	20.16 (2.39)	12.57 (2.39)	45.25 (16.36)
Retinex McCann	98.66 (95.77)	65.40 (38.60)	57.01 (18.93)	32.79 (7.17)	17.54 (2.76)	23.76 (5.70)	16.22 (2.21)	10.06 (2.39)	38.91 (28.49)
Retinex Frankle	98.82 (95.77)	66.42 (39.52)	57.47 (19.67)	34.81 (6.99)	17.95 (3.12)	24.45 (5.24)	16.73 (2.76)	10.15 (2.76)	41.42 (28.49)
Gray-World	98.81 (96.32)	47.87 (19.30)	36.08 (5.70)	51.90 (10.48)	22.42 (1.10)	35.12 (0.46)	13.41 (0.00)	8.36 (0.00)	27.24 (10.66)
Gray-Edge	98.36 (96.32)	78.80 (59.38)	70.90 (31.80)	64.46 (17.10)	37.95 (8.46)	46.55 (9.47)	33.42 (6.25)	24.51 (6.25)	58.92 (35.29)
Weighted Gray-Edge	98.16 (84.01)	75.97 (55.15)	69.37 (29.60)	64.62 (18.38)	38.65 (9.74)	46.90 (8.46)	33.08 (6.99)	24.59 (6.99)	52.30 (30.88)
Gabor RGB	93.02 (61.76)	66.96 (32.35)	51.66 (11.95)	64.81 (20.77)	38.13 (12.13)	48.03 (12.59)	27.18 (3.49)	16.43 (3.49)	75.18 (59.93)
Retinex McCann	92.91 (89.34)	66.88 (32.90)	51.08 (12.68)	65.87 (22.24)	37.55 (10.66)	48.24 (11.40)	22.96 (0.92)	13.12 (0.92)	75.80 (64.71)
Retinex Frankle	93.57 (90.07)	67.31 (33.27)	51.51 (12.68)	66.02 (21.88)	37.71 (11.03)	48.50 (11.95)	23.24 (0.92)	13.15 (0.92)	75.77 (64.15)
Gray-World	94.06 (92.28)	70.54 (37.32)	52.43 (13.42)	68.40 (23.35)	40.29 (11.76)	50.77 (12.68)	26.27 (2.02)	15.18 (2.02)	78.40 (67.46)
Gray-Edge	93.46 (60.85)	64.57 (31.43)	51.51 (11.95)	66.05 (22.79)	38.92 (11.95)	48.78 (12.68)	27.08 (3.31)	16.43 (3.31)	75.06 (59.56)
Weighted Gray-Edge	93.40 (62.13)	64.41 (31.25)	51.50 (11.76)	65.90 (23.16)	38.74 (12.13)	48.66 (13.05)	27.00 (3.49)	16.37 (3.49)	75.03 (60.85)
LCC	92.92 (88.60)	62.64 (26.84)	56.15 (12.13)	88.78 (73.71)	74.25 (46.88)	78.82 (50.64)	31.13 (5.15)	19.85 (5.15)	85.91 (84.38)
Retinex McCann	92.41 (88.60)	64.11 (27.57)	56.97 (12.13)	85.80 (63.60)	63.88 (30.88)	71.12 (31.99)	29.90 (7.54)	20.47 (7.54)	85.63 (82.17)
Retinex Frankle	92.38 (87.68)	62.33 (23.53)	56.14 (12.87)	84.63 (58.27)	61.64 (26.65)	69.27 (28.58)	28.93 (5.88)	19.26 (5.88)	84.53 (81.43)
Gray-World	92.93 (87.50)	74.39 (43.75)	60.25 (15.07)	75.50 (33.46)	42.67 (8.27)	54.36 (7.81)	26.51 (3.86)	17.02 (3.86)	78.12 (71.88)
Gray-Edge	94.27 (89.15)	57.41 (21.88)	55.10 (10.11)	82.16 (48.35)	49.74 (11.76)	61.45 (13.24)	24.37 (2.94)	16.40 (2.94)	87.10 (85.11)
Weighted Gray-Edge	93.92 (81.99)	59.19 (23.71)	54.36 (11.03)	82.46 (50.92)	50.03 (11.03)	61.52 (13.79)	24.17 (2.39)	16.20 (2.39)	86.70 (84.74)

- [28] M. Mirmehdi, X. Xie, and J. Suri, Handbook of Texture Analysis. Imperial College Press, 2009.
- [29] F. Bianconi and A. Fernández, "Evaluation of the effects of gabor filter parameters on texture classification," *Pattern Recognition*, vol. 40, no. 12, pp. 3325 – 3335, 2007. [Online]. Available: http:// www.sciencedirect.com/science/article/pii/S003132030700218X
- [30] R. Haralick, "Statistical and structural approaches to texture," *Proc. of the IEEE*, vol. 67, no. 5, pp. 786–804, 1979.
- [31] T. Ojala, M. Pietikäinen, and T. Mänepää, "Multiresolution grayscale and rotation invariant texture classification with local binary patterns," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 24, no. 7, pp. 971–987, 2002.
- [32] G. Sharma, S. ul Hussain, and F. Jurie, "Local higher-order statistics (lhs) for texture categorization and facial analysis," in *Computer Vision–ECCV* 2012, 2012, pp. 1–12.
- [33] A. S. Razavian, H. Azizpour, J. Sullivan, and S. Carlsson, "Cnn features off-the-shelf: an astounding baseline for recognition," in Computer Vision and Pattern Recognition Workshops (CVPRW), 2014 IEEE Conference on, 2014, pp. 512–519.
- [34] R. Khan, D. Muselet, and A. Trémeau, "Classical texture features and illumination color variations," in Proc. third Int'l Conf. on Machine Vision, 2010, pp. 280–285.
- [35] G. Finlayson, S. Hordley, G. Schaefer, and G. Yun Tian, "Illuminant and device invariant colour using histogram equalisation," *Pattern recognition*, vol. 38, no. 2, pp. 179–190, 2005.
- [36] M. Seifi, X. Song, D. Muselet, and A. Tremeau, "Color texture classification across illumination changes," in Conf. on Colour in Graphics, Imaging, and Vision, 2010, pp. 332–337.
- [37] C. Cusano, P. Napoletano, and R. Schettini, "Combining local binary patterns and local color contrast for texture classification under varying illumination," *JOSA A*, vol. 31, no. 7, pp. 1453–1461, 2014.
- [38] O. Drbohlav and A. Leonardis, "Towards correct and informative evaluation methodology for texture classification under varying viewpoint and illumination," *Computer Vision and Image Understanding*, vol. 114, no. 4, pp. 439–449, 2010.
- [39] U. Kandaswamy, S. A. Schuckers, and D. Adjeroh, "Comparison of texture analysis schemes under nonideal conditions," *Image Processing*, IEEE Transactions on, vol. 20, no. 8, pp. 2260–2275, 2011.

- [40] M. Pietikainen, S. Nieminen, E. Marszalec, and T. Ojala, "Accurate color discrimination with classification based on feature distributions," in *Pattern Recognition*, 1996., Proceedings of the 13th International Conference on, vol. 3, aug 1996, pp. 833 –838 vol.3.
- [41] G. Paschos, "Fast color texture recognition using chromaticity moments," *Pattern Recognition Letters*, vol. 21, no. 9, pp. 837 841, 2000. [Online]. Available: http://www.sciencedirect.com/science/article/pii/S016786550000043X
- [42] V. Arvis, C. Debain, M. Berducat, and A. Benassi, "Generalization of the cooccurrence matrix for colour images: Application to colour texture," *Image Analysis & Stereology*, vol. 23, no. 1, 2004. [Online]. Available: http://www.ias-iss.org/ojs/IAS/article/view/754
- [43] M. Hauta-Kasari, J. Parkkinen, T. Jaaskelainen, and R. Lenz, "Generalized co-occurrence matrix for multispectral texture analysis," in *Pattern Recognition*, 1996., Proceedings of the 13th International Conference on, vol. 2, aug 1996, pp. 785 –789 vol.2.
- [44] F. Bianconi, R. Harvey, P. Southam, and A. Fernández, "Theoretical and experimental comparison of different approaches for color texture classification," *Journal of Electronic Imaging*, vol. 20, no. 4, 2011.
- [45] A. Jain and G. Healey, "A multiscale representation including opponent color features for texture recognition," *Image Processing*, *IEEE Transactions on*, vol. 7, no. 1, pp. 124 –128, jan 1998.
- [46] M. Barilla and M. Spann, "Colour-based texture image classification using the complex wavelet transform," in *Electrical Engineer*ing, Computing Science and Automatic Control, 2008. CCE 2008. 5th International Conference on, nov. 2008, pp. 358 –363.
- [47] A. Hanbury, U. Kandaswamy, and D. Adjeroh, "Illumination-invariant morphological texture classification," in *Mathematical Morphology: 40 Years On*, ser. Computational Imaging and Vision, C. Ronse, L. Najman, and E. Decencire, Eds. Springer Netherlands, 2005, vol. 30, pp. 377–386. [Online]. Available: http://dx.doi.org/10.1007/1-4020-3443-1_34
- [48] A. Oliva and A. Torralba, "Modeling the shape of the scene: A holistic representation of the spatial envelope," *International journal of computer vision*, vol. 42, no. 3, pp. 145–175, 2001.
- [49] O. L. Junior, D. Delgado, V. Gonçalves, and U. Nunes, "Trainable

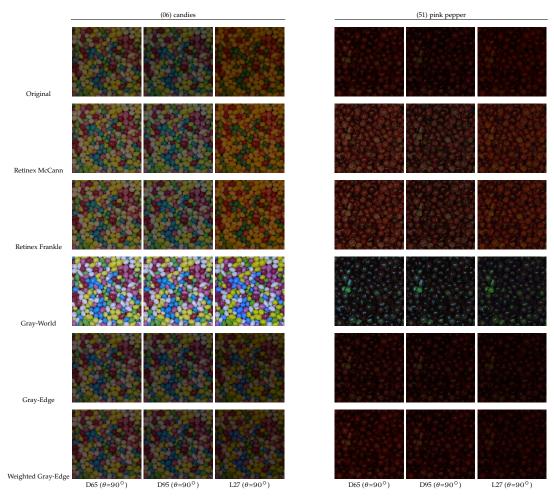


Fig. 7. Color normalization methods applied to two different samples acquired under three different lights.

- classifier-fusion schemes: an application to pedestrian detection," in *Intelligent Transportation Systems*, 2009.
- [50] C.-H. Chan, J. Kittler, and K. Messer, "Multispectral local binary pattern histogram for component-based color face verification," in First IEEE Int'l. Conf. on Biometrics: Theory, Applications, and Systems, 2007, pp. 1–7.
- [51] H. Jégou, M. Douze, C. Schmid, and P. Pérez, "Aggregating local descriptors into a compact image representation," in *Computer Vision and Pattern Recognition (CVPR)*, 2010 IEEE Conference on, 2010, pp. 3304–3311.
- [52] A. Vedaldi and K. Lenc, "Matconvnet convolutional neural networks for matlab," CoRR, vol. abs/1412.4564, 2014.
- [53] A. Krizhevsky, I. Sutskever, and G. E. Hinton, "Imagenet classification with deep convolutional neural networks," in *Advances in neural information processing systems*, 2012, pp. 1097–1105.
- [54] K. Chatfield, K. Simonyan, A. Vedaldi, and A. Zisserman, "Return of the devil in the details: Delving deep into convolutional nets," arXiv preprint arXiv:1405.3531, 2014.
- [55] M. D. Zeiler and R. Fergus, "Visualizing and understanding convolutional networks," in Computer Vision–ECCV 2014. Springer, 2014, pp. 818–833.
- [56] P. Sermanet, D. Eigen, X. Zhang, M. Mathieu, R. Fergus, and Y. Le-Cun, "Overfeat: Integrated recognition, localization and detection using convolutional networks," arXiv preprint arXiv:1312.6229, 2013.
- [57] K. Simonyan and A. Zisserman, "Very deep convolutional networks for large-scale image recognition," arXiv preprint arXiv:1409.1556, 2014.
- [58] B. Funt, F. Ciurea, and J. Mccann, "Retinex in matlab," *J. of Electronic Imaging*, pp. 112–121, 2000.
- [59] J. McCann, "Lessons learned from mondrians applied to real images and color gamuts," in *Color and Imaging Conference*, 1999, pp. 1–8.

- [60] J. Frankle and J. McCann, "Method and apparatus for lightness imaging," 1983, US Patent 4.384.336.
- imaging," 1983, US Patent 4,384,336.
 [61] G. Finlayson and E. Trezzi, "Shades of gray and colour constancy," in *Color and Imaging Conf.*, 2004, pp. 37–41.
- [62] J. van de Weijer, T. Gevers, and A. Gijsenij, "Edge-based color constancy," *IEEE Trans. Image Processing*, vol. 16, no. 9, pp. 2207– 2214, 2007.
- [63] A. Gijsenij, T. Gevers, and J. van de Weijer, "Improving color constancy by photometric edge weighting," IEEE Trans. Pattern Anal. Mach. Intell., vol. 34, no. 5, pp. 918–929, 2012.