

ON THE EXISTENCE OF INFINITELY MANY UNIVERSAL TREE-BASED NETWORKS

MOMOKO HAYAMIZU^{*†} AND KENJI FUKUMIZU^{†*}

ABSTRACT. A tree-based network on a set X of n leaves is said to be *universal* if any rooted binary phylogenetic tree on X can be its base tree. Francis and Steel showed that there is a universal tree-based network on X in the case of $n = 3$, and asked whether such a network exists in general. We settle this problem by proving that there are infinitely many universal tree-based networks for any $n > 1$.

1. INTRODUCTION

Throughout this paper, n denotes a natural number that is greater than 1 and X represents the set $\{1, 2, \dots, n\}$. All graphs considered here are directed acyclic graphs. A graph G' is said to be a *subdivision* of a graph G if G' can be obtained from G by inserting vertices into arcs of G zero or more times. Given a vertex v of a graph with $\text{indeg}(v) = \text{outdeg}(v) = 1$, *smoothing* (or *supressing*) v refers to removing v and then adding an arc from the parent to the child of v . Two graphs are said to be *homeomorphic* if they become isomorphic after smoothing all vertices of in-degree one and out-degree one.

For the reader's convenience, we briefly recall the relevant background from [1] (see [4] for the terminology in phylogenetics).

Definition 1.1. A *rooted binary phylogenetic network on X* is defined to be a directed acyclic graph (V, A) with the following properties:

- $X = \{v \in V \mid \text{indeg}(v) = 1, \text{outdeg}(v) = 0\}$;
- there is a unique vertex $\rho \in V$ with $\text{indeg}(\rho) = 0$ and $\text{outdeg}(\rho) \in \{1, 2\}$;
- for all $v \in V \setminus \{X \cup \{\rho\}\}$, $\{\text{indeg}(v), \text{outdeg}(v)\} = \{1, 2\}$.

The vertices in X are called *leaves*, and the vertex ρ is called the *root*.

Definition 1.2. Suppose $\mathcal{T} = (V, A)$ is a rooted binary phylogenetic tree on X . A rooted binary phylogenetic network \mathcal{N} on X is said to be a *tree-based network on X with base tree \mathcal{T}* if there are a subdivision $\mathcal{T}' = (V', A')$ of \mathcal{T} and a set I of mutually vertex-disjoint arcs between vertices in $V' \setminus V$ such that $(V', A' \cup I)$ is acyclic and is homeomorphic to \mathcal{N} . The vertices in $V' \setminus V$ are called *attachment points*, and the arcs in I are called *linking arcs*.

Tree-based networks have an important role to play in modern phylogenetic inference as they can represent more intricate or realistic relationships among taxa

2010 *Mathematics Subject Classification.* Primary 05C05; Secondary 05C20, 05C25.

Key words and phrases. binary phylogenetic network, tree-based network.

* Department of Statistical Science, The Graduate University of Advanced Studies.

† The Institute of Statistical Mathematics.

than phylogenetic trees without compromising the concept of ‘underlying trees’ (cf., [1, 3]).

In order to state the problem formally, we now introduce the notion of universal tree-based networks. A tree-based network on X is said to be *universal* if any binary phylogenetic tree on X can be a base tree. We can define universal tree-based networks in a more concrete manner with the number $(2n - 3)!!$ of binary phylogenetic trees on X as follows.

Definition 1.3. A tree-based network $\mathcal{N} = (V, A)$ on X is said to be *universal* if for any binary phylogenetic tree $\mathcal{T}^{(i)}$ on X ($i \in \{1, 2, \dots, (2n - 3)!!\}$), there is a set $I^{(i)} \subset A$ of linking arcs such that $(V, A \setminus I^{(i)})$ is homeomorphic to $\mathcal{T}^{(i)}$.

Problem 1.4 ([1]). Does a universal tree-based network on a set X of n leaves exist for all n ?

This problem is fundamental because it explores whether a phylogenetic tree on X is always reconstructable from a tree-based network on X . In [1], Francis and Steel pointed out that the answer is ‘yes’ for $n = 3$. In this paper, we will completely settle their question in the affirmative and provide further insights into universal tree-based networks (Theorem 3.1).

2. PRELIMINARIES

Here, we slightly generalise the concept of tree shapes. Given a tree-based network \mathcal{N} on X , ignoring the labels on the leaves of \mathcal{N} results in an unlabelled tree-based network N with n leaves. We use the two different types of symbols, such as N and \mathcal{N} , to mean unlabelled and labelled tree-based networks, respectively. Two tree-based networks \mathcal{N} and \mathcal{N}' on X are said to be *shape equivalent* if N and N' are isomorphic. This equivalence relation partitions a set of the tree-based networks on X into equivalence classes called *tree-based network shapes with n leaves*.

Definition 2.1. A tree-based network shape N with n leaves is said to be *universal* if for any rooted binary phylogenetic tree shape $T^{(i)}$ with n leaves ($i \in \{1, 2, \dots, r_n\}$), there is a set $I^{(i)}$ of linking arcs such that $(V, A \setminus I^{(i)})$ is homeomorphic to $T^{(i)}$. Here, r_n denotes the number of rooted binary phylogenetic tree shapes with n leaves.

The following proposition is not directly relevant to this paper, but ideas behind it, which are summarised in Remark 2.3, will be useful in the proof of Theorem 3.1.

Proposition 2.2 ([2]). *Let $r_1 := 1$ and $k \in \mathbb{N}$ with $k > 1$. Then, we have the following recurrence equation:*

$$r_n = \begin{cases} 1 & \text{if } n = 2; \\ \sum_{i=1}^{k-1} r_i r_{n-i} & \text{if } n = 2k - 1; \\ \frac{r_k(r_k+1)}{2} + \sum_{i=1}^{k-1} r_i r_{n-i} & \text{if } n = 2k. \end{cases}$$

Remark 2.3. We assume that T_1 represents a rooted chain shape. Any rooted binary phylogenetic tree shape T_n with n leaves can be decomposed into two first-order subshapes T_m and T_{n-m} with $m \in \mathbb{N}$. In other words, using Harding’s notation [2], we can write $T_n = T_m + T_{n-m}$.

3. RESULTS

Theorem 3.1. *For any natural number $n > 1$, there are infinitely many universal tree-based networks on a set X of n leaves.*

Proof. First, we will show that there is a universal tree-based network shape with n leaves. Let U_n be a rooted binary phylogenetic network shape with n leaves as illustrated in the left panel of Figure 1, which can be obtained by adding $(n-1)(n-2)/2$ linking arcs and $(n-1)(n-2)$ attachment points to a rooted caterpillar tree shape with n leaves. By definition, U_n is a tree-based network shape with n leaves. We will prove that U_n is universal by induction. (i) It is easy to see that U_2 and U_3 are universal. (ii) Assuming U_k is universal for any $k \in \mathbb{N}$ ($2 \leq k \leq n$), we will show that U_{n+1} is universal. We claim that any binary phylogenetic tree shape T_{n+1} with $T_{n+1} = T_n + T_1$ can be a base tree shape of U_{n+1} . Indeed, U_{n+1} contains mutually vertex-disjoint arcs whose removal turns U_{n+1} into the union of two subgraphs that are homeomorphic to U_n and T_1 , respectively (see the middle panel of Figure 1). Because U_n is universal, our claim holds true. We next claim that any binary phylogenetic tree shape T_{n+1} with $T_{n+1} = T_k + T_{n-k+1}$ can be a base tree of U_{n+1} . The right panel of Figure 1 indicates that U_{n+1} contains two distinct subsets of mutually vertex-disjoint arcs, one of which delineates U_{n-k+1} (shown in thick gray line) and the other distinguishes U_k from the remainder. Because both U_{n-k+1} and U_k are universal, our claim holds true. Therefore, U_{n+1} is universal. Hence, U_n is universal for all n .

Next, we will provide a method to create infinitely many universal tree-based networks on X from U_n . Let \mathcal{E}_n be a tree-based network on X obtained from U_n by specifying a permutation π_0 of X . In what follows, we use the same notation i both for a leaf labelled i and for the terminal arc incident with i . A *crossover* σ_{ij} refers to a pair of crossed additional arcs between two distinct terminal arcs i and j as described in Figure 2. Note that σ_{ij} can be viewed as representing the transposition (i, j) of the labels. For any permutation π_1 ($\neq \pi_0$) of X , there is a series of adjacent crossovers that converts π_0 into π_1 and then vice versa (note that any permutation can be expressed as a product of transpositions and that the symmetric group S_n is generated by the adjacent transpositions). Then, by sequentially adding $n! - 1$ series of crossovers, we can construct a universal tree-based network \mathcal{U}_n on X from \mathcal{E}_n . Moreover, it is possible to create infinitely many universal tree-based networks on X because we may add an arbitrary number of redundant crossovers among the terminal arcs of \mathcal{U}_n . This completes the proof. \square

REFERENCES

1. A. R. Francis and M. Steel, *Which phylogenetic networks are merely trees with additional arcs?*, *Systematic Biology* **64** (2015), no. 5, 768–777.
2. E. F. Harding, *The probabilities of rooted tree-shapes generated by random bifurcation*, *Advances in Applied Probability* **3** (1971), no. 1, 44–77.
3. D. H. Huson, R. Rupp, and C. Scornavacca, *Phylogenetic networks: concepts, algorithms and applications*, Cambridge University Press, 2010.
4. C. Semple and M. Steel, *Phylogenetics*, Oxford Lecture Series in Mathematics and its Applications, vol. 24, Oxford University Press, Oxford, 2003. MR 2060009 (2005g:92024)
5. LX. Zhang, *On tree based phylogenetic networks*, arXiv:1509.01663 [q-bio.PE] (2015), preprint.

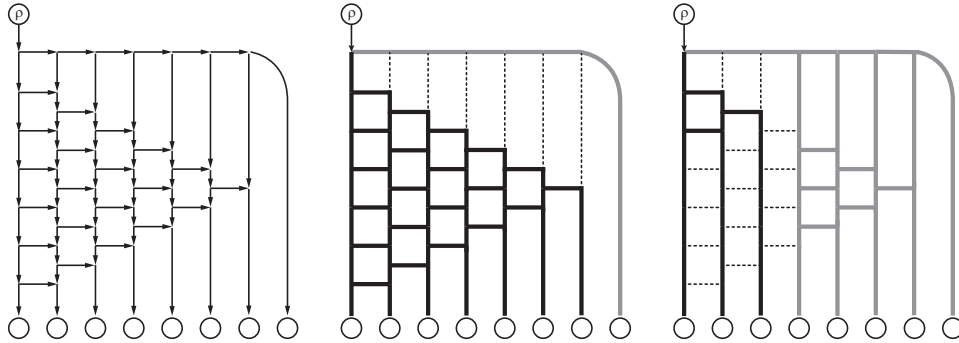


FIGURE 1. The first part of the proof of Theorem 3.1.

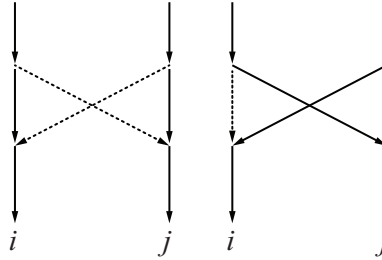


FIGURE 2. The second part of the proof of Theorem 3.1. Left: A *crossover* σ_{ij} is defined to be a pair of crossed additional arcs placed between arcs i and j ($i \neq j$) after subdividing both arcs twice. Right: When the two arcs in σ_{ij} are selected as tree arcs, σ_{ij} represents the transposition $(i j)$.

COMMENTS

Louxin Zhang [5] studied Problem 1.4 independently from us.

ACKNOWLEDGEMENT

This work was supported in part by JSPS KAKENHI Grant Number 25120012 and 26280009.

Current address, Momoko Hayamizu, Kenji Fukumizu: The Institute of Statistical Mathematics, 10-3 Midori-cho, Tachikawa, Tokyo 190-8562, Japan

E-mail address, M. Hayamizu, K. Fukumizu: {hayamizu,fukumizu}@ism.ac.jp