

Reaction-diffusion waves of blood coagulation

Tatiana Galochkina · Anass Bouchnita · Polina
Kurbatova · Vitaly Volpert

Received: date / Accepted: date

Abstract One of the main characteristics of blood coagulation is the speed of clot growth. This parameter strongly depends on the speed of propagation of the thrombin concentration in blood plasma. In the current work we consider mathematical model of the coagulation cascade and study the existence, stability and speed of propagation of the reaction-diffusion waves of blood coagulation. We also develop a simplified one-equation model that describes the main features of the thrombin wave propagation. For this equation we estimate the wave speed analytically. The resulting formulas give a good approximation for the speed of wave propagation in a more complex model as well as for the experimental data.

Keywords Blood coagulation · Reaction-diffusion wave · Speed of propagation

T. Galochkina
Camille Jordan Institute, University Lyon 1, Villeurbanne, 69622, France
Department of Biophysics, Faculty of Biology, M.V. Lomonosov Moscow State University, Leninskie gory
1, Moscow, 119992, Russia
Federal Research Clinical Center of Federal Medical & Biological Agency of Russia, Orekhovy boulevard
28, Moscow, 115682, Russia
Tel.: +7-495-9391116
Fax: +7-495-939115
E-mail: tat.galochkina@gmail.com

A. Bouchnita
Camille Jordan Institute, University Lyon 1, Villeurbanne, 69622, France
Laboratoire de Biométrie et Biologie Evolutive, UMR 5558 CNRS, University Lyon 1, Lyon, 69376,
France
Laboratory of Study and Research in Applied Mathematics, Mohammadia School of Engineers, Mohamed
V university, Rabat, Morocco

P. Kurbatova
Laboratoire de Biométrie et Biologie Evolutive, UMR 5558 CNRS, University Lyon 1, Lyon, 69376,
France

V. Volpert
Camille Jordan Institute, University Lyon 1, Villeurbanne, 69622, France

1 Introduction

1.1 Mathematical models of blood coagulation

The main function of the coagulation system is terminating bleeding, caused by the injury of the vessel wall, with a fibrin clot. The reaction of fibrin polymerization appears at the final stage of the proteolytic enzymatic cascade where the activated clotting factors act as catalyst for activation of the others (Butenas and Mann, 2001; Orfeo et al, 2005). Mature form of fibrin molecules can aggregate into the long branching fibers and form a complex network which serves as thrombus scaffold. The key enzyme of the coagulation cascade is thrombin as it catalyzes fibrinogen conversion to fibrin and its concentration has a crucial influence on the kinetics of the clot formation (Butenas and Mann, 2001; Hemker, 1993; Hemker and Béguin, 1995). To prevent the spontaneous formation of thrombi the activation reactions are normally regulated by the action of plasma inhibitors (Koppelman et al, 1995; Monkovic and Tracy, 1990; Panteleev et al, 2002; Pieters et al, 1988). The balance between coagulation and anti-coagulation systems is important for the normal organism functioning and any alternations can lead to severe pathological states: thrombosis or, on the contrary, disseminative bleeding (Askari and Lincoff, 2010; Colman, 2006).

The influence of different factors on the coagulation process was studied both experimentally and using multiple theoretical approaches. As compared with the experiment, parameters in the theoretical studies can be varied much easier allowing to detect not only experimentally observed regimes of blood coagulation (Ataullakhanov et al, 1998; Bouchnita et al, 2016; Krasotkina et al, 2000; Leiderman and Fogelson, 2011; Stortelder and Hemker, 1997) but also to suppose their possible variations for the conditions that are hard to reproduce in the experiment (Zarnitsina et al, 2001). Model results also provide data about the possible spatiotemporal distribution of all the blood factors participating in the coagulation cascade, while the main parameter used to measure the dynamics of the clot growth experimentally is fibrin clot density (Ataullakhanov et al, 1998, 2002; Krasotkina et al, 2000; Ovasenov et al, 2005; Panteleev et al, 2006). Recently, the hypothesized in multiple mathematical models shape of the thrombin concentration profile in blood plasma was obtained in the direct experiment (Dashkevich et al, 2012).

The biochemical reactions in plasma are normally described with a set of ordinary or partial differential equations (Butenas et al, 2004; Jones and Mann, 1994; Krasotkina et al, 2000; Lacroix, 2012; Leiderman and Fogelson, 2011; Stortelder and Hemker, 1997) while the blood flow is modeled using continuous, discrete or mixed methods. Despite the differences of the modeling approaches, the systems of equations used for the description of the biochemical reactions are rather close, and they can usually be reduced to some simplified models (Ataullakhanov et al, 1998; Bouchnita et al, 2016; Zarnitsina et al, 2001). In Section 2 of the current paper we consider a reaction-diffusion model of the intrinsic pathway of blood coagulation cascade and perform its reduction under certain assumptions. For the reduced system we prove a number of properties of its solutions (Section 3,4) that allow us to replace the analysis

of the whole system by the analysis of one equation on the dynamics of thrombin concentration.

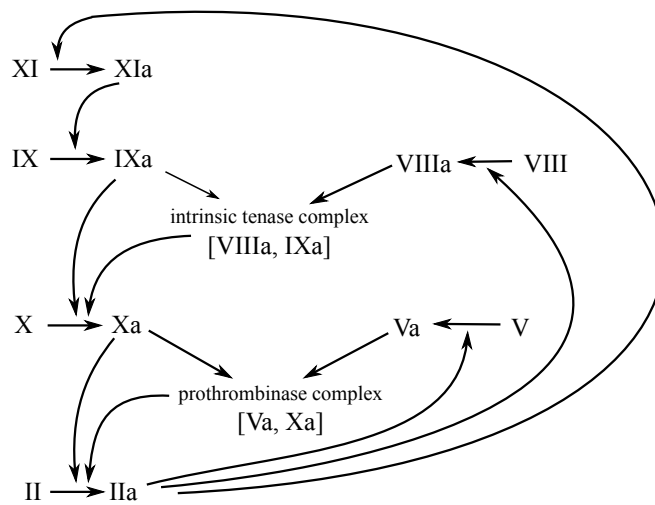


Fig. 1 The main activation reactions of the intrinsic pathway of the coagulation cascade.

1.2 The speed of thrombin propagation

Thrombin is the key enzyme of the coagulation cascade as it catalyzes fibrinogen cleavage to fibrin which in turn forms haemostatic clot. Thrombin formation is a result of the prothrombin activation that can be initiated by different blood factors. Normally the process is launched by the tissue factor that is expressed on the surfaces of all human cells except the endothelium and is bared in case of the vessel wall damage (extrinsic pathway), or through the activation of the factor XI after the contact with the foreign surface (contact activation) (Gailani and Broze, 1991; Orfeo et al, 2005, 2008). Both pathways lead to the activation of factor X (Orfeo et al, 2005) that contributes to the thrombin activation. Once the thrombin concentration reaches the threshold value, further prothrombin activation takes place due to the positive feedback loops of the coagulation cascade (intrinsic pathway) (Orfeo et al, 2005, 2008; Panteleev et al, 2006). Thrombin controls activation of factor XI (Gailani and Broze, 1991) and also of factors V (Monkovic and Tracy, 1990) and VIII whose activated forms (Va, VIIIa) increase activity of factors Xa and IXa by formation of the prothrombinase and intrinsic kinase complexes respectively (Baugh and Krishnaswamy, 1996; Butenas et al, 2004; Orfeo et al, 2005; Scandura and Walsh, 1996) (Fig. 1).

As the result of these biochemical reactions, the thrombin wave propagates in the direction from the injury site to the vascular lumen. According to the experimental data, after thrombin reaches substantial concentration the speed of the clot growth does not anymore depend on the way of the initial activation of the coagulation sys-

tem (Orfeo et al, 2008; Ovasenov et al, 2005) and thrombin wave profile stays constant in time (Ataullakhanov et al, 1998; Butenas et al, 2004; Tokarev et al, 2006). The speed of propagation of the thrombin concentration serves then as one of the important criteria for the validation of the mathematical models of the coagulation system. Moreover, this speed depends strongly on the activity of the blood factors and can be significantly lowered or increased in case of illnesses disturbing the normal functioning of the coagulation system (Askari and Lincoff, 2010; Colman, 2006). This phenomena can be simulated using mathematical models of the whole coagulation cascade (Lobanov and Starozhilova, 2005; Tokarev et al, 2006; Zarnitsina et al, 1996b) or the combination of analytical and numerical approaches as it was done by Pogorelova and Lobanov (2014).

In Section 5 of the current work we propose a new theoretical approach for the estimation of the speed of the thrombin wave propagation. After reducing the system of PDE describing the coagulation cascade to one equation, we build the analytical estimates on the speed of the propagation of the traveling wave solution using two different methods. We then compare the estimates given by analytical formulas with computational values of the speed as well as with the experimental data.

2 Mathematical model

2.1 Complete model

The main biochemical reactions of the coagulation cascade can be described by the following system of partial differential equations:

$$\begin{aligned}
\frac{\partial U_{11}}{\partial t} &= D\Delta U_{11} + r_{11}V_{11}T - h_{11}U_{11}, \\
\frac{\partial V_{11}}{\partial t} &= D\Delta V_{11} - r_{11}V_{11}T, \\
\frac{\partial T}{\partial t} &= D\Delta T + r_2U_{10}\frac{P}{P+K_{2m}} + \bar{r}_2C_1\frac{P}{P+\bar{K}_{2m}} - h_2T, \\
\frac{\partial P}{\partial t} &= D\Delta P - r_2U_{10}\frac{P}{P+K_{2m}} - \bar{r}_2C_1\frac{P}{P+\bar{K}_{2m}}, \\
\frac{\partial C_1}{\partial t} &= D\Delta C_1 + k_{510}U_5U_{10} - h_{510}C_1, \\
\frac{\partial U_5}{\partial t} &= D\Delta U_5 + r_5V_5T - h_5U_5, \\
\frac{\partial V_5}{\partial t} &= D\Delta V_5 - r_5V_5T, \\
\frac{\partial U_{10}}{\partial t} &= D\Delta U_{10} + r_{10}V_{10}U_9 + \bar{r}_{10}V_{10}C_2 - q_{10}U_{10}, \\
\frac{\partial V_{10}}{\partial t} &= D\Delta V_{10} - r_{10}V_{10}U_9 - \bar{r}_{10}V_{10}C_2, \\
\frac{\partial C_2}{\partial t} &= D\Delta C_2 + k_{89}U_8U_9 - h_{89}C_2, \\
\frac{\partial U_8}{\partial t} &= D\Delta U_8 + r_8V_8T - q_8U_8, \\
\frac{\partial V_8}{\partial t} &= D\Delta V_8 - r_8V_8T, \\
\frac{\partial U_9}{\partial t} &= D\Delta U_9 + r_9V_9U_{11} - q_9U_9, \\
\frac{\partial V_9}{\partial t} &= D\Delta V_9 - r_9V_9U_{11}.
\end{aligned} \tag{1}$$

Here, U_i and V_i denote the concentrations of the activated and inactivated forms of the i -th factor respectively, C_1 denotes the concentration of the prothrombinase complex and C_2 corresponds to the concentration of the intrinsic tenase complex. The first term in each equation describes diffusion of the factor in blood plasma. The process of factor activation depends both on concentrations of its inactivated form and on the concentration of the activating factor, thus we consider the factor activation as the bimolecular reactions with the rate constants r_i . The inhibition of the activated factors is assumed to be the first order reaction with the rate constants q_i . Reaction of the thrombin activation obeys to the Michaelis-Menten mechanism with Xa and prothrombinase complex playing the role of enzyme and K_{2m} , \bar{K}_{2m} being the Michaelis constants (Anand et al, 2006; Zarnitsina et al, 1996a, 2001). The reactions of complex formation are considered as the bimolecular reactions. The rate constants of the complex formation are k_i ; as the rates of the complex degradation are much lower, we neglect the corresponding terms. In this work we do not consider the reaction of the fibrinogen conversion to fibrin as it does not influence the other reactions of

the cascade and thus can be decoupled from the system. The resulting model consists of fourteen PDEs and it takes into account the main reactions of the intrinsic pathway (1).

2.2 Model reduction

To perform further analysis of system (1) we will reduce the number of equations. First, let us apply the assumption of the detailed equilibrium to the complex formation equations and set:

$$C_1 = \frac{k_{510}}{h_{510}}U_{10}U_5, \quad C_2 = \frac{k_{89}}{h_{89}}U_9U_8. \quad (2)$$

This approximation is justified if the reaction constants $k_{510}, h_{510}, k_{89}, h_{89}$ are sufficiently large. Next, we assume that the concentrations of the inactivated factors remain constant. This assumption implies that these factors are in excess and they do not limit the rate of the corresponding reactions. It allows us to consider the activation reactions as first-order reactions with $k_i = r_i V_i^0$. Then, we replace the Michaelis-Menten kinetics by the corresponding first-order reaction assuming that the constants $K_{2m}, \overline{K}_{2m}$ are sufficiently large. Finally, we replace P in the equation for T using the approximation $P = P_0 - T$. This relation is exact if $h_2 = 0$ and it gives a good approximation for small h_2 (Figure 2). The reduced system has the form:

$$\begin{aligned} \frac{\partial T}{\partial t} &= D\Delta T + \left(k_2 U_{10} + \overline{k}_2 \frac{k_{510}}{h_{510}} U_{10} U_5 \right) \left(1 - \frac{T}{T_0} \right) - h_2 T, \\ \frac{\partial U_5}{\partial t} &= D\Delta U_5 + k_5 T - h_5 U_5, \\ \frac{\partial U_8}{\partial t} &= D\Delta U_8 + k_8 T - h_8 U_8, \\ \frac{\partial U_9}{\partial t} &= D\Delta U_9 + k_9 U_{11} - h_9 U_9, \\ \frac{\partial U_{10}}{\partial t} &= D\Delta U_{10} + k_{10} U_9 + \overline{k}_{10} \frac{k_{89}}{h_{89}} U_9 U_8 - h_{10} U_{10}, \\ \frac{\partial U_{11}}{\partial t} &= D\Delta U_{11} + k_{11} T - h_{11} U_{11}, \end{aligned} \quad (3)$$

where $\overline{k}_{10} = r_{10} U_{10}^0$, $\overline{k}_2 = r_2 T_0$.

A similar model was previously considered by Anand et al (2006); Zarnitsina et al (1996b). The parameter values of this model were verified using the experimental data. We take these values for the current study (Table 1, Appendix C). The thrombin wave propagates with a constant velocity of about 0.05 mm/min (Fig. 2) that is in a good agreement with the experimental data (Tokarev et al, 2006).

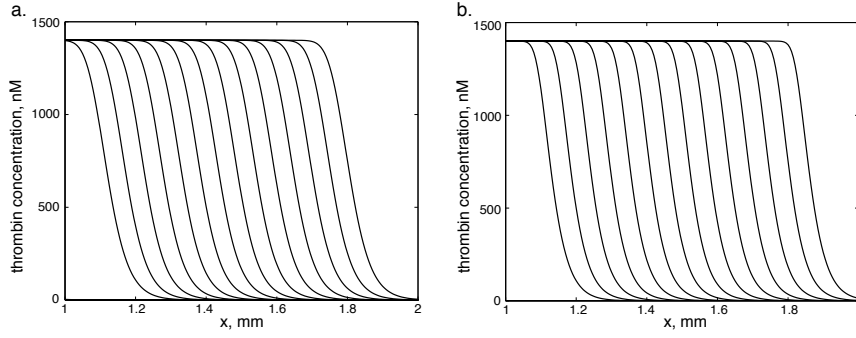


Fig. 2 Propagation of thrombin wave for the model with prothrombin (left) and for the reduced model (3) (right). Each next concentration profile is drawn after 1 min of physical time, the speed of the wave propagation is about 0.05 mm/min.

3 Existence and stability of waves

Let us set $u = (T, U_5, U_8, U_9, U_{10}, U_{11})$. Then system (3) can be written in the vector form:

$$\frac{\partial u}{\partial t} = D\Delta u + F(u), \quad (4)$$

where $F = (F_1, \dots, F_6)$ is the vector of reaction rates in equations (3). It satisfies the following property:

$$\frac{\partial F_i}{\partial u_j} \geq 0, \quad \forall i \neq j.$$

This class of systems is called the monotone systems. These systems have a number of properties similar to those for one scalar equation including the maximum principle. It allows the proof of existence and stability of the wave solutions for such systems and estimation of the speed of the wave propagation (Volpert, 2008). In order to apply these results we need to begin with the analysis of the existence and stability of the stationary points of system (3).

3.1 Stationary points of the kinetic system

Consider the system of ordinary differential equations:

$$\frac{du}{dt} = F(u) \quad (5)$$

Its equilibrium points satisfy the following relations:

$$U_5 = \frac{k_5}{h_5}T, \quad U_8 = \frac{k_8}{h_8}T, \quad U_{11} = \frac{k_{11}}{h_{11}}T, \quad U_9 = \frac{k_9 k_{11}}{h_9 h_{11}}T, \quad (6)$$

$$U_{10} = \frac{k_9 k_{11}}{h_{10} h_9 h_{11}} \left(k_{10}T + \overline{k_{10}} \frac{k_{89}}{h_{89}} T^2 \right), \quad (7)$$

where T is a solution of the equation $P(T) = 0$. Here $P(T) = aT^4 + bT^3 + cT^2 + dT$,

$$\begin{aligned} a &= \frac{\overline{k_{10}k_{89}k_8\overline{k_2}k_5k_{510}k_9k_{11}}}{h_{89}h_8h_5h_{10}h_{510}h_9h_{11}}, & d &= -\frac{k_2k_{10}k_9k_{11}}{h_9h_{11}h_{10}} + h_2T_0, \\ b &= -\frac{\overline{k_{10}k_{89}k_8\overline{k_2}k_5k_{510}k_9k_{11}}}{h_{89}h_8h_5h_{10}h_{510}h_9h_{11}}T_0 + \frac{k_{10}\overline{k_2}k_5k_{510}k_9k_{11}}{h_5h_{10}h_{510}h_9h_{11}} + \frac{\overline{k_2k_{10}k_{89}k_8k_9k_{11}}}{h_{89}h_8h_9h_{11}}, \\ c &= -\frac{k_{10}\overline{k_2}k_5k_{510}k_9k_{11}}{h_5h_{10}h_{510}h_9h_{11}}T_0 + \frac{k_2k_{10}k_9k_{11}}{h_9h_{11}} - \frac{k_2k_{89}k_8k_9k_{11}}{h_{89}h_8h_9h_{11}h_{10}}T_0. \end{aligned}$$

Hence stationary points of system (5) can be found through the stationary points T^* of the equation

$$\frac{\partial T}{\partial t} = -P(T) \quad (8)$$

and equalities (6), (7).

Let us determine the number of positive roots of the polynomial $P(T)$. We set $P(T) = TQ(T)$, where $Q(T) = aT^3 + bT^2 + cT + d$. The number of positive roots of $Q(T)$ can be found as follows. First, we consider a function $Q'(T) = 3aT^2 + 2bT + c$. If it has no zeros, then $Q(T)$ is increasing and has one positive root if and only if $Q(0) < 0$. Otherwise, we denote by T_1, T_2 the nonzero solutions of the equation $Q'(T) = 0$: $T_{1,2} = (-b \pm \sqrt{b^2 - 3ac})/(3a)$. Then the polynomial $Q(u)$ has one positive root in one of the cases:

- $T_1 \leq 0$, $Q(0) < 0$,
- $0 \leq T_1 < T_2$, $Q(0) < 0$ and $Q(T_1) > 0$, $Q(T_2) > 0$ or $Q(T_1) < 0$

and it has two positive roots if $0 < T_2$, $Q(0) > 0$, $Q(T_2) < 0$.

Stability of stationary points of the system (5) can be determined from the stability of stationary points of equation (8). The following theorem holds (see Appendix A for the proof).

Theorem 1 *There is one to one correspondence between stationary solutions $u^* = (T^*, U_5^*, U_8^*, U_9^*, U_{10}^*, U_{11}^*)$ of system (3) and T^* of equation (8) given by (6), (7). The principal eigenvalue of the matrix $F'(u^*)$ is positive (negative) if and only if $P'(T^*) < 0$ ($P'(T^*) > 0$).*

Thus, we can make the following conclusions about the existence and stability of stationary points of the kinetic system of equation (5). It always has the trivial solution $u^* = 0$. It has one (two) positive solution if and only if the polynomial $P(T)$ has one (two) positive roots. A positive solution u^* is stable if and only if $P'(T^*) > 0$.

3.2 Wave existence and stability

We can now formulate the theorem on the existence of waves for the system (3).

Theorem 2 *Suppose that $P(T^*) = 0$ for some $T^* > 0$ and $P'(0) \neq 0$, $P'(T^*) \neq 0$. Let $u^* = (T^*, U_5^*, U_8^*, U_9^*, U_{10}^*, U_{11}^*)$ be the corresponding stationary solutions of system (5) determined by relations (6), (7).*

- *Monostable case. If there are no other positive roots of the polynomial $P(T)$, then system (3) has monotonically decreasing travelling wave solutions $u(x, t) = w(x - ct)$ with the limits $u(+\infty) = 0, u(-\infty) = u^*$ for all values of the speed c greater than or equal to the minimal speed c_0 ,*
- *Bistable case. If there is one more positive root of the polynomial $P(T)$ in the interval $0 < T < T^*$, then system (3) has a monotonically decreasing travelling wave solutions $u(x, t) = w(x - ct)$ with the limits $u(+\infty) = 0, u(-\infty) = u^*$ for a unique value of c .*

The proof of the theorem follows from the general results on the existence of waves for monotone systems of equation (Volpert et al, 2000; Volpert, 2008). Let us note that conditions on the stability of stationary points follow from the assumption of the Theorem 2 and Theorem 1. We have $P'(T^*) > 0$ in both cases since it is the largest root of the polynomial increasing at infinity. The sign of $P'(0)$ is negative if there is no other root in between and positive if there is one more root.

Monotone travelling wave solutions of monotone systems are asymptotically stable (Volpert et al, 2000; Volpert, 2008) that gives global stability in the bistable case. In the monostable case the wave is globally stable for the minimal speed c_0 and stable with respect to small perturbations in a weighted norm for $c > c_0$ (Volpert et al, 2000).

The unique wave speed in the bistable case and the minimal wave speed in the monostable case admit minimax representations. Below we will use them for the bistable system as this case is more appropriate for the applications considered in the current work. Indeed, travelling wave solution of system (3) describes propagation of the thrombin concentration in the blood flow due to the reactions of the coagulation cascade. In this system the convergence to the travelling wave solution takes place only if the initial concentrations of blood factors exceed some critical level, otherwise the clot formation does not start because of the action of plasma inhibitors. Described dependency on the initial conditions and stability of zero solution correspond to the bistable case. In the monostable case, on the contrary, a small perturbation would result in the solution converging to the propagating wave. In terms of the coagulation system functioning, monostable case corresponds to the spontaneous disseminated coagulation blocking blood circulation.

Finally, let us note that in the Theorem 2 we consider only the case of a single positive root of the polynomial and the case of two positive roots. If $P(T)$ has three positive roots the system would be monostable with a stable intermediate stationary point. While this case is interesting from the point of view of wave existence and stability, it is less relevant for the modelling of blood coagulation, and we will not discuss it here.

4 Speed of wave propagation

One of the main objectives of this work is to obtain an analytical approximation of the wave speed for the blood coagulation model (3). We proceed in two steps. First, we reduce the system (3) to a single equation and justify this reduction. Then in the next section, we obtain some estimates of the wave speed for one reaction-diffusion equation.

4.1 System reduction

In order to simplify the presentation, we describe the method of reduction for the system of two equations:

$$u'' + cu' + f(u, v) = 0, \quad (9)$$

$$v'' + cv' + \frac{1}{\varepsilon}(au - bv) = 0, \quad (10)$$

where ε is a small parameter, $\frac{\partial f}{\partial v} > 0$ and the system (9),(10) is bistable. If we multiply the second equation by ε and take a formal limit as $\varepsilon \rightarrow 0$, then we have $v = \frac{a}{b}u$, and the first equation can be rewritten as follows:

$$u'' + cu' + f\left(u, \frac{a}{b}u\right) = 0. \quad (11)$$

Let us recall that the value of the speed $c = c_\varepsilon$ in system (9), (10) and $c = c_0$ for the scalar equation (11) are unknown, and in general they are different from each other. We will demonstrate that $c_\varepsilon \rightarrow c_0$ as $\varepsilon \rightarrow 0$:

Theorem 3 *The speed of wave propagation for system (9), (10) converges to the speed of the wave propagation for equation (11) as $\varepsilon \rightarrow 0$.*

Singular perturbations of travelling waves are extensively studied by Volpert (2008). Here we present another method of proof based on the estimates of the wave speed. This method is simpler and gives not only the limiting value of the speed for $\varepsilon = 0$ but also the estimates of the speed value for any positive ε . In the following section we describe the approach in details and construct the wave speed estimates for the system (9), (10).

4.2 Wave speed estimate

We get the following estimates from the minimax representation of the wave speed in the bistable case (Volpert et al, 2000) :

$$\min\left(\inf_x S_1(\rho), \inf_x S_2(\rho)\right) \leq c \leq \max\left(\sup_x S_1(\rho), \sup_x S_2(\rho)\right), \quad (12)$$

where

$$S_1(\rho) = \frac{\rho_1'' + f(\rho_1, \rho_2)}{-\rho_1'}, \quad S_2(\rho) = \frac{\rho_2'' + (a\rho_1 - b\rho_2)/\varepsilon}{-\rho_2'},$$

$\rho = (\rho_1, \rho_2)$ is an arbitrary test function continuous together with its second derivatives, monotonically decreasing (component-wise) and having the same limits at infinity as the wave, $\rho(+\infty) = 0$, $\rho(-\infty) = u^*$.

Let us choose the following test functions:

$$\rho_1 = u_0, \quad \rho_2 = \frac{a}{b}u_0 - \varepsilon f\left(u_0, \frac{a}{b}u_0\right) \frac{a}{b^2}, \quad (13)$$

where u_0 is the solution of the equation (11). Neglecting the second-order terms with respect to ε , we get:

$$\begin{aligned} S_1(\rho) &= \left(u_0'' + f\left(u_0, \frac{a}{b}u_0 - \varepsilon \frac{a}{b^2} f\left(u_0, \frac{a}{b}u_0\right)\right)\right) / (-u_0') = \\ &= \left(u_0'' + f\left(u_0, \frac{a}{b}u_0\right) - \varepsilon \frac{a}{b^2} f_v\left(u_0, \frac{a}{b}u_0\right) f\left(u_0, \frac{a}{b}u_0\right)\right) / (-u_0') = c_0 + \varepsilon \varphi(x), \end{aligned} \quad (14)$$

where

$$\varphi(x) = \frac{a}{b^2 u_0'} f_v\left(u_0, \frac{a}{b}u_0\right) f\left(u_0, \frac{a}{b}u_0\right),$$

and c_0 is the value of the speed in (11). Next,

$$S_2(\rho) = \frac{u_0'' + f\left(u_0, \frac{a}{b}u_0\right) - \frac{\varepsilon}{b} \left(f\left(u_0, \frac{a}{b}u_0\right)\right)''}{-u_0' + \frac{\varepsilon}{b} \left(f\left(u_0, \frac{a}{b}u_0\right)\right)'} = c_0 + \varepsilon \psi(x), \quad (15)$$

where

$$\psi = \frac{c_0}{b u_0'} \left(f\left(u_0, \frac{a}{b}u_0\right)\right)' + \frac{1}{b u_0'} \left(f\left(u_0, \frac{a}{b}u_0\right)\right)''.$$

Hence from (14), (15) we obtain the estimate

$$c_0 + \varepsilon \max \left\{ \min_x \varphi, \min_x \psi \right\} \leq c \leq c_0 + \varepsilon \min \left\{ \max_x \varphi, \max_x \psi \right\}, \quad (16)$$

where c_0 is the wave propagation speed for (11), the functions $\varphi(x)$, $\psi(x)$ are bounded. The proof of Theorem 3 follows from this estimate.

5 One equation model

5.1 Reduction to the single equation

If the reaction rate constants in the equations of system (3) for the variables U_9 , U_{10} , U_5 and U_8 are sufficiently large, then we can replace these equations by the following algebraic relations (cf. Section 4.1):

$$U_5 = \frac{k_5}{h_5}T, U_8 = \frac{k_8}{h_8}T, U_9 = \frac{k_9}{h_9}U_{11}, U_{10} = U_{11} \frac{k_9}{h_9 h_{10}} \left(k_{10} + \frac{\overline{k_{10}k_{89}}}{h_{89}} \frac{k_8}{h_8} T \right).$$

Then instead of system (3) we obtain the following system of two equations:

$$\begin{aligned} \frac{\partial T}{\partial t} &= D\Delta T + U_{11} \frac{k_9}{h_9 h_{10}} \left(k_{10} + \frac{\overline{k_{10}k_{89}}}{h_{89}} \frac{k_8}{h_8} T \right) \left(k_2 + \frac{\overline{k_2 k_{510}}}{h_{510}} \frac{k_5}{h_5} T \right) \left(1 - \frac{T}{T_0} \right) - h_2 T, \\ \frac{\partial U_{11}}{\partial t} &= D\Delta U_{11} + k_{11} T - h_{11} U_{11}. \end{aligned} \quad (17)$$

Similarly, we can reduce this system to the single equation:

$$\frac{\partial T}{\partial t} = D\Delta T + \frac{k_9 k_{11}}{h_9 h_{10} h_{11}} T \left(k_{10} + \frac{\overline{k_{10}k_{89}}}{h_{89}} \frac{k_8}{h_8} T \right) \left(k_2 + \frac{\overline{k_2 k_{510}}}{h_{510}} \frac{k_5}{h_5} T \right) \left(1 - \frac{T}{T_0} \right) - h_2 T. \quad (18)$$

We realize this reduction in two steps in order to compare the one-equation model with the system (3) as well as the intermediate model of two equations (17). Numerical simulations show that for the values of parameters in the physiological range, all three models give the wave speed of the same order of magnitude (Fig. 3). The two equation model (17) gives a better approximation of the model (3) than the single equation (18). However, the latter demonstrates the same parameter dependence of the wave speed as other models. Taking into account the complexity of the initial model (3), the approximation provided by one equation is acceptable. In what follows we obtain analytical formulas for the wave speed for the one equation model.

5.2 Dimensionless model

In dimensionless variables

$$T = T_0 u, t = \frac{\tilde{t}}{h_2}, D = \tilde{D} h_2. \quad (19)$$

we write equation (18) in the following form:

$$\frac{\partial u}{\partial \tilde{t}} = \tilde{D}\Delta u + M_1 u (1 + M_2 u) (1 + M_3 u) (1 - u) - u, \quad (20)$$

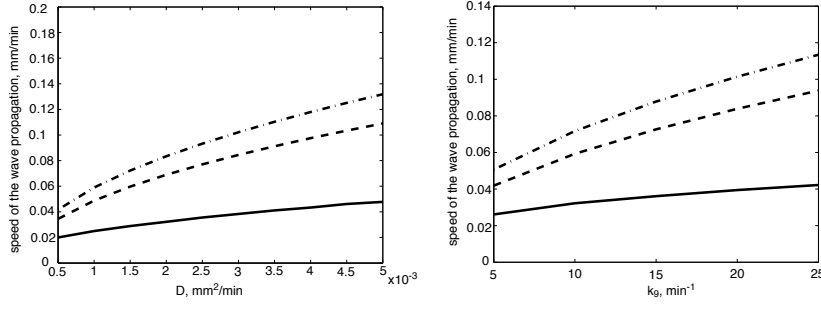


Fig. 3 Speed of wave propagation (mm/min) as a function of D (left) and k_9 (right). Solid line: reduced model (3); dashed line: two-equation model (17); dash-dot line: one equation model (18).

where:

$$M_1 = \frac{k_2 k_9 k_{10} k_{11}}{h_2 h_9 h_{10}}, M_2 = \frac{k_8 k_{89} \bar{k}_{10}}{k_{10} h_8 h_{89}} T_0, M_3 = \frac{\bar{k}_2 k_5 k_{510}}{k_2 h_5 h_{510}} T_0.$$

Analysis of the rate constant values allows us to further simplify the equation. As $M_3 \gg 1$ we can approximate equation (20) by the following equation:

$$\frac{\partial u}{\partial \tilde{t}} = \tilde{D} \Delta u + M_1 M_3 u^2 (1 + M_2 u) (1 - u) - u. \quad (21)$$

Let us note that in the term $u_1^2 (1 + M_2 u_1)$ the first component corresponds to the prothrombin activation by the factor Xa and the second one corresponds to the prothrombin activation by the [Va, Xa] complex. Since during the propagation phase the rate of activation by prothrombinase complex is several orders of magnitude higher than the activation by Xa itself, we can neglect the first component. Thus, applying the assumption of the detailed equilibrium for the second equation, we finally obtain the following equation for the thrombin concentration:

$$\frac{\partial u_1}{\partial \tilde{t}} = \tilde{D} \Delta u_1 + b u_1^3 (1 - u_1) - u_1, \quad (22)$$

where:

$$b = M_1 M_2 M_3. \quad (23)$$

5.3 Wave speed estimate

The equation (22) can be rewritten in the more general form:

$$\frac{\partial u}{\partial t} = D \Delta u + b u^n (1 - u) - \sigma u. \quad (24)$$

Travelling wave solution of (24) satisfies the equation:

$$D w'' + c w' + b w^n (1 - w) - \sigma w = 0. \quad (25)$$

Here we will present two approximate analytical methods to determine the wave speed.

5.3.1 Narrow reaction zone method

One of the methods to estimate the wave speed for the reaction-diffusion equation is the narrow reaction zone method developed in combustion theory (Zeldovich and Frank-Kamenetskii, 1938). Let us rewrite the equation (25) in the form:

$$Dw'' + cw' + F(w) - \sigma w = 0, \quad F(w) = w^n(1-w) \quad (26)$$

We assume that the reaction takes place at one point $x = 0$ in the coordinates of the moving front. Then outside of the reaction zone we consider the linear equations:

$$\begin{cases} Dw'' + cw' - \sigma w = 0, & x > 0, \\ Dw'' + cw' = 0, & x < 0. \end{cases} \quad (27)$$

These equations should be completed with the jump conditions at the reaction zone. In order to derive them, we omit the first derivative w' at the reaction zone since it is small in comparison with two other terms:

$$Dw'' + F(w) = 0. \quad (28)$$

Multiplying (28) by w' and integrating through the reaction zone we obtain the following jump conditions:

$$(w'(+0))^2 - (w'(-0))^2 = \frac{2}{D} \int_0^{w^*} F(w)dw, \quad (29)$$

considered together with the condition of the continuity of solution $w(+0) = w(-0)$.

Solving (27) we have:

$$w = \begin{cases} w_*, & x < 0, \\ w_* \exp\left(\frac{-c - \sqrt{c^2 + 4D\sigma}}{2D}\right), & x > 0. \end{cases} \quad (30)$$

Then from (29) and (30) we obtain the following equation for the wave speed:

$$\hat{c}^2 + \hat{c}\sqrt{\hat{c}^2 + 4D\sigma} + 2D\sigma = A, \quad A = \frac{4D}{w_*^2} \int_0^{w^*} F(w)dw. \quad (31)$$

Hence

$$\hat{c}_1 = \frac{A - 2D\sigma}{\sqrt{2A}}, \quad A = 4bD \left(\frac{w_*^{n-1}}{n+1} - \frac{w_*^n}{n+2} \right). \quad (32)$$

This formula gives a good approximation of the wave speed found numerically for $n \geq 3$ (Fig. 4). The approximation improves with growth of n . The obtained formula gives an estimation of the speed from below (see Appendix B for the justification of the method).

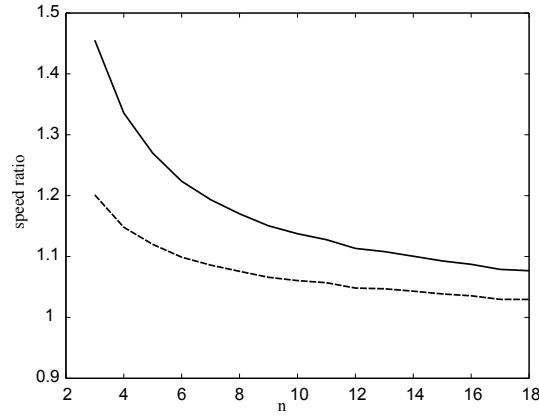


Fig. 4 Ratio of wave speeds found numerically and analytically for different values of n ; $\sigma = 0.01$, $D = 2$, $b = 10$. Solid line: $\frac{c}{c_1}$, dashed line $\frac{c}{c_2}$.

5.3.2 Piecewise linear approximation

Consider equation (26) written in the form

$$Dw'' + cw' + f(w) = 0,$$

where $f(w) = w^n(1-w) - \sigma w$ and $f(0) = f(w_*) = 0$. Let us introduce the following approximation of this equation:

$$Dw'' + cw' + f_0(w) = 0, \quad (33)$$

with

$$f_0(w) = \begin{cases} \alpha w, & 0 < w < w_0, \\ \beta(w - w_*), & w_0 < w < w_*, \end{cases} \quad (34)$$

where

$$\alpha = f'(0), \quad \beta = f'(w_*). \quad (35)$$

In case of equation (24) we have:

$$\alpha = -\sigma, \quad \beta = bnw_*^{n-1} - b(n+1)w_*^n - \sigma. \quad (36)$$

We find the value of w_0 from the additional condition:

$$\int_0^{w_*} f(w)dw = \int_0^{w_*} f_0(w)dw. \quad (37)$$

Hence we obtain the following equation with respect to w_0 :

$$\frac{\alpha - \beta}{2} w_0^2 + \beta w_* w_0 + r = 0, \quad (38)$$

where

$$r = -\beta w_*^2 - \int_0^{w_*} f(w)dw. \quad (39)$$

Taking into account the explicit form of the function $f(w)$, we obtain:

$$r = bw_*^{n+1} \left(-\frac{n}{2} - \frac{b}{n+1} \right) + bw_*^{n+2} \left(\frac{n+1}{2} + \frac{1}{n+2} \right) + \sigma w_*^2. \quad (40)$$

From (38) we get:

$$w_0 = \frac{-\beta w_* + \sqrt{\beta^2 w_*^2 - 2(\alpha - \beta)r}}{\alpha - \beta}. \quad (41)$$

Thus, instead of (33) we consider the following equation:

$$\begin{cases} Dw'' + cw' + \beta(w - w_*) = 0, & x < 0, \\ Dw'' + cw' + \alpha w = 0, & x > 0, \end{cases} \quad (42)$$

with the additional conditions on the continuity of solution and its first derivative:

$$w(0) = w_0, \quad w'(-0) = w'(+0).$$

We find the explicit solution:

$$\begin{cases} w = (w_0 - w_*) \exp\left(x \frac{\sqrt{c^2 - 4\beta D} - c}{2D}\right) + w_*, & x < 0, \\ w = w_0 \exp\left(x \frac{-\sqrt{c^2 - 4\alpha D} - c}{2D}\right), & x > 0. \end{cases} \quad (43)$$

From the condition of continuity of the derivative we obtain the following formula:

$$\hat{c}_2 = \frac{\sqrt{D}(\alpha \bar{w}^2 - \beta)}{\sqrt{(\bar{w} - 1)(\alpha \bar{w}^2 - \beta \bar{w})}}, \quad \bar{w} = \frac{w_0}{w_0 - w_*}. \quad (44)$$

It gives a good approximation of the wave speed for equation (26) (Fig. 4).

5.4 Comparison of the estimated speed of the wave propagation with the complete model and experimental data

5.4.1 Comparison of the estimated speed with the computational speed in system (3)

Considering the system (3) and taking the parameter values for (32), (44) according to (23), we approximate the speed of wave propagation by the following formula obtained by the narrow reaction zone method:

$$\hat{c}_1 = \sqrt{D} \frac{bT_0^2 - \frac{4}{5}bT_0^3 - 2h_2}{\sqrt{2 \left(bT_0^2 - \frac{4}{5}bT_0^3 \right)}}, \quad (45)$$

where

$$b = \frac{k_9 k_{11} \bar{k}_{10} k_8 k_{89} \bar{k}_2 k_5 k_{510} T_0^2}{h_9 h_{10} h_{11} h_8 h_{89} h_5 h_{510}},$$

and by the piecewise linear approximation:

$$\hat{c}_2 = \frac{\sqrt{D}(-3bT_0^2 - h_2\bar{T} + 4bT_0^3 - h_2)}{\sqrt{(T_0 - 1)\bar{T}(-h_2\bar{T} - 3bT_0^2 + 4bT_0^3 + h_2)}}, \quad (46)$$

where:

$$\bar{T} = \frac{T_*}{T_* - T_0}, \quad T_* = \frac{-3bT_0^2 + 4bT_0^4 + h_2}{4bT_0^2 - 3bT_0} + \frac{\sqrt{(3bT_0^2 - 4bT_0^3 - h_2)^2 - 2b(4T_0 - 3)T_0^2\left(-\frac{3}{2}bT_0^2 - \frac{b^2}{4}T_0^2 + \frac{11}{5}bT_0^3 + h_2\right)}}{4bT_0^2 - 3bT_0}. \quad (47)$$

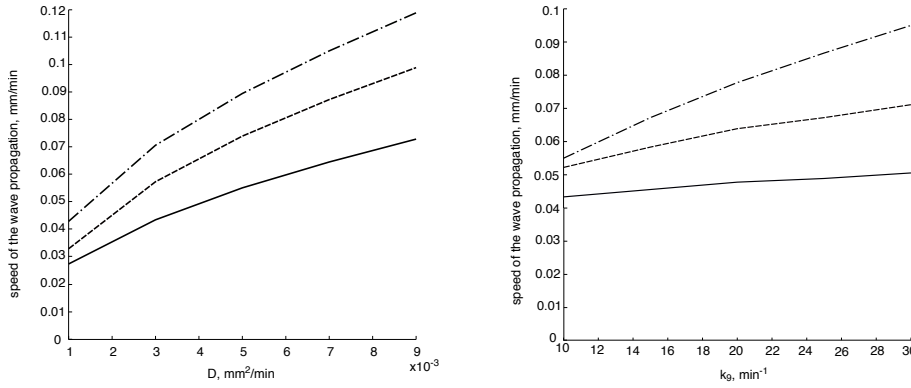


Fig. 5 Speeds of wave propagation (mm/min) as function of D (left) and k_9 (right). Solid line: model (3); dashed line: narrow reaction zone approximation; dash-dot line: piecewise linear approximation.

We compare the speed of wave propagation for model (3) found numerically with the analytical formulas (Fig. 5). As it was demonstrated above, the computational speed for the one-equation model is higher than for the complete model (Fig. 3). The analytical formulas for the speed of the wave propagation for one-equation model give in turn the estimates from below (Fig. 4). As the result, the analytical estimates for one equation give a better approximation of the speed in the complete model than the numerical speed for one equation (Fig. 5). If we then compare two different analytical estimates for the wave speed in one-equation model, we can conclude that narrow reaction zone method gives the speed further from the one-equation computational speed than piecewise linear approximation (Fig. 4) but at the same time it better approximates the wave speed in the complete model (the narrow reaction zone speed is 1.5 times higher than the computational one).

5.4.2 Comparison with experimental data

Analytical formulas for the wave propagation speed are in a good correlation with the experimental data. As an example, by Tokarev et al (2006) we can find the results of the *in vitro* experiments, measuring the speed of clot growth for the patients with hemophilia. This illness affects the activity of the factor IX thus slowing down the process of prothrombin conversion into thrombin. To compare the formula for the speed of wave propagation with the experimental data we fitted the parameters only for one experimental point corresponding to 1% of factor IX activity. Then, we considered different values of the activity of factor IX which corresponds to the parameter k_9 in our estimates (Fig. 6). Both formulas provide a good approximation of the experimental results.

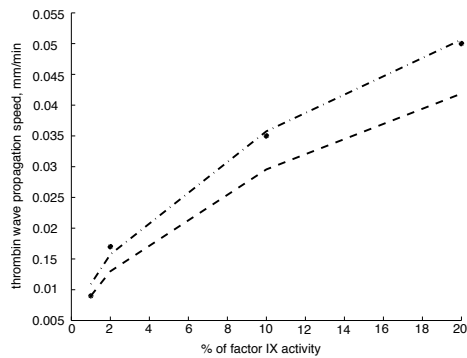


Fig. 6 Speeds of the thrombin wave propagation (mm/min) as function of percentage of factor IX activity. Dots: experimental data; dashed line: narrow reaction zone approximation; dash-dot line: piecewise linear approximation.

6 Discussion and conclusions

Coagulation cascade is a complex network of chemical reactions whose functioning depends strongly on various factors. Numerous mathematical models were developed to describe the influence of different parameters on the details of clotting process. The key stage of the coagulation cascade defining the dynamics of the clot formation is cumulative thrombin production due to the intrinsic pathway functioning. In the most of mathematical models this process is described in terms of PDE on the concentrations of the involved factors and complexes. The traveling wave solutions of such systems correspond to the experimentally observed thrombin wave propagating from the vessel wall to the vascular lumen (Dashkevich et al, 2012).

In the current work we proved existence and stability of traveling wave solutions for the system describing intrinsic pathway of blood coagulation cascade. The main property of the considered system that allowed us to study the traveling waves analytically is its monotonicity. Not all of the previously considered models satisfy

this property, but most of them can be reduced to the monotone systems under some conditions. Moreover, the system reduction can be performed in different ways depending on the assumptions on the kinetics of coagulation cascade. In the upcoming work we will consider another method of the system reduction and will prove the existence and stability of wave solutions for the resulting system.

The most important parameter defining the dynamics of clot growth is the speed of the thrombin wave propagation, or in terms of the mathematical model, the speed of propagation of the reaction-diffusion wave. In the current work we obtain analytical formula for the speed of wave propagation in the model of blood coagulation. We reduce the system of equations to one equation and then determine the wave speed for this equation. The method of reduction is based on the minimax representation of the wave speed applicable for monotone reaction-diffusion systems. Though one equation model gives the value of the speed higher than for the system of equations, the order of magnitude and the dependence on parameters remain the same. Furthermore, the resulting estimates give a good approximation of the available experimental data.

Despite the general character of the methods used in this work, the developed approaches imply some limitations. First, in our model we considered only a part of the coagulation cascade (intrinsic pathway) without taking into account neither the initial activation, nor the role of the activated protein C. This simplification allowed us to perform more detailed analysis of the resulting model. The independence of the final speed of the thrombin wave propagation on the nature of the stimuli that launched the clotting process was previously studied in multiple works (Orfeo et al, 2005, 2008; Tokarev et al, 2006). The role of protein C can be also omitted if we consider the reaction on the distance from the vessel wall. Indeed, the process of the protein C activation occurs due to its reaction on the surface of the vessel wall after a substantial amount of thrombin is already formed (Anand et al, 2008) and thus does not influence the speed of the thrombin propagation in the vascular lumen.

The next important assumption that makes possible model reduction is that certain constants of the kinetic reactions are sufficiently large. However, for the realistic values of the reaction rates this property is not always satisfied thus leading to the difference in the solutions for the complete and reduced models. We also observe this effect in our model, but as the resulting parameter dependence remains the same and the solutions are still rather close we take the reduced models as acceptable approximations of the complete one.

One more important limitation of the considered approach is the application of the narrow reaction zone method for analytical estimation of the wave propagation speed for one equation model. As this method was originally developed for the description of the flame front propagation in the combustion theory, the function describing the reaction should be close to the exponential function. In our work the reaction function is described with the polynomial of the third degree that makes the obtained estimate less precise.

Finally, despite all the assumptions made the obtained analytical estimates give good approximation of both computational and experimental speed of the thrombin propagation. The system reduction, analysis of the existence and stability of waves

and estimates of wave speed developed in this work can be further expanded on other models.

Acknowledgements The authors thank the French-Russian scholarship program “Metchnikov” for the opportunity of the international collaboration.

References

- Anand M, Rajagopal K, Rajagopal KR (2006) A model for the formation and lysis of blood clots. *Pathophysiology of Haemostasis and Thrombosis* 34(2-3):109–120, DOI 10.1159/000089931
- Anand M, Rajagopal K, Rajagopal KR (2008) A model for the formation, growth, and lysis of clots in quiescent plasma. A comparison between the effects of antithrombin III deficiency and protein C deficiency. *Journal of Theoretical Biology* 253(4):725–738, DOI 10.1016/j.jtbi.2008.04.015
- Askari AT, Lincoff AM (2010) Antithrombotic Drug Therapy in Cardiovascular Disease. 1, DOI 10.1007/978-1-60327-235-3
- Ataullakhanov FI, Guria GT, Sarbash VI, Volkova RI (1998) Spatiotemporal dynamics of clotting and pattern formation in human blood. *Biochimica et biophysica acta* 1425(3):453–468, DOI 10.1016/S0304-4165(98)00102-0
- Ataullakhanov FI, Krasotkina YV, Sarbash VI, Volkova RI, Sinauridse EI, Kondratovich AY (2002) Spatio-Temporal Dynamics of Blood Coagulation and Pattern Formation: a Theoretical Approach. *International Journal of Bifurcation and Chaos* 12(9):1969–1983
- Baugh RJ, Krishnaswamy S (1996) Role of the Activation Peptide Domain in Human Factor X Activation by the Extrinsic Xase Complex. *J Biol Chem* 271(27):16,126–16,134
- Bouchnita A, Tosenberger A, Volpert V (2016) On the regimes of blood coagulation. *Applied Mathematics Letters* 51:74–79, DOI 10.1016/j.aml.2015.07.010
- Butenas S, Mann KG (2001) Blood coagulation. *Biochemistry (Moscow)* 61(3):3–12
- Butenas S, Orfeo T, Gissel MT, Brummel KE, Mann KG (2004) The significance of circulating factor IXa in blood. *Biochemistry* pp 1–41
- Colman RW (2006) Hemostasis and thrombosis: basic principles and clinical practice, lippincott edn
- Dashkevich NM, Ovanesov MV, Balandina N, Karamzin SS, Shestakov PI, Soshitova NP, Tokarev AA, Panteleev MA, Ataullakhanov FI (2012) Thrombin activity propagates in space during blood coagulation as an excitation wave. *Biophysical Journal* 103(10):2233–2240, DOI 10.1016/j.bpj.2012.10.011
- Gailani D, Broze GJ (1991) Factor XI Activation in a Revised Model of Blood Coagulation. *Science* 253(5022):909–912
- Hemker HC (1993) Thrombin generation, an essential step in haemostasis and thrombosis. *Haemostasis and thrombosis* 3:477–491
- Hemker HC, Béguin S (1995) Thrombin generation in plasma: its assessment via the endogenous thrombin potential. *Thrombosis and haemostasis* 74(1):134–8

- Jones KC, Mann KG (1994) A model for the tissue factor pathway to thrombin. II. A mathematical simulation. *Journal of Biological Chemistry* 269(37):23,367–23,373
- Koppelman SJ, Hackeng TM, Sixma JJ, Bouma BN (1995) Inhibition of the Intrinsic Factor X Activating Complex by Protein S: Evidence for a Specific Binding of Protein S to Factor VIII. *Blood* 86(3):1062–1071
- Krasotkina YV, Sinauridze EI, Ataulakhanov FI (2000) Spatiotemporal dynamics of fibrin formation and spreading of active thrombin entering non-recalcified plasma by diffusion. *Biochimica et Biophysica Acta - General Subjects* 1474(3):337–345, DOI 10.1016/S0304-4165(00)00019-2
- Lacroix DE (2012) A reduced equation mathematical model for blood coagulation and lysis in quiescent plasma. *International journal of structural changes in solids - mechanics and applications* 4:23–35
- Leiderman K, Fogelson AL (2011) Grow with the flow: A spatial-temporal model of platelet deposition and blood coagulation under flow. *Mathematical Medicine and Biology* 28(1):47–84, DOI 10.1093/imammb/dqq005
- Lobanov AI, Starozhilova TK (2005) The effect of convective flows on blood coagulation processes. *Pathophysiology of haemostasis and thrombosis* 34(2-3):121–34, DOI 10.1159/000089932
- Monkovic DD, Tracy PB (1990) Functional characterization of human platelet-released factor V and its activation by factor Xa and thrombin. *J Biol Chem* 265(18):17,132–17,141
- Orfeo T, Butenas S, Brummel-Ziedins KE, Mann KG (2005) The tissue factor requirement in blood coagulation. *Journal of Biological Chemistry* 280(52):42,887–42,896, DOI 10.1074/jbc.M505506200
- Orfeo T, Brummel-Ziedins KE, Gissel M, Butenas S, Mann KG (2008) The nature of the stable blood clot procoagulant activities. *Journal of Biological Chemistry* 283(15):9776–9786, DOI 10.1074/jbc.M707435200
- Ovasenov MV, Ananyeva NM, Pantelev MA, Ataulakhanov FI, Saenko EL (2005) Initiation and propagation of coagulation from tissue factor-benfin cell monolayers to plasma: initiator cells do not regulate spatial growth rate. *J Thromb Haemost* 3:321–31, DOI 10.1017/CBO9781107415324.004, arXiv: 1011.1669v3
- Pantelev MA, Zarnitsina VI, Ataulakhanov FI (2002) Tissue factor pathway inhibitor: a possible mechanism of action. *Eur J Biochem* 269:118–122, DOI 10.1046/j.1432-1033.2002.02818.x
- Pantelev MA, Ovasenov MV, Kireev DA, Shibeko AM, Sinauridze EI, Ananyeva NM, Butylin AA, Saenko EL, Ataulakhanov FI (2006) Spatial Propagation and Localization of Blood Coagulation Are Regulated by Intrinsic and Protein C Pathways, Respectively. *Biophysical Journal* 90(5):1489–1500, DOI 10.1529/biophysj.105.069062
- Pieters J, Willems G, Hemker HC, Lindhout T (1988) Inhibition of Factor Xa and Factor X, by Antithrombin III / Heparin during Factor X Activation. *The Journal of biological chemistry* 263(30):15,313–15,318
- Pogorelova EA, Lobanov AI (2014) Influence of enzymatic reactions on blood coagulation autowave. *Biophysics* 59(1):110–118, DOI 10.1134/S0006350914010151
- Scandura JM, Walsh PN (1996) Factor X bound to the surface of activated human platelets is preferentially activated by platelet-bound factor IXa. *Biochemistry*

- 35(27):8903–13., DOI 10.1021/bi9525031
- Stortelder W, Hemker PW (1997) Mathematical modelling in blood coagulation ; Simulation and parameter estimation. Report - Modelling, analysis and simulation 20:1–11
- Tokarev A, Krasotkina Y, Ovanesov M, Panteleev M, Azhigirova M (2006) Spatial Dynamics of Contact-Activated Fibrin Clot Formation in vitro and in silico in Haemophilia B : Effects of Severity and Ahemphil B Treatment. Math Model Nat Phenom 1(2):124–137, DOI 10.1051/mmnp:2008007
- Volpert AI, Volpert VA, Volpert VA (2000) Traveling Wave Solutions of Parabolic Systems, vol 140
- Volpert V (2008) Elliptic Partial Differential Equations, vol 104
- Zarnitsina VI, Pokhilko AV, Ataullakhanov FI (1996a) A mathematical model for the spatio-temporal dynamics of intrinsic pathway of blood coagulation. I. The model description. Thrombosis Research 84(4):225–236, DOI 10.1016/S0049-3848(96)00182-X
- Zarnitsina VI, Pokhilko AV, Ataullakhanov FI (1996b) A mathematical model for the spatio-temporal dynamics of intrinsic pathway of blood coagulation. II. Results. Thrombosis Research 84(5):333–344, DOI 10.1016/S0049-3848(96)00197-1
- Zarnitsina VI, Ataullakhanov FI, Lobanov AI, Morozova OL (2001) Dynamics of spatially nonuniform patterning in the model of blood coagulation. Chaos 11(1):57–70, DOI 10.1063/1.1345728
- Zeldovich YB, Frank-Kamenetskii DA (1938) A theory of thermal propagation of flame. Acta Physicochim USSR 9

Appendix

A Proof of the Theorem 1

Proof Along with the system system

$$\frac{du}{dt} = F(u) \quad (48)$$

consider the system

$$\frac{du}{dt} = F_{\tau}(u) \quad (49)$$

which depends on the parameter $\tau \in [0, 1]$. They differ only by the equation for T which is considered now in the following form:

$$\frac{dT}{dt} = (\tau U_{10} + (1 - \tau)\varphi_{10}(T)) \left(k_2 + \frac{k_2 k_{510}}{h_{510}} (\tau U_5 + (1 - \tau)\varphi_5(T)) \right) \left(1 - \frac{T}{T_0} \right) - h_2 T.$$

Here the functions $\varphi_i(T)$ are determined by the equalities:

$$\begin{aligned} \varphi_{11}(T) &= \frac{k_{11}}{h_{11}} T, \quad \varphi_9(T) = \frac{k_9 k_{11}}{h_9 h_{11}} T, \quad \varphi_5(T) = \frac{k_5}{h_5} T, \quad \varphi_8(T) = \frac{k_8}{h_8} T, \\ \varphi_{10}(T) &= \frac{k_9 k_{11}}{h_{10} h_9 h_{11}} \left(k_{10} T + \frac{k_{89}}{h_{89}} T^2 \right). \end{aligned}$$

We can express U_i , $i = 5, 8, 9, 10, 11$ as functions of T from the corresponding equations in (48) or, the same, from (49): $U_i = \varphi_i(T)$. Therefore the solutions of the system of equations $F_\tau(T) = 0$ coincide with the solutions of the system $F(T) = 0$.

Thus, systems (48) and (49) have the same stationary solutions for all $\tau \in [0, 1]$. For $\tau = 1$ these two systems coincide. For $\tau = 0$ the equation for T in (49) does not depend on other variables. This will allow us to determined the eigenvalues of the corresponding linearized matrix.

It can be verified by the direct calculations that $\det F'_\tau(u^*) = 0$ if and only if $\det F'(u^*) = 0$ for all $\tau \in [0, 1]$. Suppose that the latter is different from zero. Then the principal eigenvalue of the matrix F'_τ , which is real and simple, cannot change sign when τ changes from 0 to 1. Hence the sign of the principal eigenvalue of the matrix $F'(u^*)$ is the same as for the matrix $F'_0(u^*)$. This matrix has the form:

$$F'_0(u^*) = \begin{matrix} & T & U_5 & U_8 & U_{11} & U_9 & U_{10} \\ \begin{matrix} T \\ U_5 \\ U_8 \\ U_{11} \\ U_9 \\ U_{10} \end{matrix} & \begin{pmatrix} -P'(T^*) & 0 & 0 & 0 & 0 & 0 & 0 \\ k_5 & -h_5 & 0 & 0 & 0 & 0 & 0 \\ k_8 & 0 & -h_8 & 0 & 0 & 0 & 0 \\ k_{11} & 0 & 0 & -h_{11} & 0 & 0 & 0 \\ 0 & 0 & 0 & k_9 & -h_9 & 0 & 0 \\ 0 & 0 & \frac{k_{10}k_{89}}{h_{89}}U_9^* & 0 & k_{10} + \frac{k_{10}k_{89}}{h_{89}}U_8^* & -h_{10} \end{pmatrix} \end{matrix}$$

The principal eigenvalue of this matrix is positive if $P'(T^*) < 0$ and negative if this inequality is opposite.

B Justification of the narrow reaction zone method

Consider equation (26) and suppose for simplicity that $F(u) = 0$ for $u \leq u_0$ and $F(u) > 0$ for $u_0 < u < 1$. Let u^* be the maximal solution of the equation $F(u) = \sigma u$ (Figure 7). We will look for a decreasing solution of equation (26) with the limits:

$$u(-\infty) = u^*, \quad u(+\infty) = 0.$$

Multiplying the equation (26) by u' and integrate through the hole axis we obtain:

$$c = \frac{\int_0^{u^*} F(u) du - \frac{1}{2} \sigma (u^*)^2}{\int_{-\infty}^{\infty} (u'(x))^2 dx}. \quad (50)$$

Along with equation (26) we consider the system of two first-order equations:

$$\begin{cases} u' = p, \\ p' = -cp - F(u) + \sigma u. \end{cases} \quad (51)$$

The wave solution of (26) corresponds to the trajectory connecting the stationary points $(u^*, 0)$ and $(0, 0)$ (Figure 7). This trajectory coincides with the line $p = \lambda u$ for $0 < u \leq u_0$, where λ is a negative solution of the equation

$$\lambda^2 + c\lambda - \sigma = 0.$$

The integral in the denominator of (50) can be approximated by replacing the trajectory function by the straight line $p = -\lambda u$:

$$\int_{-\infty}^{\infty} (u'(x))^2 dx = \int_0^{u^*} p(u) du \approx \frac{1}{2} \lambda (u^*)^2.$$

Substituting this expression into (50) we obtain the same formula for the speed as by the narrow reaction zone method (32).

Thus, narrow reaction zone method is equivalent to replacing the equation trajectory by the straight line. Hence we can conclude that this method provides the estimate of the speed from below, and it also gives asymptotically correct result in the limiting case as the support of the function $F(u)$ converges to a point.

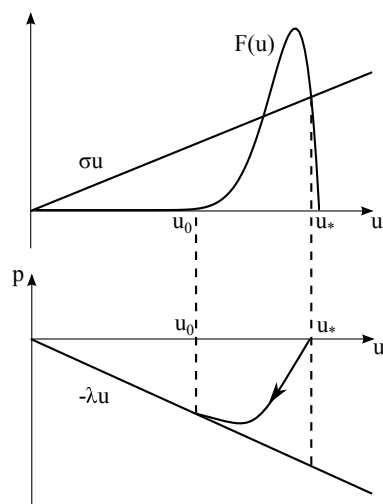


Fig. 7 Illustration of the narrow reaction zone method approximation.

C Parameter values used for the simulations

Table 1 Parameter rates used for the modeling of the coagulation cascade.

parameter	value	units
k_{11}	0.000011	min^{-1}
h_{11}	0.5	min^{-1}
k_{10}	0.00033	min^{-1}
\bar{k}_{10}	500	min^{-1}
h_{10}	1	min^{-1}
k_9	20	min^{-1}
h_9	0.2	min^{-1}
k_{89}	100	$\text{nM}^{-1}\text{min}^{-1}$
h_{89}	100	min^{-1}
k_8	0.00001	min^{-1}
h_8	0.31	min^{-1}
k_5	0.17	min^{-1}
h_5	0.31	min^{-1}
k_{510}	100	$\text{nM}^{-1}\text{min}^{-1}$
h_{510}	100	min^{-1}
k_2	2.45	min^{-1}
h_2	2.3	min^{-1}
\bar{K}_{2m}	58	nM
\bar{K}_{2m}	210	nM
D	0.0037	$\text{mm}^2\text{min}^{-1}$
T_0	1400	nM