

DEUCE: A Lightweight User Interface for Structured Editing

Brian Hempel, Justin Lubin, Grace Lu, and Ravi Chugh
University of Chicago
{brianhempel,justinlubin,gracelu,rchugh}@uchicago.edu

ABSTRACT

We present a structure-aware code editor, called DEUCE, that is equipped with direct manipulation capabilities for invoking automated program transformations. Compared to traditional refactoring environments, DEUCE employs a direct manipulation interface that is tightly integrated within a text-based editing workflow. In particular, DEUCE draws (i) clickable widgets atop the source code that allow the user to *structurally select* the unstructured text for subexpressions and other relevant features, and (ii) a lightweight, interactive menu of potential transformations based on the current selections. We implement and evaluate our design with mostly standard transformations in the context of a small functional programming language. A controlled user study with 21 participants demonstrates that structural selection is preferred to a more traditional text-selection interface and may be faster overall once users gain experience with the tool. These results accord with DEUCE’s aim to provide human-friendly structural interactions on top of familiar text-based editing.

CCS CONCEPTS

• **Software and its engineering** → Integrated and visual development environments; • **Human-centered computing** → Human computer interaction (HCI);

KEYWORDS

Structured Editing, Refactoring, Direct Manipulation

ACM Reference Format:

Brian Hempel, Justin Lubin, Grace Lu, and Ravi Chugh. 2018. DEUCE: A Lightweight User Interface for Structured Editing. In *ICSE ’18: 40th International Conference on Software Engineering*, May 27–June 3, 2018, Gothenburg, Sweden. ACM, New York, NY, USA, 26 pages. <https://doi.org/10.1145/3180155.3180165>

1 INTRODUCTION

Plain text continues to dominate as the universal format for programs in most languages. Although the simplicity and generality of text are extremely useful, the benefits come at some costs. For novice programmers, the unrestricted nature of text leaves room for syntax errors that make learning how to program more difficult [Altadmri et al. 2016]. For expert programmers, many editing

This is the authors’ preprint version, extended with Supplementary Appendices. It is posted here for your personal use. Not for redistribution. The definitive version was published in the following venue.

ICSE ’18, May 27–June 3, 2018, Gothenburg, Sweden
© 2018 Copyright held by the owner/author(s). Publication rights licensed to ACM.
ACM ISBN 978-1-4503-5638-1/18/05...\$15.00
<https://doi.org/10.1145/3180155.3180165>

tasks—perhaps even the vast majority [Ko et al. 2005]—fall within specific patterns that could be performed more easily and safely by automated tools. Broadly speaking, two lines of work have, respectively, sought to address these limitations.

Structured Editing. Structured editors—such as the Cornell Program Synthesizer [Teitelbaum and Reps 1981], Scratch [Maloney et al. 2010; Resnick et al. 2009], and TouchDevelop [Tillmann et al. 2012]—reduce the amount of unstructured text used to represent programs, relying on blocks and other visual elements to demarcate structural components of a program (e.g. a conditional with two branches, and a function with an argument and a body). Operations that create and manipulate structural components avoid classes of errors that may otherwise arise in plain text, and text-editing is limited to within well-formed structures. Structured editing has not yet, however, become popular among expert programmers, in part due to their cumbersome interfaces compared to plain text editors [Monig et al. 2015], as well as their restrictions that even transitory, evolving programs always be well-formed.

Text Selection-Based Refactoring. An alternative approach in integrated development environments (IDEs), such as Eclipse, is to augment unrestricted plain text with support for a variety of refactorings [Fowler 1999; Griswold 1991; Roberts et al. 1997]. In such systems, the user text-selects something of interest in the program—an expression, statement, type, or class—and then selects a transformation either from a menu at the top of the IDE or in a right-click pop-up menu. This approach provides experts both the full flexibility of text as well as mechanisms to perform common tasks more efficiently and with fewer errors than with manual, low-level text-edits. Although useful, this workflow suffers limitations:

- (1) The text-selection mechanism is error-prone when the item to select is long, spanning a non-rectangular region or requiring scrolling [Murphy-Hill and Black 2008].
- (2) All transformations must require a single “primary” selection argument, and any additional arguments are relegated to a separate Configuration Wizard window.
- (3) The list of tools is typically very long—even in the right-click menu where tools that are not applicable to the primary selection are filtered out—making it hard to *identify*, *invoke*, and *configure* a desired refactoring [Mealy et al. 2007; Murphy-Hill et al. 2009; Vakilian et al. 2012].
- (4) Even when a transformation has no configuration options or when the defaults are acceptable—as is often the case [Murphy-Hill et al. 2009]—the user must go through a separate Configuration Wizard to make the change. The user must, furthermore, navigate to another pane within the Configuration Wizard to preview the changes before confirming them.

Our Approach. Our goal is to enable a workflow that enjoys the benefits of both approaches. Specifically, programs ought to be

represented in plain text for familiar and flexible editing by expert programmers, and the editing environment ought to provide automated support for a variety of code transformations without deviating from the text-editing workflow.

In this paper, we present a structure-aware editor, called DEUCE, that achieves these goals by augmenting a text editor with (i) clickable widgets directly atop the program text that allow the user to *structurally select* the unstructured text for subexpressions and other relevant features of the program structure, and (ii) a *context-sensitive tool menu with previews* based on the current selections.

Structural Code Selection. Rather than relying on keyboard-based text-edits for selection, our editor draws direct manipulation widgets to *structurally select* items in the code with a single mouse-click. In particular, holding down the Shift key transitions the editor into structural selection mode. In this mode, the editor draws a box (which resembles a text-selection highlight) around the code item below the current mouse position. Clicking the box selects the entire text for that code item, eliminating any possibility for error and reducing the time needed to select long, non-rectangular sequences of lines. Furthermore, this interface naturally allows multiple selection, even when items are far apart in the code. Structural text selection helps address concerns (1) and (2) above.

Context-Sensitive Menu with Previews. Because structural selection naturally supports multiple selection, we address concern (3) by showing only tools for which *all* necessary arguments have been selected, reducing the number of tools shown to the user compared to a typical right-click menu. Hovering over a result description previews the changes, and clicking a result chooses it. For tools with few configuration options, we believe the preview menu provides a lightweight way to consider multiple options while staying within the normal editing workflow, helping to address concern (4).

The resulting workflow in DEUCE is largely text-driven, but augmented with automated support for code transformations (e.g. to introduce local variables, rearrange definitions, and introduce function abstractions) that are tedious and error-prone (e.g. because of typos, name collisions, and mismatched delimiters), allowing the user to spend keystrokes on more creative and difficult tasks that are harder to automate. The name DEUCE reflects this streamlined combination of text- and mouse-based editing.

Contributions. This paper makes the following contributions:


- We present the design of DEUCE, a code editor equipped with *structural code selection*, a lightweight direct manipulation mechanism that helps to identify and invoke program transformations while retaining the freedom and familiarity of traditional text-based editing. Our design can be instantiated for different programming languages and with different sets of program transformations. (§3.1)
- We implement DEUCE within SKETCH-N-SKETCH, a programming environment for creating Scalable Vector Graphics (SVG) images. Most of the functional program transformations in our implementation are common to existing refactoring tools, but two transformations—*Move Definitions* and *Make Equal*—are, to the best of our knowledge, novel. (§3.2)

- To evaluate the utility of our user interface, we performed a controlled user study with 21 participants. The results show that, compared to a more traditional text selection-based refactoring interface, structural code selection is preferred and may be faster for invoking transformations, particularly as users gain experience with the tool. (§4)

Our implementation, videos of examples, and user study materials are available at <http://ravichugh.github.io/sketch-n-sketch/>. In the next section, we introduce DEUCE with a few short examples.

2 OVERVIEW EXAMPLES

Example 1. Despite the intention of the following program, the `redSquare` definition uses different values for the width and height of the rectangle (the fourth and fifth

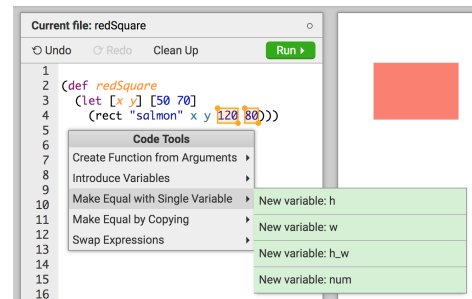


arguments, respectively, to the `rect` function). The user chooses DEUCE code tools—rather than text-edits—to correct this mistake.

The user presses the Shift key to enter structured editing mode, and then hovers over and clicks the two constants 120 and 80 to select them; the selected code items are colored orange in the screenshot above. Based on these selections, DEUCE shows a pop-up Code Tools menu with several potential transformations. The *Make Equal by Copying* tool would replace one of the constants with the other, thus generating a square. However, such a program would require two constants to be changed whenever a different size is desired. Instead, the user wishes to invoke *Make Equal with Single Variable* to introduce a new variable that will be used for both arguments. Hovering over this menu item displays a second-level menu (shown above) with tool-specific options, in this case, the names of four suggested new variable names.

The user hovers over the second option, which shows a preview of the transformed code (shown on the right). The user clicks to choose the second option. Notice that the number 80 (rather than 120) was chosen to be the value of the new variable `w`. Whereas the tool provided configuration options for the variable name, it did not provide options for which value to use; this choice was made by the implementer of the *Make Equal* code tool, not by the DEUCE user interface.

```
(def redSquare
  (let [x y] [100 70]
    (let [w 80
          (rect "salmon" x y w w))]))
```

Example 2. Consider the following program that draws two circles connected by a line. All design parameters and shapes have been organized within a single top-level `connectedCircles` definition. To make the design more reusable, the user wants `connectedCircles` to be a function that is abstracted over the positions of the two circles. The user hovers over and clicks the `def` keyword, and selects the *Create Function from Definition* tool (shown in the screenshot).

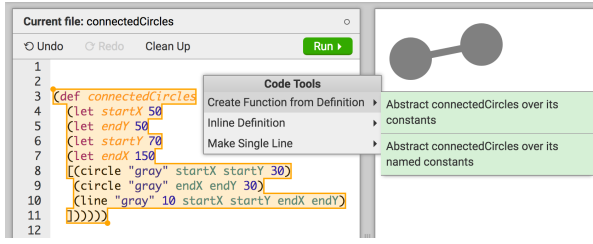


In response, *Create Function* rewrites the definition to be a function (shown on the right), and previous uses of `connectedCircles` are rewritten to appropriate function calls (not shown).

```
(def connectedCircles C(startX endY start end))
[[circle "gray" startX startY 30]
(circle "gray" endX endY 30)
(line "gray" 10 startX startY endX endY)
]]
```

The order of arguments to the function match the order of definitions in the previous program, but that order was unintuitive—the coordinates of the start and end points were interleaved. To fix this, as shown above, the user selects the last two arguments and the *target position* (i.e. the space enclosed by a blue rectangular selection widget) between the first two, and selects the *Reorder Arguments* tool so that the order of arguments becomes `startX`, `startY`, `endX`, and `endY` (not shown). Calls to `connectedCircles` are, again, rewritten to match the new order (not shown).

Example 3. In the program below, the user would like to organize all design parameters and shapes within the single logo definition. The user hovers over and selects the five definitions on lines 2 through 9, as well as the space on line 13, and selects the *Move Definitions* tool to move the definitions inside logo. The transformation manipulates indentation and delimiters appropriately in the final code (not shown).

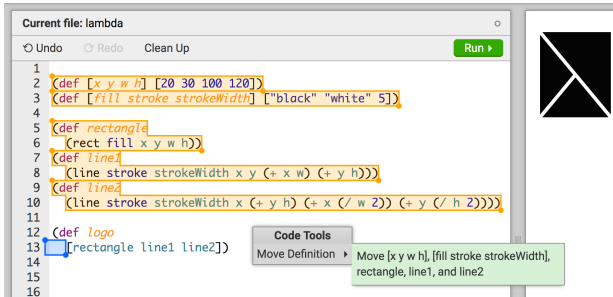

3 DEUCE: DESIGN AND IMPLEMENTATION

In this section, we explain the design of DEUCE in more detail. First, we define a core language of programs where various structural features can be selected. Then, we describe a user interface that displays active transformations based on the set of structural selections. Finally, we describe a set of general-purpose program transformations that are provided in our current implementation.

LITTLE. To make the discussion of our design concrete, we choose to work with a small functional language called LITTLE, defined in Figure 1. A LITTLE program is a sequence of top-level definitions, the last of which is called `main`. Notice that all (sub)expressions, (sub)patterns, definitions (both at the top-level and locally via `let`),

```
program ::= • (def x0 e0) • ... • (def main e)
e ::= c | x | (λ p e) | (e1 e2) | [e1 | e2]
      | (let p e1 e2) | (case e (p1 e1) ...)
p ::= c | x | [] | [p1 | p2]
Expressions e ::= • e • Patterns p ::= • p •
```

Figure 1: Syntax of LITTLE. The orange boxes and blue dots identify features for structural selection.

```
EditorState = { code: Program, selections: Set Selection }
ActiveState = Active | NotYetActive | Inactive
Options = NoOptions | StringOption String
Result = { description: String, code: Program }
```

```
CodeTool =
{ name : String
, requirements : String
, active : EditorState -> ActiveState
, run : (EditorState, Options) -> List Result }
```

Figure 2: Code tool interface.

and branches of case expressions are surrounded in the abstract syntax by orange boxes; these denote *code items* that will be exposed for selection and deselection in the user interface. In addition, there are *target positions*, denoted by blue dots, before and after every definition, expression, and pattern in the program. Target positions are “abstract whitespace” between items in the abstract syntax tree, which will also be exposed for selection.

Code Tool Interface. Each code tool must implement the interface in Figure 2. A tool has access to the `EditorState`, which contains a `Program` and the `Set` of structural `Selections` within it. Based on the `EditorState`, the `active` predicate specifies whether the tool is `Active` (ready to run and produce `Result` options), `NotYetActive` (could be `Active` if given more valid selections), or `Inactive` (invalid based on the selections). For example, *Move Definitions* is `NotYetActive` if the user has selected one or more definitions but no target position. When invoked via run, a tool has access to the `EditorState` and configuration `Options`, namely, an optional `String`. This strategy supports the ubiquitous *Rename* tool. A more full-featured interface may allow a more general set of configuration parameters; the challenge would be to expose them using a lightweight user interface. In our implementation, all transformations besides *Rename* require `NoOptions`. Each `Result` is a new `Program` and a description of the changes.

This API between the user interface and code tool implementations is shallow, in the sense that a code tool implementation can do whatever it wants with the selection information. A framework for defining notions of transformation correctness would be a useful line of work, but is beyond the scope of this paper. Currently, code tools must be implemented inside the DEUCE implementation. Designing a domain-specific language for writing transformations would be useful, but is also beyond the scope of this paper.




Figure 3: Example target positions.

Implementation in SKETCH-N-SKETCH. We have chosen to implement our design within SKETCH-N-SKETCH [Chugh et al. 2016; Hempel and Chugh 2016], an interactive programming system for generating SVG images. Whereas SKETCH-N-SKETCH provides capabilities for directly manipulating the *output* of a program, DEUCE provides capabilities for directly manipulating the *code* itself.

Direct code manipulation is particularly useful for a system like SKETCH-N-SKETCH for a couple reasons. First, while the existing output-directed synthesis features in SKETCH-N-SKETCH attempt to generate program updates that are readable and which maintain stylistic choices in the existing code, the generated code often requires subsequent edits, e.g. to choose more meaningful names, to rearrange definitions, and to override choices made automatically by heuristics; DEUCE aims to provide an intuitive and efficient interface for performing such tasks. Furthermore, by allowing users to interactively manipulate both code and output, we provide another step towards the goal of *direct manipulation programming systems* identified by Chugh et al. [2016]. These two capabilities—direct manipulation of code and output—are complementary.

SKETCH-N-SKETCH is written in Elm (<http://elm-lang.org/>), a language in which programs are compiled to JavaScript and run in the browser. The project uses the Ace text editor (<https://ace.c9.io/>) for manipulating LITTLE programs. (The second reason for the name DEUCE is that it extends Ace.) We extended SKETCH-N-SKETCH to implement DEUCE; our changes constitute approximately 9,000 lines of Elm and JavaScript code. The new version (v0.6.2) is available at <http://ravichugh.github.io/sketch-n-sketch/>.

3.1 User Interface

The goals of our user interface are, first, to expose *structural code selection widgets*—corresponding to the code items and target positions in a LITTLE program—and, second, to display an interactive menu of active transformations based on the set of selections.

So that the additional features provided by DEUCE do not intrude on the text-editing workflow, we display structural selection widgets when hovering over the code box only when the user is holding down the Shift key. Hitting the Escape key at any time deselects all widgets and clears any menus, returning the editor to text-editing mode. This allows the user to quickly toggle between editing modes during sustained periods in either mode. When not using the Shift modifier key, the editor is a standard, monospace code editor with familiar, unrestricted access to general-purpose text-editing features.

3.1.1 Structural Code Selection. The primary innovation in our design is the ability to *structurally select* concrete source text corresponding to code items and target positions from the abstract syntax tree of a program.

Code Items. Our current implementation draws an invisible “bounding polygon” around the source text of each expression, which

tightly wraps the expression even when stretched across multiple lines. These polygons serve as mouse hover regions for selection, with the polygons of larger expressions drawn behind the (smaller) polygons for the subexpressions such that all polygons for child expressions partially occlude those of their parents. Because complex expressions in LITTLE are fully parenthesized, it is always unambiguous exactly where to start and end each polygon, and there are always character positions that can be used to select an arbitrary subexpression in the tree. Similarly, we create bounding polygons for all patterns and definitions.

When hovering over an invisible selection polygon, DEUCE colors the polygon to indicate that it has become the focus. Its transparency and style is designed to resemble what might otherwise be expected for text selection (cf. the screenshots in §2). Clicking a polygon selects the code item, making it visible even after hovering away. Hovering the mouse back to the polygon and clicking it again deselects the code item.

Target Positions. The user interface also draws polygons for the whitespace between code items for selecting target positions. Figure 3 (left) shows how our implementation draws whitespace polygons slightly to the left of the beginning of a line, and until the end of a line even if there are no characters on that line. Figure 3 (center) shows whitespace polygons with non-zero width even when there are no whitespace characters between adjacent code items.

Another concern is that many target positions in the abstract syntax from Figure 1 describe the *same* space between code items. For example, the expression `[•50••70•]` on line 3 of Figure 3 contains both an after-50 and before-70 position. Because such target positions between adjacent items are redundant, our implementation draws only one whitespace polygon. (This polygon is not selected in any of the screenshots.)

A more interesting case is for the code items `(def •p••e•)` and `(let •p••e••••)`; there is both an after-**p** target and a before-**e** target. To allocate the whitespace between **p** and **e**, we take the following approach. The space up to the first newline, if any, is dedicated to after-**p**; the remaining is for before-**e**. If there is no newline, then we do not expose any selection widget for before-**e**. For comparison, notice how the whitespace from the end of line 2 to beginning of line 3 in Figure 3 (right) is split into two polygons, but the whitespace from the end of line 3 to the beginning of line 4 in the Figure 3 (left) is not. In other settings, it may be worthwhile to consider alternative approaches to the design decisions above.

3.1.2 Displaying Active Code Tools. Several program transformations may be Active based on the items and targets that are selected. We design and implement a lightweight user interface for identifying, invoking, and configuring Active transformations.

Pop-up Panel. When the user has entered structured editing mode (by pressing Shift) and selected at least one item, we automatically

display a menu near the selected items. The user has already pressed a key to enter this mode, so our design does not require a right-click to display the menu. The user can drag the pop-up panel if it is obstructing relevant code. We often manually re-positioned pop-up menus to make the screenshots in §2 fit better in the paper.


Hover Previews. Each tool in the menu has a list of Results, which appear in a second-level menu when hovering the tool name. Each second-level menu item displays the description of the change, and hovering over it previews the new code in the editor. Clicking the item confirms the choice and clears all DEUCE selections. When there are few Results (*i.e.* configuration options), this preview menu provides a quick way to consider the options, rather than going through a separate Configuration Wizard. For tools that require multiple and non-trivial configurations, however, the editor could fall back on separate, tool-specific Configuration Wizards; our current implementation of DEUCE does not support this.

3.2 Program Transformations

We have implemented a variety of program transformations, shown on the right. While we believe these transformations form a useful set of basic tools for common programming tasks, we do not argue that these constitute a necessary or sufficient set. One benefit of our design is that different sets of transformations—such as refactorings for class-based languages [Fowler 1999], refactorings for functional languages [Thompson and Li 2013], transformations that selectively change program behavior [Reichenbach et al. 2009], and task-specific transformations that do not have common, recognizable names [Steimann and von Pilgrim 2012]—can be incorporated and displayed to the user within our interface.

We limit our discussion below to transformations that are not implemented in existing refactoring tools. The Supplementary Appendices [Hempel et al. 2018] describe other transformations, but these details are not necessary to understand the rest of the paper.

Make Equal with Single Variable. When multiple constants and an optional target position are selected, the *Make Equal with Single Variable* transformation introduces a new variable, bound to one of the constants, and replaces all the constants with the new variable. This has the effect of changing the program to make each of these values equal. The transformation attempts to suggest meaningful names, based on how the selected expressions appear in the program. For Example 1 from §2, because the numbers 120 and 80 are passed as the fourth and fifth arguments, respectively, to the function (`def rect (\(fill x y w h) ...)`), the suggested names include `w` and `h`. The user is asked to choose a name. The value itself (in this case, 120 or 80) is not as important—the intention is that the values vary at once by a single change—so, to keep the number of Results small, the transformation does not ask the user to choose which value to use for the variable.

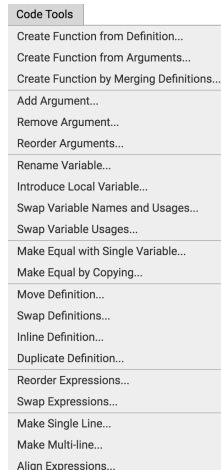

Move Definitions. Because of nested scopes and simultaneous bindings (*i.e.* tuples), there are many stylistic choices about variable definitions when programming in functional languages. The *Move Definitions* transformation takes a set of selected definitions and a single target position, and attempts to move the definitions to the target position. If the target position is before an expression, a new `let`-binding is added to surround the target. Whitespace is added or removed to match the indentation of the target scope. If the target position already defines a list pattern, then the selected definitions are inserted into the list. If the target position defines a single variable, then a list pattern is created. In cases where the intended transformation would capture variable uses or move definitions above their dependencies (errors that are easy to make when using text-edits alone), the transformation makes secondary edits (alpha-renaming variables and moving dependencies) to the program to avoid these issues. Our implementation of *Move Definitions* also provides options for whether or not to collapse multiple definitions into a single tuple, and also provides support for rewriting arithmetic expression definitions as an alternative way to deal with dependency inversion issues.

4 USER STUDY

We designed and implemented DEUCE with the goal to incorporate structured editing within a text-based program editor. In this section, we describe a user study designed to measure the degree to which we were successful.

Besides the two novel mechanisms in our user interface design—structural code selection and context-sensitive preview menus—that we wish to evaluate, there are several additional factors at play. First, many users may not have extensive experience with functional programming languages, especially the custom LITTLE language supported in our implementation. Second, our implementation provides some familiar transformations but some—particularly those involving target positions—are not. Furthermore, some users may prefer to use text-editing rather than structured edits, even when the latter can be used. These factors make it hard to perform a direct comparison between our implementation of DEUCE and an existing system, such as Eclipse.

To mitigate these factors, we designed a study that compared DEUCE with a “baseline” version of the system, with features designed to emulate the traditional text-select-based interface described in §1. We then designed tasks, to be completed in both versions and *without* text-edits, to measure the effect of the new DEUCE user interface features compared to the baseline ones. Below, we describe the different configurations of our system, our study procedures, and our results.

4.1 System Configurations

Recall that tools may be `Active` or `NotYetActive` based on one or more selected items and target positions (Figure 2).


Traditional Mode (“Text-Select Mode”). To form the traditional mode of the tool, which we called Text-Select Mode in the user study materials, we implemented four interactions separate from the workflow described in §2 and §3.1 to invoke code tools.

(A) *Code Tools Menu*. The editor displays a Code Tools menu at the top of the window with a list of all transformations available in the system; this menu is akin to the Source and Refactor menus in Eclipse. The user selects a tool from this menu without first selecting anything in the program. Then, the editor displays a Tool Configuration Panel that displays tool-specific instructions. Tool Configuration Panels, which appear in all four interactions of Traditional Mode, are discussed below.

(B) *Text-Select Single Argument + Code Tools Menu*. This interaction is like Interaction A, except that the user first text-selects an item or target in the code. Like Eclipse, text-selecting requires the entire item to be selected, possibly with trailing or leading whitespace. Our implementation provides more generous text-selection mechanisms (e.g. largest containing expression, smallest surrounding expression), but the stricter version is used in the study because it is more similar to existing approaches [Murphy-Hill and Black 2008]. Also like Eclipse, all tools are displayed and enabled in the Code Tools menu, even if the tool is Inactive based on the selection.


(C) *Text-Select Single Argument + Right-Click Menu*. After first text-selecting an item, as in Interaction B, the user right-clicks to trigger a pop-up menu that displays *only* plausible tools (Active or NotYetActive). A similar workflow is provided by Eclipse.

Returning to Example 1 from § 2, the screenshot on the right shows the right-click menu after text-selecting the 120 constant. By comparison, notice how this right-click menu displays more tools (NotYetActive tools in addition to Active ones). After the text selection is made, the editor draws an orange box (as with DEUCE widgets) to identify the selection.



(D) *Cursor-Select Single Argument + Right-Click Menu*. For atomic code items (i.e. constants and variables), the user implicitly selects the item by right-clicking on the token (rather than text-selecting it) to trigger the right-click menu, as in Interaction C. Again, a similar workflow is provided by Eclipse.

Tool Configuration Panels. Each of the four interactions above trigger Tool Configuration Panels, which display the requirements string that explains how to invoke the tool. The user selects any additional arguments by hovering over and clicking structural selection widgets. That is, structural selection widgets are *not* accessible to make the primary selection, but they *are* used to make all remaining selections in a Tool Configuration Panel. The screenshot above shows the Configuration Panel after text-selecting 120, as above, and then selecting 80 and a target position using structural selection. Because the tool requirements are satisfied, the panel displays the list of Results, each of which can be hovered to preview the change before selecting it.

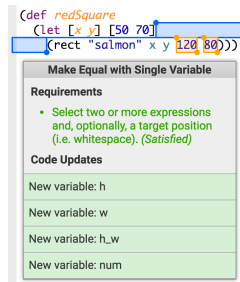

DEUCE Mode (“Box-Select Mode”). This configuration, called Box-Select Mode in the user study materials, isolates the new DEUCE features. To review, the user holds down the Shift key, then hovers over and clicks one or more structural code selection widgets. When at least one widget is selected, the pop-up preview menu displays the list of Active tools.

There is no Code Tools menu at the top of the editor in this mode, even though the “full” version of our tool (not used by participants in the study) does; the list of tool names and descriptions in Tool Configuration Panels (which are *not* accessible in DEUCE Mode) can help understand unfamiliar transformations.

Combined Mode. Our last configuration combines Traditional and DEUCE Modes, with all interactions described above.

4.2 Questions and Procedures

We sought to address several questions:

- Is either mode more effective for (a) completing tasks, (b) rapid editing, or (c) achieving more with fewer transforms?
- Is either mode preferred by users? In which cases?

To answer these questions, we designed the following IRB-approved, controlled user study with 21 undergraduate and graduate students from the University of Chicago. We recruited users by sending emails to public mailing lists, offering a monetary incentive of \$50 for participating in the two-hour study. Prior experience with functional programming or SKETCH-N-SKETCH was not required. Each user attended an individual session and was given the option to use the laptop and mouse provided by us or their own devices.

The primary components of the study included a tutorial portion followed by a tasks portion. We configured a pared-down version of the system that turned off all SKETCH-N-SKETCH features unrelated to the interactions being studied. The tutorial and tasks were set up as a self-guided progression of steps through the tool, to be completed at the user’s own pace. In the description of the tutorial and tasks below, all random choices were made independently of other choices, as well as across users.

Our system logged user events to analyze the tutorial and tasks. We also recorded video of the users performing the tasks, for manual inspection in situations where the log information was insufficient or more difficult to process. Besides helping to get started and correct minor issues unrelated to DEUCE, the user study proctor did not answer any questions about DEUCE or the tasks. To wrap up, users answered questions about their programming background and experience using DEUCE in an exit survey.

Tutorial. The first part of the tutorial introduced ordinary text-based programming in LITTLE, emphasizing that the syntax would not be too important for subsequent tasks.

The majority of the tutorial introduced the code tools using both Traditional and DEUCE Modes. The first tool introduced—*Rename Variable*, a familiar tool to many—was explained using all five interaction modes. But because the four interactions in Traditional Mode are largely similar, all subsequent tools introduced in the tutorial had only one set of instructions for Traditional Mode. For all tools introduced, a random choice was used to determine whether to explain Traditional or DEUCE Mode first. In total, 10 of the 22 code tools in our implementation were demonstrated in the tutorial.

Table 1: Overview of the four head-to-head and two open-ended tasks. #LOC is non-blank lines of code in the starting program.

Name	#LOC	#Transforms	Example Tool Sequence (with minimum number of transforms required)
One Rectangle	9	3	Swap Expressions; Move Definition; Swap Definitions
Two Circles	11	2	Create Function from Definition; Reorder Arguments
Three Rectangles	11	2	Creating Function by Merging Definitions; Rename
Four Rings	7	4	Remove Argument; Rename; Move Definition; Add Arguments
Four Squares	9	7	Create Function by Merging Definitions; Create Function from Arguments; Rename (5x)
Lambda Icon	10	8	Make Equal with Single Variable (6x); Introduce Variable; Rename

To give a flavor of the tutorial, Example 1 in §2 is adapted from the steps that introduced the *Make Equal* tools. In addition to tool-specific tutorial steps, we also dedicated a step for more practice with target positions, independent of a specific tool, because the notion of target positions was likely to be unfamiliar.

Tasks. After the tutorial, users worked on six *tasks*, each a different program and a list of one or more edits to perform using code tools. For some tasks, there were multiple different sequences of code tool invocations that could lead to the desired result. The starting programs ranged from 7 to 11 lines of code and required between 2 and 8 tool invocations (at minimum) to finish the tasks. Table 1 outlines the tasks. The Two Circles task was presented as Example 2 in §2. Extended task descriptions can be found in the Supplementary Appendices [Hempel et al. 2018].

Before every task, the participant was given a read-only reading period to understand the program before seeing the list of edits to perform. To emulate a real-world scenario where the programmer knows what to accomplish but may not quite remember all the steps, the task directions were written in a more natural style without direct reference to tool names—for example, “move the ring definition inside target” instead of “invoke *Move Definition* on the ring definition with a target position inside target.”

Each of the first four tasks (“head-to-head tasks”) was performed twice, once each in Traditional and DEUCE Modes, resulting in eight *trials*. The first four trials comprised each of the four tasks, in random order and with one of the modes randomly chosen per trial. For the next four trials, the order of tasks was, again, randomized, each using the mode not chosen for the task in the first round. After these eight trials, the user performed each of the last two tasks (“open-ended tasks”) once using the Combined Mode—both Traditional and DEUCE Modes were available for use, to mix-and-match the two modes however they saw fit.

For each task, comments showed what the desired final code should look like, sometimes modulo minor whitespace differences. The editor provided an indicator about whether the task was completed, giving the user the option to Give Up at any point if needed. There was also a maximum time limit of six and twelve minutes for each head-to-head and open-ended task, respectively, with no indication about the time limit until and unless the user reached the two and four minutes remaining mark, respectively.

4.3 Results

Participants reported between 2 and 10 years of programming experience (mean: 5.1), of which between 0 and 3 years involved functional programming (mean: 0.76). 10 participants (48%) reported

no prior functional programming experience. 8 participants reported using tools that supported automated refactoring (Eclipse, IntelliJ, and PyCharm all received multiple mentions). 4 participants reported some prior exposure to previous versions of the SKETCH-N-SKETCH project, but none reported knowledge of the code tools presented in the study.

For the study itself, 8 users brought their own laptop, the remaining 13 used ours. 15 participants used a mouse, and 6 relied on their laptop’s trackpad. Each session took a mean of 1hr 44min (range: 1h 11m – 2h 27m). Users spent between 23 and 66 minutes on the tutorial (mean: 41) and 20 and 65 minutes on the tasks (mean: 44). The remaining time was spent on introductory remarks and the exit survey. All users attempted all tasks. Two trials were discarded because of tool malfunction, for a final total of 166 head-to-head trials and 42 open-ended tasks suitable for analysis.

The tasks proved moderately difficult. On average, each participant successfully completed 71% of the trials and open-ended tasks within the time limits, with 3 users completing them all and 1 user failing to complete any. Figure 4 shows completion rates by task. The One Rectangle and Lambda tasks had particularly low completion rates. Based on videos of failed attempts, many users struggled with choosing appropriate tools—e.g. many chose *Introduce Variables* rather than *Make Equal*, and some chose *Inline* rather than *Move Definitions* in an attempt to create a tuple definition. The tutorial was not sufficient for everyone to remember and understand all the tools needed for the tasks. The task descriptions may have also presented obstacles—e.g. for Lambda, the phrase “Define and use...”, along with (def [x y w h] ...) in the final code, may have led some to use *Introduce Variables*, which would then require several roundabout transformations to complete the task. We believe these difficulties are largely independent of the user interface features. We now address each of the research questions in turn.

Is either mode more effective for completing tasks? Figure 5 breaks down completion rates for head-to-head tasks by mode. Because each was attempted twice, to assess possible learning effects from already completing a task in the other mode, Figure 5 also differentiates between the user’s first or second encounter with each task. Visually, the data suggest that on the first encounter with a task, Traditional Mode may better facilitate completion, and is also a better teacher for the subsequent encounter with DEUCE Mode. In contrast, a first encounter with DEUCE Mode may be less helpful for the second encounter with Traditional Mode.

To control for learning effects, a mixed effects logistic regression model [Gelman and Hill 2007] was fit with lme4 [Bates et al. 2015] to predict task completion probability based upon fixed effect



Figure 4: Task completion rates pooled over both modes.

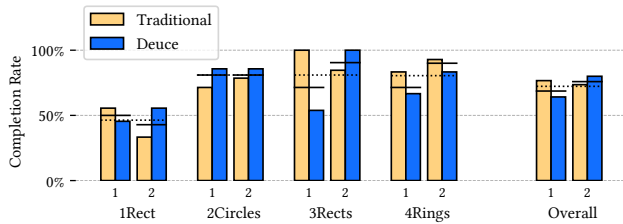


Figure 5: Head-to-head task completion rates by mode and by subject's first/second encounter with task. Overlaid lines indicated pooled completion rates.

predictors for the mode (coded as 0 or 1), the trial number (1-8), whether the trial was the second encounter with the task (0 or 1), whether the participant used a mouse (0 or 1), whether the participant used their own computer (0 or 1), and the interaction of mode with the second encounter (0, or 1 when DEUCE Mode and a second encounter). To model differences in user skill and task difficulty, a random effect was added for each participant as well as each task, and a random interaction was added to model differences in the second encounter difficulty per task. Reported p-values are based on Wald Z-statistics.

In the fit model, the coefficient for mode was on the edge of significance ($p=0.057$), indicating that Traditional Mode did better facilitate task completion on the first encounter with a task. Given this, DEUCE Mode performed better than expected on the second encounter (interaction term $p=0.036$), but not enough to confidently say that DEUCE Mode was absolutely better than Traditional Mode for the second encounter ($p=0.17$). No other fixed effect coefficients approached significance.

DEUCE Mode therefore seems to present a learning curve, but may be just as effective as Traditional Mode once that learning curve is overcome. This interpretation accords with the surveys: 5 participants wrote that Traditional Mode might be better for learning, and 4 participants—including 3 of the previous 5—said DEUCE Mode was better when they knew the desired transformation. However, the data may be alternatively explained if DEUCE Mode on the first encounter is a poor teacher, actively misleading users on the second encounter with Traditional Mode.

Is either mode more effective for rapid editing? Among trials successfully completed, the duration of each trial was measured from the start of configuration of the first refactoring to the end of the final refactoring. The distribution of these timings is presented in Figure 6, scaled relative to the mean duration for each task.

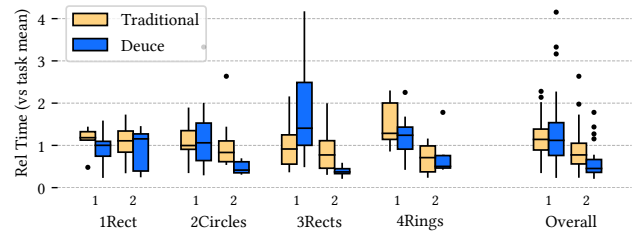


Figure 6: Head-to-head task durations for successfully completed trials, scaled relative to the mean time per task.

Again, to tease out if any of these differences are significant, from the same predictors described above two linear mixed effects models were fit to predict (1) trial duration and (2) the logarithm of trial duration (*i.e.* considering effects to be multiplicative rather than additive). Percentile bootstrap p-values for the fixed effect coefficients were calculated from 10,000 parametric simulate-refit samples.¹ For the first encounter with a task, Traditional Mode was insignificantly faster (by 13 seconds, $p=0.44$; or 9.2%, $p=0.52$). However, DEUCE Mode was on average 25 seconds ($p=0.13$) or 36% ($p<0.01$) faster for the second encounter with a task, suggesting that DEUCE Mode may be faster once users become familiar with the available tools. Most of the gain comes from less time spent in configuration—after discounting all idle thinking time between configurations, the model still reveals an 18 second difference.

Is either mode more effective for achieving more with fewer transforms? To determine if either mode facilitated more efficient use of interactions, the same mixed effects model was fit to predict the number of refactorings invoked during each successful trial, as well as the number of Undos. On the first encounter with a task, Traditional Mode accounted for an average of 2.0 fewer refactorings ($p<0.01$) and 2.1 fewer Undos ($p<0.01$), but on the second encounter no significant difference in number of refactorings or Undos was indicated. As a second encounter with DEUCE Mode is faster than Traditional Mode, the speed gain thus appears to be explained by faster invocations rather than fewer invocations.

Is either mode preferred by users? In which cases? The two final open-ended tasks allowed participants to mix-and-match the two modes as they pleased. As shown in Figure 7, on both tasks the overwhelming number of users performed a greater share of refactorings using DEUCE Mode. We believe a main advantage of DEUCE Mode is that it simplifies the configuration of refactorings that require multiple arguments, as the user may select all the arguments together before choosing a transformation from a short menu. In Traditional Mode, the workflow is stuttered: the user must select a single argument, right-click to choose a transformation, then select the remaining arguments. However, for a refactoring requiring only a single argument, Traditional Mode is more streamlined: a user may simply select the desired transformation immediately after right-clicking on the first argument. Thus, for single-argument refactorings, DEUCE Mode's advantages may be limited. A breakdown of mode usage by popular tools (Figure 8) lends support to

¹See <https://www.rdocumentation.org/packages/lme4/versions/1.1-13/topics/bootMer>

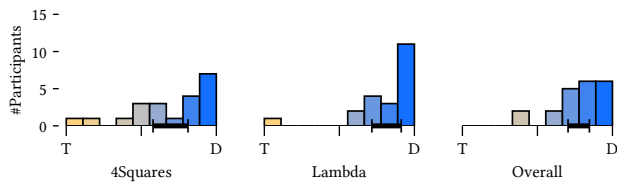


Figure 7: Distribution of user preferences for Traditional vs. DEUCE Modes as measured by the ratio of refactorings performed by the user in each mode on the open-ended tasks. Far left represents all Traditional Mode refactorings; far-right indicates all DEUCE Mode refactorings. The 95% confidence interval for the mean preference across all users is indicated (via percentile bootstrapping, 10,000 samples).

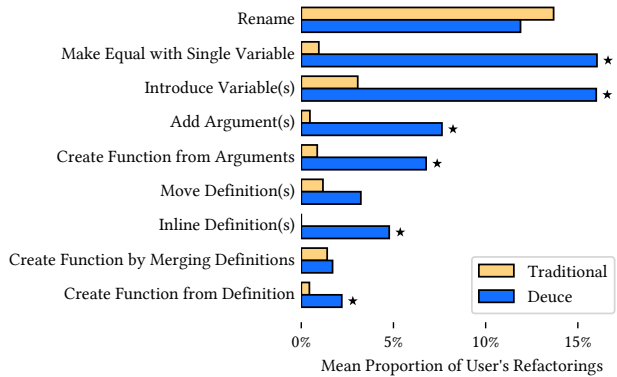


Figure 8: Mode usage for tools used by at least half of participants on the open-ended tasks. DEUCE mode is preferred for most tools. Stars indicate differences significant at the 95% level (via percentile bootstrapping, 10,000 samples).

this hypothesis. For the most commonly used tool, *Rename*, which always takes only a single argument, participants used Traditional and DEUCE Modes with roughly even frequency. Most other tools showed strong preferences towards DEUCE Mode, with the notable exception of *Create Function by Merging Definitions*. Because the Four Squares task required invoking this tool with four expressions, according to the hypothesis, users should prefer DEUCE Mode. The videos revealed that several users were unable to discover how to structurally select a function call, which required hovering on the open parenthesis (not demonstrated in the tutorial). Several of these users were, however, able to invoke the tool by text-selecting a function call or by starting from the full Code Tools menu.

Subjectively, the concluding survey asked whether DEUCE or Traditional Mode worked better for each head-to-head task, measured on a 5-point scale from “Text-Select Mode worked much better” to “Box-Select Mode worked much better”. For each participant, a random choice determined which mode appeared at each end of the scale. As shown in Figure 9, on average a similar modest preference for DEUCE Mode was expressed for each task.

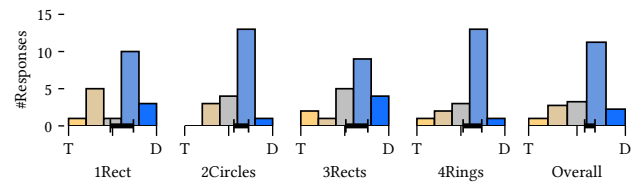


Figure 9: Surveyed subjective preference for Traditional vs. DEUCE Modes for the head-to-head tasks. The 95% confidence interval for the mean preference across all users is indicated (via percentile bootstrapping, 10,000 samples).

On the free-response portion of the survey, several explanations were given for this preference for DEUCE Mode. 3 participants appreciated the ability to select multiple arguments; 2 other participants appreciated selecting all arguments before selecting a tool; 1 other participant appreciated the smaller menu of refactorings; and 1 other participant appreciated the ease of starting a refactoring by clicking code objects rather than having to create a text selection.

Altogether, users demonstrated a strong objective and modest subjective preference for DEUCE over Traditional Mode, suggesting that DEUCE accomplishes its goal to provide a more human-friendly interface to identify, configure, and invoke refactorings.

Limitations. There are several threats to the validity of our experimental setup. One is that our emulation of traditional features may have been less effective than those features in existing tools. Another is that the participants may have felt compelled to use DEUCE Mode (which could likely have been deduced to be more novel than Traditional Mode) more during the open-ended tasks—and pronounce a preference for it in the survey—because the participants were drawn from the same academic community as the authors. Another is that participants used the tool in heterogeneous environments—different computers and browsers, configured with different screen sizes and mouse settings. Performance on the tasks may have also been affected by the presence of the user study proctor and video recording device. According to self-reported assessments, participants were relatively unfamiliar with functional programming and with refactoring tools, so the results may differ for users with more extensive experience. Finally, our results were obtained on small programs and tasks in a prototype language.

Future Improvements. There are opportunities to improve our implementation of DEUCE. First, to reduce the learning curve, it would be worth adding more explanatory features (e.g. in a tutorial, or within the tool when the user selects certain kinds of items for the first time), particularly for unfamiliar transformations (e.g. *Move Definitions*) and for unfamiliar user interface features (i.e. target positions). Enabling the full Code Tools menu may also help because of the descriptions of requirements in the Tool Configuration Panels (cf. the “DEUCE Mode” discussion). Also, to allow easy corrections of misconfigured refactorings, it would help if Undo restored the previous selection state rather than just the previous version of the code; we have since implemented this feature.

5 RELATED WORK

We describe the most closely related ideas in structured editing and refactoring. Ko and Myers [2006], Lee et al. [2013], and Omar et al. [2017] provide more thorough introductions.

5.1 User Interfaces for Structured Editing

Compared to traditional text-selection and menus, several alternative user interface features have been proposed to integrate structured editing more seamlessly within the text-editing workflow.

Text Selection. Murphy-Hill and Black [2008] identify that text selection-based refactoring is prone to error, particularly for statements that span multiple lines and that have irregular formatting. They propose two prototype user interface mechanisms, called Selection Assist and Box View, to help. With Selection Assist, the user positions the cursor at the start of a statement, and the entire statement is highlighted green to show what must be selected (using normal text-selection). With Box View, the editor draws a separate panel (next to the code editor) that shows the tree structure of the program with nested boxes. When selecting text in the editor, the nested boxes are colored according to which code items are completely selected. Similarly, the user can select a nested box in the Box View to select the corresponding text in the code.

In contrast, our structural selection polygons are drawn directly atop the code, at once helping to identify (like Box View) and select (like Selection Assist), which aims to mitigate the context switching overhead of Box View identified by Murphy-Hill and Black [2008].

Drag-and-Drop Refactoring. Lee et al. [2013] propose a tool called DNDREFACTORING that eliminates the use of menus altogether. They demonstrate how many common Eclipse refactorings can be unambiguously invoked with a drag-and-drop gesture without the need for any additional configuration. This is a compelling workflow for situations in which the user can (a) readily *identify* an intended refactoring based on a preconceived notion (e.g. its name), (b) unambiguously *invoke* the intended refactoring by a single-source, single-target drag-and-drop gesture, and (c) accept the *default configuration* of the refactoring. It would be useful to add drag-and-drop gestures to DEUCE for refactorings that satisfy these three conditions. However, our user interface supports situations when one or more of these three conditions fails to hold.

Hybrid Editors. Compared to “fully” structured editors, several *hybrid editor* approaches augment text-based programs with additional information. Barista [Ko and Myers 2006] is a hybrid Java editor where *structure views* can be implemented to present alternate representations of structural items instead of text. For example, an arithmetic expression may be rendered with mathematical symbols, a method may be accompanied by interactive documentation with input-output examples, and structures may be selectively collapsed, expanded, or zoomed. Omar et al. [2012] introduce a similar notion to structure views, called *palettes*, where custom displays can be incorporated based on the type of a subexpression. For example, a color palette can provide visual previews of different candidate color values, and a regular expression palette can show input-output examples for different candidate regular expressions. In Greenfoot [Brown et al. 2016], program text is separated into structural regions called *frames*, which are created and manipulated

with text- and mouse-based operations that are orthogonal to the text-edits within a frame. Code Bubbles [Bragdon et al. 2010] allows text fragments to be organized into *working sets*, which are collections of code, documentation, and notes from multiple files that can be organized in a flexible way. Outside of the views, palettes, frames, and working sets in the above hybrid editors, the user has access to normal text-editing tools.

Our approach is complementary to all of the above: in places where code fragments—regardless of their granularity and their relationship to alternative or additional pieces of information—are represented in plain text, we aim for a lightweight user interface to structurally manipulate it.

Refactoring with Synthesis. In contrast to direct manipulation in DNDREFACTORING and DEUCE, Raychev et al. [2013] propose a workflow where the user starts a refactoring with text-edits—providing some of the changes after the refactoring—and then asks the tool to synthesize a sequence of refactorings that complete the task. This text-based interface and the mouse-based interfaces of DNDREFACTORING and DEUCE are complementary.

5.2 Program Transformations

Automated support for refactoring [Fowler 1999; Griswold 1991; Roberts et al. 1997] has been aimed primarily at programs written in class-based, object-oriented languages.

Refactoring for Functional Languages. HARE [Brown 2008; Li 2006; Thompson and Li 2013] is a refactoring tool for functional languages, such as Haskell, where features—including first-class functions (*i.e.* lambdas), local bindings, tuples, algebraic datatypes, and type polymorphism—lead to editing tasks that are different from those supported in most typical refactoring tools for object-oriented programs. Our user interface could be incorporated by HARE to expose the supported transformations with lightweight direct manipulation. HARE provides a larger catalog of transformations than our current implementation of DEUCE. However, the details of our *Move Definitions* and *Make Equal* transformations are, to the best of our knowledge, not found in existing tools.

6 CONCLUSION

Based on our experience and the results of our user study, we believe DEUCE represents a proof-of-concept for how to achieve a lightweight, integrated combination of text- and structured editing. In future work, our design may be adapted and implemented for full-featured programming languages and development environments, incorporating additional well-known transformations (e.g. Fowler [1999]; Thompson and Li [2013]). Additional direct code manipulation gestures, as well as incremental parsing (e.g. the algorithm of Wagner and Graham [1998] used by Barista [Ko and Myers 2006]), could further help streamline, and augment, support for structured editing within an unrestricted text-editing workflow.

ACKNOWLEDGMENTS

The authors thank Shan Lu, Elena Glassman, Aaron Elmore, Peter Scherpelz, and Blase Ur for suggestions about this paper. This work was supported by National Science Foundation Grant No. 1651794, and a University of Chicago Liew Family Research Fellows Grant.

REFERENCES

- Amjad Altmiri, Michael Kölling, and Neil Christopher Charles Brown. 2016. The Cost of Syntax and How to Avoid It: Text versus Frame-Based Editing. In *Computer Software and Applications Conference (COMPSAC)*.
- Aaron Bangor, Philip Kortum, and James Miller. 2009. Determining What Individual SUS Scores Mean: Adding an Adjective Rating Scale. *Journal of Usability Studies* (2009).
- Douglas Bates, Martin Mächler, Ben Bolker, and Steve Walker. 2015. Fitting Linear Mixed-Effects Models Using lme4. *Journal of Statistical Software* (2015).
- Andrew Bragdon, Steven P. Reiss, Robert Zeleznik, Suman Karumuri, William Cheung, Joshua Kaplan, Christopher Coleman, Ferdi Adeputra, and Joseph J. LaViola, Jr. 2010. Code Bubbles: Rethinking the User Interface Paradigm of Integrated Development Environments. In *International Conference on Software Engineering (ICSE)*.
- John Brooke. 1986. System Usability Scale (SUS): A Quick-and-Dirty Method of System Evaluation. *User Information Architecture Advanced Development Group, DEC, Reading, UK* (1986).
- Christopher Brown. 2008. *Tool Support for Refactoring Haskell Programs*. Ph.D. Dissertation. University of Kent.
- Neil Christopher Charles Brown, Amjad Altmiri, and Michael Kölling. 2016. Frame-Based Editing: Combining the Best of Blocks and Text Programming. In *Conference on Learning and Teaching in Computing and Engineering (LaTiCE)*.
- Ravi Chugh, Brian Hempel, Mitchell Spradlin, and Jacob Albers. 2016. Programmatic and Direct Manipulation, Together at Last. In *Conference on Programming Language Design and Implementation (PLDI)*.
- Martin Fowler. 1999. *Refactoring: Improving the Design of Existing Code*. Addison-Wesley Longman Publishing Co., Inc.
- Andrew Gelman and Jennifer Hill. 2007. *Data Analysis Using Regression and Multi-level/Hierarchical Models*. (2007).
- William G. Griswold. 1991. *Program Restructuring as an Aid to Software Maintenance*. Ph.D. Dissertation. University of Washington.
- Brian Hempel and Ravi Chugh. 2016. Semi-Automated SVG Programming via Direct Manipulation. In *Symposium on User Interface Software and Technology (UIST)*.
- Brian Hempel, Justin Lubin, Grace Lu, and Ravi Chugh. 2018. Deuce: A Lightweight User Interface for Structured Editing. (2018). Extended version of ICSE 2018 paper available as [CoRR abs/1707.00015](https://arxiv.org/abs/1707.00015).
- Andrew J. Ko, Htet Htet Aung, and Brad A. Myers. 2005. Design Requirements for More Flexible Structured Editors from a Study of Programmers' Text Editing. In *Human Factors in Computing Systems (CHI)*.
- Andrew J. Ko and Brad A. Myers. 2006. Barista: An Implementation Framework for Enabling New Tools, Interaction Techniques and Views in Code Editors. In *Human Factors in Computing Systems (CHI)*.
- Yun Young Lee, Nicholas Chen, and Ralph E. Johnson. 2013. Drag-and-Drop Refactoring: Intuitive and Efficient Program Transformation. In *International Conference on Software Engineering (ICSE)*.
- Huiqing Li. 2006. *Refactoring Haskell Programs*. Ph.D. Dissertation. University of Kent.
- Henry Lieberman. 1993. *Mondrian: A Teachable Graphical Editor*. In *Watch What I Do: Programming by Demonstration*. MIT Press.
- John Maloney, Mitchel Resnick, Natalie Rusk, Brian Silverman, and Evelyn Eastmond. 2010. The Scratch Programming Language and Environment. *Transactions on Computing Education (TOCE)* (2010).
- Erica Mealy, David Carrington, Paul Strooper, and Peta Wyeth. 2007. Improving Usability of Software Refactoring Tools. In *Australian Software Engineering Conference (ASWEC)*.
- Jens Monig, Yoshiki Ohshima, and John Maloney. 2015. Blocks at Your Fingertips: Blurring the Line Between Blocks and Text in GP. In *IEEE Blocks and Beyond Workshop (BLOCKS AND BEYOND)*.
- Emerson Murphy-Hill and Andrew P. Black. 2008. Breaking the Barriers to Successful Refactoring. In *International Conference on Software Engineering (ICSE)*.
- Emerson Murphy-Hill, Chris Parnin, and Andrew P. Black. 2009. How We Refactor, and How We Know It. In *International Conference on Software Engineering (ICSE)*.
- Cyrus Omar, Ian Voysey, Michael Hilton, Joshua Sunshine, Claire Le Goues, Jonathan Aldrich, and Matthew A. Hammer. 2017. Toward Semantic Foundations for Program Editors. In *Summit on Advances in Programming Languages (SNAPL)*.
- Cyrus Omar, YoungSeok Yoon, Thomas D. LaToza, and Brad A. Myers. 2012. Active Code Completion. In *International Conference on Software Engineering (ICSE)*.
- Veselin Raychev, Max Schäfer, Manu Sridharan, and Martin Vechev. 2013. Refactoring with Synthesis. In *Object-Oriented Programming, Systems, Languages, and Applications (OOPSLA)*.
- Christoph Reichenbach, Devin Coughlin, and Amer Diwan. 2009. Program Metamorphosis. In *European Conference on Object-Oriented Programming (ECOOP)*.
- Mitchel Resnick, John Maloney, Andrés Monroy-Hernández, Natalie Rusk, Evelyn Eastmond, Karen Brennan, Amon Millner, Eric Rosenbaum, Jay Silver, Brian Silverman, and Yasmin Kafai. 2009. Scratch: Programming for All. *Communications of the ACM (CACM)* (2009).
- Don Roberts, John Brant, and Ralph Johnson. 1997. A Refactoring Tool for Smalltalk. *Theory and Practice of Object Systems* (1997).
- Friedrich Steimann and Jens von Pilgrim. 2012. Refactorings Without Names. In *International Conference on Automated Software Engineering (ASE)*.
- Tim Teitelbaum and Thomas Reps. 1981. The Cornell Program Synthesizer: A Syntax-Directed Programming Environment. *Commun. ACM* (1981).
- Simon Thompson and Huiqing Li. 2013. Refactoring Tools for Functional Languages. *Journal of Functional Programming* (2013).
- Nikolai Tillmann, Michal Moskal, Jonathan de Halleux, Manuel Fahndrich, and Sebastian Burckhardt. 2012. TouchDevelop: App Development on Mobile Devices. In *International Symposium on the Foundations of Software Engineering (FSE)*.
- Mohsen Vakilian, Nicholas Chen, Stas Negara, Balaji Ambresh Rajkumar, Brian P. Bailey, and Ralph E. Johnson. 2012. Use, Disuse, and Misuse of Automated Refactorings. In *International Conference on Software Engineering (ICSE)*.
- Tim A. Wagner and Susan L. Graham. 1998. Efficient and Flexible Incremental Parsing. *ACM Transactions on Programming Languages and Systems (TOPLAS)* (1998).

A PROGRAM TRANSFORMATIONS

In this section, we supplement the discussion in §3.2 of transformations currently implemented in DEUCE.

A.1 General-Purpose Transformations

Figure 10 shows a list of the general-purpose code tools in our implementation, along with the number of selected code items and target positions required to make the tools Active.

Move Definitions. A common, mundane text-editing task is to rearrange definitions. While conceptually simple, there are several aspects that are subject to error, such as making sure not to break dependencies and making sure not to break scoping. Furthermore, particularly in functional languages where local-bindings can be arbitrarily nested and where tuples can be used to simultaneously define multiple bindings, there are many stylistic reasons for arranging definitions in a certain way. These choices are often in flux during the prototyping and repairing process, where definitions may be reordered to more clearly explain program dependencies and to ensure that the concrete layout fits nicely within the screen width.


The *Move Definitions* transformation takes a set of selected patterns and a single target position, and attempts to move the pattern and its definition to the target position. If the target position is an expression, a new let-binding is added to surround the target. Whitespace is added or removed to match the indentation of the target scope. If the target position already defines a list pattern, then the selected definitions are inserted into the list. If the target position defines a single variable, then a list pattern is created.

There are three cases in which DEUCE provides the user options for how to correct an otherwise invalid transformation. In all cases, the user may choose the original invalid option since breaking the code temporarily may be the intention during the course of prototyping and repairing. Note that the screenshots in Figure 11 show a preliminary implementation of DEUCE, with cosmetic differences in the user interface.


Option: Renaming to Preserve Binding Structure. One issue is that the binding structure may change. For example, in Figure 11a, the uses of x in the expression $(+ x 1)$ on lines 2 and 5 resolve to different definitions of x , on lines 1 and 4, respectively. Moving the definition of x from line 4 before $y1$ will result in a program that evaluates safely but with different binding structure. In this case, the *Move Definition*

Active Transformations Tool Name (+ Options)	Selected Widgets		
	Expressions	Patterns (or Defs)	Targets
Preserve Behavior for Reuse			
Create Function from Definition (+ all constants or only named constants)	0	1 (or 1)	0
Create Function from Arguments	1+	0	0
Merge	2+	0	0
Preserve Behavior for Readability or Subsequent Editing			
Move Definitions (+ renaming; dep. lifting; dep. inversion)	0	1+ (or 1+)	1
Swap Definitions	0	2 (or 2)	0
Introduce Variable	1+	0	1
Add Arguments	1+	0	1 in arg list
Remove Arguments at function definition	0	1+ arg	0
Remove Arguments at function call	1+ arg	0	0
Reorder Arguments at function definition	0	1+	1 in arg list
Reorder Arguments at function call	1+	0	1 in arg list
Reorder List Items	1+	0	1 in parent list
Rename Variable at definition (+ new name)	0	1	0
Rename Variable at use (+ new name)	1 variable	0	0
Swap Variable Names and Usages	0	2	0
Inline Definition	0	1+	0
Duplicate Definition	0	1+	1
Clean Up	0	0	0
Make Single Line	1	0	0
Make Multi-Line	1	0	0
Align Expressions	2+	0	0
Change Behavior			
Make Equal with Single Variable (+ choose suggested name)	2+ constants	0	0
Make Equal by Copying (+ choose expression to copy)	2+	0	0
Reorder Expressions	1+	0	1
Swap Variable Usages	0	2	0


Figure 10: General-purpose transformations in DEUCE.

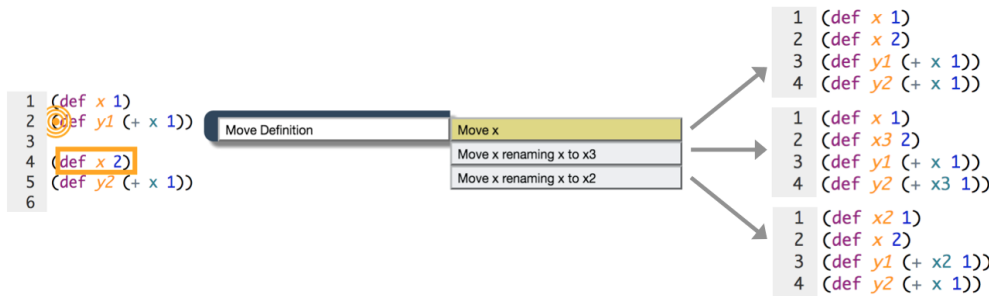


(a) Simply moving the definition of `x` on line 4 to line 2 would change the binding structure of the program. In addition to this option, so the second and third options use renaming to preserve the binding structure of the original program.

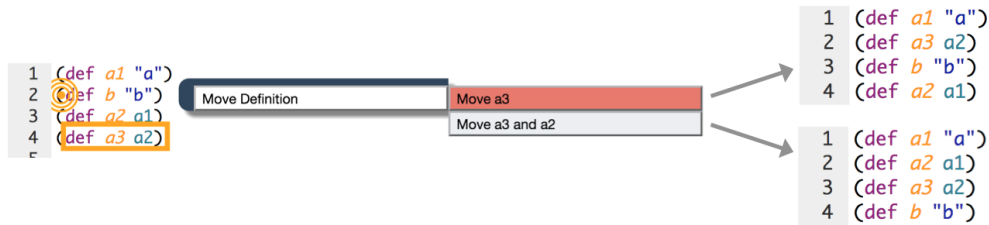

(b) Simply moving the definition of `a3` above `b` would result in a use of `a2` before it is defined, so the second option additionally lifts the definition of `a2`.

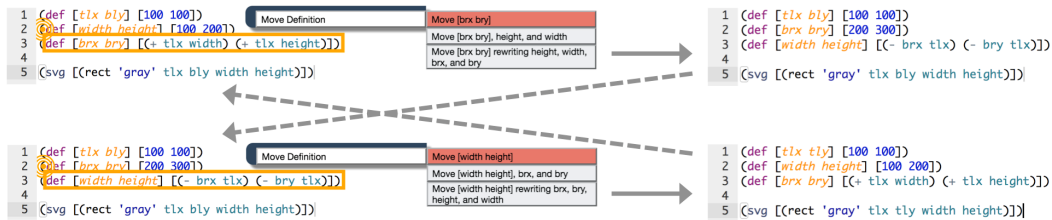

(c) For arithmetic constraints among expressions—such as the top-left corner, width, height, and bot-right corner of a rectangle—*Move Definitions* can move definitions above dependencies by rewriting the expressions.

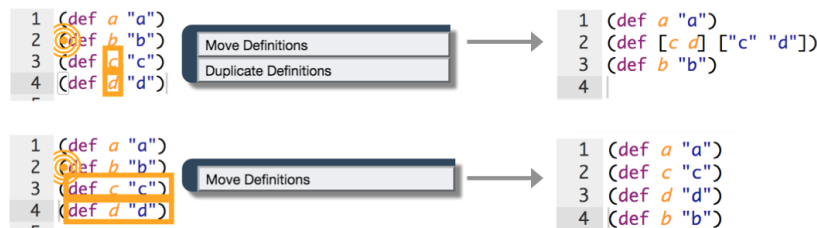

(d) When selecting the patterns `c` and `d` and moving them before `b`, they are put into a single definition. When selecting the definitions `c` and `d`, the separate definitions are preserved in the new location.

Figure 11: Examples demonstrating four configuration options for *Move Definition* transformation.

transformation provides several options: the unsafe option that performs the transformation without renaming which allows a binding to be captured, and two safe options that rename either of the definitions to avoid capture.

Option: Lifting Dependencies. A second potential issue is that the definitions would be moved before its dependencies. In the example in Figure 11b, `a2` is defined to be `a1`, and `a3` is defined to be `a2`. Trying to move `a3` above `b` is not safe, because `a2` is not in scope. The transformation provides two options: the unsafe transformation, and a version where the dependency, `a2`, is automatically moved as well to make the original transformation safe.

Option: Inverting Dependencies. A third situation is when the user may want to rewrite definitions so that a dependency violation can be avoided. In the top-half of Figure 11c, the program defines the top-left point (abbreviated to `tl` for space) to be `(100, 100)` and the

width and height to be 100 and 200, respectively; the location of the bottom-right point (abbreviated to *br*) is derived in terms of these parameters. Dragging the third definition above the second results in *brx* and *bry* being rewritten to constants that the previous expressions evaluated to (*i.e.* 200 and 300), and then width and height are rewritten to arithmetic expressions that preserve the original relationship (*i.e.* $(- brx \ t1x)$ and $(- bry \ t1y)$). In situations where there are constraints among expressions—particularly common in programming domains that generate visual output, such as a web application or data visualization—this transformation allows the programmer to vary the choices about which parameters are defined first in the program with constants and which are derived in terms of them. The bottom half of Figure 11c shows how the new definitions can also be inverted, returning the program to the original.

Option: Flattening or Preserving Definition Structure. As listed in Figure 10, *Move Definition* can be initiated by selecting either one or more patterns (*e.g.* just the variables *c* and *d* in the top half of Figure 11d) or one or more definitions (*e.g.* the definitions `(def c "c")` and `(def d "d")`) in the bottom half of Figure 11d). In the former case, the selected patterns are moved into the same list pattern in the target position; in the latter case, separate patterns are kept separate. This is useful for preserving stylistic choices of the definitions (*e.g.* the line length of each definition) as well as semantic properties (*e.g.* dependencies between the selected definitions).

Make Equal by Copying. When selecting multiple expressions, this transformation copies one of the expressions in place of all others. Unlike the case where all selected expressions are constant, the key choice here is which expression to use, so the user is asked to choose which one to replace the others with.

Create Function by Merging Definitions. While prototyping, it is often convenient to copy-paste code and then make changes to the different clones as needed. Afterwards, it may be desirable to pull out the common code between the clones into a single function. The *Create Function by Merging Definitions* tool takes multiple selected expressions and attempts to abstract them over their syntactic differences: any differing subtrees become arguments to a new function inserted into the program. The selected expressions are rewritten as calls to this function. To avoid suggesting unhelpful small abstractions, the *Create Function by Merging Definitions* tool is displayed only if the resulting function is larger than a threshold (more precisely, if the number of AST nodes in the function body is at least double the number of arguments to the function).

Create Function from Definition. The *Create Function from Definition* tool transforms a selected expression into a lambda abstracted over constants within the expression body. The transformation provides two choices: (1) abstracting all constants, or (2) abstracting constants that are immediately let-bound to variables. The latter is a (simplified version of a) heuristic proposed by Hempel and Chugh [2016]. We could add configuration options to ask the user about all potential constants to abstract; to keep this process lightweight, however, we propose only the two parameterizations and then allow the user to modify the result with tools for arguments (below). After the expression is rewritten, the variable it is bound to is tracked so that its uses can be rewritten to calls to the new lambda, with the constants that had been pulled out of the definition.

Add, Remove, or Reorder Arguments. The tools to *Add, Remove, or Reorder Arguments* allow the interface of a function to be changed. Arguments may be added to a function by selecting expressions within a lambda and a target position in the argument list. The *Remove* and *Reorder Argument* tools allow the modification to be specified either at the argument list of the function definition or at a call-site of the function. All three transformations require call-sites to be updated in sync. Currently, we use a simple static analysis to track when a lambda is let-bound to a variable. If the lambda ever escapes this simple syntactic discipline, then we cannot guarantee that all function calls are rewritten appropriately. In which case, the transformation is marked as potentially unsafe (*i.e.* yellow). As in other cases with unsafe transformations, the user must rely on other mechanisms to ensure correctness (*e.g.* types, tests, viewing the output, or code review).

Reorder Items. This transformation allows one or more (potentially non-consecutive) items to be removed and inserted elsewhere in the same list. The whitespace between each pair of consecutive elements is preserved in the transformed list, a detail that can often be tedious to ensure with manual text-edits.

Rename Variable. A transformation commonly found in IDEs is to *Rename* a variable and all its uses. In DEUCE, the variable to be renamed may be selected either at its definition or at one of its usage sites. In either case, as the user types the new name it is checked to ensure the name will not introduce collisions; if it would, the transformation is marked as unsafe (*i.e.* yellow) to indicate that a different name may be desired.

Swap Tools. *Swap Variable Names and Usages* can be used to correct the names chosen for two variables. The alternative is to perform the sequence of *Renaming* the first variable to a temporary, *Renaming* the second to the first, and *Renaming* the temporary to the second. A related transformation, *Swap Variables Usages*, is handy for when the definitions were correct, but their usages are the opposite of what is intended (*e.g.* mixing up width and height values).

Duplicate Definition. Text-based copy-paste works especially well when entire, adjacent lines are copied. For expressions with smaller delimitations (within a single line) or larger, “jagged” ones (different positions across multiple lines), text-based selection may be more cumbersome. The *Duplicate Definition* transformation is a mouse-based alternative for copy-pasting an expression to a different target position.

Inline Definition. This transformation replaces all uses of a selected variable with its definition. For convenience, multiple different variables can be selected and inlined simultaneously. As any definition being inlined may itself have variables, if any such variables are accidentally captured at their new locations then capture avoiding renamings are offered.

Clean Up; Make Single Line; Make Multi-Line; Align Expressions. All transformations in DEUCE attempt to handle whitespace reasonably. Even so, occasionally a transformation or series of transformations will result in a program with, for example, a long line of code. We supplement the whole-program *Clean Up* tool of [Hempel and Chugh 2016] with whitespace reformatting rules to break long definitions into multiple lines and ensure that any multi-line definition is comfortably padded by a blank line before and after. This is currently the only transformation that requires no selected items—it applies to the entire program. We also implement several transformations to help format selected expressions, by adding or removing line breaks and indentation.

A.2 Domain-Specific Transformations

To demonstrate how our approach can be instantiated with custom structured transformations, we have implemented several transformations (in addition to the general-purpose ones) that are specific to features in SKETCH-N-SKETCH and/or are particularly useful for the domain of SVG graphics; these are summarized in Figure 12.

Thaw/Freeze Number; Add/Remove Range; Show/Hide Slider; Flip Boolean. Numeric constants in LITTLE can be annotated with an optional range—written $15\{1-30\}$ —to instruct the SKETCH-N-SKETCH editor to display a slider in the output to make it easy to change the number without text-editing. This feature is an example of “scrubbing” constants, a live programming feature described by Bret Victor (<http://worrydream.com/#!/DrawingDynamicVisualizationsTalk>) and Sean McDirmid (<https://www.youtube.com/watch?v=YLrdhFEAiQo>). We made one minor addition to the LITTLE language: the option to mark a range annotation as hidden—written $15\{1-30, "hidden"\}$ —to keep the range information in the program while suppressing the slider widget in the output.

In DEUCE, the *Add/Remove Range* tool operates on constant literals to attach or remove these range annotations. New minimum and maximum range values are determined based on the current value. The *Show/Hide Sliders* tool annotates a range to be $15\{1-30, "hidden"\}$, which keeps the range in the text but suppresses the slider from the output. This tool makes it quicker to toggle the sliders on and off (and, furthermore, preserves the possibly-edited min- and max-values to remain in the text). SKETCH-N-SKETCH allows numbers to be frozen with the annotation $15!$, which tells SKETCH-N-SKETCH not to change this value in response to changes to the output. (Compared to the discussion of the *Create Function from Definition* tool, the heuristic for arguments is to choose named and unfrozen constants.) As with sliders, it can be tedious to use text-editing to toggle this annotation on and off, so the *Thaw/Freeze Constants* tool provides an alternative. The *Flip Boolean* tool is a quick way to “scrub” boolean literals.

Rewrite as Offset. Hempel and Chugh [2016] point out that there are often (at least) three different common ways to programmatically describe a positional attribute of a shape: with constants, with constant offsets from an anchor point, or with constant relative percentages with respect to a bounding box. When prototyping, it is often easiest to start by using constants and then later switching to one of the relative versions. The *Rewrite as Offset* tool converts one or more selected constants into offsets from a selected value. For example, in the expression $(let\ x\ 10\ 15)$, rewriting 15 as an offset from x transforms the program to $(let\ x\ 10\ (+\ x\ 5))$. As with several other structured transformations we have discussed, this transformation is conceptually simple but can become tedious and error-prone to perform with manual text-editing when multiple numbers scattered across the program need to be offset and when the base values are not easy-to-remember numbers.

Convert Color String. In SKETCH-N-SKETCH, as in HTML and SVG, colors can be specified in a variety of ways: RGBA codes, HSL codes, HEX, and color strings. The SKETCH-N-SKETCH editor provides special support for color attributes defined as “color numbers” which are (essentially) just the hue component of an HSL triple; in particular, the editor displays a slider next to the shape to control this color value. The *Convert Color String* tool converts color names (often useful for prototyping) into corresponding numbers, to enable the direct manipulation support for color numbers that SKETCH-N-SKETCH provides. This transformation is an example of how a custom program transformation can be used to complement other features provided by the IDE.

Active Transformations Tool Name (+ Options)	Selected Widgets		
	Expressions	Patterns (or Defs)	Targets
Preserve Behavior for Readability or Subsequent Editing			
<i>Thaw/Freeze Number</i>	1+	0	0
<i>Add/Remove Range</i>	1+	0	0
<i>Show/Hide Slider</i>	1+	0	0
<i>Rewrite as Offset</i>	1+	1	0
<i>Convert Color String</i> (+ RGB or Hue)	1+ strings	0	0
Change Behavior			
<i>Flip Boolean</i>	1+ booleans	0	0

Figure 12: Domain-specific transformations in DEUCE.

B EXAMPLES IN SKETCH-N-SKETCH

We describe five examples we authored in SKETCH-N-SKETCH, using a combination of text- and mouse-based code edits. Together, the five examples required a total of 35 minutes of development time in DEUCE (the videos are a few minutes longer because of pauses during the narration), resulting in approximately 100 lines of LITTLE code for the final programs. We encourage the reader to watch the accompanying videos, available on the web. At several points in the videos, we use the existing SKETCH-N-SKETCH ability to directly manipulate the size, position, and color of shapes in the output, as a way to indirectly update constant literals in the program. We use this feature for simplicity; the constant literals could, of course, be changed with ordinary text-edits.

Preliminary Version of DEUCE. Note that the screenshots below, as well as the videos, show a preliminary version of DEUCE (implemented in SKETCH-N-SKETCH v0.6.0), with cosmetic differences compared to the bounding boxes and target positions shown in this paper. In the preliminary version, *Create Definition from Definition* was called *Abstract*, *Create Definition by Merging Expressions* was called *Merge Expressions*, and the two *Make Equal* tools were combined into a single tool.

B.1 Example: SKETCH-N-SKETCH Logo

We use an example in this section to motivate and summarize the workflow enabled by DEUCE. The task, to write a program that generates an SVG design, is borrowed from Hempel and Chugh [2016]. Throughout the discussion, notice how DEUCE automates tasks that would otherwise be tedious and error-prone, and the user performs manual text-edits for tasks that require additional human insight and choice.

Consider the task of writing a program that generates the SKETCH-N-SKETCH logo (shown in the adjacent screenshot), where two white lines atop a black rectangle reveal a lambda symbol between three triangles. We would like the program to be structured so that it can be reused to easily generate configurations of the logo with different design parameters, namely, the size, background color, and color and width of the lines. We will describe a sequence of text- and mouse-based code edits in DEUCE that allows the user to prototype, repair, and refactor the code until it achieves the desired goal. The reader is encouraged to follow along with the example in our online demo, or to watch the video.



Phase I: Prototyping. The user writes definitions for the background rectangle and the first line, between the top-left and bottom-right corners of the logo. To start, these shapes are both positioned at the origin $(0, 0)$ and stretch to $(200, 200)$. They are combined in `(svg [rectangle line1])` to generate the first version to render; this code can be seen in the screenshot in the left half of Figure 13. The user confirms that the pieces look roughly as intended, and now returns to the program to replace the hard-coded $(0, 0)$ constants with variables so that the positions of both shapes can be modified together.

Rather than text-editing, however, the user can use the structured editing capabilities of DEUCE to perform this task in a quick, and safe, way. The user holds down the Shift key, which causes DEUCE to display clickable widgets when hovering over different parts of the program text. The user clicks on the two `0` constants that correspond to the x-positions of the top-left corners of the shapes, and DEUCE displays a menu of potential transformations underneath the selected widgets. When the user hovers over the *Make Equal* tool in the menu, DEUCE displays a list of candidate new variable names to add to the program. When hovering over each choice, DEUCE previews the result of the transformation; in each case, the selected constants are replaced by uses of the new variable, which binds `0` and is defined at the innermost scope relative to the constants. The user chooses the new variable name to be `x1`, and the code is transformed as shown in the right half of Figure 13.


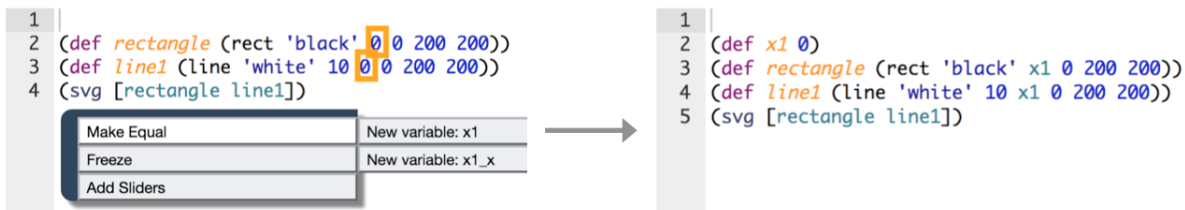


Figure 13: When the user holds the Shift key and selects the two constants (highlighted in orange), a context-sensitive menu identifies the program transformations that may be applied. When the user invokes the “Make Equal, New variable: x1” tool, the program is transformed to the version on the right.

Next, the user employs the *Make Equal* tool three more times, selecting the remaining pairs of constants that define the x- and y-positions of the top-left and bottom-right corners. Although happy with the four names DEUCE has suggested (`x1`, `y1`, `w`, and `h`), the user wants to combine the definitions into a single line, because each of the names and values is short. The user selects three variables to move—`y1`, `w`, and `h`—and the *target position* after the `x1` variable, to indicate that the selected variables should appear inline after the `x1` (shown on the right).

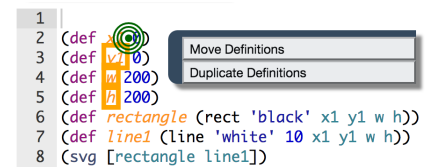

The user hovers over the *Move Definitions* tool to preview the transformation where all four variables are defined in a tuple (i.e. 4-element list), and then selects this transformation.

Now, the user uses normal copy-paste to duplicate the `line1` definition, renames it `line2`, and adds `line2` to the list of shapes. This second line will eventually connect the bottom-left corner of the logo to its center, which will form the lambda symbol. To start testing, however, the user edits the start and end points to be $(x1, h)$ and $(w, y1)$, respectively, which generates the symbol “X” when run.

The user invokes *Make Equal* twice to relate the stroke color and width of the two lines with two new variables called `stroke` and `w1`, respectively. The user is not happy with the name chosen for the latter, so she clicks on the variable definition and uses the *Rename* tool to rename `w1` to `strokeWidth` (the interaction is shown on the right), which automatically replaces all uses with the new name.

```

1
2 (def [x1 y1 w h] [0 0 200 200])
3 (def rectangle (rect 'black' x1 y1 w h))
4 (def stroke 'white')
5 (def w1 10)
6 (def line1 (line stroke w1 x1 y1 w h))
7 (def line2 (line stroke w1 x1 h w y1))
8 (svg [rectangle line1 line2])
    
```

Then the user invokes the *Move Definition* tool to combine these two variables into a tuple (not shown). The user invokes *Move Definition* once again to move `rectangle` below `stroke` and `strokeWidth` (not shown). Having taken care to organize the code in a readable fashion, the user would like to define a variable to clearly identify that the constant 'black' defines the color of the rectangle. The user selects this constant and the target position before `stroke`, and invokes the *Introduce Variable* tool (shown on the right) to add a new variable called `fill` in place of the string literal.

```

1
2 (def [x1 y1 w h] [0 0 200 200])
3 (def [fill stroke strokeWidth] ['black' 'white' 10])
4 (def rectangle (rect 'black' x1 y1 w h))
5 (def line1 (line stroke strokeWidth x1 y1 w h))
6 (def line2 (line stroke strokeWidth x1 h w y1))
7 (svg [rectangle line1 line2])
    
```

Phase II: Repairing. At this stage, the user has become comfortable with the basics of the design, but is aware of two issues that must be addressed. The first issue is that even though the position of the top-left corner has been factored into variables `x1` and `y1`, the relationships for the other endpoints depend on the values of these variables both being 0. To verify this, the user text-edits them to be 50 and 50, re-runs the program, and confirms that the lines do not “move” with the rectangle. Knowing what the intended relationships ought to be, the user text-edits the second endpoint of `line1` to be $(+ x1 w)$ and $(+ y1 h)$.

Now, to snap the other line of the “X” to the top-right corner, the user must use these same subexpressions in the definition of `line2`. The user selects $(+ y1 h)$ of `line1` and `h` in `line2`, and invokes the *Make Equal* tool (shown on the right). Because these two subexpressions differ, the DEUCE menu asks the user to select which of these expressions should be used in both places; the user chooses to use the sum expression. Similarly, the user invokes *Make Equal* (not shown) to replace the `w` in `line2` with the $(+ x1 w)$.

```

1
2 (def [x1 y1 w h] [50 50 200 200])
3 (def [fill stroke strokeWidth] ['black' 'white' 10])
4 (def rectangle (rect fill x1 y1 w h))
5 (def line1 (line stroke strokeWidth x1 y1 (+ x1 w) (+ y1 h)))
6 (def line2 (line stroke strokeWidth x1 h (+ y1 h) w y1))
7 (svg [rectangle line1 line2])
    
```

The remaining issue is that the second line needs to be half the length, so that it reveals the lambda symbol instead of the letter “X.” To do this, the user text-edits the coordinates of the endpoint to be $(+ x1 (/ w 2))$ and $(+ y1 (/ h 2))$, respectively. Viewing the output now reveals the lambda. Either with text-edits or the existing output-directed manipulation features of SKETCH-N-SKETCH, the user varies the values of the four positional variables, and visually confirms that the output continues to exhibit the intended lambda symbol.

Phase III: Refactoring. At this point, the user has finished encoding all the desired relationships in the program. Now is the time to refactor the program so that it can be reused to generate multiple variations. First, the user selects the list of shapes at the end of the program and invokes the *Introduce Variable* tool (shown below left) to give it a name (`shapes`) outside the `svg` expression. Next, the user selects the definitions that contribute to `shapes`, and invokes the *Move Definitions* tool to place them inside the `shapes` definition (shown below right).

```

1
2 (def [x1 y1 w h] [50 50 200 200])
3 (def [fill stroke strokeWidth] ['black' 'white' 10])
4 (def rectangle (rect fill x1 y1 w h))
5 (def line1 (line stroke strokeWidth x1 y1 (+ x1 w) (+ y1 h)))
6 (def line2 (line stroke strokeWidth x1 (+ y1 h) (+ x1 (/ w 2)
7 (/ h 2)))
8 (svg [rectangle line1 line2])
    
```

```

1
2 (def [x1 y1 w h] [50 50 200 200])
3 (def [fill stroke strokeWidth] ['black' 'white' 10])
4 (def rectangle (rect fill x1 y1 w h))
5 (def line1 (line stroke strokeWidth x1 y1 (+ x1 w) (+ y1 h)))
6 (def line2 (line stroke strokeWidth x1 (+ y1 h) (+ x1 (/ w 2)
7 (/ h 2)))
8 (def shapes
9 [rectangle line1 line2])
10 (svg shapes)
    
```

The top-level definitions are turned into local let-bindings, taking care of indentation and parenthesis delimiters that would otherwise require tedious, manual text-edits. The user uses *Rename Variable* (not shown) to change `shapes` to `logo`.

The final step is to turn `logo` into a function that is parameterized over the design constants inside the definition. Selecting the definition (shown below), DEUCE shows an *Abstract* tool to turn several of the constants into function arguments. In Figure 14, notice how the use of `logo` has been rewritten to a call, with the appropriate arguments selected from their values within the definition. Again, this would be a

tedious and error-prone manual transformation, as the connection between formal parameters and actual arguments are not syntactically adjacent in the program. However, this transformation is easy to automate with structure information. To create other versions, the user copies and pastes the function call and changes the arguments to each (shown in Figure 14).

To recap, the process of prototyping, repairing, and refactoring the program is a text-driven process, as usual, but with support for automating low-level, structural edits that are tedious and error-prone (e.g. because of typos, accidental shadowing, and mismatched delimiters). Furthermore, the tools can suggest useful information, such as the different variable names offered by Make Equal and Introduce Variable. As a result, the user spends keystrokes on the more interesting tasks that are harder to automate—arithmetic relationships in the design, the choice of names, and final decisions about whitespace and formatting.

```

1
2 (def logo
3   (let [x1 y1 w h] [50 50 200 200])
4     (let [fill stroke strokeWidth] ['black' 'white' 10])
5       (let [rectangle (rect fill x1 y1 w h)]
6         (let [line1 (line stroke strokeWidth x1 y1 (+ x1 w) (+ y1 h))]
7           (let [line2 (line stroke strokeWidth x1 (+ y1 h) (+ x1 (/ w 2)) (+ y1 (/ h 2)))]
8             [rectangle line1 line2])))
9         ))
10 (svg logo)

```

Abstract

Abstract logo over its constants

Abstract logo over its named unfrozen constants

```

1 (def logo (\(x1 y1 w h fill stroke strokeWidth)
2   (let [rectangle (rect fill x1 y1 w h)
3     (let [line1 (line stroke strokeWidth x1 y1 (+ x1 w) (+ y1 h))
4       (let [line2 (line stroke strokeWidth x1 (+ y1 h) (+ x1 (/ w 2)) (+ y1 (/ h 2)))]
5         [rectangle line1 line2])))
6   ))
7 (svg (concat [
8   (logo 33 21 135 120 'purple' 'orange' 15)
9   (logo 180 99 72 31 'darkgreen' 'pink' 3)
10  (logo 186 26 60 60 'black' 'white' 5)
11 ]))

```




Figure 14: Program to generate SKETCH-N-SKETCH logo, developed with a combination of text-edits and DEUCE code tools.

B.2 Example: Target

In this example, our goal is to generate a target comprising concentric rings of alternating color. We start by writing a single red circle, using the expression $(* 1 50)$ for the radius to anticipate that it will scale linearly for ring 2, 3, and so on. We use *Abstract* to extract a function, *ring*, that is parameterized over this index *i*, and we use *Remove Arguments* so that *ring* is parameterized over only *i*. We use *Introduce Variable* to give a name to the ring color, and then use text-editing to choose red or gray depending on the parity of index *i*. Next, we update the main expression with text-editing to map the function's *i* over the list of indices (*reverse (range 1 4)*). We use the *Abstract* tool to extract a target function for drawing these concentric circles. We would like the target function to take *cx*, *cy*, *ringWidth*, and *ringCount*, but the first three of these are currently constants inside the *ring* function. To turn these constants into function arguments, we move the entire *ring* definition (and thus the constants of interest) inside of *target*, which then allows us to use the DEUCE tools to introduce and rename the desired arguments.



B.3 Example: Battery Icon

In this example, our goal is to build a program that generates a battery icon, akin to those often found in operating system task bars. The design comprises three shapes: a polygon with rounded stroke for the body of the battery, a rectangle for the cap, and a rectangle for the battery juice inside. In addition to setting up the appropriate positional relationships, we want the color of the battery juice to change based on the amount that remains. Our development process from start to finish, which takes approximately 15 minutes (without narration), mixes text-edits and DEUCE transformations throughout. Our general workflow is to incrementally add new shapes and features, often starting with hard-coded or copy-pasted expressions, and then iteratively repairing the program by adding new variables and relationships.



The first shape we add to the program is the polygon for the body outline. We use the *Introduce Variable* tool to give names to the top-left and top-right corners of the body, which are needed by subsequent expressions. We use the *Make Equal* tool to equate certain offsets among edges in the design, and we use the domain-specific *Freeze* tool to ensure that some of these offsets are always the constant zero. If we accidentally swap the usages of width and height variables, we can use the *Swap Variable Names and Usages* tool to correct the bug. The second shape we add to the program is the cap. Again, we use a combination of text-edits and structured editing tools, such as *Introduce Variable* and *Move Definitions*, during this process.

The last shape we add is the colored rectangle for the battery juice. After we add it to our list of shapes, we see that the juice appears on top of the body rather than behind it. We use the *Reorder Items* tool to move this rectangle earlier in this list, which results in the desired z-ordering. When prototyping, it is natural to define the width of this rectangle directly as a constant w , with the intention that it remains less than the width of the body. Later in the development process, we use text-editing to introduce a conditional expression that determines the color (*i.e.*, green, black, orange, or red) based on the value of the percentage ($/ w$ width). This expression appears in several guards of a multi-way conditional, so we use the *Make Equal with Single Variable* tool to give it a name, which we *Rename* to `juicePct`. Now that the relationships are set up, we realize that it would be better to first define `juicePct` (the percentage denoted by a number between 0.0 and 1.0) and then derive w in terms of it. We use the *Move Definition* tool to drag the former above the latter, and DEUCE proposes an option where the definitions are inverted, specifically, `juicePct` is redefined to be a constant percentage and w is defined in terms of it. We use the *Add Range* tool twice twice, once on w before it was rewritten and once on `juicePct` afterwards. In each case, the automatically chosen range was useful for allowing the slider to quickly manipulate reasonable values for each quantity.

At this point, our program generates the entire icon in terms of the design parameters. To finish, we turn the definition into a function using a similar series of *Move Definitions* and *Create Function from Definition* transformations as described earlier. This time, we realize that the *Abstract* tool did not make all of our desired constants into parameters. So, we use the *Add Argument* and *Rename* tools to reach our desired parameterization of `topLeft`, `bodyWidth`, `bodyHeight`, `capWidth`, `capHeight`, `strokeWidth`, and `juicePct`.

B.4 Example: Coffee Mug

In this example, our goal is to build a program that generates a coffee mug, in a way that it is easy to reposition and resize the logo. When developing the body of the mug and two concentric ellipses for the handle, the *Introduce Variable* and *Move Definition* tools help turn initially hard-coded shapes into the desired relationships.

When designing the steam, we use tools not already exercised in the previous examples. When we add the first steam puff, we use hard-coded constants for all of the points and control points of the path. This helps us get the initial design for the curvy puff, but makes it hard to move to a different position; all 12 constants must be updated by the same offset to translate it. We use the *Rewrite as Offset* tool several times to make the steam puff rigid. Then we use the *Duplicate Definition* tool to copy-paste (via DEUCE rather than text-editing) the first steam definition twice. After changing just the initial position of each puff, our copy-pasted definitions contain nearly identical code. We use the *Merge* tool to abstract the three steam puffs over their differences (*i.e.* the position). We use *Rewrite as Offset* several more times to position the second and third steam puffs in terms of the first, and then again to position the first steam puff in terms of the mug; the effect is that the steam remains rigid and correctly positioned as the mug is translated to different positions. During these last steps, we move several definitions from the bottom of the program up to the top so that the related expressions are closer together; the *Move Definition* tool allows us to make such transformations without fear of breaking dependencies in or changing the binding structure of the program.



B.5 Example: Mondrian Arch

Inspired by the Mondrian programming-by-demonstration graphics editor [Lieberman 1993], our final example is an arch, where two upright rectangles support a third horizontal rectangle, all of which are of equal width. As in the previous examples, we use tools like *Introduce Variable* often to help reorganize the code and text-edits to fill in arithmetic relationships. Unlike the previous examples, we use tools that manipulate concrete whitespace—*Make Multi-Line* to facilitate the step of going from one call to `rect` to multiple ones, and *Make Multi-Line* to make the arguments to these adjacent calls line up vertically, making it easier to distinguish the differences between all calls. These tools eliminate some of the tedious text-edits that arise when making such stylistic changes to the code.



C USER STUDY

We configured a pared down version of the system that turned off all SKETCH-N-SKETCH features unrelated to the interactions being studied. This version also contained a panel in the bottom-right corner with instructions about the current task. To improve readability, the screenshots below show a lighter color theme than used in the user study) The user study version of the system, as well as a video that demonstrates how to complete the following tasks, is available at <http://ravichugh.github.io/sketch-n-sketch/blog/>.

C.1 Tasks

Head-to-Head Task: One Rectangle. This task required swapping two arguments to a function (either with Swap Expressions or Swap Variable Usages), and combining and reordering five separate definitions into a single tuple definitions (requiring at least two calls to Move Definitions).

View Options Help

← Previous Step Task Step 8/21 Give Up ▶

```

1
2 (def rect1
3   (let x 20
4     (let y 20
5       (let height 250
6         (let width 80
7           (let fill "black"
8             (rect fill x y height width))))))
9
10 (def main
11   (draw [ rect1 ]))
12
13
14 ; The final program should look something like:
15 ;
16 ; (def rect1
17 ;   (let [fill x y width height] ["black" 20 20 80 250]
18 ;     (rect fill x y width height)))
19 ;
20 ; (def main
21 ;   (draw [ rect1 ]))
22

```

Use only BOX-SELECT MODE to perform the edits below. When you are done, press Next Step.

Goals:

- The programmer intended the rectangle to be 250 pixels tall and 80 pixels wide, but the height and width arguments to rect are in the wrong order. Swap them.
- Rearrange the five variable definitions into a single tuple definition. The order of variables should match the order of arguments to rect.

Head-to-Head Task: Two Circles. This task (described as Example 1 in §2) required turning a definition into a function (Create Function from Definition or Create Function from Arguments) and then rearranging arguments (Reorder Arguments).

Code Tools View Options Help

← Previous Step Task Step 4/21 Give Up ▶

```

1
2 (def connectedCircles
3   (let startX 50
4     (let endY 50
5       (let startY 70
6         (let endX 150
7           [(circle "gray" startX startY 30)
8            (circle "gray" endX endY 30)
9            (line "gray" 10 startX startY endX endY)
10          ]))))
11
12 (def main
13   (draw connectedCircles))
14
15
16 ; The final program should look something like:
17 ;
18 ; (def connectedCircles (\(startX startY endX endY)
19 ;   [(circle "gray" startX startY 30)
20 ;    (circle "gray" endX endY 30)
21 ;    (line "gray" 10 startX startY endX endY)
22 ;   ])
23 ;
24 ; (def main
25 ;   (draw (connectedCircles 50 70 150 50)))
26

```

Use only TEXT-SELECT MODE to perform the edits below. When you are done, press Next Step.

Goals:

- Turn connectedCircles into a function takes startX, startY, endX, and endY arguments, and draws two gray circles at (startX, startY) and (endX, endY) connected by a line.


Head-to-Head Task: Three Rectangles. This task required factoring three nearly-identical definitions into a helper function (Create Function by Merging Definitions) and renaming the resulting function (Rename Variable).

Code Tools View Options Help
← Previous Step Task Step 2/21 Give Up ▶

Undo Redo

```

1 |
2 | (def rect1
3 |   (let [fill x y w h] ["red" 30 30 50 70]
4 |     (rect fill x y w h)))
5 |
6 | (def rect2
7 |   (let [fill x y w h] ["green" 109 53 50 70]
8 |     (rect fill x y w h)))
9 |
10 | (def rect3
11 |   (let [fill x y w h] ["blue" 192 35 50 70]
12 |     (rect fill x y w h)))
13 |
14 | (def main
15 |   (draw [rect1 rect2 rect3 ]))
16 |
17 |
18 | ; The final program should look something like:
19 | ;
20 | ; (def rect_50_70 (\(fill x y)
21 | ;   (let [w h] [50 70]
22 | ;     (rect fill x y w h))))
23 | ;
24 | ; (def rect1
25 | ;   (rect_50_70 "red" 30 30))
26 | ;
                
```



Use only TEXT-SELECT MODE to perform the edits below. When you are done, press Next Step.

Goals:

- The three rectangle definitions share a lot of identical code. Create a function `rect_50_70` that generates a `50 x 70` rectangle given color and position arguments, and define `rect1`, `rect2`, and `rect3` in terms of `rect_50_70`.


Head-to-Head Task: Four Circles (a.k.a. Target Icon). This task required removing a function argument (Remove Argument), renaming a function argument (Rename Variable), moving a function definition inside another (Move Definition), and adding several additional arguments to an existing function (Add Arguments).

View Options Help
← Previous Step Task Step 6/21 Give Up ▶

Undo Redo

```

1 |
2 | (def ring (\i
3 |   (let fill (if (= 0 (mod i 2)) "firebrick" "lightgray")
4 |     (circle fill 150 150 (* 30 i))))
5 |
6 | (def target (\(startIndex endIndex)
7 |   (map ring (reverse (range startIndex endIndex)))))
8 |
9 | (def main
10 |   (draw (target 1 4)))
11 |
12 |
13 | ; The final program should look something like:
14 | ;
15 | ; (def target (\(numRings cx cy num)
16 | ;   (let ring (\i
17 | ;     (let fill (if (= 0 (mod i 2)) "firebrick" "lightgray")
18 | ;       (circle fill cx cy (* num i))))
19 | ;     (map ring (reverse (range 1 numRings)))))
20 | ;
21 | ; (def main
22 | ;   (draw (target 4 150 150 30)))
23 | ;
                
```



Use only BOX-SELECT MODE to perform the edits below. When you are done, press Next Step.

Goals:


- Remove the `startIndex` argument; its value should always be `1`.
- Rename `endIndex` to `numRings`.
- Move the `ring` function inside the `target` definition.
- Add the center position and ring width as arguments to `target`.

Open-Ended Task: Four Squares. This task required factoring four similar function calls into a helper function (Create Function by Merging Definitions), creating a function (Create Function from Definition followed by Add Arguments, or Create Function from Arguments), and renaming five variables (five uses of Rename Variable).

Code Tools View Options Help
← Previous Step Task Step 19/21 Give Up ▶

```

1
2 (def fourSquares
3   (let [x y w] [80 30 100]
4
5     [(rect "yellowgreen" (+ x (* 0 w)) (+ y (* 0 w)) w w)
6      (rect "gold" (+ x (* 1 w)) (+ y (* 0 w)) w w)
7      (rect "royalblue" (+ x (* 0 w)) (+ y (* 1 w)) w w)
8      (rect "salmon" (+ x (* 1 w)) (+ y (* 1 w)) w w)
9     ])
10
11 (def main
12   (draw fourSquares))
13
14
15 ; The final program should look something like:
16 ;
17 ; (def fourSquares (\(x y w topLeft topRight botLeft botRight)
18 ;
19 ;   (let oneCorner (\(fill num2)
20 ;     (rect fill (+ x (* num w)) (+ y (* num2 w)) w w))
21 ;
22 ;     [(oneCorner topLeft 0 0)
23 ;      (oneCorner topRight 1 0)
24 ;      (oneCorner botLeft 0 1)
25 ;      (oneCorner botRight 1 1)
26 ;     ])))
                
```

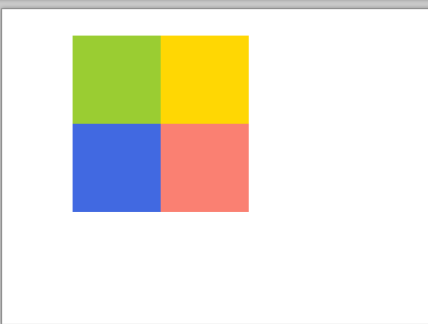

Use TEXT-SELECT MODE and/or BOX-SELECT MODE to perform the edits below. You can mix both modes, like in the tutorial. Text edits are disabled. When you are done, press Next Step.

Goals:


- Introduce a helper function called `oneCorner` that factors the code that is common to the four calls to `rect`.
- Turn `fourSquares` into a function that takes `x`, `y`, and `w` arguments, as well as color arguments called `topLeft`, `topRight`, `botLeft`, and `botRight`.

Open-Ended Task: Lambda Icon. This task is the same as Example 3 in §2, not including the last step to Move Definitions. That is, there are seven variables to define (one using Introduce Variable and six with Make Equal with Single Variable). These seven variables must be defined in two tuples, which can be accomplished by Move Definitions but also without it if the previous tools were used with the appropriate optional target positions.

Code Tools View Options Help
← Previous Step Task Step 21/21 Give Up ▶

```

1
2 (def rectangle
3   (rect "black" 20 30 100 120))
4 (def line1
5   (line "white" 5 20 30 (+ 20 100) (+ 30 120)))
6 (def line2
7   (line "white" 5 20 (+ 30 120) (+ 20 (/ 100 2)) (+ 30 (/ 120 2))))
8
9 (def logo
10  [rectangle line1 line2])
11
12 (def main
13   (draw logo))
14
15
16 ; The final program should look something like:
17 ;
18 ; (def [x y w h] [20 30 100 120])
19 ; (def [fill stroke strokeWidth] ["black" "white" 5])
20 ;
21 ; (def rectangle
22 ;   (rect fill x y w h))
23 ; (def line1
24 ;   (line stroke strokeWidth x y (+ x w) (+ y h)))
25 ; (def line2
26 ;   (line stroke strokeWidth x (+ y h) (+ x (/ w 2)) (+ y (/ h 2))))
27 ;
                
```



The initial program draws a 100 x 120 pixel lambda icon at xy-position (20, 30), but the use of duplicated constants requires many changes if we want to draw the icon at a different position or change the style of the lines.

Use TEXT-SELECT MODE and/or BOX-SELECT MODE to perform the edits below. You can mix both modes, like in the tutorial. Text edits are disabled. When you are done, press Next Step.

Goals:

- Define and use four new variables called `x`, `y`, `w`, and `h` for the x-position, y-position, width, and height, respectively, of the logo. These variables should be defined in a single 4-tuple.
- Define and use two new variables called `stroke` and `strokeWidth` for the color and width, respectively, of the lines. These variables should be defined in a single 2-tuple.
- Define and use a new variable called `fill` for the color of the rectangle. This variable should be defined in the same tuple as `stroke` and `strokeWidth`.

C.2 Exit Survey

Background Questions

How many years of programming experience do you have?

- Less than 1
- 1-2
- 3-5
- 6-10
- 11-20
- More than 20

How many years of functional programming experience do you have (in languages such as Racket, Haskell, OCaml, Standard ML, or Elm)?

- Less than 1
- 1-2
- 3-5
- 6-10
- 11-20
- More than 20

Do you use languages and tools that provide automated support for refactorings or other program transformations? (Examples include Java and Eclipse, Idris and its editor, etc.) If so, please describe which tools and how often you use them.

Did have knowledge or hands-on experience with Sketch-n-Sketch before this study?

- Yes
- No

Did have knowledge or hands-on experience with the Code Tools in Sketch-n-Sketch before this study?

- Yes
- No

If you answered Yes to either question above, please explain briefly.

Head-to-Head Comparisons on First Four Tasks

Text-Select Mode: Text-selection + Code Tools menu or right-click Code Tools menu.

Box-Select Mode: Box-selection + pop-up Code Tools menu.

Which interaction worked better for the One Rectangle task?

- Text-Select Mode worked much better
- Text-Select Mode worked a little better
- They are about the same
- Box-Select Mode worked a little better
- Box-Select Mode worked much better

Which interaction worked better for the Two Circles task?

- Text-Select Mode worked much better
- Text-Select Mode worked a little better
- They are about the same
- Box-Select Mode worked a little better
- Box-Select Mode worked much better

Which interaction worked better for the Three Rectangles task?

- Text-Select Mode worked much better
- Text-Select Mode worked a little better
- They are about the same
- Box-Select Mode worked a little better
- Box-Select Mode worked much better

Which interaction worked better for the Target Icon task?

- Text-Select Mode worked much better
- Text-Select Mode worked a little better
- They are about the same
- Box-Select Mode worked a little better
- Box-Select Mode worked much better

Explain your answers to the four previous questions. When did Text-Select Mode work better and why? When did Box-Select Mode work better and why?

Questions about Final Two Tasks

For the last two tasks, you were allowed to use both Text-Select Mode and Box-Select Mode. The following questions ask about this combination of features.

	Strongly Disagree				Strongly Agree
1. I think that I would like to use this system frequently.	1	2	3	4	5
2. I found the system unnecessarily complex.	1	2	3	4	5
3. I thought the system was easy to use.	1	2	3	4	5
4. I think that I would need the support of a technical person to be able to use this system.	1	2	3	4	5
5. I found the various functions in this system were well integrated.	1	2	3	4	5
6. I thought there was too much inconsistency in this system.	1	2	3	4	5
7. I would imagine that most people would learn to use this system very quickly.	1	2	3	4	5
8. I found the system very cumbersome to use.	1	2	3	4	5
9. I felt very confident using the system.	1	2	3	4	5
10. I needed to learn a lot of things before I could get going with this system.	1	2	3	4	5

Did the Code Tools (either with Text-Select Mode or Box-Select Mode) work well for the Four Squares task? If so, how? If not, why not?

Did the Code Tools (either with Text-Select Mode or Box-Select Mode) work well for the Lambda Icon task? If so, how? If not, why not?

Additional Questions

What computer did you use?

- My own personal laptop
- The laptop provided by the user study administrator

What improvements or new features would make Code Tools in Sketch-n-Sketch better?

Are there any other comments about Code Tools in Sketch-n-Sketch that you would like to share?

Are there other languages, application domains, or settings where you would like to see the Code Tools features?

C.3 Additional Discussion

Within-Subjects Experimental Design. One of our experiments measured which mode participants preferred when given the ability to mix modes. This was possible only because of the within-subjects design. Our within-subjects design also enabled us to control for each subject's measured skill level (via the random effect for each participant in the mixed model). A between-subjects design would require more participants to avoid an imbalance of participant skill between the treatment groups. On the other hand, a between-subjects design would be simpler to interpret and would mitigate concerns about learning effects between modes. Instead, we relied on the mixed model to control for learning effects.

System Usability Results. In §4.3, we discussed the responses to all survey questions except one (due to space constraints). Our survey asked users to rate Combined Mode using the System Usability Scale [Brooke 1986]. The score (mean: 63.9) was in the second quartile (describable as between "OK" and "Good") compared to a corpus of SUS evaluations [Bangor et al. 2009]. There was moderate correlation between completion rate and SUS score (Pearson's $r=0.54$); the score among participants who completed all tasks (extrapolated mean: 75.0) was in the third quartile (describable as between "Good" and "Excellent").