

Detecting periodic subsequences in cyber security data

Matthew Price-Williams¹, Nick Heard^{1,2}, and Melissa Turcotte³

¹Department of Mathematics, Imperial College London

²Heilbronn Institute for Mathematical Research, University of Bristol

³Advanced Research in Cyber Systems, Los Alamos National Laboratory

April 2017

Abstract

Statistical approaches to cyber-security involve building realistic probability models of computer network data. In a data pre-processing phase, separating automated events from those caused by human activity should improve statistical model building and enhance anomaly detection capabilities. This article presents a changepoint detection framework for identifying periodic subsequences of event times. The opening event of each subsequence can be interpreted as a human action which then generates an automated, periodic process. Difficulties arising from the presence of duplicate and missing data are addressed. The methodology is demonstrated using authentication data from the computer network of Los Alamos National Laboratory.

1 Introduction

Recent statistical approaches to cyber-security defence [1, 2] utilize anomaly detection techniques based upon statistical models of normal network behavior, analyzing deviations in an attempt to identify malicious actors. Regarding the arrivals of communications between each pair of hosts in a computer network as a point process of event times on \mathbb{R}^+ , this article proposes a method to distinguish between automated network events and those caused by human behavior.

Polling behavior at a constant periodicity is a common feature of automated signal traffic. [3] presents a method to detect overall polling behavior in a sequence of event data using Fourier analysis. The work presented here aims to detect more complex polling behavior where the entire traffic sequence can be split up into periodic subsequences, separated by more random durations of inactivity. In this scenario, the start of each periodic subsequence is a user-driven event that initiates subsequent automated polling events that beacon at a constant periodicity. Since the user-driven events are not labeled, inferring their identities between the bulk of automated, periodic events can be viewed as a changepoint detection problem.

When the method of [3] is applied to periodic subsequences of event data, detection performance can be seen to deteriorate when the lengths of each periodic subsequence are relatively short. This provides justification for devising bespoke procedures for detecting periodic subsequences.

Treating automated and user-driven data separately should provide a more robust framework for modeling network data, whereby bespoke models can be specified for each type of behavior. Alternatively, as a data reduction tool, identifying only user-driven events represents a significant thinning of the bulk of computer network data, potentially improving anomaly detection capabilities. Examples of periodic subsequences in

network data can occur in the constant refreshing of an open webpage, or when validating log on credentials in authentication data [4].

This article focuses on two types of polling behavior which can be observed in computer network data, each exhibiting a hypothetical periodicity P in different ways:

1. Fixed phase polling: Event times occur every P seconds plus a random zero-mean error; any delay in one event time does not propagate into future event times.
2. Fixed duration polling: Event times occur P seconds after the preceding event, plus a random zero-mean error.

In this article a full generative model is proposed for event times exhibiting both types of polling. These models are robust to both missing and duplicate data.

Section 2 will describe the data used for analysis, taken from the Los Alamos National Laboratory computer network. Section 3 will introduce the screening method used for detecting periodicity in a sequence of event times, demonstrating effectiveness in the presence of periodic subsequences. Section 4 will show how directional statistics can be used to model the error terms of periodic events as angular displacements. Sections 5 and 6 will describe how changepoint detection methods can identify separate periodic subsequences conditional on an underlying model. Section 7 will present results from both a simulated data example which exhibits fixed phase polling, and the real computer network data which exhibits fixed duration polling.

2 Computer Network Authentication

The data analyzed are authentication logs collected over 58 days from the Los Alamos National Laboratory (LANL) internal computer network [5, 4]. The authentication logs record a source username and computer, a destination username and computer, and the

time when the authentication event was initiated. Additionally, the type of authentication event is also recorded, such as “Network”, “Kerberos” or “Negotiate”. Authentication events often exhibit periodic polling, separated by random durations of inactivity. This can occur when a user initially authenticates their credentials on a computer, and the authentication mechanism then periodically verifies the continued validity of those credentials. Such information cannot be derived from the authentication event types collected in the data.

The left panel of Figure 1 plots all event times for an example user, U514, authenticating between two particular computers, C528 and C15607, over the 58-day period. It is apparent that these data comprise several periodic subsequences of evenly-spaced event times. Each subsequence starts during working hours, and so these initial events are potentially user-driven. Note that within the periodic subsequences there can be duplicate events or missing data, and so it is important that any proposed model is robust to these data features. Duplicates can occur when multiple packets are sent, and missing data can occur when there is packet loss either on the network or on the central authentication server. A comprehensive explanation of the data is given in [4].

The right panel of Figure 1 shows a circular histogram of the times of day for all 4688 “Log On” events initiated by the same user, U514, connecting between any source and destination computers. Time-of-day event data are most informatively plotted on a circle whose circumference represents one day. In this way, event data falling just before and just after midnight are displayed close together, rather than at opposite ends of a section of the real line. The limited variation in the number of events within and outside the working day further implies that there is substantial automated polling behavior.

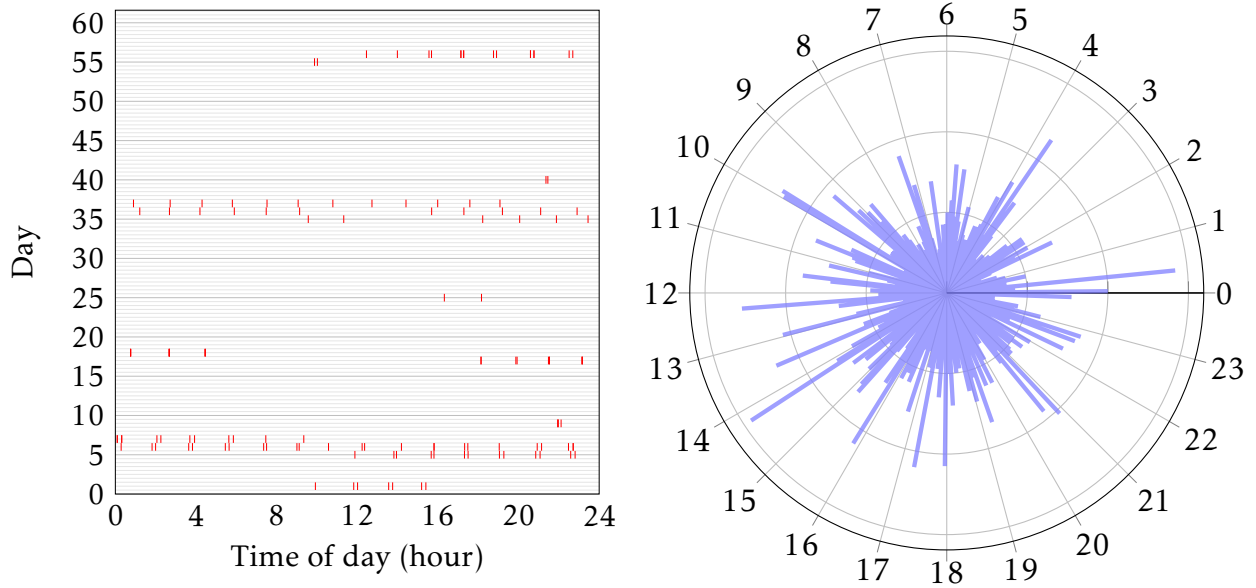


Figure 1: Log on event times over a 58-day period for an example user, U514, from the LANL computer network. Left: Log on event times between two specific computers frequented by the user, C528 and C15607. Right: The time of day distribution for all events generated by the user.

3 Detecting Polling Behavior

A natural approach for detecting polling behavior, described in detail in [3], is to calculate a discrete Fourier transform [6] of the event times of each point process in the network in order to uncover any periodicities; a large peak in the resulting periodogram $S(f)$ indicates polling behavior at frequency f . In particular, a standard significance test for a simple periodicity (see, for example [7]) uses the test statistic

$$g = \max_f \frac{S(f)}{\sum_{f'} S(f')}, \quad (1)$$

where the sum in the denominator and the maximization are both over the Fourier frequencies. An approximate upper-tail p-value for g can be calculated under the null hypothesis of no polling behavior.

[8] presents a Bayesian model for network authentication behavior which was applied

to the data described in Section 2 with some success. As a pre-processing step, any edges within the network that were identified as containing significant polling behavior according to the g -statistic procedure of [3] were removed from the data. This level of filtering could lead to potentially important user-driven authentication behavior also being deleted. The proposed methodology seeks to separate the user-driven events from the automated polling events on a given network edge, rather than completely removing the edge.

3.1 Detecting Polling Subsequences

This section presents a simulation study to demonstrate the performance of the Fourier analysis presented in Section 3 for detecting polling behavior contained within periodic subsequences. This study provides justification for using a changepoint detection methodology to detect periodic subsequences. To construct a full generative model for an ordered sequence of event times with intermittent periodicity, we first consider two sequences

$$\begin{aligned} x_1, x_2, \dots, x_S &\stackrel{i.i.d.}{\sim} \text{Exponential}(\lambda), \\ n_1, n_2, \dots, n_S &\stackrel{i.i.d.}{\sim} \text{Geometric}(q), \end{aligned} \tag{2}$$

such that x_i specifies the duration of inactivity before the i th polling subsequence commences, n_i specifies the number of beaconing periods of length P within that i th subsequence and S is the number of polling subsequence within the event sequence.

In each simulation a sequence is sampled from the model (2) for different values of q and S . The constant periodicity is fixed at $P = 1$ and λ is chosen to be 0.2. The value for λ generates large durations of inactivity which break the polling cycle. The event times in the beaconing subsequences are perturbed with $U(-0.2, 0.2)$ errors; more realistic

representations of this error are provided in Section 4.

The case where $q = 1$ corresponds to no periodic behavior, and the approximate p -values from the upper tail of the test statistic (1) will be approximately uniformly distributed on $[0, 1]$. As q decreases, the proportion of periodic data increases and the test should yield statistically smaller p -values. For $q < 1$, increasing the total number of subsequences S increases the overall sample size, and should also yield statistically smaller p -values.

Ten thousand Monte Carlo simulations were performed for different combinations of $q \in \{1, 0.5, 0.25, 0.1\}$, $S \in \{20, 40\}$. Figures 2 and 3 show the empirical cumulative distribution function of the resulting p -values for all combinations of q and S .

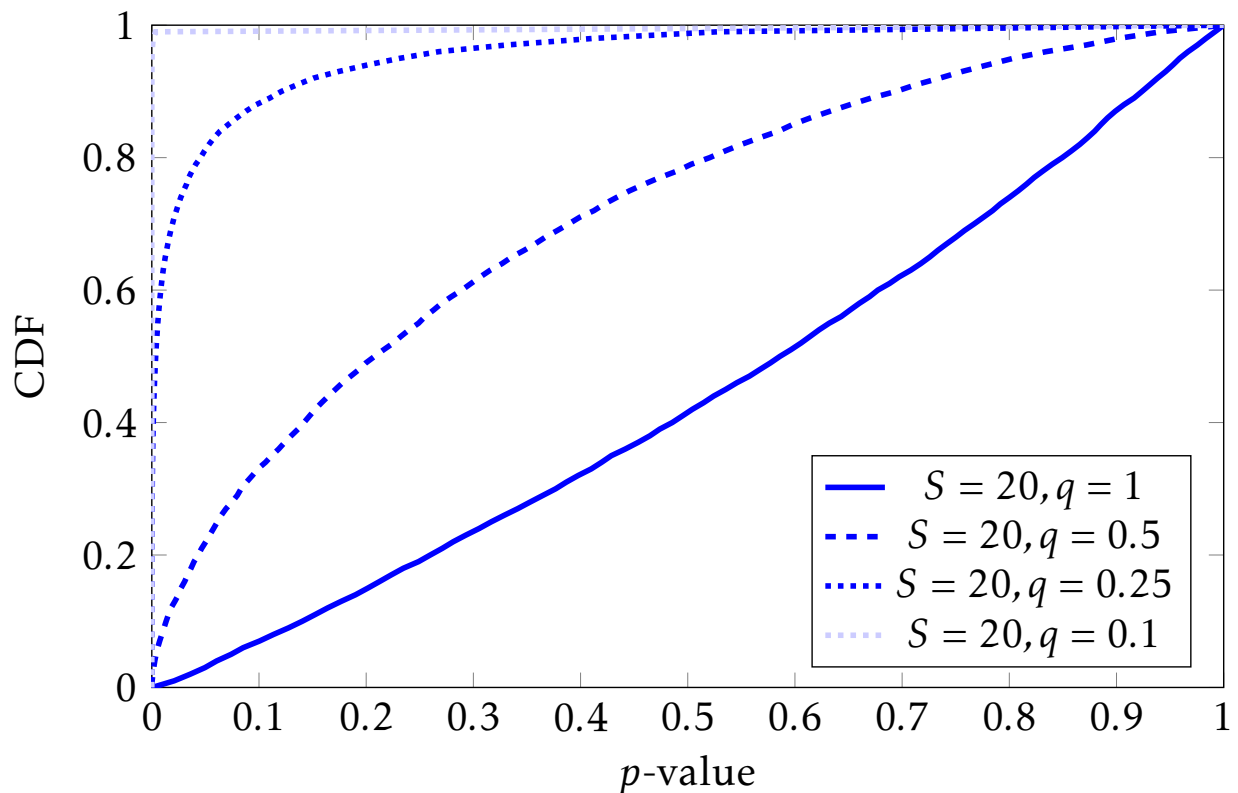


Figure 2: Distribution of p -values from g -test of simple periodicity for 20 polling subsequences generated from (2) with parameters $\lambda = 0.2$ and $q \in \{1, 0.5, 0.25, 0.1\}$. It is clear that a decrease in q yields statistically smaller p -values for periodicity in the event sequence.

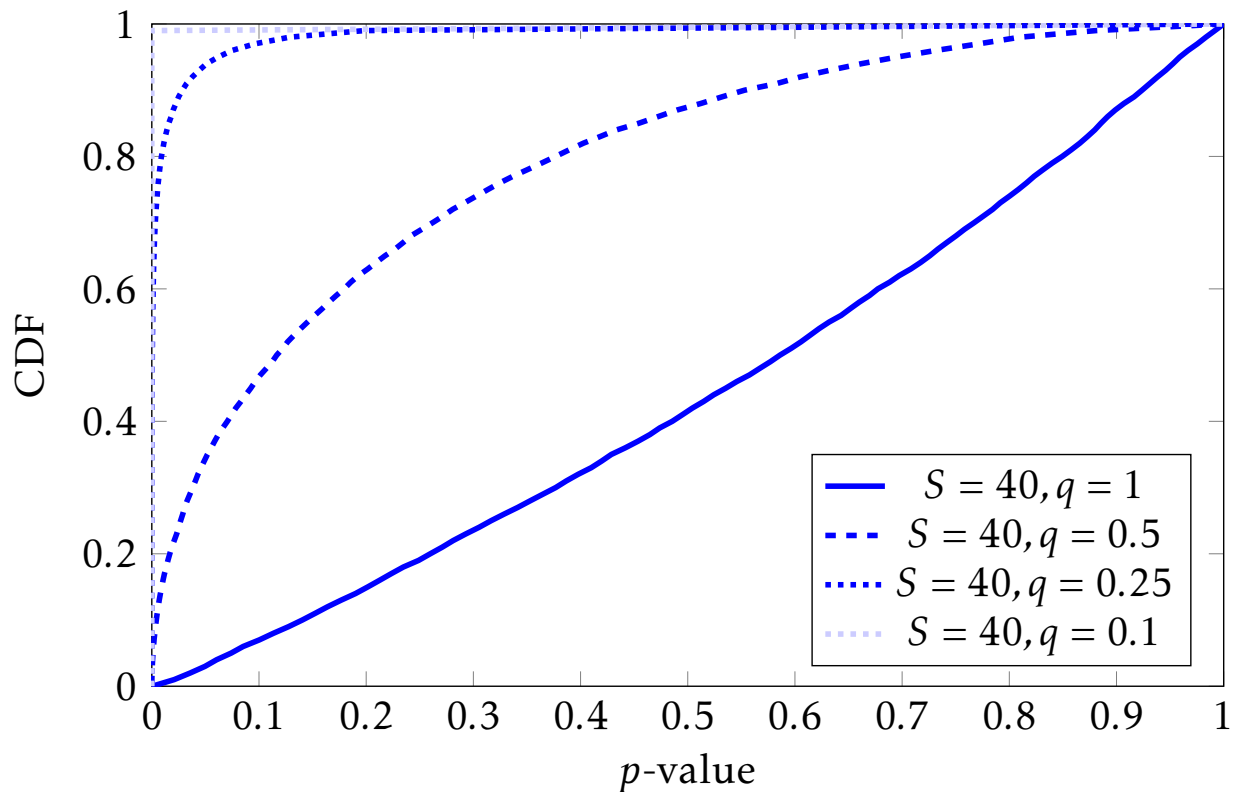


Figure 3: Distribution of p -values from g -test of simple periodicity for 40 polling subsequences generated from (2) with parameters $\lambda = 0.2$ and $q \in \{1, 0.5, 0.25, 0.1\}$. By comparing the results with Figure 2 it is clear that increasing the number of polling subsequences yields statistically smaller p -values for $q \in \{0.5, 0.25, 0.1\}$.

When $q = 1$, the p -values are approximately uniformly distributed. Even when $q = 0.5$, which in expectation provides the shortest meaningful subsequence length for exhibiting a common periodicity, the distribution of p -values is already quite different. For a moderate expected subsequence length of 10, $q = 0.1$, the p -values from observing 20 such subsequences are concentrated strongly at zero. These simulations imply that the random lengths of inactivity in-between periodic subsequences do not significantly reduce the signal of the Fourier transform-based g -test. Polling behavior is still detectable even in the most extreme cases. By comparing Figures 2 and 3, it is clear that increasing the number of polling subsequences causes a further decrease in the p -values.

This section uses a crude uniform estimate to model the random error of each event in a periodic subsequence. Section 4 introduces directional statistics and explains how they can be used to provide a smoother more accurate estimate of this error.

4 Directional Statistics

For modeling data with an underlying periodicity, it is intuitively most simple to consider noise in the data as angular displacements from the underlying periodic sequence. For a given period P , event times from a point process can be transformed to directions in two-dimensional space, represented by points on a unit circle. For an event time y , let

$$\phi(y) = \frac{2\pi y}{P} \pmod{2\pi},$$

denote the angular position of the corresponding point on the unit circle. Under this transformation, any variability in the periodic event times corresponds to small angular displacements from an overall angular mean. This transformation is depicted in Figure 4.

The mean direction and circular variance provide respective measures of the location and spread of directional data: For a given sample $\phi = (\phi_1, \dots, \phi_n)$, let $x_i = (x_{i,1}, x_{i,2})$ where $x_{i,1} = \cos \phi_i$ and $x_{i,2} = \sin \phi_i$, such that x_i is the location of a unit vector with angle ϕ_i in two-dimensional space. Then let $\bar{x} = (\bar{x}_1, \bar{x}_2)$ denote the mean resultant vector of the sample, where $\bar{x}_1 = \sum_{i=1}^n x_{i,1}/n$ and $\bar{x}_2 = \sum_{i=1}^n x_{i,2}/n$, and let $\bar{R} = \sqrt{\bar{x}_1^2 + \bar{x}_2^2}$ denote the length of \bar{x} . The mean direction $\bar{\phi}$ is defined to be

$$\bar{\phi} = \arctan(\bar{x}_2/\bar{x}_1) \pmod{2\pi},$$

and the circular variance is defined as $V = 1 - \bar{R}$. A comprehensive overview of these and

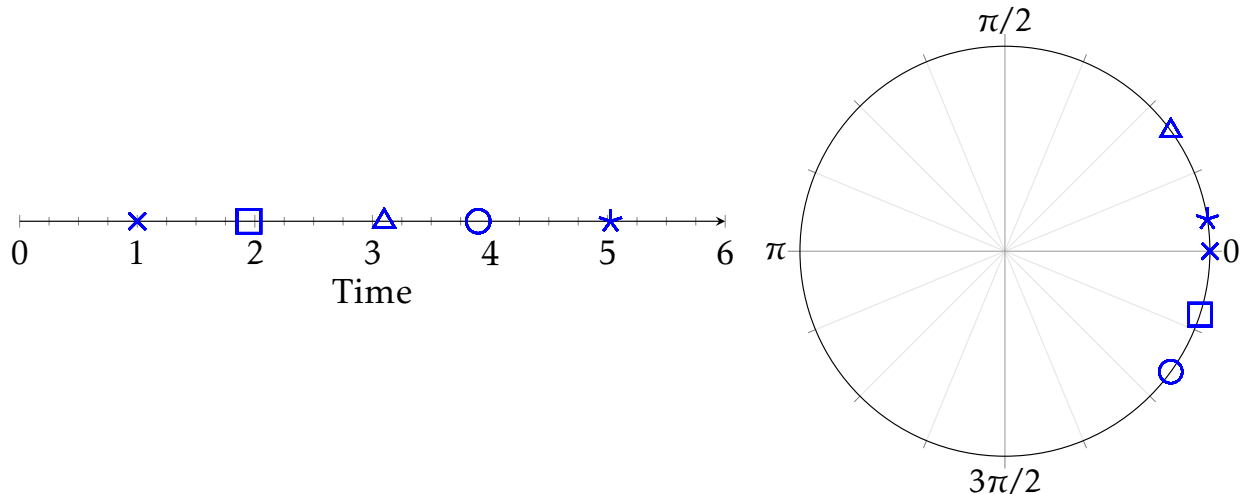


Figure 4: Cartoon depiction of the transformation $y \mapsto \phi(y)$ reducing event times on \mathbb{R}^+ to angular positions with respect to a unit periodicity.

other directional data summaries is provided in [9].

4.1 The von Mises Distribution

A commonly used distribution for directional data is the *von Mises* distribution [10]. A random variable θ is said to follow the von Mises distribution with location parameter $\nu \in [0, 2\pi)$ and precision parameter $\kappa > 0$, written $M(\nu, \kappa)$, if it has density

$$f_M(\theta | \nu, \kappa) = \frac{\exp(\kappa \cos(\theta - \nu))}{2\pi I_0(\kappa)}, \quad \theta \in [0, 2\pi),$$

where $I_\ell(\cdot)$ is the modified Bessel function of order ℓ . In Section 5 the von Mises distribution will be used to construct a model for periodic event subsequences, and so it is useful to review frequentist and Bayesian parameter estimation for this distribution.

4.1.1 Maximum Likelihood Estimation

Let $\theta_1, \dots, \theta_n$ be a sequence of realizations drawn from $M(\nu, \kappa)$. The log-likelihood function for this sample simplifies to

$$l(\nu, \kappa \mid \theta_1, \dots, \theta_n) = n\{\log 2\pi + \kappa \bar{R} \cos(\bar{\theta} - \nu) - \log I_0(\kappa)\}, \quad (3)$$

[9]. Maximizing with respect to the location parameter ν yields the maximum likelihood estimate (MLE)

$$\hat{\nu} = \bar{\theta}, \quad (4)$$

where $\bar{\theta}$ is the mean direction of the sample, defined above. Substituting $\bar{\theta}$ into (3) and differentiating with respect to κ yields the equation

$$\hat{\kappa} = A^{-1}(\bar{R}) \quad (5)$$

for the MLE for κ , where

$$A(\kappa) = \frac{I_1(\kappa)}{I_0(\kappa)}.$$

There is no analytic solution for (5), but numerical estimates can be obtained [11, 9].

4.1.2 Bayesian Inference

For relatively straightforward Bayesian inference for the von Mises distribution, [12] and [13] use the conjugate prior

$$g(\nu, \kappa) \propto \{I_0(\kappa)\}^{-c} \exp(\kappa R_0 \cos(\nu - \nu_0)). \quad (6)$$

This specification is analogous to having observed c notional prior directional samples with a mean direction ν_0 and resultant length R_0 .

As in the previous section, let $\theta_1, \dots, \theta_n$ be samples drawn from $M(\nu, \kappa)$. Then the posterior distribution is given by

$$g(\nu, \kappa \mid \theta_1, \dots, \theta_n) \propto \{I_0(\kappa)\}^{-(c+n)} \exp(\kappa R_n \cos(\nu - \nu_n)), \quad (7)$$

where ν_n is the mean direction of the resultant of the sum of a vector with direction ν_0 and length R_0 together with unit vectors in each of the directions of the samples $\theta_1, \dots, \theta_n$, and R_n is the magnitude of that resultant vector. The Metropolis Hastings algorithm can be used to obtain a posterior estimate for the precision parameter κ .

5 A Model for Periodic Subsequences

To construct a full generative model for an ordered sequence of event times with intermittent periodicity, we first consider the two sequences defined in (2) on page 6, where x_i specifies the duration of inactivity before the i th polling subsequence commences and n_i specifies the number of beaconing periods of length P within that i th subsequence.

Within a polling subsequence, 0 events (in the case of missing data), 1 event, or multiple events (in the case of duplication) may be observed during each period. Within the i th polling subsequence, for $j = 1, \dots, n_i$ let $m_{i,j}$ be the number of events observed in the j^{th} period. The values of each event count $m_{i,j}$ is assumed to be *hurdle geometric*: Defining

$$\delta_{i,j} = \mathbb{1}(m_{i,j} > 0)$$

we assume $\delta_{i,j} \sim \text{Bernoulli}(1 - p)$; if $\delta_{i,j} = 0$ then clearly $m_{i,j} = 0$, and otherwise if $\delta_{i,j} = 1$

then $(m_{i,j} - 1) \sim \text{Geometric}(r)$ for parameters $0 < p, r < 1$, implying

$$\mathbb{P}(m_{i,j} = m) = \begin{cases} p, & m = 0, \\ (1-p)(1-r)r^{m-1}, & m \geq 1. \end{cases}$$

5.1 Fixed Phase Polling

Figure 5 shows an example of a possible subsequence of event data exhibiting fixed phase polling, where an error in one event does not propagate into future events. A cross indicates an observed event whilst a square indicates a period with missing data.

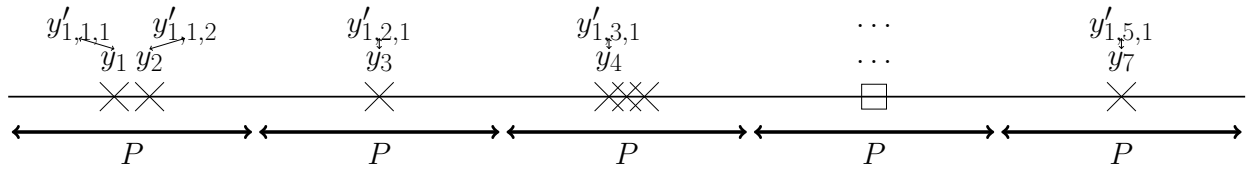


Figure 5: Example of a subsequence of periodic event times exhibiting fixed phase polling with period P .

To construct a subsequence exhibiting fixed phase polling. For the i th polling subsequence and the j^{th} period of the i th subsequence, $i = 1, 2, \dots$ and $j = 1, \dots, n_i$, let $\theta_{i,j,1} < \dots < \theta_{i,j,m_{i,j}}$ be the order statistics from $m_{i,j}$ independent draws from the von Mises distribution $M(\pi, \kappa)$. Then for $k = 1, \dots, m_{i,j}$ we define the ordered event times for that period to be

$$y'_{i,j,k} = \sum_{i'=1}^{i-1} (x_{i'} + n_{i'}P) + x_i + P \left\{ (j-1) + \frac{\theta_{i,j,k}}{2\pi} \right\}.$$

Considering these event times transformed to the unit circle, let

$$\phi_{i,j,k} = \frac{2\pi \cdot y'_{i,j,k}}{P} \pmod{2\pi}, \quad (8)$$

be the corresponding angular representation. Since $\theta_{i,j,k}$ has expected value π , it can easily be seen that the expected angular position of each event time in the i th periodic subsequence is given by

$$\nu_i = \mathbb{E}(\phi_{i,j,k}) = \left(\frac{2\pi \sum_{i'=1}^i x_{i'}}{P} + \pi \right) \pmod{2\pi}. \quad (9)$$

Therefore the angular displacement error associated with each event time is described by the $M(0, \kappa)$ distributed variables

$$\begin{aligned} z_{i,j,k} &= (\phi_{i,j,k} - \nu_i) \pmod{2\pi} \\ &= (\theta_{i,j,k} + \pi) \pmod{2\pi}. \end{aligned}$$

Finally, to complete the specification for a point process of event times with periodic subsequences, let $y_1 < y_2 < \dots$ be the sequence of observable event times defined by

$$\begin{aligned} y_{\sigma(i,j,k)} &= y'_{i,j,k'} \\ \sigma(i,j,k) &= \sum_{i'=1}^{i-1} \sum_{j'=1}^{n_{i'}} m_{i',j'} + \sum_{j'=1}^{j-1} m_{i,j'} + k. \end{aligned} \quad (10)$$

An illustration of this indexing format is provided in Figure 5.

5.2 Fixed Duration Polling

An example of a possible subsequence exhibiting fixed duration polling is shown in Figure 6. It is most intuitive to define the event times recursively, since the event times in one period affect the mean of the distribution of event times for subsequent periods. To construct a subsequence of event times exhibiting fixed duration polling, let $z'_{i,j,k} \in (-\pi, \pi]$ be

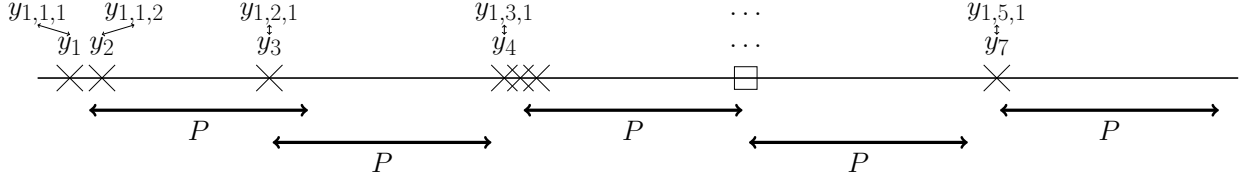


Figure 6: Example of a subsequence of periodic event times exhibiting fixed duration polling with period P .

the angular displacement error associated with each event time, drawn from $M(0, \kappa)$. Let

$$\bar{y}_{i,j} = \begin{cases} x_1 & m_{i,j} = 0, i = 1, j = 1, \\ \bar{y}_{i-1, n_{i-1}} + x_i & m_{i,j} = 0, i > 1, j = 1, \\ \bar{y}_{i, n_{i-1}} + P & m_{i,j} = 0, j > 1, \\ \sum_{k=1}^{m_{i,j}} y'_{i,j,k} / m_{i,j} & m_{i,j} > 0, \end{cases}$$

such that for each non-empty period in a beaconing subsequence $\bar{y}_{i,j}$ is the arithmetic mean of all event times in that period. Then we define the ordered event times for each period to be

$$y'_{i,j,k} = \begin{cases} x_1 + z'_{1,1,k} & i = 1, j = 1, \\ \bar{y}_{i-1, n_{i-1}} + x_i + z'_{i,1,k} & i > 1, j = 1, \\ \bar{y}_{i, j-1} + P + z'_{i,j,k} & j > 1. \end{cases}$$

The sequence of observable event times is again described by (10).

6 Changepoint Detection

Changepoint detection techniques are widely used in data analysis across a range of scientific fields. These methods partition a sequence of data into a possibly unknown number

of smaller segments, such that the data within each segment are assumed to arise from a single generative model. Here, discrete changepoint analysis are used to separate a point process of event times on a computer network edge into periodic subsequences, using one of the proposed models from Section 5.

Let $y_1 < \dots < y_n$ be a sequence of event times from a point process. Suppose the sequence is partitioned into $m+1$ segments by m integer-valued changepoints $\bar{\tau} = (\tau_1, \dots, \tau_m)$, ordered such that $0 \equiv \tau_0 < \tau_1 < \dots < \tau_m < \tau_{m+1} \equiv n$. For each $i = 1, \dots, m+1$, the i th segment of data is the subsequence of event times $y_{\tau_{i-1}+1:\tau_i} = (y_{\tau_{i-1}+1}, \dots, y_{\tau_i})$.

A common aim of discrete changepoint detection algorithms is to find changepoints that minimize an overall cost function

$$\sum_{i=1}^{m+1} [C(y_{\tau_{i-1}+1:\tau_i})] + \beta_n, \quad (11)$$

where C is a segment-based cost function relating to the fitted likelihood of the data in a segment and $\beta_n \in \mathbb{R}$ is a penalty term to discourage over fitting.

There are many changepoint detection algorithms, but here we consider binary segmentation (BS), optimal partitioning (OP) and the pruned exact linear time (PELT) algorithm [14]. [15] introduces the BS method for changepoint detection. This method has the advantage of being computationally efficient, $\mathcal{O}(n \log n)$, but it is not guaranteed to find the global minimum of (11). [16] introduces the OP method which is guaranteed to minimize (11). The OP method works by iterating sequentially through each event time and minimizing (11) conditional on all previous combinations of changepoints. The disadvantage to this method is that it has computational cost which is quadratic in n .

[14] introduces the PELT method which uses pruning to improve the computational efficiency of the OP method whilst still ensuring that the search algorithm finds a global minimum to (11). Under the assumption that the number of changepoints m increases

linearly with the size of the data n , PELT has a linear computational cost. Pseudo code for both the PELT and the OP methods can be found in [14].

Following the changepoint literature [17], C is chosen to be twice the negative log-likelihood function for a periodic subsequence of data according to a model from Section 5. Furthermore, in accordance with the Bayesian information criterion (BIC) [18], the penalty is chosen to be of the form

$$\beta_n = \alpha \log n, \quad (12)$$

where α notionally represents the number of additional free parameters introduced to the model by adding a changepoint. Here the natural choice is $\alpha = 2$, since the only parameters introduced by adding a changepoint are the position of the changepoint within the data sequence and the location parameter (9) of the new periodic subsequence.

Using the various definitions from Section 5, the likelihood of a proposed subsequence is given by

$$\lambda e^{-\lambda x_i} (1-q)^{n_i-1} q \prod_{j=1}^{n_i} \left((1-\delta_{i,j})p + \delta_{i,j}(1-p)(1-r)r^{m_{i,j}-1} \prod_{k=1}^{m_{i,j}} \frac{\exp\{\kappa \cos(\phi_{i,j,k} - \hat{v}_{i,j})\}}{2\pi I_0(\kappa)} \right),$$

where in the case of fixed phase polling $\hat{v}_{i,j} = \hat{v}_i$ is the MLE (4) for the location parameter of the von Mises distribution using the angular representation (8) of all event times from the proposed subsequence. In the case of fixed duration polling $\hat{v}_{i,j}$ is the MLE (4) for the location parameter of the von Mises distribution using the angular representation (8) of all event times from the previous non-empty period.

When the parameters $(p, q, r, \lambda, \kappa)$ are considered unknown, independent conjugate priors can be deployed such that p , q and r have beta distributions with respective parameters (α_p, β_p) , (α_q, β_q) , and (α_r, β_r) , whilst $\lambda \sim \text{gamma}(\alpha_\lambda, \beta_\lambda)$. The prior distribution

for κ is given by (6). A simple Metropolis Hastings algorithm with a uniform proposal density centered at the current parameter value can be used to obtain a posterior estimate of κ , (7) using the estimated angular displacements of the event times,

$$\hat{z}_{i,j,k} = (\phi_{i,j,k} - \hat{v}_{i,j}) \pmod{2\pi},$$

where it is assumed that $\hat{z}_{i,j,k} \sim M(0, \kappa)$.

The proposed procedure is to iterate between three inferential steps:

1. Changepoint analysis for identifying periodic subsequence using PELT
2. Bayesian estimation of the nuisance parameters $(p, q, r, \lambda, \kappa)$
3. Updating the estimated periodicity P

The algorithm simply loops through steps 1-3 repeatedly until convergence is reached: Convergence is determined to have occurred when identical changepoints are found by step 1 in two successive iterations of the algorithm. After each iteration of the changepoint algorithm in step 1, the nuisance parameters are re-estimated using their revised posterior means, conditional on the updated set of changepoints, in step 2. The posterior means of the parameters p, q, r, λ all have closed form under the conjugate priors, and the posterior mean of κ is estimated by Metropolis Hastings sampling as described above. Finally, the estimated periodicity P is also updated in step 3 as follows: For each non-empty period in a beaconing subsequence, let $\bar{v}_{i,j}$ be the arithmetic mean of all event times in that period; then for $j = 1, \dots, n_i - 1$ let $w_{i,j} = \bar{v}_{i,j+1} - \bar{v}_{i,j}$ be the difference between the mean event times from two successive periods of events. To reduce the influence of missing event data, P is estimated to be the median value of $\{w_{i,j}\}$ over all subsequences i defined by the current set of changepoints.

Since computational scalability is paramount, changepoints are detected using PELT,

which has a computational cost which is linear in the number of data points. For updating model parameters between successive iterations of the PELT algorithm, maximum likelihood estimation can potentially lead to degenerate solutions and therefore a Bayesian estimation procedure is adopted.

7 Examples

7.1 Simulated Data Example

To gain an understanding of the accuracy and the efficiency of two of the changepoint detection algorithms, both the BS and PELT methods described in Section 6 are applied to sequences of event times sampled from the full generative model for fixed phase polling from Section 5. The aim is to partition the event times so that each changepoint is positioned at the start of a new periodic subsequence, therefore changepoints can only occur at the discrete number of event times within the data.

Three different combinations of the model parameters p, q, r, λ and κ are used to generate different types of periodic subsequences which could arise in real world computer network data. For example, larger values of κ induce smaller error terms in the angular displacements of the beaconing subsequences, whilst increasing λ leads to longer lengths of inactivity between the subsequences. Both of these changes should make separate periodic subsequences easier to identify. Without loss of generality, the periodicity is set to 1. The three sets of parameter choices are presented in Table 1. For each set of parameters, 100 sequences of 10 beaconing subsequences were generated.

Both the BS and the PELT algorithms identify changepoints by minimizing (11). In this example, the proportion of true positive (TP) changepoints corresponds to the number of true changepoints correctly identified divided by the total number of true changepoints, whilst the proportion of false positive (FP) changepoints corresponds to the num-

Parameter settings	κ	p	r	q	λ
1	9	10	0.05	0.5	0.1
2	8	10	0.1	0.5	0.1
3	7	10	0.2	0.5	0.1

Table 1: Parameter settings for generating periodic subsequences of event times from the generative model for fixed phase polling in Section 5.

ber of events incorrectly identified as changepoints, divided by the true number of events which do not correspond to a changepoint.

Figure 7 plots an example of one sequence of simulated event times comprised of ten beaconing subsequences with periodicity 1, generated with parameter setting 2 from Table 1. Changepoints were detected using PELT with the commonly used BIC penalty $\beta_n = 2\log(n)$ (12). For each event time $y_{\sigma(i,j,k)}$ from (10), the angular position $\phi_{i,j,k}$ from (8), determined by the fitted changepoints, is plotted. The vertical lines indicate the locations of the changepoints, which correctly partition the event times into the ten separate subsequences.

To obtain a thorough comparison of the two methods, the performance of both methods was tested over a range of settings for the penalty β_n from (12) by repeating the analysis for $\alpha \in \{-3, -1.5, 0, 2, 5, 10, 20, 40\}$. Increasing α corresponds to a higher penalty β_n for adding a changepoint, therefore we would expect to detect fewer TP and FP changepoints as α increases.

Note that for completeness even negative penalties are considered, in order to reach the extreme case where every event time is selected to be a changepoint. This enables a receiver operating characteristic (ROC) curve to be plotted in Figure 8, showing how the true and false positive changepoint rates increase as the penalty term is reduced. If α was increased further, we would eventually reach the other extreme where no event times are selected as changepoints. Since PELT only has linear computational cost when

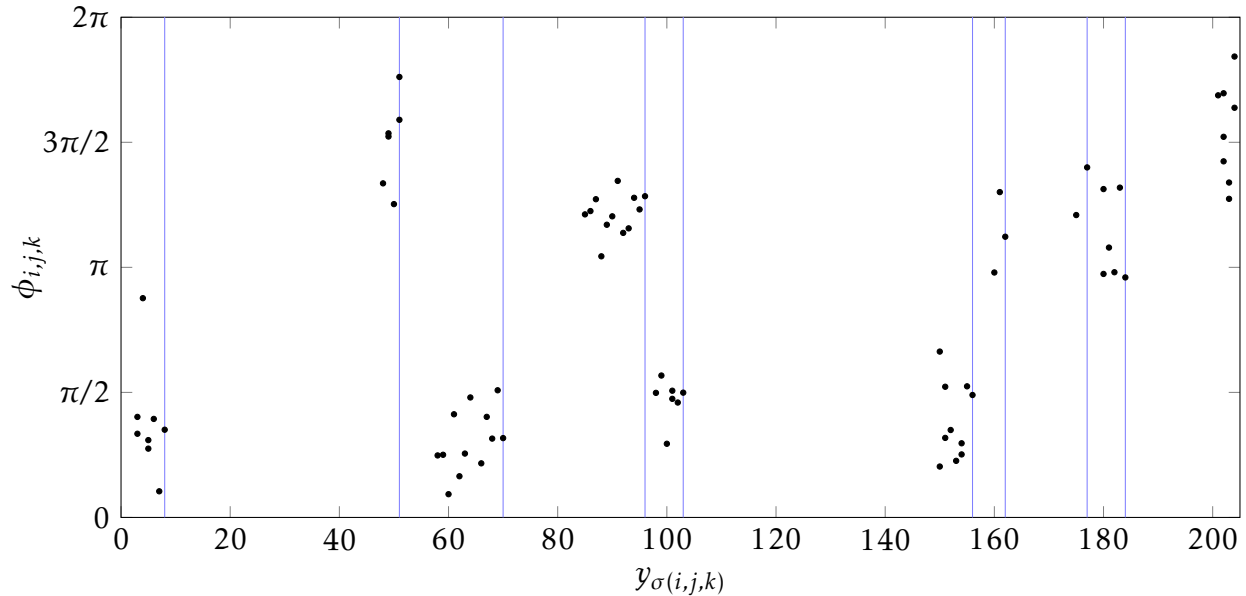


Figure 7: A simulated point process representing periodic subsequences, partitioned by changepoints found using PELT.

the number of changepoints increases linearly with the size of the data, [14] reducing the number of changepoints towards zero is computationally prohibitive and is therefore not included.

The proportions of true and false positive changepoints found using PELT closely resemble those found using the BS method. Table 2 presents the proportion of TP and FP changepoints found for the commonly used BIC penalty, $\beta_n = 2\log(n)$. In this case PELT identifies at least as high a proportion of TP changepoints as the BS method, and at least as small a proportion of FP changepoints for all three parameter settings.

Parameter settings	BS		PELT	
	TP	FP	TP	FP
1	0.9587	0.0002	0.9587	0.0002
2	0.8784	0.0007	0.8845	0.0006
3	0.6340	0.0012	0.6639	0.0010

Table 2: Proportion of true positive (TP) and false positive (FP) changepoints identified under the BIC penalty.

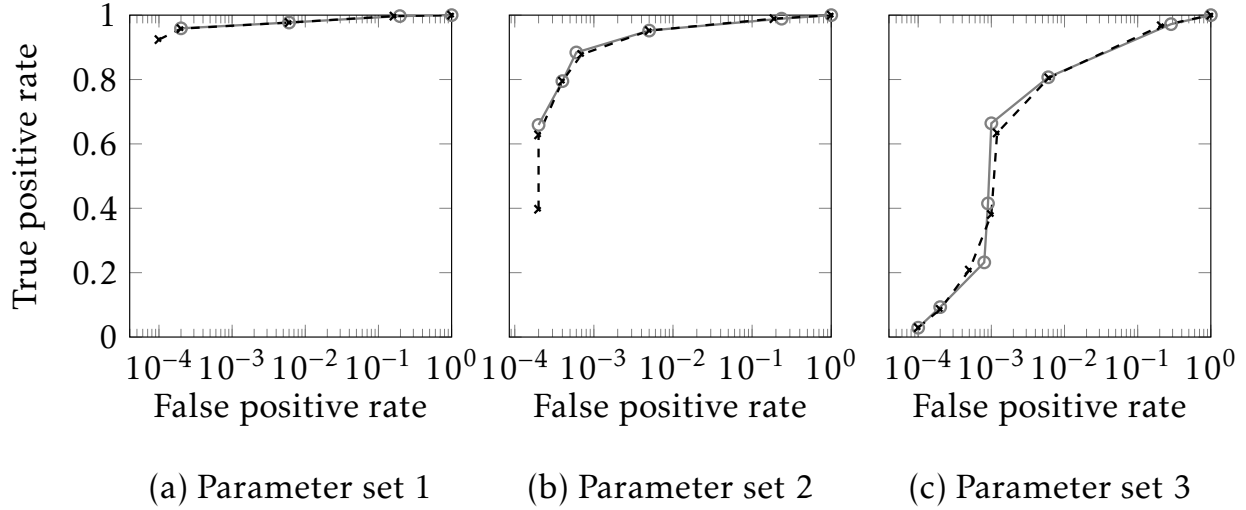


Figure 8: ROC curves comparing the changepoints detected using PELT and BS for data generated using the three parameter settings in Table 1.

To further investigate how the two methods differ, the run time of the two algorithms is measured against the number of changepoints for the commonly used BIC penalty. For each set of parameters from Table 1, ten sequences formed of different numbers of beaconing subsequences (equivalently, changepoints) were generated. The average run time in seconds on a computer with an Intel Core i7 processor, clocked at 2.2 GHz, are presented in Table 3. Both algorithms use the same underlying code for calculating the cost of a proposed changepoint configuration. In almost all situations, the PELT method was quicker than the BS method, especially when the number of changepoints in the model increased.

Changepoint algorithm Parameter setting		BS			PELT		
		1	2	3	1	2	3
Number of changepoints	10	14.1	8.7	8.2	12.1	6.2	9.3
	20	46.8	36.4	29.0	28.3	19.9	20.4
	50	293.0	219.4	171.3	57.7	45.0	63.4
	100	1110.1	995.9	824.7	102.9	99.7	200.4

Table 3: Average run times (in seconds) using the two changepoint detection algorithms for different numbers of changepoints and parameter settings from Table 1.

When monitoring real computer networks, traffic is often observed for several days to allow construction of an accurate model of normal behavior. It is therefore possible that a large number of beaconing periodic subsequences could be observed; in such cases, where there is an unknown but potentially large number of changepoints, the PELT method is preferable since it has a linear computational cost.

7.2 Real Data Example

The PELT changepoint detection algorithm for detecting periodic subsequences, presented in Section 6, is applied to the authentication data from the Los Alamos National Laboratory (LANL) computer network described in Section 2. The analysis in this section focuses on the “Log On” events for user U514 depicted in Figure 1. The event times for each source-destination pair of computers are modeled as separate point processes. The time of day distribution of all Log On events from user U514 are shown in Figure 1, where the lack of variation in the number of events within and outside the working day indicated the presence of substantial polling behavior associated with this username. The periodicity detection method was applied separately to each computer-computer point process, identifying the first event after each changepoint as a user-driven Log On event. Unlike the previous example these data exhibit fixed duration polling, where any error in the beaconing subsequence propagates into future event times (see Section 5).

To initialize the algorithm, the model parameters $(p, q, r, \lambda, \kappa)$ are initially estimated using the means of the prior distributions given in Section 6. The hyper-parameters of the prior distributions are estimated empirically from a small segment of a beaconing subsequence, in one point process in the network. These hyper-parameters are given in Table 4.

As in Figure 1, the left panel of Figure 9 plots all event times over the entire 58-day period, where user U514 logs onto computer C528 from computer C15607. The circles

Parameter settings	R	c	α_p	β_p	α_r	β_r	α_q	β_q	α_λ	β_λ
1	9	10	10	1	10	5	10	1	20	1

Table 4: Parameter settings for generating periodic subsequences of event times from the generative model in Section 5.

in the diagram now indicate the inferred user-driven events that initiate the start of an automated polling subsequence. It is clear that meaningful subsequences of periodic event times are identified, and the methodology is robust to duplicate event data, as seen between days 5 and 10, and missing event data, as seen between days 35 and 40.

The right panel of Figure 9 plots the distribution of the 169 human Log On events found by applying the PELT changepoint detection algorithm to all pairs of computers used by user U514 over the entire 58-day period. The distribution of these events is much more consistent with human behavior than Figure 1, with the majority of events occurring within the hours of an extended working day (9am-8pm) and a large spike of Log On events at the start of the working day (9am-10am).

For user U514, automated polling behavior accounts for over 97% of all Log On data. As a data reduction tool, this represents a significant thinning of the bulk of authentication data. Further analytics operating on only user-driven behavior would become more manageable and allow for more robust modeling, potentially strengthening anomaly detection capabilities.

7.2.1 Robustness

The proposed procedure of iterating between the changepoint analysis and Bayesian estimation of the nuisance parameters introduces random variation to the algorithm due to the stochastic nature of the Metropolis-Hastings (MH) algorithm. Variation can also be introduced by varying the specification of the prior hyper-parameters displayed in Table

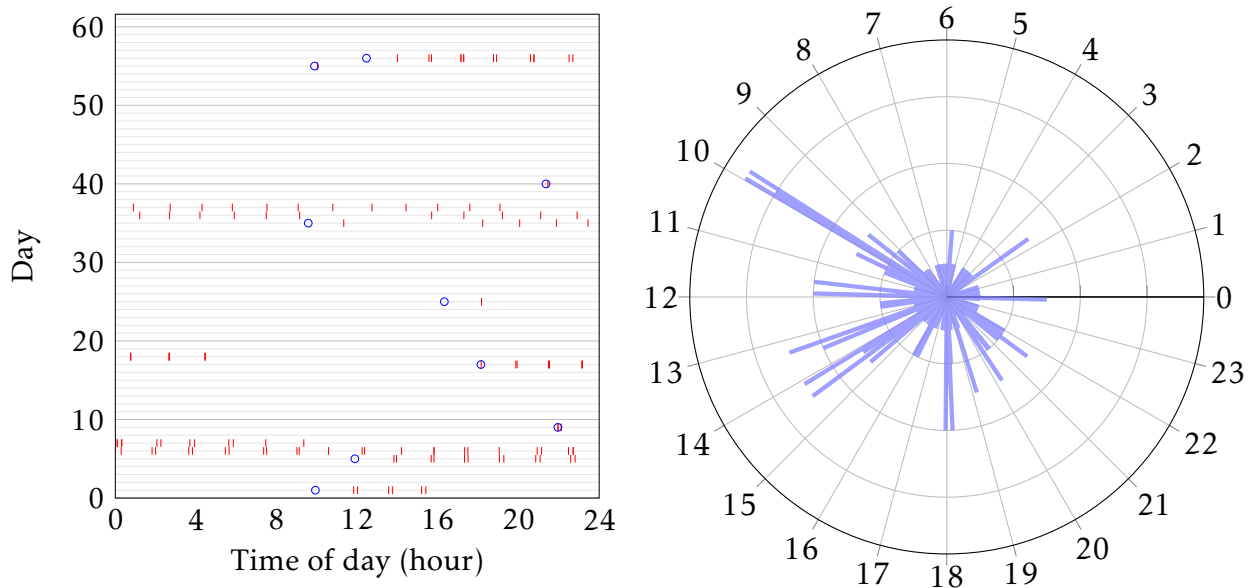


Figure 9: Log on event times for U514 from the LANL computer network. Left: Log on event times between the two specific computers C528 and C15607, where events have been attributed as human or automated, periodic events. Right: The time of day distribution for all human-generated events attributed to the user.

4. We examine the robustness of the model by performing 10 repetitions of the algorithm on the same data set, for each of three different sets of prior hyper-parameters. These hyper-parameters are presented in Table 5.

Parameter settings	R	c	α_p	β_p	α_r	β_r	α_q	β_q	α_λ	β_λ
1	8	10	10	2	10	5	10	1	10	1
2	9	10	10	1	10	5	10	1	20	1
3	7	10	10	3	10	5	10	1	5	1

Table 5: Parameter settings for generating periodic subsequences of event times from the generative model in Section 5.

To measure the effect of the random variation introduced by the MH algorithm for approximating Bayesian estimation of the posterior parameters, let e_1, \dots, e_M be the ordered list of all events in the data sequence. Then let $b_{i,l,1}, \dots, b_{i,l,M}$ be a binary representation of the changepoint events found by the i th repetition of the algorithm, with prior hyper-

parameters $l \in \{1, 2, 3\}$. When the algorithm identifies e_k to be a changepoint (user driven event), $b_{i,l,k} = 1$. Otherwise e_k is assumed to be automated and $b_{i,l,k} = 0$. For prior hyper-parameter settings $l \in \{1, 2, 3\}$ and each pair of repetitions of the algorithm $i, j \in \{1 \dots 10\}$, $i \neq j$, let

$$c_{i,j,l} = \frac{\sum_{k=1}^M |b_{i,l,k} - b_{j,l,k}|}{M}$$

be the proportion of events which are assigned differently. $c_{i,j,l}$ is calculated for all pairs of repetitions of the algorithm under each choice of hyper-parameters. Finally let c_l be the mean of $c_{i,j,l}$ over all pairs of repetitions, $i, j \in 1 \dots 10$, $i \neq j$.

For the first set of hyper-parameters, we find that $c_1 = 0.000103$. This value implies that any two repetitions of the algorithm make identical inference except for approximately 1 in every 1000 events differently. We also found that $c_2 = 0.000177$ and $c_3 = 0.000103$.

We are also interested in finding the effects of changing the prior hyper-parameterisation of the model. For each prior hyper-parameterisation displayed in Table 5 and event e_k , let

$$\bar{b}_{l,k} = \frac{\sum_{i=1}^{10} b_{i,l,k}}{10}$$

be the proportion of repetitions of the algorithm which identify the k^{th} event to be user-driven. Then, for $l_1, l_2 \in \{1, 2, 3\}$, let

$$d_{l_1, l_2} = \frac{\sum_{k=1}^M |\bar{b}_{l_1, k} - \bar{b}_{l_2, k}|}{M}$$

be the average proportion of events which are differently categorized for prior hyper-parameterisations l_1 and l_2 .

For the 2 alternative sets of hyper-parameters proposed in Table 4 we find that

$$d_{1,2} = 0.000332, \quad d_{1,3} = 0.000442.$$

Compared to the results found for the original parameter settings, approximately three in every 1000 events are assigned differently when using prior hyper-parameter settings 2, and approximately four in every 1000 events are assigned differently when using prior hyper-parameter settings 3.

The example presented in the left panel of Figure 9 identified the inferred user-driven Log-On events when U514 logs onto computer C528 from computer C15607. In this example, the algorithm finds the same inferred user-driven Log-On events for all repetitions of the algorithm, for all prior hyper-parameterisations. The right panel of Figure 9 plots the distribution of the 169 human Log On events found by applying the algorithm to all pairs of computers used by user U514 over the entire 58-day period. This plot is visually indistinguishable for all repetitions of the algorithm, for all prior hyper-parameterisations.

The results in this section show that any variability in the algorithm, due to the stochastic variability of the MH algorithm or from altering the specification of the prior hyper-parameters, has a very small effect on the resulting inference.

8 Conclusion

In this article we first demonstrated that intermittent polling behavior in computer network data can typically be detected using standard Fourier analysis methods, such as [3]. Secondly, we proposed a methodology for identifying the separate beaconing subsequences within intermittent polling data. Conditional on the presence of intermittent

polling behavior, with a constant periodicity estimated by [3], we introduced a changepoint detection methodology to identify the separate polling subsequences within the overall event sequence. We proposed iterating between the changepoint analysis and estimation of nuisance parameters, to reflect the dependency between these quantities. The proposed method is robust to complications typically encountered in computer event data collection, such as duplicated and missing data.

The purpose of partitioning event data into periodic subsequences is to identify potentially user-driven actions in computer network event data, with the future intention of modeling user-driven and automated behavior separately for anomaly detection purposes. User-driven actions are identified as the first events of each beaconing subsequence, which are followed by automated periodic updates.

Treating automated and user-driven data separately should provide a more robust framework for modeling computer network data, whereby bespoke models can be specified for each type of behavior (see for example [2]). Alternatively, as a data reduction tool, identifying only user-driven events represents a significant thinning of the bulk of computer network data, potentially improving anomaly detection capability and efficiency.

In this article the changepoint detection methodology was applied separately to each edge in a computer network, with the aim of classifying human user activity against automated events. If the events from an edge in the network consist of a single beaconing sequence with no phase shifts, this suggests no human activity and the event data will be best described using the simpler method of [3]. However, if the events consist of multiple, intermittent periodic subsequences sharing a constant periodicity, the methodology proposed in this article can be used to identify the user-driven events initiating each period subsequence. If the events exhibit no periodic patterns, then we might conclude that the events from that edge are potentially all user-driven.

The algorithm was applied to authentication data from the Los Alamos National Lab-

oratory (LANL) enterprise computer network. The algorithm identified meaningful subsequences of periodic event times and was robust to duplicate and missing event data. In the absence of true classification labels for the data, we investigated the time of day distributions of the inferred user-driven events and compared this with the distribution for all of the authentication events from one user. The distribution of the inferred user-driven events was much more consistent with human behavior, displaying a more clear diurnal pattern.

Further extensions of the model could be considered. For example, within the i th subsequence, θ_{ijk} are assumed to be the order statistics of independent identically distributed draws from a $M(\pi, \kappa)$ distribution. However, in reality there is often a correlation exhibited between these angular displacements within a beaconing period, as events can arrive in bursts. To incorporate this correlation into the model, we could postulate a hierarchical model for beaconing subsequences of event times, where clusters of event time variables θ_{ijk} are considered to be only conditionally independent given some unobserved location value.

References

- [1] Lazarevic A, Ertöz L, Kumar V, Ozgur A, Srivastava J. A Comparative Study of Anomaly Detection Schemes in Network Intrusion Detection. In: SDM. SIAM; 2003. p. 25–36.
- [2] Neil J, Hash C, Brugh A, Fisk M, Storlie CB. Scan statistics for the online detection of locally anomalous subgraphs. *Technometrics*. 2013;55(4):403–414.
- [3] Heard N, Rubin-Delanchy P, Lawson D. Filtering Automated Polling Traffic in Computer Network Flow Data. In: Intelligence and Security Informatics Conference

- (JISIC), 2014 IEEE Joint. IEEE; 2014. p. 268–271.
- [4] Kent A. Cybersecurity Data Sources for Dynamic Network Research. In: *Dynamic Networks in Cybersecurity*. Imperial College Press; 2015. p. 37–65.
- [5] Kent A. *Comprehensive, Multi-Source Cyber-Security Events*; 2015. Los Alamos National Laboratory.
- [6] Halliday DM, Rosenberg JR. Time and frequency domain analysis of spike train and time series data. In: *Modern techniques in neuroscience research*. Springer; 1999. p. 503–543.
- [7] Jenkins GM, Priestley MB. The spectral analysis of time-series. *Journal of the Royal Statistical Society Series B (Methodological)*. 1957;p. 1–12.
- [8] Turcotte MJM, Heard NA, Kent AD. Modelling user behaviour in a network using computer event logs. In: *Dynamic Networks in Cybersecurity*. Imperial College Press; 2016. p. 67–87.
- [9] Mardia KV, Jupp PE. *Directional statistics*. vol. 494. John Wiley & Sons; 2009.
- [10] von Mises R. Über die Ganzzahligkeit der Atomgewichte und verwandte Fragen. *Phys z.* 1918;19:490–500.
- [11] Banerjee A, Dhillon IS, Ghosh J, Sra S. Clustering on the unit hypersphere using von Mises-Fisher distributions. In: *Journal of Machine Learning Research*; 2005. p. 1345–1382.
- [12] Guttorp P, Lockhart RA. Finding the location of a signal: A Bayesian analysis. *Journal of the American Statistical Association*. 1988;83(402):322–330.

- [13] Damien P, Walker S. A full Bayesian analysis of circular data using the von Mises distribution. *Canadian Journal of Statistics*. 1999;27(2):291–298.
- [14] Killick R, Fearnhead P, Eckley I. Optimal detection of changepoints with a linear computational cost. *Journal of the American Statistical Association*. 2012;107(500):1590–1598.
- [15] Scott AJ, Knott M. A cluster analysis method for grouping means in the analysis of variance. *Biometrics*. 1974;p. 507–512.
- [16] Jackson B, Scargle JD, Barnes D, Arabhi S, Alt A, Gioumousis P, et al. An algorithm for optimal partitioning of data on an interval. *Signal Processing Letters, IEEE*. 2005;12(2):105–108.
- [17] Chen J, Gupta AK. *Parametric statistical change point analysis: with applications to genetics, medicine, and finance*. Springer Science & Business Media; 2011.
- [18] Schwarz G, et al. Estimating the dimension of a model. *The annals of statistics*. 1978;6(2):461–464.