

Attentive Tensor Product Learning

Qiuyuan Huang, Li Deng, Dapeng Wu, Chang Liu, Xiaodong He *

Abstract

This paper proposes a new architecture — Attentive Tensor Product Learning (ATPL) — to represent grammatical structures in deep learning models. ATPL exploits Tensor Product Representations (TPR), a structured neural-symbolic model developed in cognitive science, to integrate deep learning with explicit language structures and rules. The key ideas of ATPL are: 1) unsupervised learning of role-unbinding vectors of words via TPR-based deep neural network; 2) employing attention modules to compute TPR; and 3) integration of TPR with typical deep learning architectures including Long Short-Term Memory (LSTM) and Feedforward Neural Network (FFNN). The novelty of our approach lies in its ability to extract the grammatical structure of a sentence by using role-unbinding vectors, which are obtained in an unsupervised manner. This ATPL approach is applied to 1) image captioning, 2) part of speech (POS) tagging, and 3) constituency parsing of a sentence. Experimental results demonstrate the effectiveness of the proposed approach.

1 Introduction


Deep learning (DL) is an important tool in many natural language processing (NLP) applications. Since natural languages are rich in grammatical structures, there is an increasing interest in learning a vector representation to capture the grammatical structures of the natural language descriptions using deep learning models [1, 2, 3].

In this work, we propose a new architecture, called *Attentive Tensor Product Learning (ATPL)*, to address this representation problem by exploiting Tensor Product Representations (TPR) [4, 5]. TPR is a structured neural-symbolic model developed in cognitive science over 20 years ago. In the TPR theory, a sentence can be considered as a sequences of *roles* (i.e., grammatical components) with each filled with a *filler* (i.e., tokens). Given each role associated with a *role vector* r_t and each filler associated with a *filler vector* f_t , the TPR of a sentence can be computed as $S = \sum_t f_t r_t^\top$. Comparing with the popular RNN-based representations of a sentence, a good property of TPR is that decoding a token of a timestamp t can be computed directly by providing an *unbinding vector* u_t . That is, $f_t = S \cdot u_t$. Under the TPR theory, encoding and decoding a sentence is equivalent to learning the role vectors r_t or unbinding vectors u_t at each position t .

We employ the TPR theory to develop a novel attention-based neural network architecture for learning the unbinding vectors u_t to serve the core at ATPL. That is, ATPL employs a form of the recurrent neural network to produce u_t one at a time. In each time, the TPR of the partial prefix of the sentence up to time $t - 1$ is leveraged to compute the attention maps, which are then used to compute the TPR S_t as well as the unbinding vector u_t at time t . In doing so, our ATPL can not only be used to generate a sequence of tokens, but also be used to generate a sequence of *roles*, which can interpret the syntactic/semantic structures of the sentence.

To demonstrate the effectiveness of our ATPL architecture, we apply it to three important NLP tasks: 1) image captioning; 2) POS tagging; and 3) constituency parsing of a sentence. The first showcases our ATPL-based generator, while the later two are used to demonstrate the power of role vectors in interpreting sentences' syntactic structures. Our evaluation shows that on both image captioning and POS tagging, our approach can outperform previous state-of-the-art

*QH is with Microsoft Research AI, Redmond, WA; email: qihua@microsoft.com. LD is with Citadel; email: l.deng@ieee.org. DW is with University of Florida, Gainesville, FL 32611; email: dpwu@ufl.edu. CL is with University of California, Berkeley; email: liuchang@eecs.berkeley.edu. XH is with JD AI Research, Beijing, China; email: xiaoh.e.ai@outlook.com.

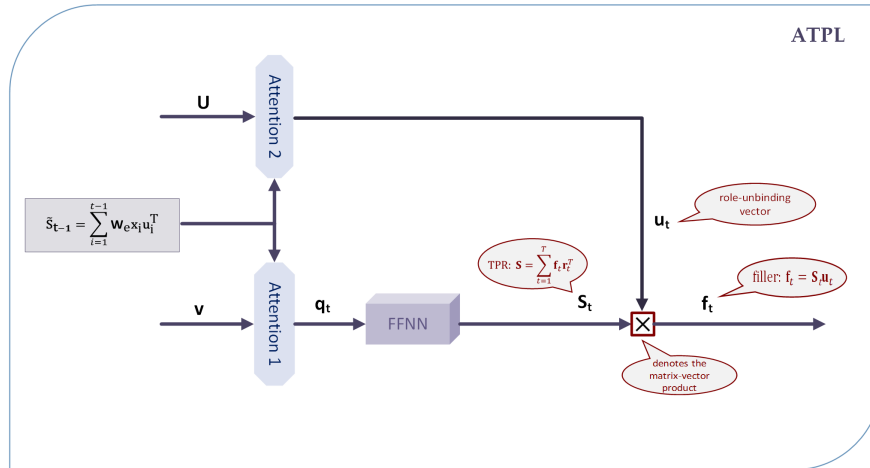

ATPL: Attentive Tensor Product Learning

Figure 1: ATPL Architecture.

approaches. In particular, on the constituency parsing task, when the structural segmentation is given as a ground truth, our ATPL approach can beat the state-of-the-art by 3.5 points to 4.4 points on the Penn TreeBank dataset. These results demonstrate that our ATPL is more effective at capturing the syntactic structures of natural language sentences.

The paper is organized as follows. Section 2 discusses related work. In Section 3, we present the design of ATPL. Section 4 through Section 6 describe three applications of ATPL, i.e., image captioner, POS tagger, and constituency parser, respectively. Section 7 concludes the paper.

2 Related work

Our proposed image captioning system follows a great deal of recent caption-generation literature in exploiting end-to-end deep learning with a CNN image-analysis front end producing a distributed representation that is then used to drive a natural-language generation process, typically using RNNs [6, 7, 8]. Our grammatical interpretation of the structural roles of words in sentences makes contact with other work that incorporates deep learning into grammatically-structured networks [1, 9, 10, 11]. Here, the network is not itself structured to match the grammatical structure of sentences being processed; the structure is fixed, but is designed to support the learning of distributed representations that incorporate structure internal to the representations themselves — filler/role structure.

The second task we consider is POS tagging. Methods for automatic POS tagging include unigram tagging, bigram tagging, tagging using Hidden Markov Models (which are generative sequence models), maximum entropy Markov models (which are discriminative sequence models), rule-based tagging, and tagging using bidirectional maximum entropy Markov models [12]. The celebrated Stanford POS tagger of [13] uses a bidirectional version of the maximum entropy Markov model called a cyclic dependency network in [14].

Methods for automatic constituency parsing of a sentence, our third task, include methods based on probabilistic context-free grammars (CFGs) [12], the shift-reduce method [15], sequence-to-sequence LSTMs [16]. Our constituency parser is similar to the sequence-to-sequence LSTMs [16] since both use LSTM neural networks to design a constituency parser. Different from [16], our constituency parser uses TPR and unbinding role vectors to extract features that contain grammatical information.

3 Attentive Tensor Product Learning

In this section, we present the ATPL architecture. We will first briefly revisit the Tensor Product Representation (TPR) theory, and then introduce several building blocks. In the end, we explain the ATPL architecture, which is illustrated in Figure 1.

3.1 Background: Tensor Product Representation

The TPR theory allows computing a vector representation of a sentence as the summation of its individual tokens while the order of the tokens is within consideration. For a sentence of T words, denoted by x_1, \dots, x_T , TPR theory considers the sentence as a sequence of *grammatical role slots* with each slot filled with a concrete token x_t . The role slot is thus referred to as a *role*, while the token x_t is referred to as a *filler*.

The TPR of the sentence can thus be computed as *binding* each role with a filler. Mathematically, each role is associated with a *role vector* $r_t \in \mathbb{R}^d$, and a filler with a *filler vector* $f_t \in \mathbb{R}^d$. Then the TPR of the sentence is

$$S = \sum_{t=1}^T f_t \cdot r_t^\top \quad (1)$$

where $S \in \mathbb{R}^{d \times d}$. Each role is also associated with a dual *unbinding vector* u_t so that $r_t^\top u_t = 1$ and $r_t^\top u_{t'} = 0, t' \neq t$; then

$$f_t = S u_t \quad (2)$$

Intuitively, Eq. (2) requires that $R^\top U = \mathbf{I}$, where $R = [r_1; \dots; r_T]$, $U = [u_1; \dots; u_T]$, and \mathbf{I} is an identity matrix. In a simplified case, i.e., r_t is orthogonal to each other and $r_t^\top r_t = 1$, we can easily derive $u_t = r_t$.

Eq. (1) and (2) provide means to *binding* or *unbinding* a TPR. Through these mechanisms, it is also easy to construct an encoder and a decoder to convert between a sentence and its TPR. All we need to compute is the role vector r_t (or its dual unbinding vector u_t) at each timestep t . One simple approach is to compute it as the hidden states of a recurrent neural network (e.g., LSTM). However, this simple strategy may not yield the best performance.

3.2 Building blocks

Before we start introducing ATPL, we first introduce several building blocks repeatedly used in our construction.

An *attention module* over an input vector v is defined as

$$\text{Attn}(v) = \sigma(Wv + b) \quad (3)$$

where σ is the sigmoid function, $W \in \mathbb{R}^{d_1 \times d_2}$, $b \in \mathbb{R}^{d_1}$, d_2 is the dimension of v , and d_1 is the dimension of the output. Intuitively, $\text{Attn}(\cdot)$ will output a vector as the attention heatmap; and d_1 is equal to the dimension that the heatmap will be attended to. W and b are two sets of parameters. Without specific notices, the sets of parameters of different attention modules are disjoint to each other.

We refer to a *Feed-Forward Neural Network* (FFNN) module as a single fully-connected layer:

$$\text{FFNN}(v) = \mathbf{tanh}(Wv + b) \quad (4)$$

where W and b are the parameter matrix and the parameter vector with appropriate dimensions respectively, and \mathbf{tanh} is the hyperbolic tangent function.

3.3 ATPL architecture

In this paper, we mainly focus on an ATPL decoder architecture that can decode a vector representation \mathbf{v} into a sequence x_1, \dots, x_T . The architecture is illustrated in Fig. 1.

We notice that, if we require the role vectors to be orthogonal to each other, then to decode the filler f_t only needs to unbind the TPR of undecoded words, S_t :

$$f_t = S_t u_t = \left(\sum_{i=t}^T (W_e x_i) r_i^\top \right) u_t = W_e x_t \quad (5)$$

where $x_t \in \mathbb{R}^V$ is a one-hot encoding vector of dimension V and V is the size of the vocabulary; $W_e \in \mathbb{R}^{d \times V}$ is a word embedding matrix, the i -th column of which is the embedding vector of the i -th word in the vocabulary; the embedding vectors are obtained by the Stanford GLoVe algorithm with zero mean [17].

To compute S_t and u_t , ATPL employs two attention modules controlled by \tilde{S}_{t-1} , which is the TPR of the so-far generated words x_1, \dots, x_{t-1} :

$$\tilde{S}_{t-1} = \sum_{i=1}^{t-1} W_e x_i r_i^\top$$

On one hand, S_t is computed as follows:

$$S_t = \text{FFNN}(\mathbf{q}_t) \quad (6)$$

$$\mathbf{q}_t = \mathbf{v} \odot \text{Attn}(h_{t-1} \oplus \text{vec}(\tilde{S}_{t-1})) \quad (7)$$

where \odot is the point-wise multiplication, \oplus concatenates two vectors, and vec vectorizes a matrix. In this construction, h_{t-1} is the hidden state of an external LSTM, which we will explain later.

The key idea here is that we employ an attention model to put weights on each dimension of the image feature vector \mathbf{v} , so that it can be used to compute S_t . Note it has been demonstrated that that attention structures can be used to effectively learn any function [18]. Our work adopts a similar idea to compute S_t from \mathbf{v} and \tilde{S}_{t-1} .

On the other hand, similarly, u_t is computed as follows:

$$u_t = \mathbf{U} \text{Attn}(h_{t-1} \oplus \text{vec}(\tilde{S}_{t-1}))$$

where \mathbf{U} is a constant normalized Hadamard matrix.

In doing so, ATPL can decode an image feature vector \mathbf{v} by recursively 1) computing S_t and u_t from \tilde{S}_{t-1} , 2) computing f_t as $S_t u_t$, and 3) setting $r_t = u_t$ and updating \tilde{S}_t . This procedure continues until the full sentence is generated.

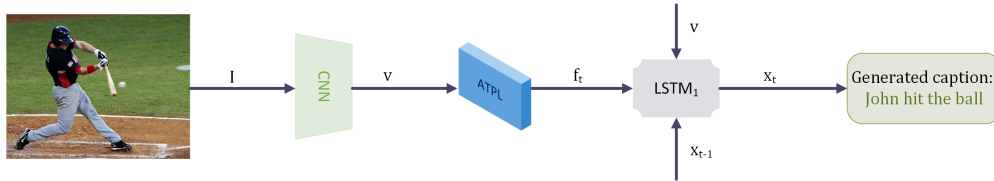


Figure 2: Architecture of image captioning.

Next, we will present three applications of ATPL, i.e., image captioner, POS tagger, and constituency parser in Section 4 through Section 6, respectively.

Table 1: Performance of the proposed ATPL model on the COCO dataset.

Methods	METEOR	BLEU-1	BLEU-2	BLEU-3	BLEU-4	CIDEr
NIC [7]	0.237	0.666	0.461	0.329	0.246	0.855
CNN-LSTM [19]	0.238	0.698	0.525	0.390	0.292	0.889
SCN-LSTM [19]	0.257	0.728	0.566	0.433	0.330	1.012
ATPL	0.258	0.733	0.572	0.437	0.335	1.013

4 Image Captioning

To showcase our ATPL architecture, we first study its application in the image captioning task. Given an input image \mathbf{I} , a standard encoder-decoder can be employed to convert the image into an image feature vector \mathbf{v} , and then use the ATPL decoder to convert it into a sentence. The overall architecture is depicted in Fig. 2.

We evaluate our approach with several baselines on the COCO dataset [20]. The COCO dataset contains 123,287 images, each of which is annotated with at least 5 captions. We use the same pre-defined splits as [8, 19]: 113,287 images for training, 5,000 images for validation, and 5,000 images for testing. We use the same vocabulary as that employed in [19], which consists of 8,791 words.

For the CNN of Fig. 1, we used ResNet-152 [21], pretrained on the ImageNet dataset. The image feature vector \mathbf{v} has 2048 dimensions. The model is implemented in TensorFlow [22] with the default settings for random initialization and optimization by backpropagation. In our ATPL architecture, we choose $d = 32$, and the size of the LSTM hidden state to be 512. The vocabulary size $V = 8,791$. ATPL uses tags as in [19].

In comparison, we compare with [7] and the state-of-the-art CNN-LSTM and SCN-LSTM [19]. The main evaluation results on the MS COCO dataset are reported in Table 1. The widely-used BLEU [23], METEOR [24], and CIDEr [25] metrics are reported in our quantitative evaluation of the performance of the proposed scheme.

We can observe that, our ATPL architecture significantly outperforms all other baseline approaches across all metrics being considered. The results clearly attest to the effectiveness of the ATPL architecture. We attribute the performance gain of ATPL to the use of TPR in replace of a pure LSTM decoder, which allows the decoder to learn not only how to generate the *filler* sequence but also how to generate the *role* sequence so that the decoder can better understand the grammar of the considered language. Indeed, by manually inspecting the generated captions from ATPL, none of them has grammatical mistakes. We attribute this to the fact that our TPR structure enables training to be more effective and more efficient in learning the structure through the role vectors.

Note that the focus of this paper is on developing a Tensor Product Representation (TPR) inspired network to replace the core layers in an LSTM; therefore, it is directly comparable to an LSTM baseline. So in the experiments, we focus on comparison to a strong CNN-LSTM baseline. We acknowledge that more recent papers reported better performance on the task of image captioning. Performance improvements in these more recent models are mainly due to using better image features such as those obtained by Region-based Convolutional Neural Networks (R-CNN), or using reinforcement learning (RL) to directly optimize metrics such as CIDEr to provide a better context vector for caption generation, or using an ensemble of multiple LSTMs, among others. However, the LSTM is still playing a core role in these works and we believe improvement over the core LSTM, in both performance and interpretability, is still very valuable. Deploying these new features and architectures (R-CNN, RL, and ensemble) with ATPL is our future work.

5 POS Tagging

In this section, we study the application of ATPL in the POS tagging task. Intuitively, given a sentence x_1, \dots, x_T , POS tagging is to assign a POS tag denoted as z_t , for each token x_t . In the following, we first present our model using ATPL for POS tagging, and then evaluate its performance.

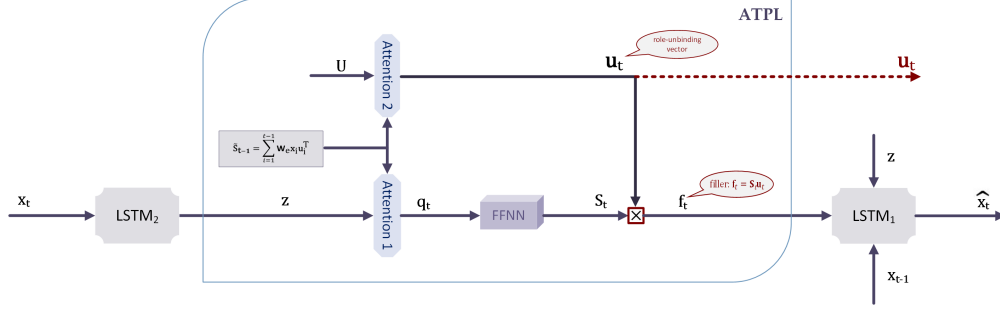


Figure 3: Architecture for acquisition of unbinding vectors of a sentence.

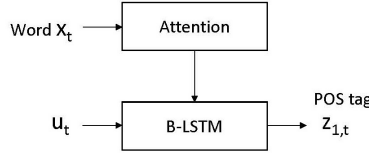


Figure 4: Structure of POS tagger.

5.1 ATPL POS tagging architecture

Based on TPR theory, the role vector (as well as its dual unbinding vector) contains the POS tag information of each word. Hence, we first use ATPL to compute a sequence of unbinding vectors u_t which is of the same length as the input sentence. Then we take u_t and x_t as input to a bidirectional LSTM model to produce a sequence of POS tags.

Our training procedure consists of two steps. In the first step, we employ an unsupervised learning approach to learn how to compute u_t . Fig. 3 shows a sequence-to-sequence structure, which uses an LSTM as the encoder, and ATPL as the decoder; during the training phase of Fig. 3, the input is a sentence and the expected output is the same sentence as the input. Then we use the trained system in Fig. 3 to produce the unbinding vectors u_t for a given input sentence x_1, \dots, x_T .

In the second step, we employ a bidirectional LSTM (B-LSTM) module to convert the sequence of u_t into a sequence of hidden states \mathbf{h} . Then we compute a vector $z_{1,t}$ from each (x_t, \mathbf{h}_t) pair, which is the POS tag at position t . This procedure is illustrated in Figure 4.

The first step follows ATPL and is straightforward. Below, we focus on explaining the second step. In particular, given the input sequence u_t , we can compute the hidden states as

$$\vec{\mathbf{h}}_t, \overleftarrow{\mathbf{h}}_t = BLSTM(u_t, \vec{\mathbf{h}}_{t-1}, \overleftarrow{\mathbf{h}}_{t+1}) \quad (8)$$

Then, the POS tag embedding is computed as

$$z_{1,t} = \text{softmax}(\vec{\mathbf{W}}(x_t) \vec{\mathbf{h}}_t + \overleftarrow{\mathbf{W}}(x_t) \overleftarrow{\mathbf{h}}_t) \quad (9)$$

Here $\vec{\mathbf{W}}(x_t)$ is computed as follows

$$\vec{\mathbf{W}}(\mathbf{x}) = \vec{\mathbf{W}}_a \cdot \text{diag}(\vec{\mathbf{W}}_b \cdot x_t) \cdot \vec{\mathbf{W}}_c \quad (10)$$

Table 2: Performance of POS Tagger.

	[13]		OUR POS TAGGER	
	WSJ 22	WSJ 23	WSJ 22	WSJ 23
ACCURACY	0.972	0.973	0.973	0.974

where $\text{diag}(\cdot)$ constructs a diagonal matrix from the input vector; $\vec{W}_a, \vec{W}_b, \vec{W}_c$ are matrices of appropriate dimensions. $\vec{W}_{3,h}(\mathbf{x}_t)$ is defined in the same manner as $\vec{W}_{3,h}(\mathbf{x}_t)$, though a different set of parameters is used.

Note that $\mathbf{z}_{1,t}$ is of dimension P , which is the total number of POS tags. Clearly, this model can be trained end-to-end by minimizing a cross-entropy loss.

5.2 Evaluation

To evaluate the effectiveness of our model, we test it using the Penn TreeBank dataset [26]. In particular, we first train the sequence-to-sequence in Fig. 3 using the sentences of Wall Street Journal (WSJ) Section 0 through Section 21 and Section 24 in Penn TreeBank data set [26]. Afterwards, we use the same dataset to train the B-LSTM module in Figure 4.

Once the model gets trained, we test it on WSJ Section 22 and 23 respectively. We compare the accuracy of our approach against the state-of-the-art Stanford parser [13]. The results are presented in Table 2. From the table, we can observe that our approach outperforms the baseline. This confirms our hypothesis that the unsupervisedly trained unbinding vector u_t indeed captures grammatical information, so as to be used to effectively predict grammar structures such as POS tags.

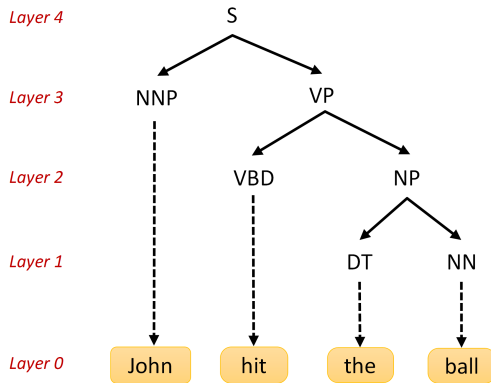


Figure 5: The parse tree of a sentence and its layers.

6 Constituency Parsing

In this section, we briefly review the constituency parsing task, and then present our approach, which contains three component: segmenter, classifier, and creator of a parse tree. In the end, we compare our approach against the state-of-the-art approach in [16].

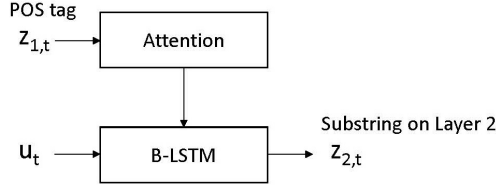


Figure 6: Structure of the segmenter on Layer 2.

6.1 A brief review of constituency parsing

Constituency parsing converts a natural language into its parsing tree. Fig. 5 provides an example of the parsing tree on top of its corresponding sentence. From the tree, we can label each node into layers, with the first layer (Layer 0) consisting of all tokens from the original sentence. Layer k contains all internal nodes whose depth with respect to the closest leaf that it can reach is k .

In particular, at Layer 1 are all POS tags associated with each token. In higher layers, each node corresponds to a *substring*, a consecutive subsequence, of the sentence. Each node corresponds to a grammar structure, such as a single word, a phrase, or a clause, and is associated with a category. For example, in Penn TreeBank, there are over 70 types of categories, including (1) clause-level tags such as S (simple declarative clause), (2) phrase-level tags such as NP (noun phrase), VP (verb phrase), (3) word-level tags such as NNP (Proper noun, singular), VBD (Verb, past tense), DT (Determiner), NN (Noun, singular or mass), (4) punctuation marks, and (5) special symbols such as \$.

The task of constituency parsing recovers both the tree-structure and the category associated with each node. In our approach to employ ATPL to construct the parsing tree, we use an encoding z to encode the tree-structure. Our approach first generates this encoding from the raw sentence, layer-by-layer, and then predict a category to each internal node. In the end, an algorithm is used to convert the encoding z with the categories into the full parsing tree. In the following, we present the three sub-routines.

6.2 Segmenting a sentence into a tree-encoding

We first introduce the concept of the encoding z . For each layer k , we assign a value $z_{k,t}$ to each location t of the input sentence. In the first layer, $z_{1,t}$ simply encodes the POS tag of input token x_i . In a higher level, $z_{k,t}$ is either 0 or 1. Thus the sequence $z_{k,t}$ forms a sequence with alternating sub-sequences of consecutive 0s and consecutive 1s. Each of the longest consecutive 0s or consecutive 1s indicate one internal node at layer k , and the consecutive positions form the substring of the node. For example, the second layer of Fig. 5 is encoded as $\{0, 1, 0, 0\}$, and the third layer is encoded as $\{0, 1, 1, 1\}$.

The first component of our ATPL-based parser predicts $z_{k,t}$ layer-by-layer. Note that the first layer is simply the POS tags, so we will not repeat it. In the following, we first explain how to construct the second layer’s encoding $z_{2,t}$, and then we show how it can be expanded to construct higher layer’s encoding $z_{k,t}$ for $k \geq 3$.

Constructing the second layer $z_{2,t}$. We can view $z_{2,t}$ as a special tag over the POS tag sequence, and thus the same approach to compute the POS tag can be adapted here to compute $z_{2,t}$. This model is illustrated in Fig. 6.

In particular, we can compute the hidden state from the unbinding vectors from the raw sentence as before:

$$\vec{h}_{2,t}, \overleftarrow{h}_{2,t} = BLSTM(u_t, \vec{h}_{2,t-1}, \overleftarrow{h}_{2,t+1}) \quad (11)$$

Table 3: Performance of Constituency Parser.

	[16]		OUR PARSER		OUR PARSER WITH GROUND-TRUTH $\mathbf{z}_{k,t}$ ($k \geq 2$)	
	WSJ 22	WSJ 23	WSJ 22	WSJ 23	WSJ 22	WSJ 23
PRECISION	N/A	N/A	0.898	0.910	0.952	0.952
RECALL	N/A	N/A	0.901	0.907	0.973	0.978
F-1 MEASURE	0.928	0.921	0.900	0.908	0.963	0.965

and the output of the attention-based B-LSTM is given as below

$$\mathbf{z}_{2,t} = \sigma_s(\vec{\mathbf{W}}_2(\mathbf{z}_{1,t})\vec{\mathbf{h}}_{2,t} + \overleftarrow{\mathbf{W}}_2(\mathbf{z}_{1,t})\overleftarrow{\mathbf{h}}_{2,t}) \quad (12)$$

where $\vec{\mathbf{W}}_{2,h}(\mathbf{z}_{1,t})$ and $\overleftarrow{\mathbf{W}}_{2,h}(\mathbf{z}_{1,t})$ are defined in the same manner as in (10).

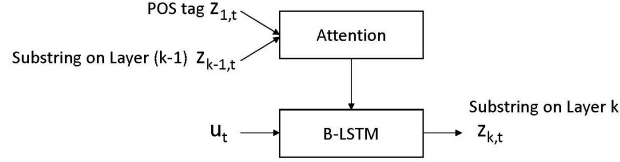


Figure 7: Structure of the segmenter on Layer $k \geq 3$.

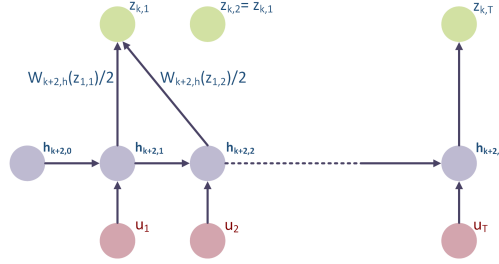


Figure 8: Segmenting Layer $k \geq 3$.

Constructing higher layer’s encoding $\mathbf{z}_{k,t}$ ($k \geq 3$). Now we move to higher levels. For a layer $k \geq 3$, to predict $\mathbf{z}_{k,t}$, our model takes both the POS tag input $\mathbf{z}_{1,t}$ and the $(k-1)$ -th layer’s encoding $\mathbf{z}_{k-1,t}$. The high-level architecture is illustrated in Fig. 7.

Let us denote

$$\mathbf{z}_{k,t} = \mathbf{softmax}(J_{k,t})$$

the key difference is how to compute $J_{k,t}$. Intuitively, $J_{k,t}$ is an embedding vector corresponding to the node, whose substring contains token x_t . Assume word x_t is in the m -th substring of Layer $k-1$, which is denoted by $s_{k-1,m}$. Then, the embedding $J_{k,t}$ can be computed as follows:

$$J_{k,t} = \sum_{i \in s_{k-1,m}} \frac{\vec{\mathbf{W}}_k(\mathbf{z}_{1,i})\vec{\mathbf{h}}_{k,i} + \overleftarrow{\mathbf{W}}_k(\mathbf{z}_{1,i})\overleftarrow{\mathbf{h}}_{k,i}}{|s_{k-1,m}|} \quad (13)$$

Here, $\vec{\mathbf{h}}_{k,i}$ and $\overleftarrow{\mathbf{h}}_{k,i}$ are the hidden states of BLSTM running over the unbinding vectors as before, and $\vec{\mathbf{W}}_k(\cdot)$ and $\overleftarrow{\mathbf{W}}_k(\cdot)$ are defined in a similar fashion as (10). We use $|\cdot|$ to indicate the cardinality of a set.

The most interesting part is that $J_{k,t}$ aggregates all embeddings computed from the substring of the previous layer $s_{k-1,m}$. Note that the set $s_{k-1,m}$ of indexes can be computed easily from $\mathbf{z}_{k-1,t}$. Note that many different aggregation functions can be used. In (13), we choose to use the average function. The process of this calculation is illustrated in Fig. 8.

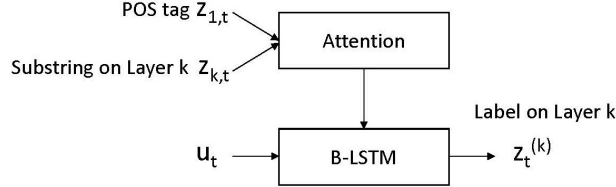


Figure 9: Structure of the classifier on Layer k .

6.3 Classification of Substrings

Once the tree structure is computed, we attach a category to each internal node. We employ a similar approach as predicting $\mathbf{z}_{k,t}$ for $k \geq 3$ to predict this category $\mathbf{z}_t^{(k)}$. Note that, in this time, the encoding $\mathbf{z}_{k,t}$ of the internal node is already computed. Thus, instead of using the encoding $\mathbf{z}_{k-1,t}$ from the previous layer, we use the encoding of the current layer $\mathbf{z}_{k,t}$ to predict $\mathbf{z}_t^{(k)}$ directly. This procedure is illustrated in Fig. 9.

Similar to (13), we have $\mathbf{z}_t^{(k)} = \mathbf{softmax}(E_{k,t})$, where $E_{k,t}$ is computed by $(\forall t \in \{t : \mathbf{x}_t \in s_{k,m}\})$

$$E_{k,t} = \sum_{i \in s_{k,m}} \frac{\vec{\mathbf{W}}_k(\mathbf{z}_{1,i}) \vec{\mathbf{h}}_{k,i} + \overleftarrow{\mathbf{W}}_k(\mathbf{z}_{1,i}) \overleftarrow{\mathbf{h}}_{k,i}}{|s_{k,m}|} \quad (14)$$

Here, we slightly overload the variable names. We emphasize that the parameters $\vec{\mathbf{W}}$ and $\overleftarrow{\mathbf{W}}$ and the hidden states $\vec{\mathbf{h}}_{k,i}$ and $\overleftarrow{\mathbf{h}}_{k,i}$ are both independent to the ones used in (14).

Note that the main different between (14) and (13) is that, the aggregation is operated over the set $s_{k,t}$, i.e., the substring at layer k , rather than $s_{k-1,t}$, i.e., the substring at layer $k-1$. Also, $E_{k,t}$'s dimension is the same as the total number of categories, while $J_{k,t}$'s dimension is 2.

6.4 Creation of a Parse Tree

Once both $\mathbf{z}_{k,t}$ and $\mathbf{z}_t^{(k)}$ are constructed, we can create the parse tree out of them using a linear-time sub-routine. We rely on Algorithm 1 to this end. For the example in Fig. 5, the output is (S(NNP John)(VP(VBD hit)(NP(DT the)(NN ball))))).

6.5 Evaluation

We now evaluate our constituency parsing approach against the state-of-the-art approach [16] using WSJ data set in Penn TreeBank. Similar to our setup for POS tag, we training our model using WSJ Section 0 through Section 21 and Section 24, and evaluate it on Section 22 and 23.

Table 3 shows the performance for both [16] and our proposed approach. In addition, we also evaluate our approach assuming the tree-structure encoding $\mathbf{z}_{k,t}$ is known. In doing so, we can evaluate the performance of our classification module of the parser. Note, the POS tag is not provided.

We observe that the F-1 measure of our approach is 2 points worse than [16]; however, when the ground-truth of $\mathbf{z}_{k,t}$ is provided, the F-1 measure is 4 points higher than [16], which is significant. Therefore, we attribute the reason for our approach’s underperformance to the fact that our model may not be effective enough to learn to predict the tree-encoding $\mathbf{z}_{k,t}$.

Remarks. We view the use of unbinding vectors as the main novelty of our work. In contrast, all other parsers need to input the words directly. Our ATPL separates grammar components \mathbf{u}_t of a sentence from its lexical units \mathbf{f}_t so that one author’s grammar style can be characterized by unbinding vectors \mathbf{u}_t while his word usage pattern can be characterized by lexical units \mathbf{f}_t . Hence, our parser enjoys the benefit of aid in learning the writing style of an author since the regularities embedded in unbinding vectors \mathbf{u}_t and the obtained parse trees characterize the writing style of an author.

7 Conclusion

In this paper, we proposed a new ATPL approach for natural language generation and related tasks. The model has a novel architecture based on a rationale derived from the use of Tensor Product Representations for encoding and processing symbolic structure through neural network computation. In evaluation, we tested the proposed model on image captioning. Compared to widely adopted LSTM-based models, the proposed ATPL gives significant improvements on all major metrics including METEOR, BLEU, and CIDEr. Moreover, we observe that the unbinding vectors contain important grammatical information, which allows us to design an effective POS tagger and constituency parser with unbinding vectors as input. Our findings in this paper show great promise of TPRs. In the future, we will explore extending TPR to a variety of other NLP tasks.

References

- [1] K. S. Tai, R. Socher, and C. D. Manning, “Improved semantic representations from tree-structured long short-term memory networks,” *arXiv preprint arXiv:1503.00075*, 2015.
- [2] A. Kumar, O. Irsoy, P. Ondruska, M. Iyyer, J. Bradbury, I. Gulrajani, V. Zhong, R. Paulus, and R. Socher, “Ask me anything: Dynamic memory networks for natural language processing,” in *International Conference on Machine Learning*, 2016, pp. 1378–1387.
- [3] L. Kong, C. Alberti, D. Andor, I. Bogatyy, and D. Weiss, “Dragnn: A transition-based framework for dynamically connected neural networks,” *arXiv preprint arXiv:1703.04474*, 2017.
- [4] P. Smolensky, “Tensor product variable binding and the representation of symbolic structures in connectionist systems,” *Artificial intelligence*, vol. 46, no. 1-2, pp. 159–216, 1990.
- [5] P. Smolensky and G. Legendre, *The harmonic mind: From neural computation to optimality-theoretic grammar. Volume 1: Cognitive architecture*. MIT Press, 2006.
- [6] J. Mao, W. Xu, Y. Yang, J. Wang, Z. Huang, and A. Yuille, “Deep captioning with multimodal recurrent neural networks (m-rnn),” in *Proceedings of International Conference on Learning Representations*, 2015.
- [7] O. Vinyals, A. Toshev, S. Bengio, and D. Erhan, “Show and tell: A neural image caption generator,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2015, pp. 3156–3164.

- [8] A. Karpathy and L. Fei-Fei, “Deep visual-semantic alignments for generating image descriptions,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2015, pp. 3128–3137.
- [9] J. Andreas, M. Rohrbach, T. Darrell, and D. Klein, “Deep compositional question answering with neural module networks,” *arXiv preprint arXiv:1511.02799*, vol. 2, 2015.
- [10] D. Yogatama, P. Blunsom, C. Dyer, E. Grefenstette, and W. Ling, “Learning to compose words into sentences with reinforcement learning,” *arXiv preprint arXiv:1611.09100*, 2016.
- [11] J. Maillard, S. Clark, and D. Yogatama, “Jointly learning sentence embeddings and syntax with unsupervised tree-lstms,” *arXiv preprint arXiv:1705.09189*, 2017.
- [12] D. Jurafsky and J. H. Martin, *Speech and Language Processing*, 3rd ed., 2017.
- [13] C. Manning, “Stanford parser,” <https://nlp.stanford.edu/software/lex-parser.shtml>, 2017.
- [14] K. Toutanova, D. Klein, C. D. Manning, and Y. Singer, “Feature-rich part-of-speech tagging with a cyclic dependency network,” in *Proceedings of the 2003 Conference of the North American Chapter of the Association for Computational Linguistics on Human Language Technology-Volume 1*. Association for Computational Linguistics, 2003, pp. 173–180.
- [15] M. Zhu, Y. Zhang, W. Chen, M. Zhang, and J. Zhu, “Fast and accurate shift-reduce constituent parsing.” in *Proceedings of Annual Meeting of the Association for Computational Linguistics (ACL)*, 2013, pp. 434–443.
- [16] O. Vinyals, Ł. Kaiser, T. Koo, S. Petrov, I. Sutskever, and G. Hinton, “Grammar as a foreign language,” in *Advances in Neural Information Processing Systems*, 2015, pp. 2773–2781.
- [17] J. Pennington, R. Socher, and C. Manning, “Stanford glove: Global vectors for word representation,” <https://nlp.stanford.edu/projects/glove/>, 2017.
- [18] A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, Ł. Kaiser, and I. Polosukhin, “Attention is all you need,” in *Advances in Neural Information Processing Systems*, 2017, pp. 6000–6010.
- [19] Z. Gan, C. Gan, X. He, Y. Pu, K. Tran, J. Gao, L. Carin, and L. Deng, “Semantic compositional networks for visual captioning,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2017.
- [20] COCO, “Coco dataset for image captioning,” <http://mscoco.org/dataset/#download>, 2017.
- [21] K. He, X. Zhang, S. Ren, and J. Sun, “Deep residual learning for image recognition,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2016, pp. 770–778.
- [22] M. Abadi, A. Agarwal, P. Barham, E. Brevdo, Z. Chen, C. Citro, G. S. Corrado, A. Davis, J. Dean, M. Devin, S. Ghemawat, I. Goodfellow, A. Harp, G. Irving, M. Isard, Y. Jia, R. Jozefowicz, L. Kaiser, M. Kudlur, J. Levenberg, D. Mané, R. Monga, S. Moore, D. Murray, C. Olah, M. Schuster, J. Shlens, B. Steiner, I. Sutskever, K. Talwar, P. Tucker, V. Vanhoucke, V. Vasudevan, F. Viégas, O. Vinyals, P. Warden, M. Wattenberg, M. Wicke, Y. Yu, and X. Zheng, “TensorFlow: Large-scale machine learning on heterogeneous systems,” 2015, software available from tensorflow.org. [Online]. Available: <https://www.tensorflow.org/>
- [23] K. Papineni, S. Roukos, T. Ward, and W.-J. Zhu, “Bleu: a method for automatic evaluation of machine translation,” in *Proceedings of the 40th annual meeting on association for computational linguistics*. Association for Computational Linguistics, 2002, pp. 311–318.
- [24] S. Banerjee and A. Lavie, “Meteor: An automatic metric for mt evaluation with improved correlation with human judgments,” in *Proceedings of the ACL workshop on intrinsic and extrinsic evaluation measures for machine translation and/or summarization*. Association for Computational Linguistics, 2005, pp. 65–72.

- [25] R. Vedantam, C. Lawrence Zitnick, and D. Parikh, “Cider: Consensus-based image description evaluation,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2015, pp. 4566–4575.
- [26] M. P. Marcus, B. Santorini, M. A. Marcinkiewicz, and A. Taylor, “Penn treebank,” <https://catalog.ldc.upenn.edu/ldc99t42>, 2017.

Algorithm 1 Creation of a constituency parse tree

Input: $\mathbf{x}_t, \mathbf{z}_t^{(k)}, \mathbf{z}_{k,t}$ ($t = 1, \dots, T; k = 1, \dots, h_p$)
i=0
for $j = 1$ **to** h_p **do**
 for $t = 1$ **to** T **do**
 if $t = 1$ **then**
 if $j == 1$ **then**
 output "(" and $\mathbf{z}_1^{(h_p)}$
 push $\mathbf{z}_1^{(h_p)}$ into the stack
 if $\mathbf{z}_1^{(h_p)} == \mathbf{z}_1^{(1)}$ **then**
 output \mathbf{x}_1 and ")"
 pop $\mathbf{z}_1^{(h_p)}$ out of the stack
 end if
 else
 if $\mathbf{z}_1^{(h_p-j+1)} \neq \mathbf{z}_1^{(h_p-j+2)}$ **then**
 output "(" and $\mathbf{z}_1^{(h_p-j+1)}$
 push $\mathbf{z}_1^{(h_p-j+1)}$ into the stack
 if $\mathbf{z}_1^{(h_p-j+1)} == \mathbf{z}_1^{(1)}$ **then**
 output \mathbf{x}_1 and ")"
 pop $\mathbf{z}_1^{(h_p-j+1)}$ out of the stack
 end if
 end if
 end if
 else
 if $\mathbf{z}_t^{(h_p-j+1)} \neq \mathbf{z}_t^{(h_p-j+2)} \& \mathbf{z}_t^{(h_p-j+1)} \neq \mathbf{z}_{t-1}^{(h_p-j+1)}$ **then**
 output "(" and $\mathbf{z}_t^{(h_p-j+1)}$
 push $\mathbf{z}_t^{(h_p-j+1)}$ into the stack
 if $\mathbf{z}_t^{(h_p-j+1)} == \mathbf{z}_t^{(1)}$ **then**
 output \mathbf{x}_t and ")"
 pop $\mathbf{z}_t^{(h_p-j+1)}$ out of the stack
 if $t == T$ or $\mathbf{z}_t^{(h_p-j+2)} \neq \mathbf{z}_{t+1}^{(h_p-j+2)}$ **then**
 while the stack is not empty **do**
 pop an element out of the stack
 if the substring of the element ends at t **then**
 output ")"
 else
 push the element back into the stack
 end if
 end while
 end if
 end if
 end if
 end for
end for
