

# Social Physics: Uncovering Human Behaviour from Communication

Kunal Bhattacharya<sup>1</sup> and Kimmo Kaski<sup>2</sup>

*Department of Computer Science, Aalto University School of Science, P.O.Box 15500,  
FI-00076 AALTO, Finland*

---

## Abstract

In the post year 2000 era the technologies that facilitate human communication have rapidly multiplied. While the adoption of these technologies has hugely impacted the behaviour and sociality of people, specifically in urban but also in rural environments, their “digital footprints” on different data bases have become an active area of research. The existence and accessibility of such large population-level datasets, has allowed scientists to study and model innate human tendencies and social patterns in an unprecedented way that complements traditional research approaches like questionnaire studies. In this review we focus on data analytics and modelling research - we call Social Physics - as it has been carried out using the mobile phone data sets to get insight into the various aspects of human sociality, burstiness in communication, mobility patterns, and daily rhythms.

*Keywords:* big data, complex networks, burstiness in time series, circadian rhythms, human mobility patterns

---

---

<sup>1</sup>kunal.bhattacharya@aalto.fi

<sup>2</sup>kimmo.kaski@aalto.fi

## 1. Introduction

Technologies that harness digital information have grown over the past two decades in a number of unprecedented ways. It is said that in the current state-of-the-art, everyday an order of  $3 \times 10^{18}$  bytes of data gets created<sup>3</sup> and this rate of data creation is forecast to increase by 2025 up to  $18 \times 10^{22}$  bytes per annum, the transfer of which with today's broadband technology would take 450 million years<sup>4</sup>. The main bulk of this 'big data' is formed by records or "digital footprints" from various modes of modern-day communication such as mobile phone calls, social media postings, and online commercial activities. The availability of such data has opened up an unprecedentedly wide range of opportunities for computational analytics and modeling research on social systems in terms of their complex structure and dynamics (Buchanan, 2008). In this data-driven approach one focusses on studying the complexities of social systems or networks at different structural and dynamical scales to understand "how does microscopic translate to macroscopic". In order to get insight into the *structure*, *function* and *behaviour* of social systems, we employ the methodologies of *data analysis* for making observations or discoveries, *modelling* for describing dynamical processes or plausible mechanisms governing the system and *simulation* for predicting the behaviour of the system. In this empirical research framework, which we call *Social Physics*, the broad perspective is about understanding the dynamics of human social behaviour in different contexts through phenomenological models. In constructing such models of complex social systems we are somewhat handicapped because unlike in physics we are not yet familiar with the "underlying laws". Then the purpose of the model becomes important. From physics we already know that any model does not come even close to capturing all the details of the system. Therefore, we have become accustomed to the idea that "the model should be as simple as possible but not simpler", yet we want the model to describe some of the salient features or behaviour of the real system, reasonably well. Thus in our model building we aim for tractability and clarity, by considering that 'models are like maps' so that they are useful when they contain the details of interest

---

<sup>3</sup><https://www-01.ibm.com/common/ssi/cgi-bin/ssialias?htmlfid=WRL12345USEN>

<sup>4</sup>The Economist, May 6th 2017 issue: The world's most valuable resource - Data and new rules of competition

and ignore others<sup>5</sup>. Therefore, we believe that the utility of simple models in describing the complexities of, for example, poorly understood ICT-based social systems, is very high. Simple models may, indeed, give deep insights into the social system in the same way that the simple Ising model provides useful understanding and quantitatively correct predictions on critical phenomena of real magnetic systems.

Over the past few years Social Physics has evolved into a multidisciplinary area of research interests focusing on human sociality embedded in social network and societal structures, with the help of data from various sources and its analytics. It is capable of revealing the structure and behavioural patterns of social systems at different scales from individual to societal level as well as capturing the long term evolution of the society (Pentland, 2015). The concept of Social Physics is not new; it was first introduced by philosopher August Comte during the era of Industrial Revolution in the early 19th century with the view that the behaviour and functions of human societies could be explained in terms of underlying laws like in physics (Ball, 2004). In the first half of the 20th century there were pioneering contributions in this yet emerging area by scientists like G. K. Zipf and J. Q. Stewart (Barnes and Wilson, 2014). Since then the area has mainly evolved through the efforts of statistical physicists, especially through modelling (Stauffer, 2004; Galam, 2012; Sen and Chakrabarti, 2013). Now a full fledged data-driven paradigm, the Social Physics research borrows concepts and methodologies from social experiments, network science, game theory, theory of phase transitions and critical phenomena, automated data-collection systems, etc. Overall, the Social Physics aims to answer scientific questions that would be instrumental in tackling challenges in the areas like, socio-political conflicts, organized crimes, human health, human migration, and the development and productivity at multiple scales from organizations to cities (San Miguel et al., 2012; Conte et al., 2012).

---

<sup>5</sup>A passage from Lewis Carroll's *Sylvie and Bruno Concluded* illustrates this point: What do you consider the largest map that would be really useful? About six inches to the mile. Only six inches! exclaimed Mein Herr. We very soon got six yards to the mile. Then we tried a hundred yards to the mile. And then came the grandest idea of all! We actually made a map of the country, on the scale of a mile to the mile! Have you used it much? I enquired. It has never been spread out, yet, said Mein Herr: The farmers objected: they said it would cover the whole country, and shut out the sunlight! So now we use the country itself, as its own map, and I assure you it does nearly as well.

Here we will review the work carried out in the spirit of Social Physics relying on data from mobile phone call detail records (CDRs), that includes, time stamps of voice calls and text messages (SMS messages). For the purpose of academic research such datasets could be released by mobile phone service providers with anonymity of the subscribers ensured (Blondel et al., 2013). In another type of research with volunteers, the subjects have been allotted preprogrammed mobile phones to allow the collection of the data from the subjects into centralized servers for the time period of the study for the purpose of subsequent data analytics (Eagle and Pentland, 2006; Stopczynski et al., 2014). One is referred to section 2 for further clarification on the nature of the data. Before such datasets and methods of data collection became available, research of human social behaviour relied mostly on questionnaire-based surveys and field observations typically on small number of individuals (Zachary, 1977). In these survey-based studies the scope of social interactions is usually wide but based on individual recollection, raising the issues of subjectivity and how to measure the strength of social interaction, and with what scale. In contrast, the kind of data from mobile CDRs provide relatively narrow scope to social interaction while being based on measurements, for example in terms of the duration of a phone call between a pair of people. The real benefit of studies based on the mobile phone CDRs is that they have allowed making *in vivo* or *in situ* observations on large societal level populations over a wide range of spatial and temporal scales. Nevertheless, the mobile phone CDR based studies should be considered complementary to the questionnaire based survey studies. In this review We provide an overview of the work that includes the characterization and modeling of social dynamics at the level of individuals as well as the aggregate levels observed at different scales.

A number of studies has already been conducted with mobile phone datasets from different perspectives including physics, communication engineering, transportation engineering, epidemiology, and sociology, to name a few. In this wide sense the current review is not an extensive one, and it is aligned to the approach of Social Physics. We will here focus on a set of selected topics, namely, human sociality (section 2), human burstiness in time series of human communication (section 3), human mobility patterns (section 4), and the human daily and seasonal rhythms (section 5). Readers wanting to learn more about related works as well as various other related topics may explore existing reviews, for example by Blondel et al. (2015), Saramäki and Moro (2015), and Naboulsi et al. (2016).

## 2. Human sociality

The study of human sociality from telecommunication data has over time developed into a unique field of research that provides insight into the micro-, meso- and macroscopic structure and dynamics of social networks of large-scale societal level populations. The paradigm is held in contrast to the method of surveys (Wasserman and Faust, 1994) for collecting data on human interactions (Eagle and Pentland, 2006; Eagle et al., 2009). While, at the macroscopic level, the studies have primarily investigated the structural aspects of the social networks derived from the calling information aggregated over time windows (Onnela et al., 2007b,a; Lambiotte et al., 2008), at the microscopic level the focus has been on “egocentric networks” to study the dynamics of closest relationships between egos (the individuals in focus) and their alters (the contacts of an individual) (Palchykov et al., 2012; Miritello et al., 2013b; Saramäki et al., 2014; Bhattacharya et al., 2016). At the intermediate or mesoscopic level, social groups or communities and network motifs have been the objects of study (Palla et al., 2007; Tibély et al., 2011; Kovanen et al., 2011, 2013; Sekara et al., 2016).

A mobile phone CDR dataset comprises of call logs of egos or individuals with each log containing information of the timings of incoming and outgoing calls and of text messages i.e. SMSs. For calls, usually the information on the duration of the call is also included. The CDRs used for the purpose of research are anonymized, and the egos are distinguished by attributed surrogate keys. For a given ego and for a given communication event (a call or SMS) the corresponding alter key also appears in the log. The data acquired from mobile phone service providers may contain ancillary information on self-reported age, gender and residential postcode of the users. Using CDRs the social network is constructed by aggregating information within a time window (see Fig. 1). For the studies in which volunteers are recruited, the investigators usually avail multiple modes of data collection. Apart from call logs, additional data could be collected from pre-installed software as well as from various sensor signals (Eagle and Pentland, 2006; Karikoski and Nelimarkka, 2010; Stopczynski et al., 2014; Wang et al., 2014). For example, the Bluetooth data from a volunteer collected at a certain instant could also indicate the presence of other Bluetooth devices, and hence other volunteers in the proximity (Boonstra et al., 2017). The studies of the latter kind usually also collect information from the participants in the form of questionnaires (Saramäki et al., 2014). The data obtained from multiple

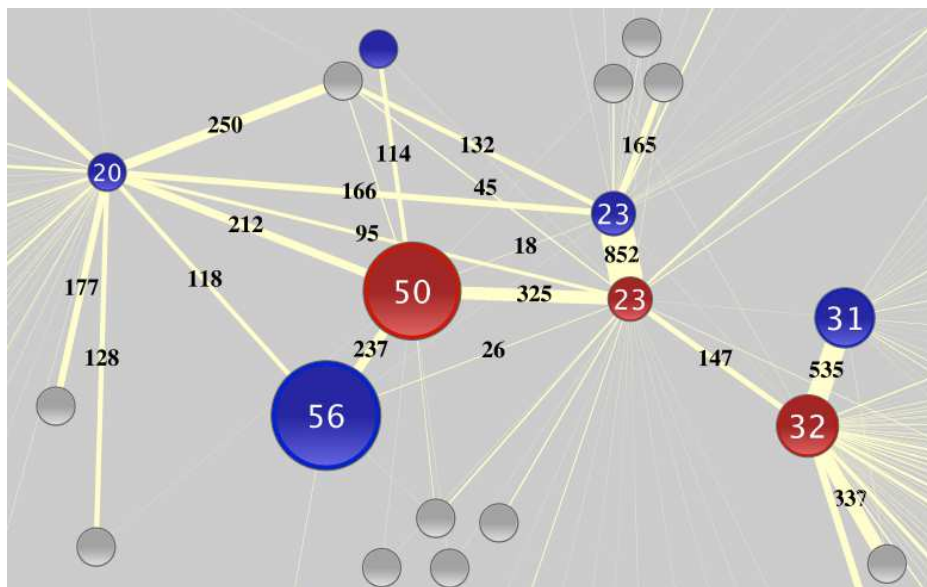


Figure 1: A part of a network constructed from mobile phone call data. Blue circles correspond to male and red circles to female subscribers. The numbers inside a circle (and also its size) indicates the age of the subscriber. Grey circles correspond to subscribers whose gender and age information is not available in the data set. The numbers on a link (as well as its width) indicates the total number of calls between the connected pair of individuals over a period of seven months. From Palchykov et al. (2012).

sources usually helps in validating the results and dealing with the problems of missing data.

### 2.1. *Marcoscale and mesoscale patterns*

The first of its kind ‘Reality Mining’ experiment was at the MIT by Eagle and Pentland (2006) who conducted a study with 100 participants who were either studying or working at the institute and were allotted Nokia 6600 mobile phones. Using data on Bluetooth based proximity, the investigators could predict the type of relationship, namely, friend or office acquaintance with a high enough accuracy. Onnela et al. (2007b) made a large scale on networks using CDRs from a mobile phone service provider that had about 20% of the market share in a European country. In the network two individuals were connected by a link if there had been a minimum of one reciprocated pair of phone calls between them over a period of 18 weeks. They termed this kind of a construct as a ‘mutual network’ or as a proxy of a social

network, and suggested that this method should eliminate a large number of one-way calls where the caller does not personally know the callee (Onnela et al., 2007a). Also, the weights of the links were attributed using the total calling duration between the ego-alter pairs. The final network that was analysed had about 4.6 million nodes and 7 million links.

A major finding of Onnela et al. (2007b) was the confirmation of the *strength of weak ties* hypothesis (Granovetter, 1973), according to which the weights of the links and the network topology were found to be correlated such that the intra-community links are stronger compared to the inter-community links. Also, by examining the percolation transition (Stauffer and Aharony, 1994) of the giant component containing 84% of the nodes, they showed the importance of weak ties in maintaining the overall connectivity of the network. Lambiotte et al. (2008) conducted a large scale study on users based in Belgium with the mutualized network having 2.5 million nodes and 5.4 million links. Besides characterizing the topology of the network, they also showed the influence of language on the structure of the network (Belgium has native French and Flemish as well as bilingual speakers).

The Belgian dataset was also used to investigate the community structure with a modularity optimization method, and the results showed that most communities are monolingual (Blondel et al., 2008). Similarly, Tibély et al. (2011) used the dataset studied by Onnela et al. (2007b) to obtain the community structure using three different community detection algorithms (Lancichinetti and Fortunato, 2009). They compared the results from the different methods as well as illustrated the Granovetterian ‘weak ties hypothesis’ from correlations between the link weights and community structure. Palla et al. (2007) included the same dataset in their study of the evolution of community structure. They studied networks derived from the mobile phone calls and from co-authorship information in the Cornell University cond-mat eprint archive. Palla et al. showed the differences between the dynamics of small and large groups.

The Granovetterian hypothesis was also illustrated in the context temporal networks by Kovanen et al. (2013), where the authors carried out a census on temporal motifs in the mobile phone data (see also Kovanen et al. (2011)). A more recent study of meso-scale patterns using the Copenhagen Network Study (CNS) dataset proposed a general framework for an evolving social network (Sekara et al., 2016). The dataset involving around 1000 freshman University students, contained information of calls, SMSs, proximity via Bluetooth, geo-location, and social media contacts in addition to

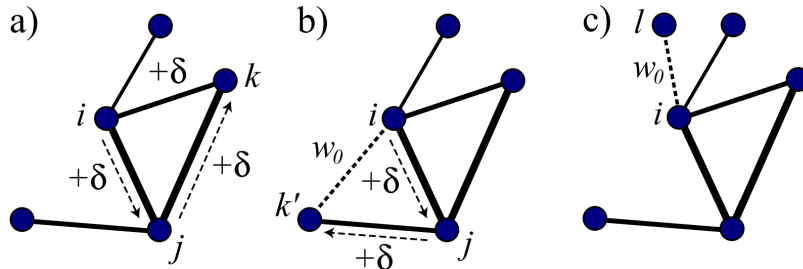


Figure 2: Schematic diagram of the model by Kumpula et al. (2007). (a): a weighted local search starts from  $i$  and proceeds to  $j$  and then to  $k$ , which is also a neighbour of  $i$ . (b): the local search from  $i$  ends to  $k'$ , which is not a neighbour of  $i$ . In this case link  $w_{ik'}$  is set with probability  $p_{\Delta}$ . (c): node  $i$  creates a link randomly to a random node  $l$  with probability  $p_r$ . In the cases of (a) and (b) the involved links weights are increased by  $\delta$ .

general demographic information. Sekara et al. proposed to identify stable cores in dynamic networks, representing meetings between individuals having different social contexts like work and recreation. They also suggested that the concept of cores is better suited to the description of social groups in time varying networks as compared to the other community detection algorithms.

As one of the first examples of an approach towards modelling meso- and macroscopic structures of a human mobile communication type social network, we describe a model presented by Kumpula et al. (2007). This model describes the processes for individuals getting acquainted with each other leading in turn to the formation of locally and globally complex weighted social network structures. In the model one considers a network with a fixed number of  $N$  nodes (or individuals) where the time evolution of the structure proceeds with the following three rules. (i) The cyclic closure or local attachment rule: In a time interval  $\Delta t$  each node or individual having at least one neighbour starts a weighted local search for new friends, see Fig. 2(a,b). The node  $i$  chooses one of its neighbouring node  $j$  with probability  $w_{ij}/s_i$ , where  $w_{ij}$  represents the weight of the link connecting  $i$  with  $j$  and  $s_i = \sum_j w_{ij}$  is the strength of node  $i$ . If the chosen node  $j$  has other neighbours  $k$  (apart from  $i$ ), it chooses one of them with probability  $w_{jk}/(s_j - w_{ij})$  implying that the search favours strong links. If there is no connection between  $i$  and  $k$ , it will be established with probability  $p_{\Delta}\Delta t$  such that  $w_{ik} = w_0$ . If the link exists, then its weight will be increased by a certain amount  $\delta$ . In addition, both  $w_{ij}$  and  $w_{jk}$  are increased by  $\delta$ . This kind of cyclic linking simulates the mechanism where “friend of a friend will also be friend”. The focal closure



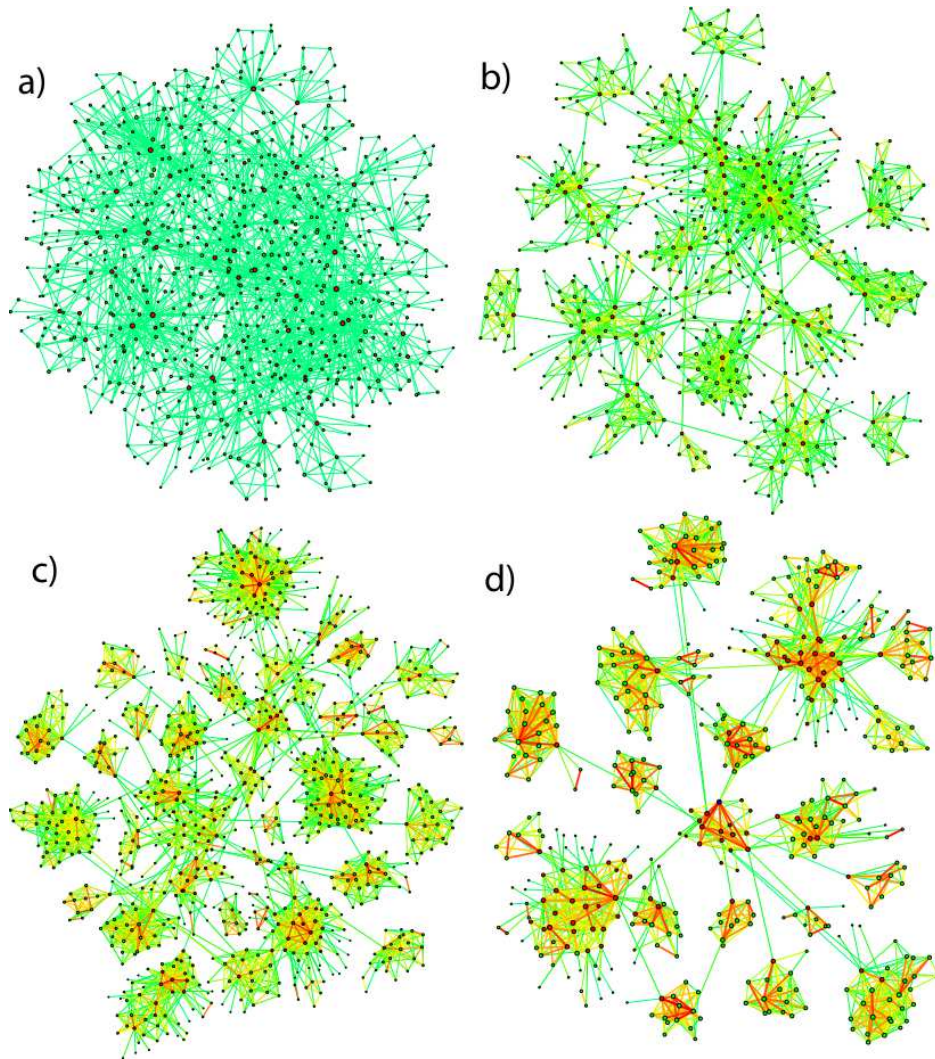


Figure 3: Simulated networks in the model by Kumpula et al. (2007), with (a)  $\delta = 0$ , (b)  $\delta = 0.1$ , (c)  $\delta = 0.5$ , and (d)  $\delta = 1$ . Link colours change from green (weak links) to yellow and red (strong links). With increase in the value of  $\delta$ , community structure starts appearing.

or global attachment rule is as follows: If a node has no links, it will create a link of weight  $w_0$  with probability  $p_r\Delta t$  to a random node, as depicted in Fig. 2(c). This mechanism is to establish a new link outside the immediate neighbourhood of the chosen node. (iii) The node deletion rule: With probability  $p_d\Delta t$  an existing node with all its links are removed from the system, and new node is introduced to maintain fixed system size. The parameter  $\delta$  is responsible for the time-dependent development of the weights of the network. When  $\delta = 0$ , one obtains unweighted networks without apparent community structure. With the increase in  $\delta$ , emerging triangles become the nuclei for community formation. Networks simulated for different values of  $\delta$  are shown in Fig. 3 ( $\Delta t = 1$ ,  $w_0 = 1$ ,  $p_d = 10^{-3}$ , and  $p_r = 5 \times 10^{-4}$ ). For larger  $\delta$  values one sees the formation of a community structure very similar to that observed in the studies of the mobile phone dataset (Onnela et al., 2007b,a).

## 2.2. Egocentric networks

While the investigations at the macroscopic and mesoscopic scales shed light on the aspects of social-like societal structure and the dynamics of group formation, the egocentric networks focus on the structure and dynamics of social ties within the immediate social neighbourhood of an individual. Different research questions can be addressed depending on the nature of data at hand. For a dataset with some ( $\sim 30$ ) student volunteers being observed over a period of several months, the study of it shows how for a given ego the alters may change their ranks over time (Saramäki et al., 2014). On the other hand if the dataset comprises of millions of subscribers whose age and gender information is available, their social behaviour can be analysed as a function of these variables, even if the dataset only spans over a month (Dong et al., 2014).

In this context Palchykov et al. (2012) were first to rank the set of alters by the total number of calls and they examined the gender and age of the top ranked alters as a function of the ego's age. Based on previous studies they assumed that the communication intensity should be a marker of emotional closeness (Roberts et al., 2009). They observed that, while the primary focus of males of all ages is likely to be on the opposite gender (or spouse), for older females there is a shift from the spouse to younger females, who can be assumed to be the daughters on the basis of the age difference. Palchykov et al. mentioned that the observation was in line with the *grandmothering* hypothesis (Hawkes, 2004). Palchykov et al. (2013) also proposed a statistical

method for ranking the set of alters based on the different relevant quantities (i.e. number of calls, duration of calling, number of SMSs, etc.).

A question that has been addressed in a number of studies is how an ego distributes its total time of communication among its alters. Using a large dataset, Miritello et al. (2013b) calculated a measure for disparity and found it to be negatively dependent on the number of alters, suggesting different strategies of communication between the users who have large numbers of contacts and those who have few. In general, all the users were found to distribute their limited time very unevenly across their contacts. Interestingly, the average communication time per alter, though being positively dependent on the number of alters, started to decrease when the number of alters increased beyond 40. Miritello et al. suggested that this effect was a partial reflection of the social brain hypothesis (Dunbar, 1993), according to which there is a cognitive limit in the number of social contacts an individual can maintain, i.e. (the *Dunbar number*  $\sim 150$ ). In another study, Miritello et al. (2013a) characterized the social strategy for communication in a space spanned by the communication capacity and communication activity of individuals. They identified two kinds of extreme strategies, namely, *social keeping* in the case of which the individuals keep a very stable focus on selected contacts, and, *social exploring* when the individuals activate and deactivate social ties at a high rate. Saramäki et al. (2014) showed that even in the presence of a turnover occurring in the egocentric network, the pattern in which an ego allocates its communication across the alters is stable. Also, that this pattern is usually the characteristic of an individual and could be considered as a “social signature” of that person. In a recent study, Centellegher et al. (2017) have explored the connections between the social signatures obtained from mobile phone calling and the individual personality traits of the participants obtained using Big five model surveys<sup>6</sup>. They observed the extroverts to have slightly lower temporal persistence of their social signatures, as compared to the introverts.

Bhattacharya et al. (2016) investigated further the aspect social focus using a large dataset (Onnela et al., 2007b; Palchykov et al., 2012). They found that younger individuals have more contacts and, among them, males more than females. In addition, they observed a steady decrease in the number of contacts with different rates for males and females, such that

---

<sup>6</sup>[https://en.wikipedia.org/wiki/Big\\_Five\\_personality\\_traits](https://en.wikipedia.org/wiki/Big_Five_personality_traits)

there is a reversal in the number of contacts around the age of late 30s. They suggested that this pattern can be attributed to the difference in reproductive investments made by the two genders. Bhattacharya et al. also analysed the gender-based inequality or disparity in social investment patterns by measuring the Gini coefficient and found the women and older people to have slightly larger values. The study was further extended by David-Barrett et al. (2016, 2017), where the authors characterized different types of social ties (friendship, spousal, kinship) based on age and gender information of the alter in conjunction with the ego. They showed how people have the tendency to rearrange their social lives as they grow older.

The maintenance of social relationships, in particular, friendships is another important context of egocentric networks. Bhattacharya et al. (2017) have demonstrated the maintenance of social relationships by examining the dependence of call durations on inter-call gaps (inter-event times) for pairs of individuals who regularly call each other. They found a logarithmic increase in call duration ( $T$ , measured in seconds) with an increase in the inter-call gap ( $\tau$ , measured in number of days):  $T = \beta \log \tau + \alpha$ . The authors suggested that the increase in the duration of the succeeding call after a long gap (time gap with the previous call) could serve as an act of relationship repair. In a sense this finding can also be considered as reflecting the maintenance of the strength of Granovetterian links. The authors have also examined the effect with the set of alters categorized into different subsets (Fig. 4). Navarro et al. (2017) have investigated the persistence of ties in terms of a prediction model based on the intensity, intimacy, and structural and temporal features of social interaction between a pair of individuals. These features included variables, like the total number of calls, age difference, topological overlap (Onnela et al., 2007b), reciprocity (Chawla et al., 2011), and coefficient of variation in inter-call gap. Their analysis showed that temporal features are effective and efficient predictors, and that bursty communication is correlated with decay (see section 3). In slightly different context, Tabourier et al. (2016) investigated the problem of link prediction (Lü and Zhou, 2011) for egocentric networks. They constructed a machine learning scheme using a mixture of supervised and unsupervised methods that, for a given ego, would predict the presence or absence of a link between a pair of its alters.

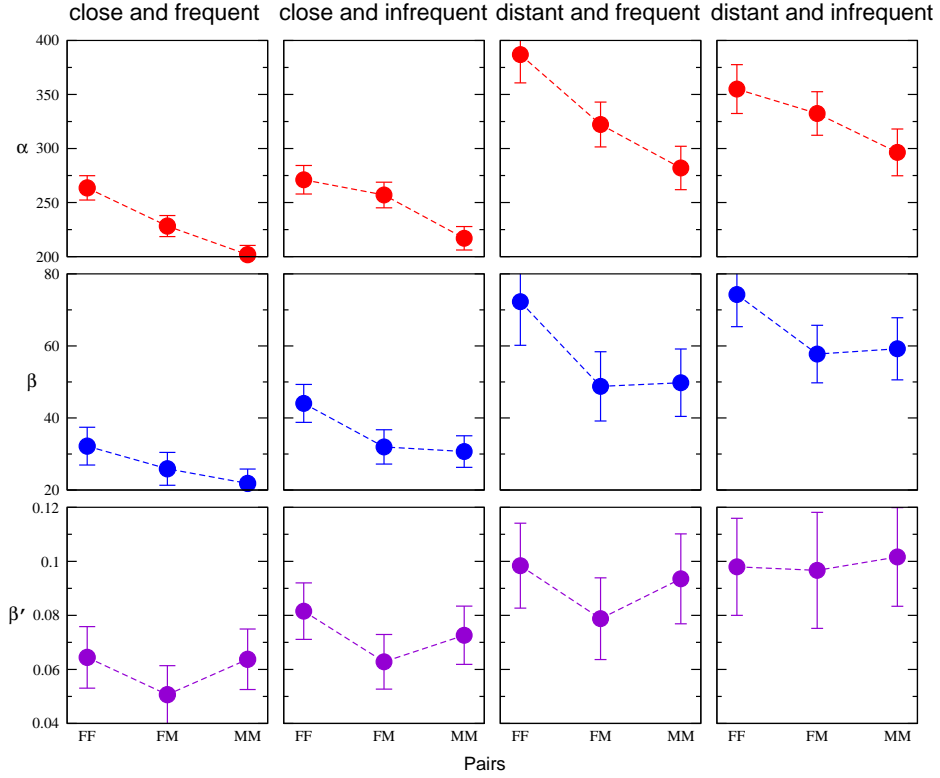


Figure 4: Quantifying the dependence of the duration of the succeeding call ( $T$ , measured in seconds) on the inter-call gap ( $\tau$ , measured in number of days) for pairs of regularly communicating individuals. The coefficients resulting from the regression:  $T = \beta \log \tau + \alpha$ , are shown.  $\beta'$  is the coefficient when both the duration and the gap are scaled by their respective averages. A broad distinction into four groups (as indicated on the top of the columns) is done based on whether for a given pair the distance between their locations is less or greater than 30 km (i.e., geographically “close” or “distant”, respectively) which being the spatial extension of large cities; and whether average gap,  $\langle \tau \rangle$  is less or greater than 12 days (i.e., communication is “frequent” or “infrequent”) which being the most probable inter-call gap. A finer classification is made based on the gender of the individuals as indicated along the horizontal axis (FF: female-female, MM: male-male, FM: mixed). Pairs are chosen irrespective of their age. The dashed line is a guide to the eye. From Bhattacharya et al. (2017).




Figure 5: Schematic diagram of a time series of events. Each vertical line indicates the timing of an outgoing call (event) from a given individual. The inter-event times ( $\tau$ ) are calculated from the differences in the timings of consecutive events, with  $\tau_i = t_{i+1} - t_i$ . The distribution of inter-event times ( $P(\tau)$ ) for a bursty time series is usually heavy-tailed.

### 3. Burstiness in the time series of human communication

Having looked at patterns observed at the level of information aggregated from calls, we now focus on the topic of ‘burstiness’ that becomes relevant when the times series of the calling activity of the service subscribers are investigated. The dynamics of a system is typically termed as bursty when there are short periods of heightened activity followed by longer periods of inactivity (Goh and Barabási, 2008; Barabási, 2010; Karsai et al., 2018). This type of dynamics has been observed in various kinds of natural and man-made systems where the dynamics can be characterized in terms of a time series. Some examples of them are earthquakes (Bak et al., 2002), neuronal firing (Grace and Bunney, 1984), biological evolution (Uyeda et al., 2011), email patterns (Eckmann et al., 2004), and mobile phone calls (Karsai et al., 2012b). Systems displaying bursty dynamics are typically differentiated from systems displaying Poisson processes (Grimmett and Stirzaker, 2001). In the latter case the rate at which events occur is a constant that is independent of time, and the resulting probability distribution for the time between a pair of successive events (inter-event time) is an exponential. Burstiness in time series is found to result due to the departure of the distribution of inter-event time from being an exponential, as well due to the presence of correlations between inter-event times. The time series found in nature and society where burstiness is observed are often described by the probability distribution ( $P(\tau)$ ) of inter-event times ( $\tau$ ) that is a power law with an exponential cut-off:  $P(\tau) \sim \tau^{-\alpha} \exp(\tau/\tau_c)$ , where  $\alpha > 0$ , and  $\tau_c$  is a time scale originating from the finiteness of the time series (Karsai et al., 2012a). Other commonly used measures to characterize the heterogeneity and correlations in the inter-event times include the burstiness parameter and the memory coefficient (Goh and Barabási, 2008).

For mobile phone-based interactions between people the time series' are constructed from the the CDRs of individual users by marking the timings of the events, namely, calls and SMSs. The calls are usually of finite duration which is rather discarded, and the starting time is considered (see Fig. 5). Also, for calls as well as SMSs the outgoing and incoming events may be separately analyzed Aoki et al. (2016). A number of empirical results support the power law form for the inter-event distribution  $P(\tau)$ , where the exponent  $\alpha$  is generally found to depend on whether it is from calls or from SMSs. Karsai et al. (2012a) used the data from a European operator (Onnela et al., 2007b) to show that  $\alpha \approx 0.7$  for calls and  $\alpha \approx 1.0$  for SMSs. Aoki et al. (2016) also used the data from a European operator (Tabourier et al., 2016) and found  $\alpha$  to be 1.2 and 1.4 for calls and SMSs, respectively. Using a Chinese dataset, Jiang et al. (2013) found that although the aggregate  $P(\tau)$  follows a power law, a majority of individual users show Weibull distributions for inter-event times. For individuals with power-law the values of  $\alpha$  varied from 1.5 to 2.6. The authors observed that anomalous and extreme calling patterns were associated with power laws, which could link the users to robot-based calls, telecom frauds, or telephone sales.

In general, the heavy-tailed  $P(\tau)$  has been observed in several different studies with calls and SMSs (Candia et al., 2008; Miritello et al., 2011; Schneider et al., 2013). Interestingly, bimodal distributions of inter-event times have also been observed in SMS datasets (Wu et al., 2010) such that the distributions are power-law for  $\tau < \tau_0$ , and exponential for  $\tau > \tau_0$ . Wu et al. (2010) reproduced the observations using a model of interacting queues for individuals, and showed that the time scale  $\tau_0$  could be related to a parameter called 'processing time' in the model.

Motivated by the observations from mobile call and SMS data, and communication data in general, there have been several attempts to reproduce the features related to burstiness using agent based models. Karsai et al. (2018) divide the models into three broad categories: (a) models of individual activity (Barabási, 2005; Vázquez et al., 2006; Vazquez, 2007; Jo et al., 2015), (b) models of link activity (Oliveira and Vazquez, 2009; Wu et al., 2010), and (c) network models of bursty agents (Goetz et al., 2009; Stehlé et al., 2010; Jo et al., 2011). Apart from the above type of models, there have been investigations of dynamical processes using dynamical substrates or temporal networks such as a mobile phone call network that has burstiness inherent to its structure (Holme and Saramäki, 2012). Processes that have been studied include epidemic spreading (Karsai et al., 2011; Kivelä et al.,

2012), random walks (Speidel et al., 2015) and threshold-driven contagion models (Takaguchi et al., 2013; Backlund et al., 2014).

Here we briefly describe the model by Jo et al. (2011) that is inspired by the model of Kumpula et al. (2007) with the cyclic and focal closure mechanisms for network formation (see section 2) and incorporates the concept of queues. In this model,  $N$  agents are each allotted a list containing tasks of two types,  $I$  and  $O$ . The priorities of each task is randomly chosen from a uniform distribution. At each time step  $t$ , every node selects the task with the highest priority. If it is an  $I$ -task, the actual node  $i$  selects a target node for interaction either (i) from the whole population with probability  $p_{GA}$ , or (ii) from its next nearest neighbours with probability  $p_{LA}$ , or (iii) from its neighbours with probability  $1 - p_{GA} - p_{LA}$  weighted by their link weight  $w_{ij}$ . The next nearest neighbour  $j$  of the node  $i$  is defined as a node that satisfies  $\{t_{ik}, t_{jk}\} = \{t - 2, t - 1\}$  with an intermediate node  $k$ , implying that  $i$  and  $k$  interacted at time  $t - 2$ , and  $k$  and  $j$  interacted at time  $t - 1$ . In the first two cases, (i) and (ii), links with unit weights are created between the interacting nodes. In case of (iii) the process is reinforcement in terms of an increment of existing weights. After an interaction the priority of  $I$ -task of node  $i$  is updated. In addition, at each time step each node can forget all of its existing connections with a probability  $p_{ML}$ , i.e., having a memory loss, to become isolated. By measuring the inter-event times between two consecutive  $I$ -tasks of a given node the system exhibits a broad inter-event time distribution with an exponential cutoff. In addition, the emerging network structure shows several realistic features similar to the model by Kumpula et al. (2007).

#### 4. Human mobility patterns

The idea of random motion of material particles while interacting with complex environments has long interested physicists (Bouchaud and Georges, 1990; Havlin and Ben-Avraham, 2002). With access to imaging technologies and other data logging methods a whole research area has emerged for studying the movement patterns of organisms from microbial scales to the scales of primates and other mammalian species (Ramos-Fernández et al., 2004; Viswanathan et al., 2011). A question underlying such studies has been how to model the paths of individual entities that can decide for themselves. A popular candidate has been the Lévy flight process in which the move lengths follow an inverse power law (Viswanathan et al., 1999). Addressing similar



questions in the case of humans have been possible with the advent of mobile phones that have facilitated to infer the trajectories of users. For billing purposes the service providers usually record the cell tower that is involved in routing a call. Therefore, when a user initiates or receives a call the location of the associated tower is known in terms of latitude and longitude (see Fig. 6 where the data from the Otasizzle project is visualized). In certain studies, data from GPS and WiFi routers have allowed the recording of trajectories with finer resolution, for example, the researchers in the CNS (Cuttone et al., 2018) achieve a median spatial resolution of 20 meters by sampling every 15 minutes. Large-scale studies based of such spatio-temporal data have provided insights into the mobility patterns of humans. The investigations have addressed diverse topics ranging from the statistical properties of trajectories to predictive models and to characterization of urban landscapes.

Gonzalez et al. (2008) tested the Lévy flights hypothesis on humans using two different data sets, the larger of which comprised of 100,000 individuals. They observed that with each user a characteristic ‘radius of gyration’ could be associated, which served as a bound on individual trajectories. Using scaling and data collapse they showed that travel patterns of a users could be described by Lévy flights for walk lengths below a radius of gyration, and extremely large displacements that would be predicted by a Lévy flights hypothesis were rather absent. Gonzalez et al. (2008) also made the general observation that human trajectories are highly regular and are characterized by few highly frequent locations like home and workplace. Also, as a result of a heavy tailed distribution of radius of gyration within the population, the aggregated distribution of the move length of all users would still be a power law. These ideas were followed up in a work by Song et al. (2010a) who provided a microscopic model laying stress on the aspects of exploration of space and propensity to return to already visited locations. Describing the spatio-temporal trajectories of 90 thousand users in a countrywide dataset in terms of a weighted and directed network, Bagrow and Lin (2012) concluded that the daily trajectory of most of the users were dominated by 5–20 frequently visited locations or “habitats”. In general, spatio-temporal motifs in the daily patterns of commuting individuals have also been investigated and modelled (Schneider et al., 2013; Jiang et al., 2016). Alessandretti et al. (2016) have shown that a number of locations an individual visits regularly is conserved over time. The authors have suggested that this conserved number could be an outcome from the limited capacity of human cognition similar to the Dunbar number (Dunbar, 1993). In an exploratory analysis of a dataset

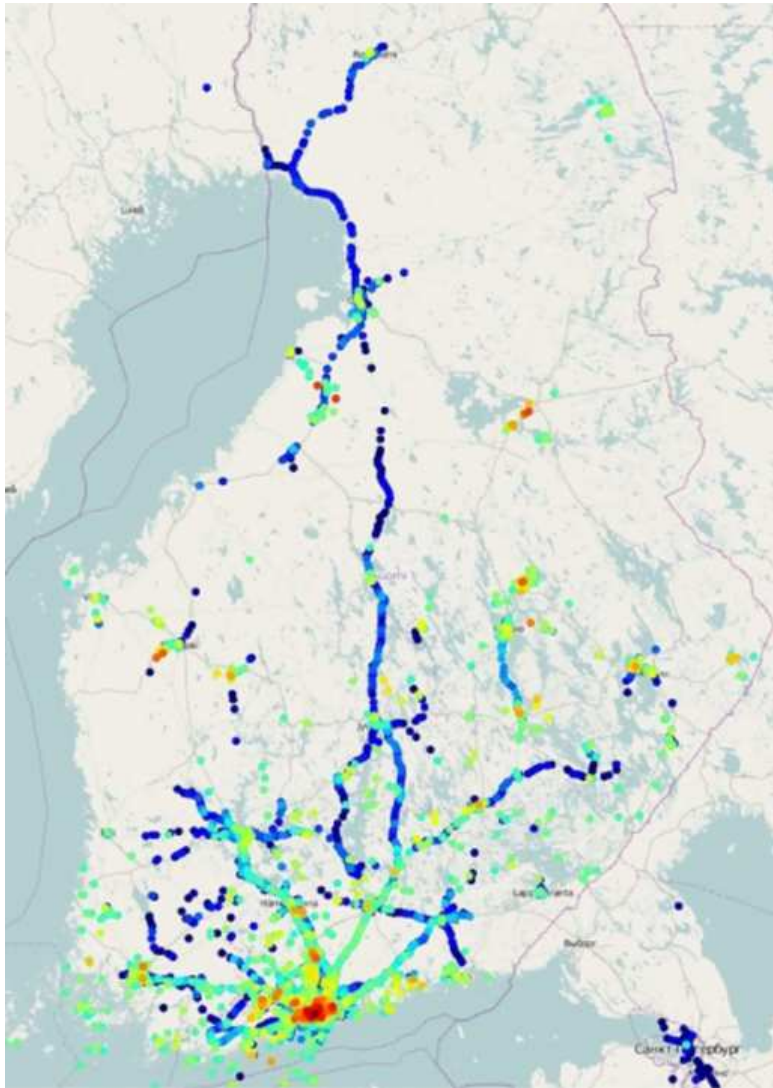


Figure 6: Positional stamps of mobile phone communication of the subjects in the Otasizzle project (Karikoski and Nelimarkka, 2010) at cell towers located around Finland for a period spanning 16 months. There were around 180 subjects, who were either students or staff members of the Aalto University, Finland, and were using Nokia Symbian smartphones with pre-installed software. The stamps got recorded every half an hour, or whenever a phone got connected to a new cell tower. Each cell tower could be located with a unique pair of latitude and longitude degrees. The higher the frequency of usage, the warmer the colour. The spatial trajectory of an individual user could be determined by following the sequence of the towers used. From Jo et al. (2012a).

from Portugal, (Csáji et al., 2013) showed how the locations of home and office can indeed be ascertained. They further used these locations to estimate the number of commuting trips ( $x_{ij}$ ) between two counties  $i$  and  $j$ , and modelled this quantity by using a gravity law.

The gravity law having a form similar to Newton’s law of attraction states that,  $x_{ij} \propto m_i^\alpha n_j^\beta / d_{ij}^\delta$ , where,  $x_{ij}$  is a measure of social interaction between  $i$  and  $j$ , with  $m_i$  and  $n_j$  being the populations of  $i$  and  $j$ , respectively, and  $d_{ij}$  is the distance between the geographical centres of the counties (Carrothers, 1956; Carey, 1867; Balcan et al., 2009; Anderson, 2011). The parameters  $\alpha$ ,  $\beta$  and  $\delta$  are usually estimated from the data. Studies considering  $x_{ij}$  as the aggregated intensity of mobile phone communication have yielded different values of the parameters depending on the geographical origin of the dataset (Krings et al., 2009; Lambiotte et al., 2008; Onnela et al., 2011). As a development over the gravity model, Simini et al. (2012) proposed a ‘radiation model’ for the mobility and migration between places in the framework of emission and absorption of particles from the sources and targets. Apart from modelling the commuting fluxes, they used the same dataset as Gonzalez et al. (2008) to model the volume of phone calls between municipalities. In a recent work, Grauwin et al. (2017) introduced a new model for the spatial organization of the population in a country based on the concept of a hierarchical distance. Analysing calling data from multiple countries, the authors observed a systematic decrease of communication flux induced by regional borders within countries. While the gravity and the radiation were unable to capture this effect, the new model produced better predictions due to the use of a hierarchical distance replacing the continuum geographical distance. Interestingly, Louail et al. (2014) studied the spatial organization of population in cities using aggregated CDRs providing the number of unique individuals using a given cell tower for each hour of the day. By studying the separation between the tower positions weighted by the density of users as function time during a typical day, the authors could discern between the patterns found for monocentric and polycentric cities.

Predictability and benchmarking of mobility patterns of individuals has been another important track. In this respect the concept of Shannon entropy has been a powerful tool. In the Reality Mining study, Eagle and Pentland (2006) observed that people whose patterns yield low entropies should be easier to predict, and vice versa. In a seminal work, Song et al. (2010b) utilized three expressions based on the Shannon entropy to test the extent to which human mobility could be predicted. For example, an individual visit-

ing  $N$  locations could be characterized by a temporal-uncorrelated entropy,  $S = -\sum_{i=1,N} p_i \log_2 p_i$ , where  $p_i$  is the probability that a location  $i$  is visited by the individual<sup>7</sup>. Additionally, they used a random, and a correlated entropy that took into account the order in which the locations were visited. Using these entropy expressions the authors employed Fano's inequality<sup>8</sup> to estimate the upper bound of predictability that algorithms can achieve. The findings revealed that irrespective of the background of the individuals investigated, there was a high degree of regularity in the trajectories, with the average of the maximum predictability having a value around 93%. Lu et al. (2012) used this framework with the data from a mobile phone users who were displaced following an earthquake in Haiti, and showed that predictability constructed from historical records of the individuals was quite high. The authors suggested that the knowledge about the possible future locations of people displaced by natural disasters would be useful in planning and dispensing of relief.

Using data from three cities in two industrialized countries Toole et al. (2015) explored the links between social ties and mobility. They constructed location vectors of individuals by counting visits to different locations in a city (number of entries in the vector), and subsequently obtained cosine similarities between pairs of individuals who were communicating. The results showed that the mobility pattern of an individual is, in general, similar to the latter's social contacts. Moreover, the stronger the social tie as observed from communication, the more was the similarity in mobility. In the study by Deville et al. (2016), the authors used scaling theory and universality to obtain a scaling relationship between mobility and communication. They were able to connect the exponents of the two empirically observed power laws characterizing the distributions of aggregated move lengths and geodesic distances (as well as density dependent distances) between the communicating pairs. To establish the relation they showed that a mediating scaling relationship exists between fluxes of mobility (number of trips) and fluxes of communication (number of calls) between two locations.

---

<sup>7</sup>Interestingly, in the expression for Shannon entropy  $N$  could denote the number of alters of an ego such that  $p_i$  is the fraction of calls between the ego and an alter  $i$ . This kind of expression has been used, for example by Saramäki et al. (2014). In a study to investigate gender differences, Psylla et al. (2017) used entropy expressions in both the contexts of mobility as well as sociality.

<sup>8</sup>[https://en.wikipedia.org/wiki/Fano%27s\\_inequality](https://en.wikipedia.org/wiki/Fano%27s_inequality)

More recently, using the CNS dataset, Mollgaard et al. (2017) have shown that mobility as well as other types of behaviour of individuals can be predicted with high precision based on patterns obtained at the population level. They base their conclusion on a logistic regression model using information on calls, SMS, proximity via Bluetooth and mobility from GPS. Using the same dataset Cuttone et al. (2018), discussed the contrasting ideas of predicting a visit to an already visited location against predicting exploration of newer locations. In addition, they discussed the effect of spatial and temporal resolutions on predictive power. The related issue of sampling has been addressed in a recent study by Gallotti et al. (2018). The authors constructed a one dimensional model of alternating moves and rests, with sampling at regular intervals, and showed analytically that the fraction of correctly sampled moves can be 51% at maximum. They applied the model to empirical datasets to show that the fraction decreases even further.

## 5. Daily and seasonal rhythms

In section 3 we focused on the temporal heterogeneity in people’s social patters. Here we discuss the periodic nature of the temporal signals obtained from the CDRs of individuals (Jo et al., 2012b). Remarkably, by precisely examining the daily, weekly, and seasonal patterns it is possible to gather insights into the different factors influencing human behaviour and health (Cornet and Holden, 2017). This is demonstrated very clearly by the Fig. 7 where the authors Monsivais et al. (2017a) show the daily pattern for outgoing calls in a city, from which they calculate a characteristic time duration that provides an upper bound for the sleeping time of the population.

Traditionally, the field of chronobiology had been involved in the science of circadian rhythms - a roughly 24 hour cycle that is found in the biological processes of living organisms (Aschoff, 1965; Vitaterna et al., 2001). Notably, the Nobel Prize in Physiology or Medicine of 2017 was awarded for the discovery of molecular mechanisms behind these rhythms<sup>9</sup>. For humans, a circadian cycle encompass oscillations in different physiological processes, like blood pressure and body temperature, along with the alternating phases of sleep and wakefulness. It is known that the “clocks” that are internal to body, and are responsible for maintaining the rhythm are synchronized or

---

<sup>9</sup>[https://www.nobelprize.org/nobel\\_prizes/medicine//medicine/laureates/2017/](https://www.nobelprize.org/nobel_prizes/medicine//medicine/laureates/2017/)

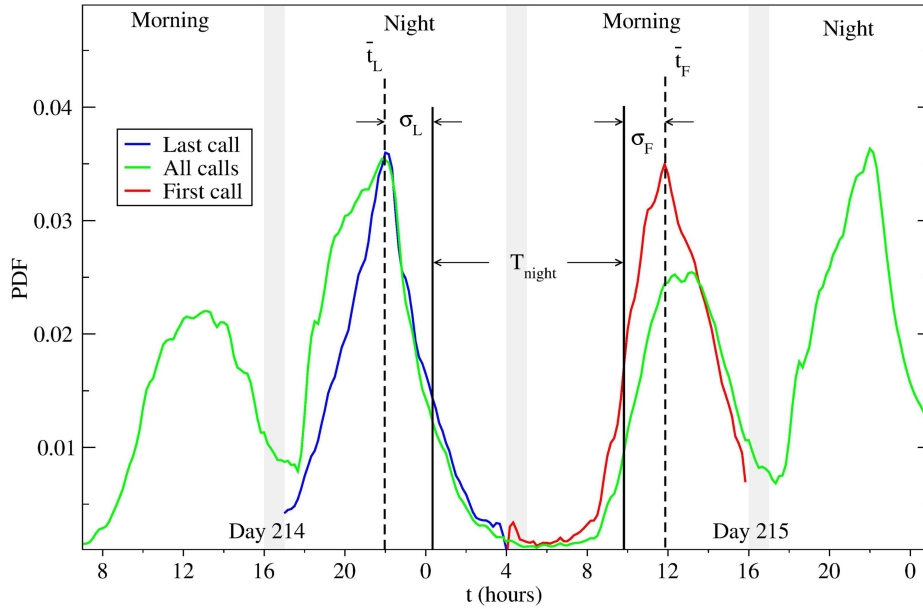


Figure 7: Probability distribution functions (PDF) of finding an outgoing call at a time  $t$  of the day in a city, for a pair of consecutive days in a given year. (Green) Distribution when all calls are included. (Red) Distribution when only the last call (L) at night is included (between 5:00 pm and 4:00 am next day). (Blue) Distribution when only the first call (F) of the day is included (between 5:00 am and 4:00 pm). The respective mean times,  $\bar{t}_L$  and  $\bar{t}_F$ , and the standard deviations  $\sigma_L$  and  $\sigma_F$  are calculated. A period of low calling activity is defined as the region bounded by  $\bar{t}_L$  and  $\bar{t}_F$ , and its width  $T_{night}$  is calculated as the time interval between  $\bar{t}_L + \sigma_L$  and  $\bar{t}_F - \sigma_F$ . Interestingly, the onset and length of  $T_{night}$  change along the seasons, in middle of February (day 46)  $T_{night}$  is around 10.5 hours, whilst in the early August (day 214) it is 9.5 hours. From Monsivais et al. (2017b).

entrained to various external factors of which the day-night cycle is likely the most well-understood one. Other factors like social interactions and environmental conditions are also known to be important (Grandin et al., 2006; Yetish et al., 2015). The major goals for understanding the circadian rhythm and sleep or overall daily resting behaviour include characterizing populations with respect to physiological factors like gender and age, and at the same time constructing benchmarks for monitoring the health of individuals. The study on human subjects is usually conducted through questionnaires and wearable sensors (Ancoli-Israel et al., 2003; Roenneberg et al., 2015). In this regard, the daily records of usage of mobile and smart phones appears to provide a complimentary, unobtrusive and viable alternative (Choe et al., 2011; Cornet and Holden, 2017).

In the studies on sleep-wake cycles individuals are usually classified as morning-type and evening-type, based on the tendency to wake up early and the tendency to sleep late, respectively (Roenneberg et al., 2003). It is also known that due to busy work schedules evening-type individuals sleep less on weekdays (Roenneberg et al., 2007). As a compensatory effect the duration of sleep for these individuals gets stretched on weekends. Using the smartphone screen on-off sensor data from 9 volunteers collected over a period of 97 days, Abdullah et al. (2014) demonstrated this effect by quantifying “sleep-debt”. They considered the screen on-off as an indicator of activity of the users. There have been other investigations of sleep, circadian rhythm, and mental health in general, based on smartphone data not restricted to screen on-off times but also including data from other sensors like accelerometer, microphone and GPS (Bai et al., 2012; Chen et al., 2013; Ben-Zeev et al., 2015; Abdullah et al., 2016; Saeb et al., 2016).

Using the dataset (Roberts and Dunbar, 2011; Saramäki et al., 2014) from an 18-month longitudinal study, Aledavood et al. (2015) studied circadian patterns in the percentage of calls as a function of the time of the day, and showed persistence of the individual patterns. Cuttone et al. (2017) used the screen on-off data from 400 participants in the CNS (Stopczynski et al., 2014) to propose a Bayesian model for estimating individual sleep durations. Monsivais et al. (2017a) used data from CDRs (Onnela et al., 2007b) of 900,000 users based in 36 different cities located within the latitudes of 36°N and 44°N to investigate the influence of seasonality and geography on the sleep and the daily resting patterns in general. They identified inactivity observed in daily mobile phone usage as indication of the human resting patterns. The study showed that the daylight controls human sleeping periods

during the nighttime and the seasonal variation of sleep is dependent on the latitude. In the same study they showed that afternoon resting of humans is influenced by temperature, and that a compensatory effect exists between the nightly resting and the resting in the afternoon (see Fig. 8). In another study of the same population, Monsivais et al. (2017b) investigated the possible age and gender dependencies of sleeping. They also obtained a “data collapse” of distributions of the calling activity of cities located at different longitudes, which indicates that the activity of people in urban environments of a country in one time zone follows closely the east-west progression of the sun throughout the year.

We would like to briefly comment on a related area of work that utilizes smartphone applications in sensing of the mental health of individuals. Wang et al. (2014) developed StudentLife, an Android-based application, and conducted a study on 48 student participants to obtain continuous sensing data of them for a period of 10 weeks at the Dartmouth College, UT Austin. From the sensor data they extracted the behavioural features like mobility, sleep, and type of social conversations (without explicitly analysing the contents), and in parallel ran questionnaires studies. Finally they measured correlations between the sensor data, psychological condition, and academic performance (i.e. grades) of the students. In a similar study, Bogomolov et al. (2014) tried to predict the reported levels of stress perceived by the participants in terms of their call related features, Bluetooth data, weather conditions and personality traits. There have been studies along similar lines focussing on day-to-day mood (Asselbergs et al., 2016), depression (Saeb et al., 2015), specific mental disorders (Torous et al., 2016), academic performance (Kasarnig et al., 2017), and positioning in the social network (Aledavood et al., 2017b). This is a rapidly developing field<sup>10</sup> in its inception phase with the current focus on infrastructure development (Huguet et al., 2016; Aledavood et al., 2017a).

## 6. Conclusions and future directions

What we have tried to achieve in this review is the exposition of the approach and methodology of Social Physics to study mobile phone based communication datasets. With this we hope to have demonstrated that Social Physics can give us quite an unprecedented insight into the *structure*,

---

<sup>10</sup><https://en.wikipedia.org/wiki/MHealth>



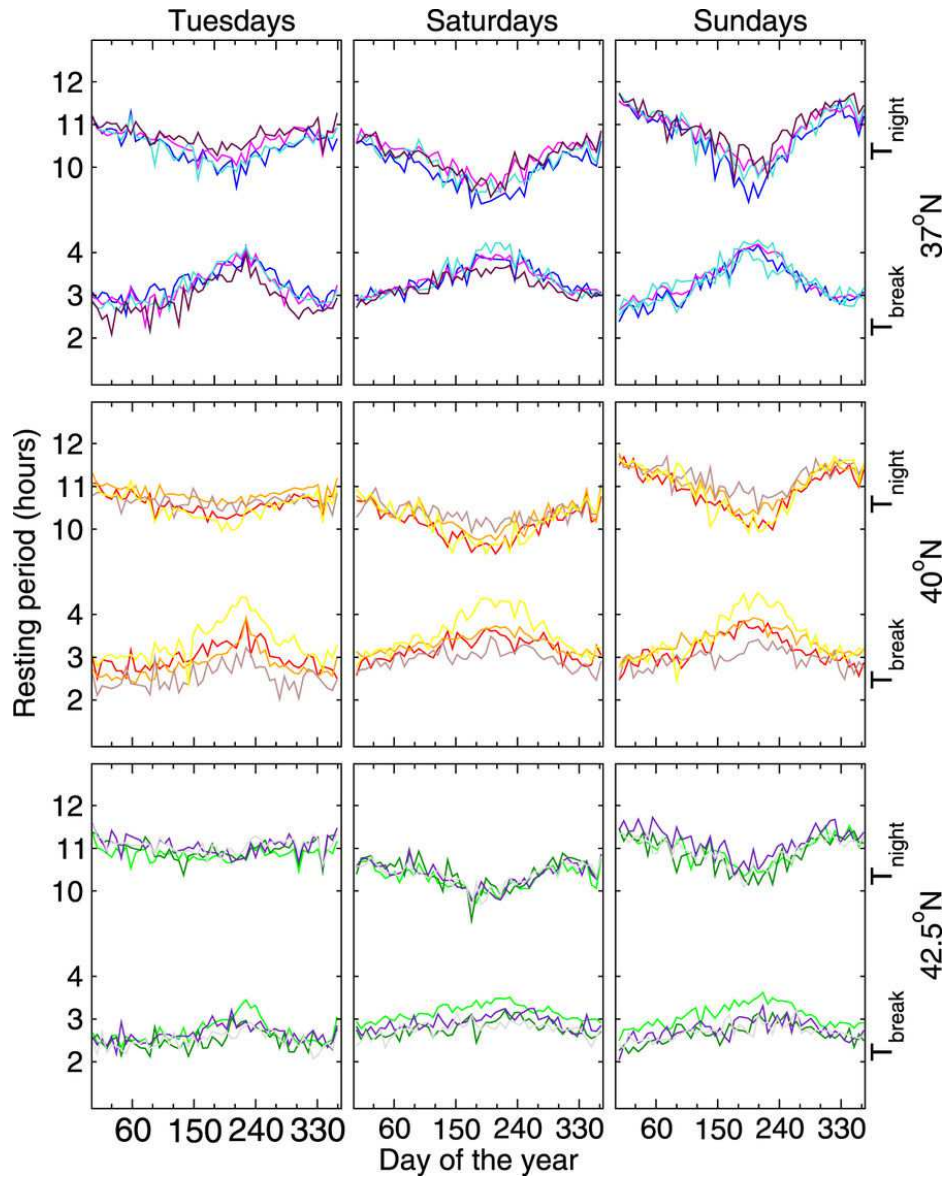


Figure 8: Periods of low calling activity or resting periods as measured from intra-day distributions of calls (Fig. 7):  $T_{break}$  (afternoon) and  $T_{night}$  (night) for 12 different cities for 3 different days of the week (Tuesdays, Saturdays, and Sundays in the left, central, and right column, respectively) in a given year. Four cities are located in one of the three different latitudinal bands centred at:  $37^{\circ}\text{N}$  (top);  $40^{\circ}\text{N}$  (middle); and  $42.5^{\circ}\text{N}$  (bottom). For cities lying around  $37^{\circ}\text{N}$ , the color line associated with their times series are blue, magenta, turquoise and maroon; for cities at  $40^{\circ}\text{N}$ , the colors are red, orange, brown and yellow; and for cities around  $42.5^{\circ}\text{N}$  the colors are green, dark green, indigo and gray. Inside each one of the nine plots, the annual behavior of  $T_{break}$  (lower lines) and  $T_{night}$  (upper lines) are shown, for the four different cities located at each band. On every plot,  $T_{break}$  and  $T_{night}$  show an opposite seasonal variations, with dynamics that appear to counterbalance each other, particularly on Sundays. From Monsivais et al. (2017a).

*function* and *behaviour* of social systems and networks of people at different structural and dynamical scales, and this with the help of the data-driven methodologies of *data analysis* for making observations or discoveries, *modelling* for describing dynamical processes or plausible mechanisms governing the human sociality and their social networks, and *simulation* for predicting the behaviour of the social system.

So far our research quest has concentrated on gaining understanding of human sociality with direct observations and analysis of data from social systems. In order to learn more and get deeper insight into the observed regularities as indication of some kind of governing principles or laws, there is need to reach out and consider whether other complex systems show behavioural similarities, patterns, and universalities rather than differences, variation, and specifics. According to Ball (2017) the former viewpoint is akin to physics while the latter is akin to biology. In the studies of complex systems both viewpoints are of course needed as they complement each other and could give us a more solid basis to develop better computational models to be used in simulating or predicting the behavior of social systems more realistically.

The advent and adoption of new channels of communication, is bound to change the distribution of the usage of different communication modalities, especially among younger generations, yet at the same time it widens our scope of human sociality research. Moreover, the approach of leveraging digital information for analysis and modeling of human sociality, embedded in social networks of different scales, is expected to get further developed and refined, for example, by the inclusion of tools like machine learning (Barnett et al., 2016) which has found a place in the area of condensed matter physics (Carrasquilla and Melko, 2017). Extensive research has already been carried out, focusing in particular on datasets from social media that includes Facebook (Mucha et al., 2010; Coviello et al., 2014; Del Vicario et al., 2016), Twitter (Golder and Macy, 2011; Beguerisse-Díaz et al., 2014; Alvarez et al., 2015), and Wikipedia (Yasseri et al., 2012). Besides serving as sources of rich datasets, mobile phone networks and other social media platforms have motivated the development of a more generalized framework for the analysis of large-scale socio-technical systems (Holme and Saramäki, 2012; Coviello et al., 2014; Kivelä et al., 2014).

Human sociality in the contemporary world is no more separable from the existing structures of Internet-driven social technologies. Understanding the structure and dynamics of information exchange in these systems has become

pivotal to understanding the functioning of the society, from the perspective of scientists as well as policy makers. There has been serious concern about the rise of adversarial and manipulative behaviour as witnessed for example, in the spread of fake news and the use of so called social bots (Vosoughi et al., 2018; Lazer et al., 2018). In this respect an interesting avenue of research has opened in the form of human experiments of social phenomena focusing on artificial and online networks, which is in contrast to the idea of passive data collection (Bond et al., 2012; Centola and Baronchelli, 2015; Becker et al., 2017; Bhattacharya et al., 2018). The development of hybrid experiments with humans teaming up with bots or algorithms to participate in cooperating tasks, appears to be particularly promising (Shirado and Christakis, 2017; Crandall et al., 2018). Teams performing efficiently in collaborative tasks are known to have shared mental models. Therefore, the need for modelling prosocial bots has indeed widened the scope of modelling humans.

#### *Acknowledgements*

KB and KK acknowledge the support from EU HORIZON 2020 FET Open RIA project (IBSEN) No. 662725. KK acknowledges support from Academy of Finland Research project (COSDYN) No. 276439 and from the European Community’s H2020 Program under the scheme INFRAIA-1-2014-2015: Research Infrastructures”, Grant agreement No. 654024 SoBigData: Social Mining and Big Data Ecosystem” (<http://www.sobigdata.eu>).

#### **References**

- Abdullah, S., Matthews, M., Frank, E., Doherty, G., Gay, G., Choudhury, T., 2016. Automatic detection of social rhythms in bipolar disorder. *Journal of the American Medical Informatics Association* 23, 538–543.
- Abdullah, S., Matthews, M., Murnane, E.L., Gay, G., Choudhury, T., 2014. Towards circadian computing: early to bed and early to rise makes some of us unhealthy and sleep deprived, in: *Proceedings of the 2014 ACM international joint conference on pervasive and ubiquitous computing*, ACM. pp. 673–684.
- Aledavood, T., Hoyos, A.M.T., Alakörkkö, T., Kaski, K., Saramäki, J., Isometsä, E., Darst, R.K., 2017a. Data collection for mental health studies through digital platforms: Requirements and design of a prototype. *JMIR research protocols* 6.
- Aledavood, T., Lehmann, S., Saramäki, J., 2017b. Social network differences of chronotypes identified from mobile phone data. *arXiv preprint arXiv:1709.06690*

- Aledavood, T., López, E., Roberts, S.G., Reed-Tsochas, F., Moro, E., Dunbar, R.I., Saramäki, J., 2015. Daily rhythms in mobile telephone communication. *PloS one* 10, e0138098.
- Alessandretti, L., Sapiezynski, P., Lehmann, S., Baronchelli, A., 2016. Evidence for a conserved quantity in human mobility. *arXiv preprint arXiv:1609.03526* .
- Alvarez, R., Garcia, D., Moreno, Y., Schweitzer, F., 2015. Sentiment cascades in the 15m movement. *EPJ Data Science* 4, 6.
- Ancoli-Israel, S., Cole, R., Alessi, C., Chambers, M., Moorcroft, W., Pollak, C.P., 2003. The role of actigraphy in the study of sleep and circadian rhythms. *Sleep* 26, 342–392.
- Anderson, J.E., 2011. The gravity model. *Annu. Rev. Econ.* 3, 133–160.
- Aoki, T., Takaguchi, T., Kobayashi, R., Lambiotte, R., 2016. Input-output relationship in social communications characterized by spike train analysis. *Physical Review E* 94, 042313.
- Aschoff, J., 1965. Circadian rhythms in man. *Science* 148, 1427–1432.
- Asselbergs, J., Ruwaard, J., Ejdys, M., Schrader, N., Sijbrandij, M., Riper, H., 2016. Mobile phone-based unobtrusive ecological momentary assessment of day-to-day mood: an explorative study. *Journal of medical Internet research* 18.
- Backlund, V.P., Saramäki, J., Pan, R.K., 2014. Effects of temporal correlations on cascades: Threshold models on temporal networks. *Physical Review E* 89, 062815.
- Bagrow, J.P., Lin, Y.R., 2012. Mesoscopic structure and social aspects of human mobility. *PloS one* 7, e37676.
- Bai, Y., Xu, B., Ma, Y., Sun, G., Zhao, Y., 2012. Will you have a good sleep tonight?: sleep quality prediction with mobile phone, in: *Proceedings of the 7th International Conference on Body Area Networks, ICST (Institute for Computer Sciences, Social-Informatics and Telecommunications Engineering)*. pp. 124–130.
- Bak, P., Christensen, K., Danon, L., Scanlon, T., 2002. Unified scaling law for earthquakes. *Physical Review Letters* 88, 178501.
- Balcan, D., Colizza, V., Gonçalves, B., Hu, H., Ramasco, J.J., Vespignani, A., 2009. Multiscale mobility networks and the spatial spreading of infectious diseases. *Proceedings of the National Academy of Sciences* 106, 21484–21489.
- Ball, P., 2004. *Critical mass: How one thing leads to another*. Macmillan.
- Ball, P., 2017. Complexity: Decoding deep similarities. *Nature* 545, 154.
- Barabási, A.L., 2005. The origin of bursts and heavy tails in human dynamics. *Nature* 435, 207–211. URL: <http://dx.doi.org/10.1038/nature03459>, doi:10.1038/nature03459, arXiv:cond-mat/0505371.
- Barabási, A.L., 2010. *Bursts: the hidden patterns behind everything we do, from your e-mail to bloody crusades*. Penguin.

- Barnes, T.J., Wilson, M.W., 2014. Big data, social physics, and spatial analysis: The early years. *Big Data & Society* 1, 2053951714535365.
- Barnett, I., Malik, N., Kuijjer, M.L., Mucha, P.J., Onnela, J.P., 2016. Feature-based classification of networks. *arXiv preprint arXiv:1610.05868* .
- Becker, J., Brackbill, D., Centola, D., 2017. Network dynamics of social influence in the wisdom of crowds. *Proceedings of the national academy of sciences* 114, E5070–E5076.
- Beguerisse-Díaz, M., Garduno-Hernández, G., Vangelov, B., Yaliraki, S.N., Barahona, M., 2014. Interest communities and flow roles in directed networks: the twitter network of the uk riots. *Journal of The Royal Society Interface* 11, 20140940.
- Ben-Zeev, D., Scherer, E.A., Wang, R., Xie, H., Campbell, A.T., 2015. Next-generation psychiatric assessment: Using smartphone sensors to monitor behavior and mental health. *Psychiatric rehabilitation journal* 38, 218.
- Bhattacharya, K., Ghosh, A., Monsivais, D., Dunbar, R., Kaski, K., 2017. Absence makes the heart grow fonder: social compensation when failure to interact risks weakening a relationship. *EPJ Data Science* 6, 1.
- Bhattacharya, K., Ghosh, A., Monsivais, D., Dunbar, R.I., Kaski, K., 2016. Sex differences in social focus across the life cycle in humans. *Royal Society open science* 3, 160097.
- Bhattacharya, K., Takko, T., Monsivais, D., Kaski, K., 2018. Role of risk and information in a group formation experiment on a small-world network. *arXiv preprint arXiv:1803.01085* .
- Blondel, V., de Cordes, N., Decuyper, A., Deville, P., Raguenez, J., Smoreda, Z., 2013. Mobile phone data for development-analysis of mobile phone datasets for the development of ivory coast. *Orange D4D challenge* .
- Blondel, V.D., Decuyper, A., Krings, G., 2015. A survey of results on mobile phone datasets analysis. *EPJ Data Science* 4.
- Blondel, V.D., Guillaume, J.L., Lambiotte, R., Lefebvre, E., 2008. Fast unfolding of communities in large networks. *Journal of statistical mechanics: theory and experiment* 2008, P10008.
- Bogomolov, A., Lepri, B., Ferron, M., Pianesi, F., Pentland, A.S., 2014. Daily stress recognition from mobile phone data, weather conditions and individual traits, in: *Proceedings of the 22nd ACM international conference on Multimedia*, ACM. pp. 477–486.
- Bond, R.M., Fariss, C.J., Jones, J.J., Kramer, A.D., Marlow, C., Settle, J.E., Fowler, J.H., 2012. A 61-million-person experiment in social influence and political mobilization. *Nature* 489, 295.
- Boonstra, T.W., Larsen, M.E., Townsend, S., Christensen, H., 2017. Validation of a smartphone app to map social networks of proximity. *PloS one* 12, e0189877.

- Bouchaud, J.P., Georges, A., 1990. Anomalous diffusion in disordered media: statistical mechanisms, models and physical applications. *Physics reports* 195, 127–293.
- Buchanan, M., 2008. *The social atom: Why the rich get richer, cheaters get caught, and your neighbor usually looks like you.* Bloomsbury Publishing USA.
- Candia, J., González, M.C., Wang, P., Schoenharl, T., Madey, G., Barabási, A.L., 2008. Uncovering individual and collective human dynamics from mobile phone records. *Journal of physics A: mathematical and theoretical* 41, 224015.
- Carey, H.C., 1867. *Principles of social science.* volume 3. JB Lippincott & Company.
- Carrasquilla, J., Melko, R.G., 2017. Machine learning phases of matter. *Nature Physics* 13, 431.
- Carrothers, G.A., 1956. An historical bedew of the gravity and potential concepts of human interaction. *Journal of the American Institute of Planners* 22, 94–102.
- Centellegher, S., López, E., Saramäki, J., Lepri, B., 2017. Personality traits and ego-network dynamics. *PloS one* 12, e0173110.
- Centola, D., Baronchelli, A., 2015. The spontaneous emergence of conventions: An experimental study of cultural evolution. *Proceedings of the National Academy of Sciences* 112, 1989–1994.
- Chawla, N.V., Hachen, D., Lizardo, O., Toroczkai, Z., Strathman, A., Wang, C., 2011. Weighted reciprocity in human communication networks. Technical Report. Technical report.
- Chen, Z., Lin, M., Chen, F., Lane, N.D., Cardone, G., Wang, R., Li, T., Chen, Y., Choudhury, T., Campbell, A.T., 2013. Unobtrusive sleep monitoring using smartphones, in: *Pervasive Computing Technologies for Healthcare (Pervasive-Health)*, 2013 7th International Conference on, IEEE. pp. 145–152.
- Choe, E.K., Consolvo, S., Watson, N.F., Kientz, J.A., 2011. Opportunities for computing technologies to support healthy sleep behaviors, in: *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*, ACM. pp. 3053–3062.
- Conte, R., Gilbert, N., Bonelli, G., Cioffi-Revilla, C., Deffuant, G., Kertesz, J., Loreto, V., Moat, S., Nadal, J.P., Sanchez, A., et al., 2012. Manifesto of computational social science. *The European Physical Journal Special Topics* 214, 325–346.
- Cornet, V.P., Holden, R.J., 2017. Systematic review of smartphone-based passive sensing for health and wellbeing. *Journal of biomedical informatics* .
- Coviello, L., Sohn, Y., Kramer, A.D., Marlow, C., Franceschetti, M., Christakis, N.A., Fowler, J.H., 2014. Detecting emotional contagion in massive social networks. *PloS one* 9, e90315.

- Crandall, J.W., Oudah, M., Ishowo-Oloko, F., Abdallah, S., Bonnefon, J.F., Cebrian, M., Shariff, A., Goodrich, M.A., Rahwan, I., et al., 2018. Cooperating with machines. *Nature communications* 9, 233.
- Csáji, B.C., Browet, A., Traag, V.A., Delvenne, J.C., Huens, E., Van Dooren, P., Smoreda, Z., Blondel, V.D., 2013. Exploring the mobility of mobile phone users. *Physica A: statistical mechanics and its applications* 392, 1459–1473.
- Cuttone, A., Bækgaard, P., Sekara, V., Jonsson, H., Larsen, J.E., Lehmann, S., 2017. Sensiblesleep: A bayesian model for learning sleep patterns from smart-phone events. *PloS one* 12, e0169901.
- Cuttone, A., Lehmann, S., González, M.C., 2018. Understanding predictability and exploration in human mobility. *EPJ Data Science* 7, 2.
- David-Barrett, T., Kertesz, J., Rotkirch, A., Ghosh, A., Bhattacharya, K., Monsivais, D., Kaski, K., 2016. Communication with family and friends across the life course. *PloS one* 11, e0165687.
- David-Barrett, T., Rotkirch, A., Ghosh, A., Bhattacharya, K., Monsivais, D., Behncke, I., Kertesz, J., Kaski, K., 2017. Peer relations with mobile phone data: Best friends and family formation. *arXiv preprint arXiv:1708.07759* .
- Del Vicario, M., Vivaldo, G., Bessi, A., Zollo, F., Scala, A., Caldarelli, G., Quattrocioni, W., 2016. Echo chambers: Emotional contagion and group polarization on facebook. *Scientific reports* 6, 37825.
- Deville, P., Song, C., Eagle, N., Blondel, V.D., Barabási, A.L., Wang, D., 2016. Scaling identity connects human mobility and social interactions. *Proceedings of the National Academy of Sciences* 113, 7047–7052.
- Dong, Y., Yang, Y., Tang, J., Yang, Y., Chawla, N.V., 2014. Inferring user demographics and social strategies in mobile social networks, in: *Proceedings of the 20th ACM SIGKDD international conference on Knowledge discovery and data mining*, ACM. pp. 15–24.
- Dunbar, R.I., 1993. Coevolution of neocortical size, group size and language in humans. *Behavioral and brain sciences* 16, 681–694.
- Eagle, N., Pentland, A.S., 2006. Reality mining: sensing complex social systems. *Personal and ubiquitous computing* 10, 255–268.
- Eagle, N., Pentland, A.S., Lazer, D., 2009. Inferring friendship network structure by using mobile phone data. *Proceedings of the national academy of sciences* 106, 15274–15278.
- Eckmann, J.P., Moses, E., Sergi, D., 2004. Entropy of dialogues creates coherent structures in e-mail traffic. *Proceedings of the National Academy of Sciences of the United States of America* 101, 14333–14337. URL: <http://dx.doi.org/10.1073/pnas.0405728101>, doi:10.1073/pnas.0405728101.

- Galam, S., 2012. *Sociophysics: a physicist's modeling of psycho-political phenomena*. Springer Science & Business Media.
- Gallotti, R., Louf, R., Luck, J.M., Barthelemy, M., 2018. Tracking random walks. *Journal of The Royal Society Interface* 15, 20170776.
- Goetz, M., Leskovec, J., McGlohon, M., Faloutsos, C., 2009. Modeling Blog Dynamics. ICWSM 2009 URL: <https://www.aaai.org/ocs/index.php/ICWSM/09/paper/view/152>.
- Goh, K.I., Barabási, A.L., 2008. Burstiness and memory in complex systems. *EPL (Europhysics Letters)* 81, 48002.
- Golder, S.A., Macy, M.W., 2011. Diurnal and seasonal mood vary with work, sleep, and daylength across diverse cultures. *Science* 333, 1878–1881.
- Gonzalez, M.C., Hidalgo, C.A., Barabasi, A.L., 2008. Understanding individual human mobility patterns. *Nature* 453, 779–782.
- Grace, A.A., Bunney, B.S., 1984. The control of firing pattern in nigral dopamine neurons: burst firing. *Journal of neuroscience* 4, 2877–2890.
- Grandin, L.D., Alloy, L.B., Abramson, L.Y., 2006. The social zeitgeber theory, circadian rhythms, and mood disorders: review and evaluation. *Clinical psychology review* 26, 679–694.
- Granovetter, M.S., 1973. The strength of weak ties. *American Journal of Sociology* 78, 1360–1380. URL: <http://dx.doi.org/10.2307/2776392>, doi:10.2307/2776392.
- Grauwin, S., Szell, M., Sobolevsky, S., Hövel, P., Simini, F., Vanhoof, M., Smoreda, Z., Barabási, A.L., Ratti, C., 2017. Identifying and modeling the structural discontinuities of human interactions. *Scientific reports* 7, 46677.
- Grimmett, G., Stirzaker, D., 2001. *Probability and random processes*. Oxford university press.
- Havlin, S., Ben-Avraham, D., 2002. Diffusion in disordered media. *Advances in physics* 51, 187–292.
- Hawkes, K., 2004. Human longevity: the grandmother effect. *Nature* 428, 128.
- Holme, P., Saramäki, J., 2012. Temporal networks. *Physics reports* 519, 97–125.
- Huguet, A., Rao, S., McGrath, P.J., Wozney, L., Wheaton, M., Conrod, J., Rozario, S., 2016. A systematic review of cognitive behavioral therapy and behavioral activation apps for depression. *PLoS One* 11, e0154248.
- Jiang, S., Yang, Y., Gupta, S., Veneziano, D., Athavale, S., González, M.C., 2016. The timegeo modeling framework for urban mobility without travel surveys. *Proceedings of the National Academy of Sciences* 113, E5370–E5378.
- Jiang, Z.Q., Xie, W.J., Li, M.X., Podobnik, B., Zhou, W.X., Stanley, H.E., 2013. Calling patterns in human communication dynamics. *Proceedings of the National Academy of Sciences* 110, 1600–1605.



- Jo, H.H., Karsai, M., Karikoski, J., Kaski, K., 2012a. Spatiotemporal correlations of handset-based service usages. *EPJ Data Science* 1, 10.
- Jo, H.H., Karsai, M., Kertész, J., Kaski, K., 2012b. Circadian pattern and burstiness in mobile phone communication. *New Journal of Physics* 14, 013055.
- Jo, H.H., Pan, R.K., Kaski, K., 2011. Emergence of bursts and communities in evolving weighted networks. *PloS one* 6, e22687.
- Jo, H.H., Perotti, J.I., Kaski, K., Kertész, J., 2015. Correlated bursts and the role of memory range. *Phys. Rev. E* 92, 022814. URL: <http://link.aps.org/doi/10.1103/PhysRevE.92.022814>, doi:10.1103/PhysRevE.92.022814.
- Karikoski, J., Nelimarkka, M., 2010. Measuring social relations: case otasizzle, in: *Social Computing (SocialCom)*, 2010 IEEE Second International Conference on, IEEE. pp. 257–263.
- Karsai, M., Jo, H.H., Kaski, K., 2018. *Bursty human dynamics*. Springer.
- Karsai, M., Kaski, K., Barabási, A.L., Kertész, J., 2012a. Universal features of correlated bursty behaviour. *Scientific reports* 2, 397.
- Karsai, M., Kaski, K., Kertész, J., 2012b. Correlated dynamics in egocentric communication networks. *PLoS ONE* 7, e40612+. URL: <http://dx.doi.org/10.1371/journal.pone.0040612>, doi:10.1371/journal.pone.0040612.
- Karsai, M., Kivelä, M., Pan, R.K., Kaski, K., Kertész, J., Barabási, A.L., Saramäki, J., 2011. Small but slow world: How network topology and burstiness slow down spreading. *Physical Review E* 83, 025102.
- Kassarnig, V., Mones, E., Bjerre-Nielsen, A., Sapiezynski, P., Lassen, D.D., Lehmann, S., 2017. Academic performance and behavioral patterns. *arXiv preprint arXiv:1706.09245* .
- Kivelä, M., Arenas, A., Barthelemy, M., Gleeson, J.P., Moreno, Y., Porter, M.A., 2014. Multilayer networks. *Journal of complex networks* 2, 203–271.
- Kivelä, M., Pan, R.K., Kaski, K., Kertész, J., Saramäki, J., Karsai, M., 2012. Multiscale analysis of spreading in a large communication network. *Journal of Statistical Mechanics: Theory and Experiment* 2012, P03005.
- Kovanen, L., Karsai, M., Kaski, K., Kertész, J., Saramäki, J., 2011. Temporal motifs in time-dependent networks. *Journal of Statistical Mechanics: Theory and Experiment* 2011, P11005.
- Kovanen, L., Kaski, K., Kertész, J., Saramäki, J., 2013. Temporal motifs reveal homophily, gender-specific patterns, and group talk in call sequences. *Proceedings of the National Academy of Sciences* 110, 18070–18075. URL: <http://dx.doi.org/10.1073/pnas.1307941110>, doi:10.1073/pnas.1307941110.

- Krings, G., Calabrese, F., Ratti, C., Blondel, V.D., 2009. Urban gravity: a model for inter-city telecommunication flows. *Journal of Statistical Mechanics: Theory and Experiment* 2009, L07003.
- Kumpula, J.M., Onnela, J.P., Saramäki, J., Kaski, K., Kertész, J., 2007. Emergence of communities in weighted networks. *Physical review letters* 99, 228701.
- Lambiotte, R., Blondel, V.D., de Kerchove, C., Huens, E., Prieur, C., Smoreda, Z., Van Dooren, P., 2008. Geographical dispersal of mobile communication networks. *Physica A: Statistical Mechanics and its Applications* 387, 5317–5325.
- Lancichinetti, A., Fortunato, S., 2009. Community detection algorithms: A comparative analysis. *Phys. Rev. E* 80, 056117. URL: <https://link.aps.org/doi/10.1103/PhysRevE.80.056117>, doi:10.1103/PhysRevE.80.056117.
- Lazer, D.M., Baum, M.A., Benkler, Y., Berinsky, A.J., Greenhill, K.M., Menczer, F., Metzger, M.J., Nyhan, B., Pennycook, G., Rothschild, D., et al., 2018. The science of fake news. *Science* 359, 1094–1096.
- Louail, T., Lenormand, M., Ros, O.G.C., Picornell, M., Herranz, R., Frias-Martinez, E., Ramasco, J.J., Barthelemy, M., 2014. From mobile phone data to the spatial structure of cities. *Scientific reports* 4, 5276.
- Lü, L., Zhou, T., 2011. Link prediction in complex networks: A survey. *Physica A: statistical mechanics and its applications* 390, 1150–1170.
- Lu, X., Bengtsson, L., Holme, P., 2012. Predictability of population displacement after the 2010 haiti earthquake. *Proceedings of the National Academy of Sciences* 109, 11576–11581.
- Miritello, G., Lara, R., Cebrian, M., Moro, E., 2013a. Limited communication capacity unveils strategies for human interaction. *Scientific reports* 3.
- Miritello, G., Moro, E., Lara, R., 2011. Dynamical strength of social ties in information spreading. *Physical Review E* 83, 045102.
- Miritello, G., Moro, E., Lara, R., Martínez-López, R., Belchamber, J., Roberts, S.G., Dunbar, R.I., 2013b. Time as a limited resource: Communication strategy in mobile phone networks. *Social Networks* 35, 89–95.
- Mollgaard, A., Lehmann, S., Mathiesen, J., 2017. Correlations between human mobility and social interaction reveal general activity patterns. *PloS one* 12, e0188973.
- Monsivais, D., Bhattacharya, K., Ghosh, A., Dunbar, R.I., Kaski, K., 2017a. Seasonal and geographical impact on human resting periods. *Scientific reports* 7, 10717.
- Monsivais, D., Ghosh, A., Bhattacharya, K., Dunbar, R.I., Kaski, K., 2017b. Tracking urban human activity from mobile phone calling patterns. *PLoS computational biology* 13, e1005824.

- Mucha, P.J., Richardson, T., Macon, K., Porter, M.A., Onnela, J.P., 2010. Community structure in time-dependent, multiscale, and multiplex networks. *science* 328, 876–878.
- Naboulsi, D., Fiore, M., Ribot, S., Stanica, R., 2016. Large-scale mobile traffic analysis: a survey. *IEEE Communications Surveys & Tutorials* 18, 124–161.
- Navarro, H., Miritello, G., Canales, A., Moro, E., 2017. Temporal patterns behind the strength of persistent ties. *EPJ Data Science* 6, 31.
- Oliveira, J.G., Vazquez, A., 2009. Impact of interactions on human dynamics. *Physica A: Statistical Mechanics and its Applications* 388, 187–192. URL: <http://dx.doi.org/10.1016/j.physa.2008.08.022>, doi:10.1016/j.physa.2008.08.022.
- Onnela, J.P., Arbesman, S., González, M.C., Barabási, A.L., Christakis, N.A., 2011. Geographic constraints on social network groups. *PLoS one* 6, e16939.
- Onnela, J.P., Saramäki, J., Hyvönen, J., Szabó, G., De Menezes, M.A., Kaski, K., Barabási, A.L., Kertész, J., 2007a. Analysis of a large-scale weighted network of one-to-one human communication. *New Journal of Physics* 9, 179.
- Onnela, J.P., Saramäki, J., Hyvönen, J., Szabó, G., Lazer, D., Kaski, K., Kertész, J., Barabási, A.L., 2007b. Structure and tie strengths in mobile communication networks. *Proceedings of the National Academy of Sciences* 104, 7332–7336.
- Palchykov, V., Kaski, K., Kertész, J., Barabási, A.L., Dunbar, R.I., 2012. Sex differences in intimate relationships. *Scientific reports* 2.
- Palchykov, V., Kertész, J., Dunbar, R., Kaski, K., 2013. Close relationships: A study of mobile communication records. *Journal of Statistical Physics* 151, 735–744.
- Palla, G., Barabási, A.L., Vicsek, T., 2007. Quantifying social group evolution. *Nature* 446, 664.
- Pentland, A., 2015. *Social Physics: How social networks can make us smarter*. Penguin.
- Psylla, I., Sapiezynski, P., Mones, E., Lehmann, S., 2017. The role of gender in social network organization. *PloS one* 12, e0189873.
- Ramos-Fernández, G., Mateos, J.L., Miramontes, O., Cocho, G., Larralde, H., Ayala-Orozco, B., 2004. Lévy walk patterns in the foraging movements of spider monkeys (*ateles geoffroyi*). *Behavioral ecology and Sociobiology* 55, 223–230.
- Roberts, S.G., Dunbar, R.I., 2011. The costs of family and friends: an 18-month longitudinal study of relationship maintenance and decay. *Evolution and Human Behavior* 32, 186–197.
- Roberts, S.G., Dunbar, R.I., Pollet, T.V., Kuppens, T., 2009. Exploring variation in active network size: Constraints and ego characteristics. *Social Networks* 31, 138–146.

- Roenneberg, T., Keller, L.K., Fischer, D., Matora, J.L., Vetter, C., Winnebeck, E.C., 2015. Human activity and rest in situ, in: *Methods in enzymology*. Elsevier. volume 552, pp. 257–283.
- Roenneberg, T., Kuehne, T., Juda, M., Kantermann, T., Allebrandt, K., Gordijn, M., Merrow, M., 2007. Epidemiology of the human circadian clock. *Sleep medicine reviews* 11, 429–438.
- Roenneberg, T., Wirz-Justice, A., Merrow, M., 2003. Life between clocks: daily temporal patterns of human chronotypes. *Journal of biological rhythms* 18, 80–90.
- Saeb, S., Lattie, E.G., Schueller, S.M., Kording, K.P., Mohr, D.C., 2016. The relationship between mobile phone location sensor data and depressive symptom severity. *PeerJ* 4, e2537.
- Saeb, S., Zhang, M., Karr, C.J., Schueller, S.M., Corden, M.E., Kording, K.P., Mohr, D.C., 2015. Mobile phone sensor correlates of depressive symptom severity in daily-life behavior: an exploratory study. *Journal of medical Internet research* 17.
- San Miguel, M., Johnson, J.H., Kertesz, J., Kaski, K., Díaz-Guilera, A., MacKay, R.S., Loreto, V., Érdi, P., Helbing, D., 2012. Challenges in complex systems science. *The European Physical Journal Special Topics* 214, 245–271.
- Saramäki, J., Leicht, E., López, E., Roberts, S.G., Reed-Tsochas, F., Dunbar, R.I., 2014. Persistence of social signatures in human communication. *Proceedings of the National Academy of Sciences* 111, 942–947.
- Saramäki, J., Moro, E., 2015. From seconds to months: an overview of multi-scale dynamics of mobile telephone calls. *The European Physical Journal B* 88, 164.
- Schneider, C.M., Belik, V., Couronné, T., Smoreda, Z., González, M.C., 2013. Unravelling daily human mobility motifs. *Journal of The Royal Society Interface* 10, 20130246.
- Sekara, V., Stopczynski, A., Lehmann, S., 2016. Fundamental structures of dynamic social networks. *Proceedings of the national academy of sciences* 113, 9977–9982.
- Sen, P., Chakrabarti, B.K., 2013. *Sociophysics: an introduction*. Oxford University Press.
- Shirado, H., Christakis, N.A., 2017. Locally noisy autonomous agents improve global human coordination in network experiments. *Nature* 545, 370.
- Simini, F., González, M.C., Maritan, A., Barabási, A.L., 2012. A universal model for mobility and migration patterns. *Nature* 484, 96–100.
- Song, C., Koren, T., Wang, P., Barabási, A.L., 2010a. Modelling the scaling properties of human mobility. *Nature Physics* 6, 818.
- Song, C., Qu, Z., Blumm, N., Barabási, A.L., 2010b. Limits of predictability in human mobility. *Science* 327, 1018–1021.

- Speidel, L., Lambiotte, R., Aihara, K., Masuda, N., 2015. Steady state and mean recurrence time for random walks on stochastic temporal networks. *Physical Review E* 91, 012806.
- Stauffer, D., 2004. Introduction to statistical physics outside physics. *Physica A: Statistical Mechanics and Its Applications* 336, 1–5.
- Stauffer, D., Aharony, A., 1994. Introduction to percolation theory. 2 ed., Taylor & Francis. URL: <http://www.worldcat.org/isbn/0748402535>.
- Stehlé, J., Barrat, A., Bianconi, G., 2010. Dynamical and bursty interactions in social networks. *Physical review E* 81, 035101.
- Stopczynski, A., Sekara, V., Sapiezynski, P., Cuttone, A., Madsen, M.M., Larsen, J.E., Lehmann, S., 2014. Measuring large-scale social networks with high resolution. *PloS one* 9, e95978.
- Tabourier, L., Libert, A.S., Lambiotte, R., 2016. Predicting links in ego-networks using temporal information. *EPJ Data Science* 5, 1. URL: <https://doi.org/10.1140/epjds/s13688-015-0062-0>, doi:10.1140/epjds/s13688-015-0062-0.
- Takaguchi, T., Masuda, N., Holme, P., 2013. Bursty communication patterns facilitate spreading in a threshold-based epidemic dynamics. *PloS one* 8, e68629.
- Tibély, G., Kovanen, L., Karsai, M., Kaski, K., Kertész, J., Saramäki, J., 2011. Communities and beyond: mesoscopic analysis of a large social network with complementary methods. *Physical Review E* 83, 056125.
- Toole, J.L., Herrera-Yaqüe, C., Schneider, C.M., González, M.C., 2015. Coupling human mobility and social ties. *Journal of The Royal Society Interface* 12, 20141128.
- Torous, J., Kiang, M.V., Lorme, J., Onnela, J.P., 2016. New tools for new research in psychiatry: a scalable and customizable platform to empower data driven smartphone research. *JMIR mental health* 3.
- Uyeda, J.C., Hansen, T.F., Arnold, S.J., Pienaar, J., 2011. The million-year wait for macroevolutionary bursts. *Proceedings of the National Academy of Sciences* 108, 15908–15913.
- Vazquez, A., 2007. Impact of memory on human dynamics. *Physica A: Statistical Mechanics and its Applications* 373, 747–752. URL: <http://dx.doi.org/10.1016/j.physa.2006.04.060>, doi:10.1016/j.physa.2006.04.060.
- Vázquez, A., Oliveira, J.G., Dezsö, Z., Goh, K.I., Kondor, I., Barabási, A.L., 2006. Modeling bursts and heavy tails in human dynamics. *Physical Review E* 73, 036127+. URL: <http://dx.doi.org/10.1103/physreve.73.036127>, doi:10.1103/physreve.73.036127, arXiv:physics/0510117.
- Viswanathan, G.M., Buldyrev, S.V., Havlin, S., Da Luz, M., Raposo, E., Stanley, H.E., 1999. Optimizing the success of random searches. *nature* 401, 911.

- Viswanathan, G.M., Da Luz, M.G., Raposo, E.P., Stanley, H.E., 2011. The physics of foraging: an introduction to random searches and biological encounters. Cambridge University Press.
- Vitaterna, M.H., Takahashi, J.S., Turek, F.W., 2001. Overview of circadian rhythms. *Alcohol Research and Health* 25, 85–93.
- Vosoughi, S., Roy, D., Aral, S., 2018. The spread of true and false news online. *Science* 359, 1146–1151.
- Wang, R., Chen, F., Chen, Z., Li, T., Harari, G., Tignor, S., Zhou, X., Ben-Zeev, D., Campbell, A.T., 2014. Studentlife: assessing mental health, academic performance and behavioral trends of college students using smartphones, in: *Proceedings of the 2014 ACM International Joint Conference on Pervasive and Ubiquitous Computing*, ACM. pp. 3–14.
- Wasserman, S., Faust, K., 1994. *Social network analysis: Methods and applications*. volume 8. Cambridge university press.
- Wu, Y., Zhou, C., Xiao, J., Kurths, J., Schellnhuber, H.J., 2010. Evidence for a bimodal distribution in human communication. *Proceedings of the national academy of sciences* 107, 18803–18808.
- Yasseri, T., Sumi, R., Rung, A., Kornai, A., Kertész, J., 2012. Dynamics of conflicts in wikipedia. *PloS one* 7, e38869.
- Yetish, G., Kaplan, H., Gurven, M., Wood, B., Pontzer, H., Manger, P.R., Wilson, C., McGregor, R., Siegel, J.M., 2015. Natural sleep and its seasonal variations in three pre-industrial societies. *Current Biology* 25, 2862–2868.
- Zachary, W.W., 1977. An information flow model for conflict and fission in small groups. *Journal of anthropological research* 33, 452–473.