

Partial Cartesian Graph Product

(and its use in modeling Java subtyping)

Moez A. AbdelGawad

Informatics Research Institute, SRTA-City, Alexandria, Egypt
moez@cs.rice.edu

Abstract

In this paper we define a new product-like binary operation on directed graphs, and we discuss some of its properties. We also briefly discuss its application in constructing the subtyping relation in generic nominally-typed object-oriented programming languages.

Keywords Graph Product, Partial Graph Product, Object-Oriented Programming (OOP), Nominal Typing, OO Subtyping, OO Generics, Variance Annotations, Java

1. Introduction

Computer science is one of the many fields in which graph products are becoming commonplace [16], where graph products are often viewed as a convenient language with which to describe structures. The notion of a product in any mathematical science enables the combination or decomposition of its elemental structures. In graph theory there are four main products: the Cartesian product, the direct/tensor/categorical product, the strong product and the lexicographic product, each with its own set of applications and theoretical interpretations.

The applications of graph theory and graph products in researching programming languages, in particular, are numerous¹. In this paper we present a notion of a *partial Cartesian graph product* and discuss some of its properties.

We conjecture partial Cartesian graph products may have a number of applications and uses in computer science, mathematics, and elsewhere. In particular, we briefly demonstrate how the notion of a partial Cartesian graph product we present in this paper can be applied to accurately construct the subtyping relation in generic nominally-typed object-oriented (OO) programming languages such as Java [14], C# [2], C++ [1], Scala [18] and Kotlin [3].

As such, this paper is structured as follows. In Section 2 we present the definition of the partial Cartesian graph product of two graphs and the intuition behind it (we present two equivalent views of the partial product), then in Section 3 we present examples for partial Cartesian graph products that illustrate our definition (in Appendix A we present SageMath code implementations of our definition/intuitions). In Section 4 we then discuss some of the basic properties of partial Cartesian graph products.

The, in Section 5, we discuss some earlier work similar to ours, and discuss the similarities and differences between their properties. In Section 6 we then discuss, in brief, how the partial Cartesian graph product operation can be used

¹As revealed, for example, by doing an online search on ‘graph theory and programming languages research’.

to construct the subtyping relation in Java². We conclude in Section 7 with some final remarks and a brief discussion of some research that can possibly extend the theoretical and practical reach of the research presented in this paper.

2. Partial Cartesian Graph Product

Definition 1. (Partial Cartesian Graph Product, \times). For two directed graphs $G_1 = (V_1, E_1)$ and $G_2 = (V_2, E_2)$ where

- $V_1 = V_p + V_n$ such that V_p and V_n partition V_1 (i.e., $V_p \subseteq V_1$ and $V_n = V_1 \setminus V_p$),
- $E_1 = E_{pp} + E_{pn} + E_{np} + E_{nn}$ such that E_{pp} , E_{pn} , E_{np} , and E_{nn} partition E_1 ,
- $G_p = (V_p, E_{pp})$ and $G_n = (V_n, E_{nn})$ are two disjoint subgraphs of G_1 (the ones induced by V_p and V_n , respectively, which guarantees that edges of E_{pp} connect only vertices of V_p and edges of E_{nn} connect only vertices of V_n), and E_{pn} and E_{np} connect vertices from V_p to V_n and vice versa, respectively, and
- G_2 is any directed graph (i.e., G_2 , unlike G_1 , need not have some partitioning of its vertices and edges),

we define the *partial Cartesian graph product* of G_1 and G_2 relative to the set of vertices $V_p \subseteq V_1$ as

$$G = G_1 \times_{V_p} G_2 = (V, E) = G_p \square G_2 \dot{+} G_n \quad (1)$$

where

- $V = V_p \times V_2 + V_n$ (\times and $+$ are the standard Cartesian set product and disjoint union operations),
- $G_p \square G_2 = (V_{p2}, E_{p2})$ is the standard Cartesian graph product [16] of G_p and G_2 , and,
- for defining E , the operator $\dot{+}$ is defined (implicitly relative to G_1) such that we have³

$$\begin{cases} (u_1, v_1) \sim (u_2, v_2) \in E & \text{if } (u_1, v_1) \sim (u_2, v_2) \in E_{p2} \\ (u_1, v) \sim u_2 \in E & \text{if } u_1 \sim u_2 \in E_{pn}, v \in V_2 \\ u_1 \sim (u_2, v) \in E & \text{if } u_1 \sim u_2 \in E_{np}, v \in V_2 \\ u_1 \sim u_2 \in E & \text{if } u_1 \sim u_2 \in E_{nn} \end{cases}$$

Notes:

²We discuss this application in much more detail in [9, 10].

³We may call $\dot{+}$ a ‘‘Cartesian disjoint union’’ (hence the addition-like symbol $\dot{+}$), since $\dot{+}$ effects adding or attaching subgraph G_n to the Cartesian product $G_p \square G_2$, using edges between G_n and G_p (in G_1) in the same way as these edges are used to define edges in the Cartesian product $G_1 \square G_2$.

- As expressed by the definition of the partial Cartesian graph product, each edge $e \in E$ in $G_1 \times_{V_p} G_2$ falls under exactly one of four cases: either e comes from $G_p \square G_2$, or e connects $G_p \square G_2$ to G_n , or e connects G_n to $G_p \square G_2$, or e comes from G_n .
- The vertices in set V_p are called *the product vertices* (of G_1), *i.e.*, vertices that participate in the product $G_p \square G_2$, while vertices in its complement, V_n (which we sometimes also write as V'_p), are called *the non-product vertices* (of G_1) since these vertices are not paired with vertices of G_2 in the construction of $G_1 \times_{V_p} G_2$.
- We call $G_1 \times_{V_p} G_2$ a *partial* graph product since, in comparison with the standard (full/total) Cartesian graph product $G_1 \square G_2$, the main component of $G_1 \times_{V_p} G_2$ (namely, the component $G_p \square G_2$) is typically the Cartesian product of a *proper* subgraph (namely, G_p) of G_1 with G_2 .
- Sometimes we omit the subscript V_p and write $G_1 \times G_2$, assuming V_p is constant and implicit in the definition of G_1 (as is the case, for example, when using \times to model generic OO subtyping).
- In the partial graph product $G_1 \times_{V_p} G_2$, if we have $V_p = V_1$ then we will have $G_p = G_1$ and G_n will be the empty graph, and in this case we have $G_1 \times_{V_p} G_2 = G_1 \square G_2$. If, on the other hand, we have $V_p = \emptyset$ then G_p will be the empty graph and we will have $G_n = G_1$, and in this case we have $G_1 \times_{V_p} G_2 = G_1$.
In other words, in case all vertices of G_1 are product vertices then, as might be expected, $G_1 \times_{V_p} G_2$ will be the standard Cartesian product of G_1 and G_2 , while in case all vertices of G_1 are non-product vertices then $G_1 \times_{V_p} G_2$ will be just G_1 (*i.e.*, graph G_2 is disregarded).

Intuition The intuition behind the definition of \times is simple. The partial product $G_1 \times G_2$ of two graphs G_1 and G_2 can be equivalently viewed as either:

- A graph that is based on the Cartesian product of the subgraph G_p (of G_1) with G_2 that further includes G_n while appropriately respecting how G_n is connected to G_p in G_1 (which is the view reflected in our definition of \times above⁴), or as
- Some sort of a special “subgraph” of the graph $G_1 \square G_2$, the standard Cartesian product of G_1 and G_2 , where some specified set of vertices of $G_1 \square G_2$ (namely those of $V_n \times V_2$) gets “coalesced” into a smaller set (one isomorphic to V_n), *i.e.*, where some vertices of G_1 (namely, vertices of G_n , *i.e.*, members of V_n) *do not fully participate* in the product graph (participate only with their edges)⁵.
- The equivalence of these two informal views of \times can be proven by showing that the product graphs resulting from the two views are always isomorphic.

3. Partial Graph Product Examples

We illustrate the definition of \times by presenting the partial Cartesian product of some sample graphs.

⁴It is also the view reflected in our standard SageMath [20] implementation of \times . (See Appendix A.)

⁵This was the view reflected in our initial SageMath implementation of \times . (See Appendix A.)

Consider the graphs G , G_1 and G_2 depicted in Figure 1. Figures 2 and 3 present the graphs of some partial products of G , G_1 and G_2 . The reader should ensure he or she sees the product graphs in Figures 2 and 3 as intuitively clear⁶.

Appendix A presents the SageMath code we used to help generate the diagrams in Figures 2 and 3.

4. Basic Properties of \times

In this section we discuss some of the fundamental properties of partial Cartesian graph products, particularly the size and order of constructed graphs.

To calculate the number of vertices and number of edges in partial product graphs, let $|S|$ denote the size (*i.e.*, cardinality) of a set S , and for a graph $G = (V, E)$ let $|G| = |V|$ denote the number of vertices in G (usually also called the size of G) and let $\langle G \rangle = |E|$ denote the number of edges (usually called the order of G).

Then, for a graph $G_1 = (V_1, E_1)$ with size v_1 and order e_1 , a graph $G_2 = (V_2, E_2)$ with size v_2 and order e_2 , and for a set $V_p \subseteq V_1$ with size $v_p \leq v_1$ and a complement $V'_p = V_1 \setminus V_p$ with size $v'_p = v_1 - v_p$ that induces a partitioning of $E_1 = E_{pp} + E_{pn} + E_{np} + E_{nn}$ such that $G_n = (V'_p, E_{nn})$, $e_p = |E_{pp}| + |E_{pn}| + |E_{np}|$ (as in Definition 1) and $e'_p = e_1 - e_p = |E_{nn}|$ (*i.e.*, $e_1 = e_p + e'_p$), the number of vertices of the partial Cartesian product graph is expressed by the equation

$$|G_1 \times_{V_p} G_2| = |V_p| \cdot |G_2| + |V'_p| = v_p \cdot v_2 + v'_p \quad (2)$$

while the number of edges is expressed by the equation

$$\begin{aligned} \langle G_1 \times_{V_p} G_2 \rangle &= |V_p| \cdot \langle G_2 \rangle + (\langle G_1 \rangle - \langle G_n \rangle) \cdot |G_2| + \langle G_n \rangle \\ &= (v_p \cdot e_2 + e_p \cdot v_2) + e'_p \end{aligned} \quad (3)$$

Note that we also have

$$\begin{aligned} \langle G_1 \times_{V_p} G_2 \rangle &= (v_p \cdot e_2 + e_1 \cdot v_2) - e'_p \cdot (v_2 - 1) \\ &= |V_p| \cdot \langle G_2 \rangle + \langle G_1 \rangle \cdot |G_2| - \langle G_n \rangle \cdot |G_2| + \langle G_n \rangle \end{aligned}$$

which could be a more intuitive equation for $\langle G_1 \times_{V_p} G_2 \rangle$ given that it indicates that edges of the partial product connecting vertices of the product corresponding to G_n get “coalesced” into one edge (*i.e.*, multiedges are disallowed).

For the sake of comparison, for the standard Cartesian product $G_1 \square G_2$ (which *is* a commutative operation, up to graph isomorphism) we have

$$\begin{aligned} |G_1 \square G_2| &= |G_1| \times |G_2| = v_1 \cdot v_2 \\ \langle G_1 \square G_2 \rangle &= |G_1| \times \langle G_2 \rangle + \langle G_1 \rangle \times |G_2| = v_1 \cdot e_2 + e_1 \cdot v_2. \end{aligned}$$

As we briefly illustrate in Section 6, the fact that the size of $G_1 \times G_2$ can be smaller than the multiplication of the sizes of G_1 and G_2 (as in the standard Cartesian graph product) makes \times perfectly suited for modeling generic OO subtyping.

Note that, in the equations above, we intentionally depart from the more common notation for graph sizes where n is used to denote the size of a graph and m is used to denote its order, so as to make the equations for sizes and orders of product graphs, particularly Equations (2) and (3), readily memorizable and reminiscent of the graph equations defining the product graphs themselves (*e.g.*, Equation (1) on the preceding page).

⁶Even though some better layout of the graphs could make their task even easier.

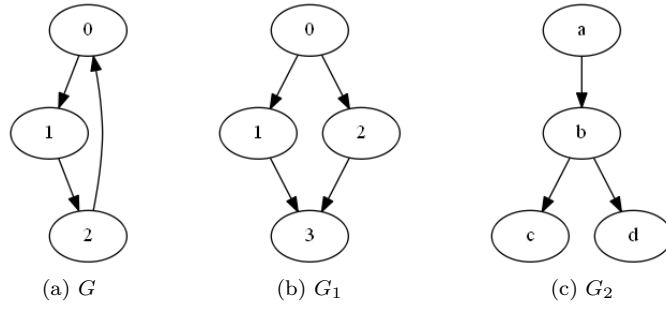


Figure 1: Graphs for illustrating \times

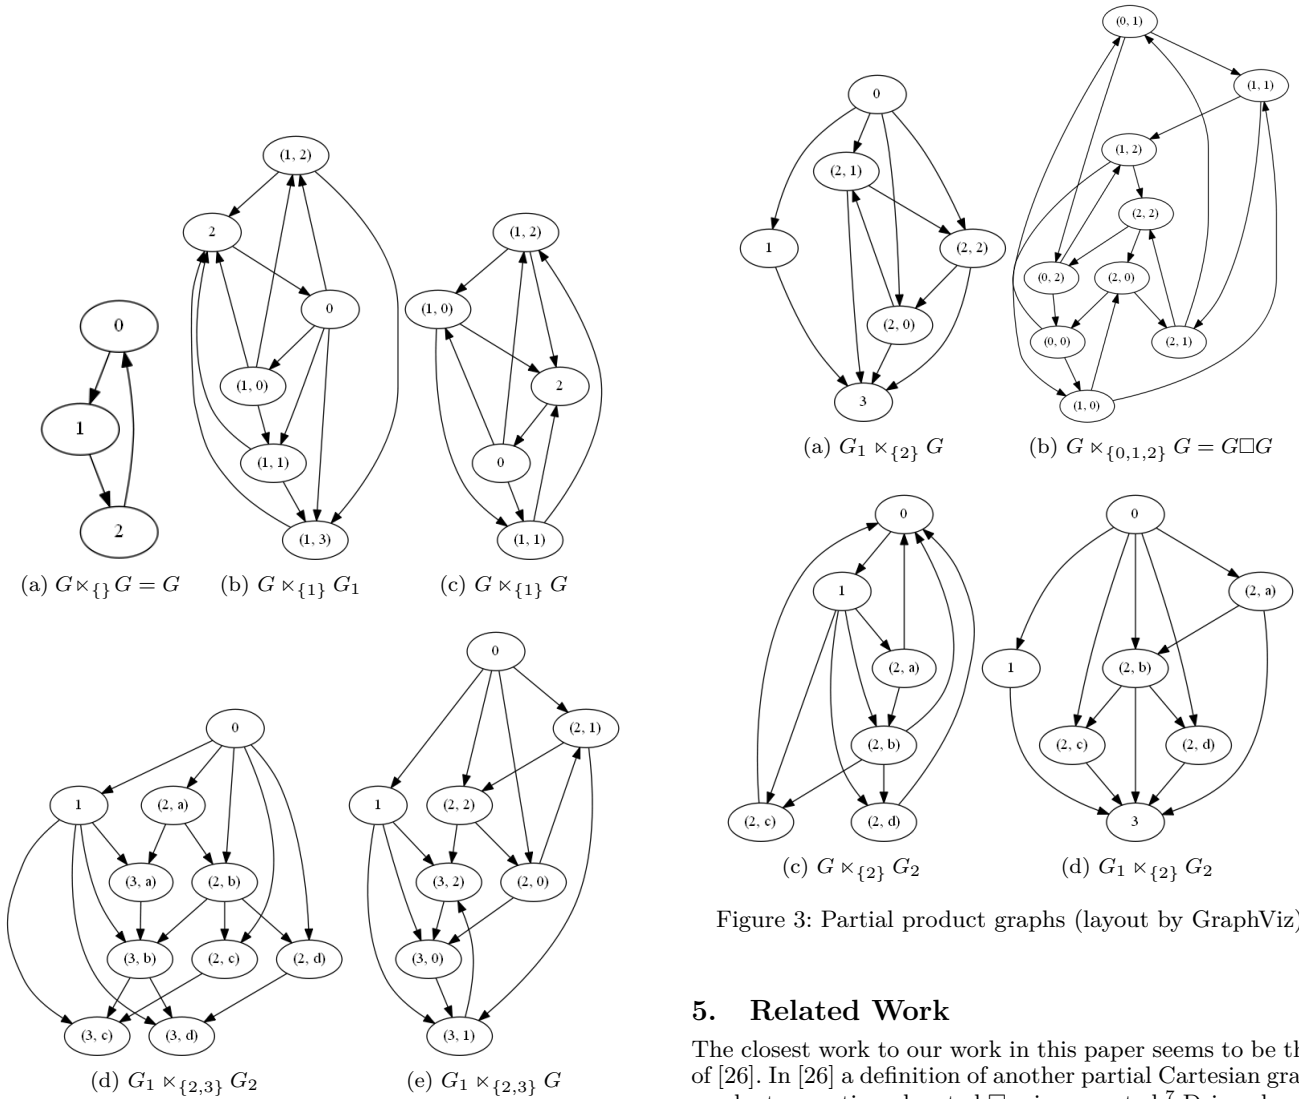


Figure 2: Partial product graphs (layout by GraphViz)

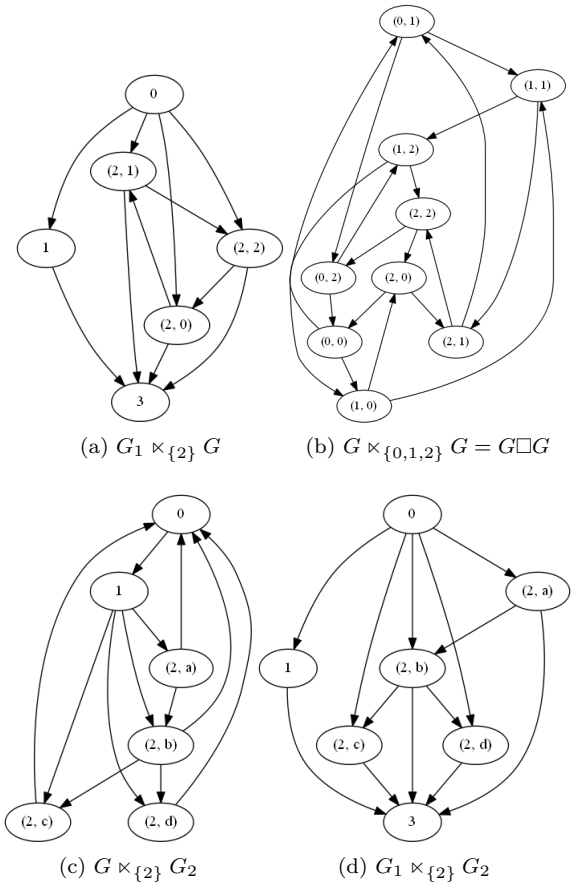


Figure 3: Partial product graphs (layout by GraphViz)

5. Related Work

The closest work to our work in this paper seems to be that of [26]. In [26] a definition of another partial Cartesian graph product operation, denoted \square_S , is presented.⁷ Driven by our use of the partial Cartesian graph product \times in constructing the generic OO subtyping relation, our definition of \times differs from that of \square_S presented in [26], as we present below.

⁷We had not known this work existed until after we defined \times and named it.

5.1 A Comparison of \times and \square_S

First, it should be noted that the order of the factors G_1 and G_2 in the partial products $G_1 \times_S G_2$ and $G_2 \square_S G_1$ is reversed (due to the set S being a subset of the vertices of graph G_1 , compared to graph G_2 graph G_1 has a special status in the products, and thus both partial products are non-commutative operations. For both operations, the order of the factors of the products matters).

More significantly, as we explain using equations in the sequel, while $G_1 \times_S G_2$ and $G_2 \square_S G_1$ can have the same number of edges, $G_1 \times_S G_2$ typically has less vertices than $G_2 \square_S G_1$.

Using the same notation as that of Section 4, the number of vertices of a partial product graph $G_2 \square_{V_p} G_1$ is expressed by the equation

$$|G_2 \square_{V_p} G_1| = |G_2| \cdot |G_1| = v_2 \cdot v_1$$

while the number of its edges is expressed by the equation

$$\begin{aligned} \langle G_2 \square_{V_p} G_1 \rangle &= |G_2| \cdot \langle G_1 \rangle + \langle G_2 \rangle \cdot |V_p| \\ &= v_2 \cdot e_1 + e_2 \cdot v_p \\ &= v_p \cdot e_2 + e_1 \cdot v_2. \end{aligned}$$

Note also that if multiedges were allowed for \times we would have

$$\langle G_1 \times_{V_p} G_2 \rangle = v_p \cdot e_2 + e_p \cdot v_2$$

and the order of $G_1 \times_{V_p} G_2$ will then be the same as that of $G_2 \square_{V_p} G_1$ (which, when multiedges are disallowed, happens only if G_n has no edges, *i.e.*, when none of the vertices of G_n is connected to another vertex of G_n , sometimes called a discrete graph).

Also it should be noted that the full (*i.e.*, standard) Cartesian graph product can be obtained using either of the two partial Cartesian graph products by setting $V_p = V_1$. This illustrates that, compared to the standard Cartesian graph product, if $V_p \neq V_1$ then the partial product operation \times decreases both the vertices and the edges of the product while the partial product operation \square_{V_p} decreases only the edges of the product.


To visually illustrate the difference between \times and \square_S we adapt the example presented in [26] for illustrating \square_S . The graph diagrams presented in Figure 4 help illustrate the differences between the two operations we discussed above.

Further adding to the differences between \times and \square_S , the main motivation for defining \times is to apply it in modeling generic OO subtyping, while the motivation behind defining \square_S —as presented in [26]—seems to be a purely theoretical motivation, namely, studying Vizing’s conjecture (a famous conjecture in graph theory, relating the domination number of a product graph to the domination number of its factors).


Finally, our choice of the symbol \times for denoting the partial product operation allows for making S implicit while indicating that the product operation is partial. For the notation \square_S doing this is not possible, given that the symbol \square —which will result if S is dropped from the notation—is the symbol for the standard Cartesian graph product, *i.e.*, for a different operation.

6. An Application of \times : Modeling Generic OO Subtyping


Generic types [4, 5, 7, 13, 14, 17] add to the expressiveness and type safety of industrial-strength object-oriented programming (OOP) languages such as Java, C#, Scala, Kotlin and other nominally-typed OO programming languages [6].




(a) G

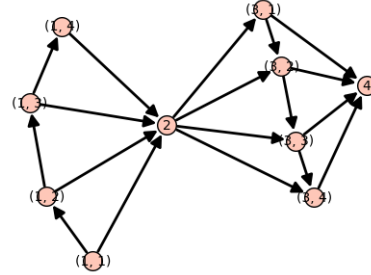


(b) $G \times_{\{1,3\}} G$

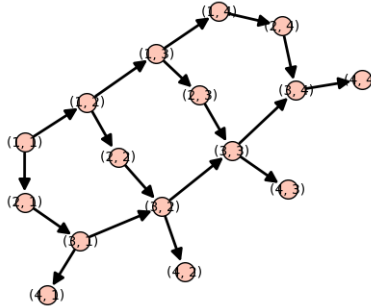

(c) $G \square_{\{1,3\}} G$

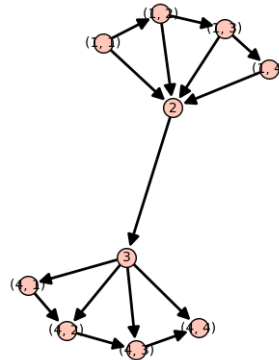

(d) $G \times_{\{1,4\}} G$

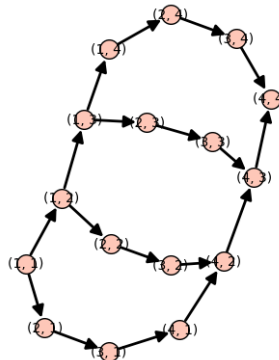

(e) $G \square_{\{1,4\}} G$

Figure 4: Comparing \times_S to \square_S (layout by SageMath)

As we detail in [4, 7], many models for generics have been proposed, particularly for modeling features such as wildcard types [11, 12, 15, 21–25]. However, as expressed by their authors, none of these models seem to be a fully satisfactory model.

This situation, in our opinion, is due to these models and the mathematical foundations they build upon distancing themselves (unnecessarily) from the nominal-typing of generic OOP languages and, accordingly, them being unaware of the far-reaching implications nominal-typing has on the type systems of these languages and on analyzing and understanding them, which—again, in our opinion—includes analyzing and understanding generics and generic variance annotations (of which wildcard types are instances).

To demonstrate the direct effect of nominal-typing on the Java type system and on generics in particular, we illustrate how the generic *subtyping* relation in Java can be constructed, using \times and the *subclassing* relation (which is an inherently nominal relation, in Java and in all OO languages) based on the nominality of the subtyping relation in Java (*i.e.*, due to the nominal typing and nominal subtyping of Java, the subclassing relation is the basis for defining the subtyping relation).

In brief, with some simplifying assumptions that we detail in [8, 9], the generic subtyping relation in Java can be constructed iteratively using the nominal subclassing relation and the partial Cartesian graph product \times , as follows.

Let C be the graph of the subclassing relation in some Java program. Let C_g be the generic classes subset of classes in C . Then the graph S of the subtyping relation in the Java program (typically S is infinite, if there is at least one generic class in C) can be constructed as the limit of the sequence of graphs S_i of subtyping relations constructed iteratively using the equation

$$S_{i+1} = C \times_{C_g} S_i^\Delta \quad (4)$$

where S_i^Δ is the graph of the containment relation between wildcard type arguments derived from S_i (as explained in [9]) and $S_0^\Delta = \text{Graph}('?)$ is the one-vertex graph having the default wildcard type argument, '?', as its only vertex and no containment relation edges (again as explained in [9]).

It should be noted that Equation (4) tells us that in the construction of the graph of the subtyping relation S the generic classes in C (*i.e.*, C_g) correspond to product vertices, while the non-generic classes in C correspond to non-product vertices in the partial product graph of each approximation S_{i+1} of S .⁸ This property of \times preserves non-generic types (and the subtyping relations between them) during the construction of S , meaning that non-generic types in S_i remain as non-generic types in S_{i+1} , and thus, ultimately, are non-generic types in S as well.

6.1 Java Subtyping Example

Figure 5 illustrates the use of \times to construct the Java subtyping relation. To decrease clutter, given that OO subtyping is a transitive relation, we present the transitive reduction of the subtyping graphs in Figure 5.

The three graphs in Figure 5 illustrate the construction of the subtyping relation S of a Java program that only has the generic class definition

```
class C<T> {}
```

⁸This observation has been a main motivation behind our definition of \times .

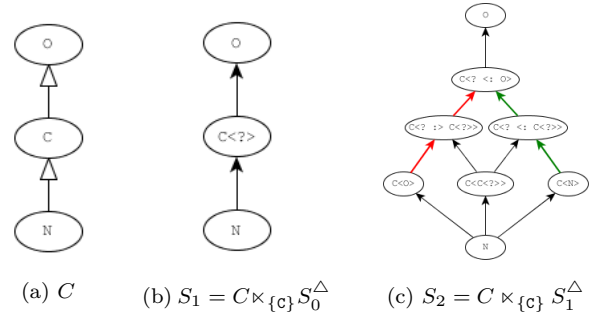


Figure 5: A simple illustration of the use of \times to model generic OO subtyping (manual layout using yEd)

As defined by Equation (4), the graph of $S_2 = C \times_{\{C\}} S_1^\Delta$ in Figure 5 is constructed as the partial product of the graph of the subclassing/inheritance relation C and the graph of S_1^Δ (of wildcard types over S_1 , ordered by containment) relative to the set $\{C\}$ of generic classes in C .

More details and examples on the use of \times to construct the generic OO subtyping relation can be found in [9, 10].

7. Concluding Remarks and Future Work

In this paper we defined a new binary operation \times on graphs that constructs a partial product of its two input graphs, we presented few examples that illustrate the definition of \times , and we discussed some of the basic properties of the operation. We also compared the \times operation to the closest similar work. Finally, we also discussed how the partial graph product operation \times may be used in understanding the subtyping relation in generic nominally-typed OO programming languages.

As of the time of this writing, we do not know of any other application of the new graph operation we present. Nevertheless, in this paper we presented the partial product operation over graphs in abstract mathematical terms, in the hope that the operation may prove to be useful in other mathematical contexts and domains.

Although we have not done so here, we believe the notion of partial Cartesian graph products, as presented here, can be easily adapted to apply to other mathematical notions such as sets, partial orders, groups (or even categories, more generally). To model infinite self-similar graphs (or groups or categories) we also believe partial products, over graphs, groups, or categories, can in some way be modeled by operads, which are category-theoretic tools that have proved to be useful in modeling self-similar phenomena [8, 19].

Finally, studying in more depth properties of partial Cartesian graph products such as the size, order (as we hinted at in Section 5) and rank of elements of the products and of infinite applications of them, is work that can build on work we presented in this paper, and which can be of both theoretical and practical significance, particularly in computer science graph theoretic applications. Also, we believe a notion of ‘degree of partialness’ of a partial product

graph⁹ can be a useful notion, even though we do not immediately see an application of this notion.

References

- [1] *ISO/IEC 14882:2011: Programming Language: C++*. 2011.
- [2] C# language specification, version 5.0. <http://msdn.microsoft.com/vcsharp>, 2015.
- [3] Kotlin language documentation, v. 1.2. <http://www.kotlinlang.org>, 2018.
- [4] Moez A. AbdelGawad. Towards an accurate mathematical model of generic nominally-typed OOP (extended abstract). *arXiv:1610.05114 [cs.PL]*, 2016.
- [5] Moez A. AbdelGawad. Towards understanding generics. Technical report, arXiv:1605.01480 [cs.PL], 2016.
- [6] Moez A. AbdelGawad. Why nominal-typing matters in OOP. Preprint available at <http://arxiv.org/abs/1606.03809>, 2016.
- [7] Moez A. AbdelGawad. Novel uses of category theory in modeling OOP (extended abstract). Accepted at *The Nordic Workshop on Programming Theory (NWPT'17), Turku, Finland, November 1-3, 2017*. (Full version available at [arXiv.org: 1709.08056 \[cs.PL\]](http://arxiv.org:1709.08056)), 2017.
- [8] Moez A. AbdelGawad. Towards a Java subtyping operad. *Proceedings of FTfJP'17, Barcelona, Spain, June 18-23, 2017*, 2017.
- [9] Moez A. AbdelGawad. Java subtyping as an infinite self-similar partial graph product. Available as *arXiv preprint at http://arxiv.org/abs/1805.06893*, 2018.
- [10] Moez A. AbdelGawad. Towards taming Java wildcards and extending Java with interval types. Available as *arXiv preprint at http://arxiv.org/abs/1805.10931*, 2018.
- [11] Nicholas Cameron, Sophia Drossopoulou, and Erik Ernst. A model for Java with wildcards. In *ECOOP'08*, 2008.
- [12] Nicholas Cameron, Erik Ernst, and Sophia Drossopoulou. Towards an existential types model for Java wildcards. *9th Workshop on Formal Techniques for Java-like Programs*, 2007.
- [13] James Gosling, Bill Joy, Guy Steele, and Gilad Bracha. *The Java Language Specification*. Addison-Wesley, 2005.
- [14] James Gosling, Bill Joy, Guy Steele, Gilad Bracha, and Alex Buckley. *The Java Language Specification*. Addison-Wesley, 2014.
- [15] Ben Greenman, Fabian Muehlboeck, and Ross Tate. Getting f-bounded polymorphism into shape. In *PLDI '14: Proceedings of the 2014 ACM SIGPLAN conference on Programming Language Design and Implementation*, 2014.
- [16] Richard Hammack, Wilfried Imrich, and Sandi Klavzar. *Handbook of Product Graphs*. CRC Press, second edition, 2011.
- [17] Angelika Langer. The Java Generics FAQ. www.angelikalanger.com/GenericsFAQ/Java-GenericsFAQ.html, 2015.
- [18] Martin Odersky. The Scala language specification, v. 2.9. <http://www.scala-lang.org>, 2014.
- [19] David Spivak. *Category theory for the sciences*. MIT Press, 2014.
- [20] William Stein. Sagemath 8.1. <http://www.sagemath.org>, 2017.

⁹For example, the degree of partialness can be a value (a real number) between 0 and 1, defined possibly as the size of the set of product vertices, $|V_p|$, divided by size of the set of all vertices of the first factor graph, $|V_1|$ (i.e., the degree of partialness of a partial product will be $|V_p|/|V_1|$). In this case a degree of partialness with value 1 means the standard Cartesian product, while a value of 0 means no product.)

- [21] Alexander J. Summers, Nicholas Cameron, Mariangiola Dezani-Ciancaglini, and Sophia Drossopoulou. Towards a semantic model for Java wildcards. *10th Workshop on Formal Techniques for Java-like Programs*, 2010.
- [22] Ross Tate. Mixed-site variance. In *FOOL '13: Informal Proceedings of the 20th International Workshop on Foundations of Object-Oriented Languages*, 2013.
- [23] Ross Tate, Alan Leung, and Sorin Lerner. Taming wildcards in Java's type system. *PLDI'11, June 4-8, 2011, San Jose, California, USA.*, 2011.
- [24] Mads Torgersen, Erik Ernst, and Christian Plesner Hansen. Wild FJ. In *Foundations of Object-Oriented Languages*, 2005.
- [25] Mads Torgersen, Christian Plesner Hansen, Erik Ernst, Peter von der Ahé, Gilad Bracha, and Neal Gafter. Adding wildcards to the Java programming language. In *SAC*, 2004.
- [26] Ismael Gonzalez Yero. Partial product of graphs and Vizing's conjecture. *Ars Mathematica Contemporanea*, 2015.

A. SageMath Code

To generate the graph examples presented in this paper we implemented the definition of \times (as presented in Section 2) in SageMath 8.1 [20]. For those interested, we present in this appendix our SageMath implementation code. The code presented here is not optimized for speed of execution but rather for clarity and simplicity of implementation.

```
# PCGP

def comp(pv,g):
    """ Computes the complement of pv relative to
        vertices of g
    """
    return filter(lambda v: v not in pv,
                  g.vertices())

def PCGP(g1,pv,g2):
    """ Computes the partial cartesian product of
        graphs g1 and g2.

    INPUT:

    - 'pv' (list) -- is the list of product
      vertices in g1.

    """
    # 1st step
    gp = g1.subgraph(pv)
    g = gp.cartesian_product(g2)

    # 2nd step
    npv = comp(pv,g1)
    gn = g1.subgraph(npv)
    g = g.union(gn)

    # 3rd step
    gpn = g1.subgraph(edge_property=
                      (lambda e: e[0] in pv and e[1] in npv))
    for u1,u2 in gpn.edge_iterator(labels=None):
        for v in g2:
            g.add_edge((u1,v),u2)

    # 4th step
    gnp = g1.subgraph(edge_property=
                      (lambda e: e[1] in pv and e[0] in npv))
    for u1,u2 in gnp.edge_iterator(labels=None):
        for v in g2:
            g.add_edge(u1,(u2,v))
```

```
return g
```

For convenience, our initial shorter (but equivalent) implementation code for \times (where **GSP** stands for ‘Generic Subtyping Product’) is as follows. The code corresponds to the second informal view of the partial Cartesian graph product we presented in Section 2.

```
# GSP
def GSP(g1, pv, g2):
    g=DiGraph.cartesian_product(g1,g2) # main step

    lnpvc = map(lambda npv: filter(lambda(v,_):
        v==npv, g.vertices()), comp(pv,g1))
    # lnpvc is list of non-product vertex clusters

    # merge the clusters
    map(lambda vc: g.merge_vertices(vc), lnpvc)

    return g
```

For any two graphs $g1, g2$ and any list pv (listing the product vertices subset of the vertices of $g1$) we have

```
GSP(g1,pv,g2).is_isomorphic(PCGP(g1,pv,g2))
```
