

# You Say ‘What’, I Hear ‘Where’ and ‘Why’ — (Mis-)Interpreting SQL to Derive Fine-Grained Provenance

Tobias Müller   Benjamin Dietrich   Torsten Grust  
 Universität Tübingen  
 Tübingen, Germany  
 [ to.mueller, b.dietrich, torsten.grust ]@uni-tuebingen.de

## ABSTRACT

SQL declaratively specifies *what* the desired output of a query is. This work shows that a non-standard interpretation of the SQL semantics can, instead, disclose *where* a piece of the output originated in the input and *why* that piece found its way into the result. We derive such data provenance for very rich SQL dialects—including recursion, windowed aggregates, and user-defined functions—at the fine-grained level of individual table cells. The approach is non-invasive and implemented as a compositional source-level SQL rewrite: an input SQL query is transformed into its own interpreter that wields data dependencies instead of regular values. We deliberately design this transformation to preserve the shape of both data and query, which allows provenance derivation to scale to complex queries without overwhelming the underlying database system.

## 1. DATA PROVENANCE EXPLAINS COMPLEX SQL QUERIES

**A complex SQL query.** In a hilly landscape, which marks are visible from your current location? That will depend on your position’s altitude and the height of the terrain around you: valleys are obscured by nearby ridges, while peaks, even if remote, may still be in view. The two-dimensional sketch of Figure 1 suggests one answer to the question: first, compute the running maximum (or: *max scan*) of view angles between our location  $\boxtimes$  and the ever farther hill tops before us. Second, a mark is visible iff its angle is at least as large as the maximum angle  $\alpha_i$  we have measured so far. We thus can spot the tree (its view angle  $\alpha_3$  exceeds the current maximum of  $\alpha_2$ ) while marks  $p_1$  and  $p_2$  are obscured.

The *max scan* technique does apply in three dimensions,


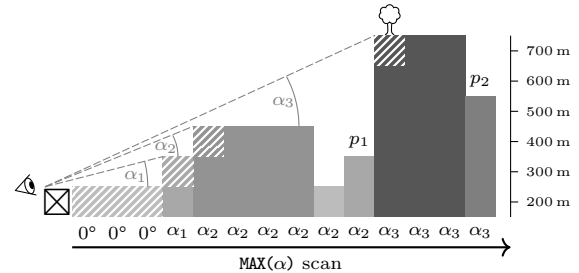


Figure 1: Visibility in a two-dimensional hilly landscape: spots marked  $\boxtimes$  are visible from  $\boxtimes$ . The max scan encounters the view angles  $0^\circ < \alpha_1 < \alpha_2 < \alpha_3$  from left to right.

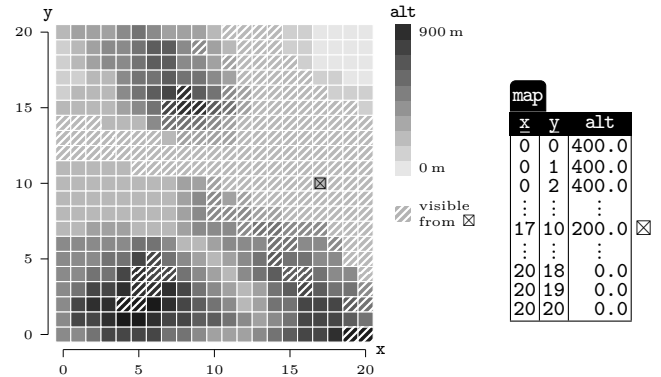

(a) Height map with our location  $\boxtimes$ . (b) Table map.

Figure 2: Height map of three-dimensional terrain and its tabular encoding. Again, spots marked  $\boxtimes$  are visible from  $\boxtimes$ .

but things get a bit more complicated. Figure 2(a) depicts the height map of a sample terrain in which shades of grey indicate altitude and  $\boxtimes$  at  $(x, y) = (17, 10)$  marks our location again. If we encode this terrain in a table `map`, see Figure 2(b), we can use the SQL query of Figure 3 to compute the visible spots ( $\boxtimes$ ). The query uses a common table expression (CTE, `WITH...`) to structure the computation. We can spot the *max scan* in Lines 37 to 44, but the interplay of local table definitions, user-defined and builtin functions, and complex query logic (e.g., the use of window functions) weaves a tangled web that is hard to see through. How does this query work and how does it adapt the two-dimensional *max scan* idea?

```

1 -- Distance between points (x1,y1) and (x2,y2)
2 CREATE FUNCTION
3 dist(x1 int, y1 int, x2 int, y2 int) RETURNS float AS
4 $$
5   SELECT sqrt((x2 - x1)^2 + (y2 - y1)^2)
6 $$ LANGUAGE SQL;

7 -- Number of steps on the line (x1,y1)-(x2,y2)
8 CREATE FUNCTION
9 steps(x1 int, y1 int, x2 int, y2 int) RETURNS int AS
10 $$
11  SELECT greatest(abs(x2 - x1), abs(y2 - y1))
12 $$ LANGUAGE SQL;

13 -- Points (x,y) on the line (x1,y1)-(x2,y2)
14 CREATE FUNCTION
15 line(x1 int, y1 int, x2 int, y2 int) RETURNS TABLE(x int, y int) AS
16 $$
17  SELECT x1 + round(i * ((x2 - x1) / steps(x1, y1, x2, y2))) AS x,
18         y1 + round(i * ((y2 - y1) / steps(x1, y1, x2, y2))) AS y
19 FROM generate_series(0, steps(x1, y1, x2, y2)) AS i
20 $$ LANGUAGE SQL;

21 WITH
22 -- (1) Ray from ☒ to (x1,y1) has points (rx,ry)
23 rays(x1, y1, rx, ry) AS (
24   SELECT m.x AS x1, m.y AS y1, l.x AS rx, l.y AS ry
25 FROM   map AS m,
26        LATERAL line(17, 10, m.x, m.y) AS l(x,y)
27 WHERE  m.x IN (0,20) OR m.y IN (0,20) -- points on the border
28 ),
29 -- (2) Angle between point (x,y) and ☒
30 angles(x, y, angle) AS (
31   SELECT m.x, m.y,
32          degrees(atan((m.alt - 200) / -- ☒ is at altitude 200m
33                      (dist(m.x, m.y, 17, 10)))) AS angle
34 FROM   map AS m
35 WHERE  ROW(m.x, m.y) <> ROW(17, 10)
36 ),
37 -- (3) Line of sight along each ray (uses a max scan)
38 max_scan(x, y, angle, max_angle) AS (
39   SELECT r.rx AS x, r.ry AS y, a.angle, MAX(a.angle) OVER (
40     PARTITION BY r.x1, r.y1
41     ORDER BY dist(17, 10, r.rx, r.ry)) AS max_angle
42 FROM   rays AS r, angles AS a
43 WHERE  ROW(r.rx, r.ry) = ROW(a.x, a.y)
44 ),
45 -- (4) Assemble visibility map from all lines of sight
46 visible(x, y, "visible?") AS (
47   SELECT s.x, s.y, bool_or(s.angle >= s.max_angle) AS "visible?"
48 FROM   max_scan AS s
49 GROUP BY s.x, s.y
50 )
51 SELECT v.x, v.y, v."visible?"
52 FROM   visible AS v;

```

**Figure 3: SQL query to compute visibility in three-dimensional terrain encoded in table `map`. A row  $(x, y, \text{true})$  in result table `visible` indicates that spot  $(x, y)$  is visible from ☒.**

**Data provenance** offers answers to these and further questions [3, 12, 30, 48]. Provenance relates a query’s individual input and output data items (table cells, say), sheds light on query internals and bugs, and helps to build trust in query results—a critical service to data-dependent science and society [19]. In our present case, we may hope that provenance helps to understand how the visibility *max scan* has been tweaked to function in three-dimensional terrain.

Clearly, the benefits of data provenance grow with the complexity of the query logic it is able to explain. As modern query languages continue to gain expressive constructs [47] and algorithms of increasing intricacy are cast into relational queries (e.g., graph processing and machine learning tasks [1, 17, 28]), the gap between queries found in practice and existing approaches for provenance derivation widens

considerably, however [12, 14, 26, 30]. The principal languages of study have been the (positive) relational algebra and its SQL equivalent. Grouping and aggregation can be handled by some approaches [15, 21] but are already considered challenging. In this light, the derivation of database provenance for complex queries found “outside the lab” appears elusive.

We set out to bridge this gap and enable the derivation of **fine-grained data provenance for a significantly richer family of SQL queries**. The admissible query dialect includes

- common table expressions including the recursive kind (`WITH RECURSIVE . . .`),
- window functions with arbitrary frame specifications as well as grouping and aggregation,
- scalar or table-valued builtin and user-defined functions,
- complex types (e.g., row values and arrays), and
- subqueries without or with dependencies (through `LATERAL` or correlation) to their enclosing query.

We aim for compositionality, *i.e.*, these and further constructs may be nested arbitrarily as long as SQL’s scoping and typing rules are obeyed.


The approach is based on a **non-standard interpretation of the SQL semantics**. This new interpretation focuses on the dependencies between input and output data items—the items’ values play a secondary role only. The required interpreter is systematically derived from the original value-based query and formulated in SQL itself. As long as we can perform this derivation for a SQL construct or idiom, the approach is ready to embrace it. While we work with PostgreSQL in what follows, the method may be implemented on top of any SQL-based RDBMS. *No engine internals need to be altered.*

**Goal** (*Where- and Why-Provenance*). *Given a SQL subject query  $q$  and its output table  $t$ , for each cell  $o$  of  $t$  compute*

- *which input table cells were copied or transformed to determine  $o$ ’s value, and* [*where-provenance*]
- *which input table cells were inspected to decide that  $o$  is present in the output at all.* [*why-provenance*]

This understanding of *where-* and *why-*provenance largely coincides with that of earlier work [6, 14, 21]—Section 5 notes where we deviate. Together, both types of provenance characterize the exact set of input table cells that were sourced by query  $q$ , providing invaluable information for query explanation and debugging [27]. Such complete cell-level provenance provides the most detailed insight into query behavior but comes at a size and speed cost. We thus also outline how coarser granularity may be traded for performance.

**Data provenance explains queries.** Once we perform provenance derivation for the SQL query of Figure 3, we can understand how the data in input table `map` (Figure 2(b)) is used to compute visibility. Figure 4 highlights those points in the input terrain that determine the visibility of spots ❶ and ❷. Since we compute the provenance of the entire query output, we could have selected any spot and investigated the provenance of its visibility. Provenance analysis reveals that the query “shoots” rays from ☒ to the points at the border of the map (see the  $\leftarrow$  in Figure 4), effectively leaving us with a two-dimensional problem that can be tackled via the *max scan* technique of Figure 1. We see that the visibility of point  $(x, y)$  only depends on the points on the ray between ☒ and  $(x, y)$ , *i.e.*, those points visited by the *max scan* so far. These and similar findings help to untangle the query and build trust in its result.

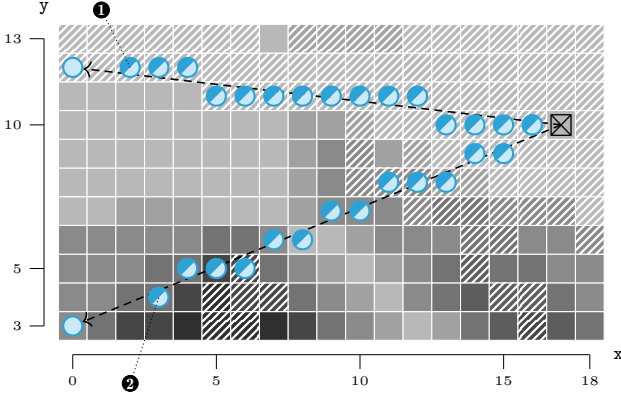

**Figure 4: Excerpt of terrain map after provenance derivation. We find that the (non-)visibility of spots ① and ② is where-as well as why-dependent on the points marked ● and only why-dependent on the two border points marked ○.**

## 2. FROM VALUES TO DEPENDENCY SETS

Regular query evaluation computes the *value* of an output cell  $o$  through the inspection and transformation of input *values*. In this work, instead, we focus on  $o$ 's *dependency set*:

**Definition 1** (Dependency Set). *Given an output cell  $o$ , the dependency set of  $o$  is the (possibly empty) set  $\{i_1, i_2, \dots, i_n\}$  of input table cells that were copied, transformed, or inspected to compute the value of  $o$ . Values are secondary:  $o$  and  $i_1, \dots, i_n$  identify the cells themselves, not their values. We use  $\mathbb{P}$  to denote the type of dependency sets.*

It is our main hypothesis that a *non-standard interpretation* of queries provides a solid foundation to reason about this shift of focus from values to dependency sets [10]. We pursue a purely SQL-based implementation of this shift: from the original value-based SQL query, we generate its dependency-deriving variant—or *interpreter*, for short—through query transformation. Since this variant manipulates dependency sets and is oblivious to values, we supply just enough runtime information to guide the interpreter whenever the original query made a value-based decision.

**Overview.** These considerations shape a two-phase approach. Let  $q$  denote the original SQL query:

**Phase 1:** Instrument  $q$  to obtain query  $q^1$  that performs the same value-based computation as  $q$  and outputs the same result. Whenever  $q^1$  makes a value-based decision (e.g., let a row pass a predicate or locate a row inside a window frame), those values relevant to this decision are appended to logs as a side effect of evaluation.

**Phase 2:** Evaluate interpreter  $q^2$  that performs dependency derivation. Query  $q^2$  reads, manipulates, and outputs tables of dependency sets. To properly replay the decisions made by  $q^1$ ,  $q^2$  additionally consults the logs written in Phase 1.

We shed light on Phases 1 and 2 and their interaction in the upcoming Sections 2.2 and 2.3. The construction of the instrumented query  $q^1$  as well as the interpreter  $q^2$ —both can be built in tandem—are the subject of Section 3. Since the evaluation of  $q^1$  incurs logging effort and  $q^2$  needs to manipulate sets instead of first normal form (1NF) values,

Section 4 discusses the sizes of both logs and result tables, quantifies the impact on query evaluation time, and discusses SQL interpretation at the coarser row granularity. Sections 5 and 6 review related efforts and wrap up.

### 2.1 Changing Types, Preserving Shape

Consider  $q$ , a general template for a single-table **SELECT-FROM-WHERE** block:

$$q(e, p, t) = \text{SELECT } e(x) \text{ FROM } t \text{ AS } x \text{ WHERE } p(x) .$$

The type of  $q$ , namely  $\forall a, b: (a \rightarrow b) \times (a \rightarrow \text{bool}) \times \{a\} \rightarrow \{b\}$ , is *parametric* [52] in the row types  $a$  and  $b$  of the input and output tables.<sup>1</sup> Any instantiation of type variables  $a$  and  $b$  yields a workable *filter-project* query. If  $t$  is table `map` of Figure 2(b) and  $e$  projects on its third column `alt` of type `real`, then  $a \equiv \text{int} \times \text{int} \times \text{real}$ ,  $b \equiv \text{real}$ , and  $q$  has type

$$(\text{int} \times \text{int} \times \text{real} \rightarrow \text{real}) \times (\text{int} \times \text{int} \times \text{real} \rightarrow \text{bool}) \times \{\text{int} \times \text{int} \times \text{real}\} \rightarrow \{\text{real}\} .$$

With the shift from values (Phase 1) to dependency sets (Phase 2) we are interested in the particular row type instantiation in which *all column types are replaced by  $\mathbb{P}$* , the type of dependency sets. If we perform this shift for the former example, we get  $a \equiv \mathbb{P} \times \mathbb{P} \times \mathbb{P}$ ,  $b \equiv \mathbb{P}$ , yielding query  $q^2$  of type

$$(\mathbb{P} \times \mathbb{P} \times \mathbb{P} \rightarrow \mathbb{P}) \times (\mathbb{P} \times \mathbb{P} \times \mathbb{P} \rightarrow \text{bool}) \times \{\mathbb{P} \times \mathbb{P} \times \mathbb{P}\} \rightarrow \{\mathbb{P}\} ,$$

over tables of dependency sets. Most importantly,  $q^2$  is indifferent to the choice of row types [52]: it continues to implement the *filter-project* semantics.

This parametricity of queries is central to the approach:

- The shift to  $\mathbb{P}$  in Phase 2 not only preserves the shape of the query type but, largely, also the *syntactic shape* of the SQL query. We can thus derive an interpreter for a given query via a transformation that is compositional (will not break in the face of complex queries) and extensible (can embrace new constructs as the SQL language grows). The query execution plans of the transformed queries resemble those of the originals which reduces the risk of overwhelming the query processor, an adverse effect that has been observed by earlier work on data provenance for SQL [40].
- The value-based and dependency-based queries read and output tables of the same width and row count: we also preserve the *shape of the data* (albeit not its type). A one-to-one correspondence between the cells in value-based and dependency-carrying tables admits a straightforward association of individual data items with their provenance.

In Phase 2, note that predicate  $p$  (of type  $\mathbb{P} \times \mathbb{P} \times \mathbb{P} \rightarrow \text{bool}$ ) exclusively receives dependency sets as input. These dependency sets reveal what influenced the predicates's outcome but do not let us compute the Boolean value of the original  $p$ . We address this in Phase 1 in which we instrument the original query such that the outcome of relevant value-based computation is logged. The interpreter of Phase 2 then uses the log to look up  $p$ 's Boolean value and to re-enact the original query's behavior.

### 2.2 Phase 1: Instrumentation

**Definition 2** (Instrumented Query, Phase 1). *Given a subject query  $q$ , its instrumented variant  $q^1$  computes the same*

<sup>1</sup>We use  $a \times b$  to denote pair (or record) types and write  $\{a\}$  for the type of tables with rows of type  $a$ .

```

1 max_scan(x, y, angle, max_angle) AS (
2   SELECT t.r_rx AS x, t.r_ry AS y, t.a_angle AS angle,
3     MAX(t.a_angle) OVER (w) AS max_angle
4   FROM (SELECT r.x1 AS r_x1, r.y1 AS r_y1,
5     r.rx AS r_rx, r.ry AS r_ry,
6     a.angle AS a_angle
7     FROM rays AS r, angles AS a
8     WHERE r.rx = a.x AND r.ry = a.y) AS t
9   WINDOW w AS
10  (PARTITION BY t.r_x1, t.r_y1
11   ORDER BY sqrt((t.r_rx - 17)^2 + (t.r_ry - 10)^2))
12 )

```

Figure 5: Common table expression `max_scan` of the visibility query (Figure 3) after normalization. UDF `dist` has been inlined into the `ORDER BY` clause.

```

1 max_scan1(ρ, x, y, angle, max_angle) AS (
2   SELECT writeWIN(④, t.ρ, FIRST_VALUE(t.ρ) OVER (w),
3     RANK() OVER (w)) AS ρ,
4     t.r_rx AS x, t.r_ry AS y, t.a_angle AS angle,
5     MAX(t.a_angle) OVER (w) AS max_angle
6   FROM (SELECT writeJOIN2(③, r.ρ, a.ρ) AS ρ,
7     r.x1 AS r_x1, r.y1 AS r_y1,
8     r.rx AS r_rx, r.ry AS r_ry,
9     a.angle AS a_angle
10    FROM rays1 AS r, angles1 AS a
11    WHERE r.rx = a.x AND r.ry = a.y) AS t -- p1(r, a)
12   WINDOW w AS
13   (PARTITION BY t.r_x1, t.r_y1 -- f1(t)
14    ORDER BY sqrt((t.r_rx - 17)^2 + (t.r_ry - 10)^2)) -- g1(t)
15 )

```

Figure 6: Instrumented variant of CTE `max_scan` in Phase 1.

output table as  $q$ . Whenever  $q$  evaluates an expression of non-parametric type to make a relevant value-based decision,  $q^1$  logs the outcome of that decision as a side-effect of query evaluation.

The instrumentation of  $q$  will be *compositional*:  $q$ 's overall instrumentation is assembled from the instrumentation of  $q$ 's subqueries—the latter transformations do not interfere and may be performed in isolation. Here, we exploit this to save page space and focus on CTE fragment `max_scan` of the SQL query in Figure 3. Input to instrumentation is a normalized form of the original query in which individual operations (*e.g.*, joins, window functions, ordering) are placed in separate subqueries. The normalized CTE `max_scan` is shown in Figure 5. Normalization, discussed in Section 3, helps to devise compact sets of query transformation rules.

Figure 6 shows `max_scan1`, the instrumented form of `max_scan`. (For a query, expression, CTE, or table named  $n$ , we use  $n$ ,

map <sup>1</sup>			map <sup>2</sup>			
x	y	alt	ρ	x	y	alt
0	0	400.0	$m_{(0,0)}$	{x(0,0)}	{y(0,0)}	{a(0,0)}
0	1	400.0	$m_{(0,1)}$	{x(0,1)}	{y(0,1)}	{a(0,1)}
0	2	400.0	$m_{(0,2)}$	{x(0,2)}	{y(0,2)}	{a(0,2)}
⋮	⋮	⋮	⋮	⋮	⋮	⋮
⊠	17	10	$m_{(17,10)}$	{x(17,10)}	{y(17,10)}	{a(17,10)}
⋮	⋮	⋮	⋮	⋮	⋮	⋮
20	18	0.0	$m_{(20,18)}$	{x(20,18)}	{y(20,18)}	{a(20,18)}
20	19	0.0	$m_{(20,19)}$	{x(20,19)}	{y(20,19)}	{a(20,19)}
20	20	0.0	$m_{(20,20)}$	{x(20,20)}	{y(20,20)}	{a(20,20)}

Figure 7: Table `map` in Phases 1 and 2. A row with key  $(x, y)$  =  $(x, y)$  is identified by row ID  $\rho = m_{(x,y)}$ .

```

1 max_scan2(ρ, x, y, angle, max_angle) AS (
2   SELECT t.ρ AS ρ,
3     t.r_rx AS rx, t.r_ry AS ry, t.a_angle AS angle,
4     ⋃ t.a_angle OVER (w) ⋃ ⋃ Ywin OVER (w) AS max_angle
5   FROM
6   (SELECT join.ρ,
7     r.x1 ⋃ Yjoin AS r_x1, r.y1 ⋃ Yjoin AS r_y1,
8     r.rx ⋃ Yjoin AS r_rx, r.ry ⋃ Yjoin AS r_ry,
9     a.angle ⋃ Yjoin AS a_angle
10    FROM rays2 AS r, angles2 AS a,
11    LATERAL readJOIN2(③, r.ρ, a.ρ) AS join(ρ),
12    LATERAL Y(r.rx ⋃ a.x ⋃ r.ry ⋃ a.y) AS Yjoin -- Y(p2(r, a))
13   ) AS t,
14   LATERAL readWIN(④, t.ρ) AS win(ρ, part, rank),
15   LATERAL Y(t.r_x1 ⋃ t.r_y1) ⋃ -- Y(f2(t))
16   Y(dist2(⊘, ⊘, t.r_rx, t.r_ry)) AS Ywin -- Y(g2(t))
17   WINDOW w AS (PARTITION BY win.part ORDER BY win.rank)
18 )

```

Figure 8: Interpreter for CTE `max_scan` in Phase 2.

$n^1$ , and  $n^2$  to refer to the original and its Phase 1/2 variants.) Where the original query reads from table  $r$ , the instrumented version reads from  $r^1$  in which column  $\rho$  carries row identifiers—otherwise,  $r$  and  $r^1$  are identical. Indeed,  $r$  and  $r^1$  may denote the very same table if the underlying RDBMS externalizes row identity in some form (*e.g.*, through virtual column `ctid` in PostgreSQL or `rowid` in IBM Db2 and Oracle). Table `map1` is depicted in Figure 7 on the left.

When we log the outcome  $v$  of a computation over a row  $\mathbf{r}$ , we write the pair  $(\mathbf{r}, \rho, v)$  to identify the row once we read the log back. It is the primary aim of instrumentation to insert calls to side-effecting functions `write□(②, r.ρ, v)` that perform the required log writing. Parameter ② distinguishes the calls' locations in the instrumented SQL text such that one log may hold entries written by multiple call sites. Phase 2 (see below) then uses `read□(②, r.ρ)` to obtain  $v$  again. The approach is indifferent to the actual realization of `write□` and `read□`. Section 3 shows pseudo code and Appendix B proposes a possible SQL-internal implementation of logging.

In the subquery in Lines 6 to 11 of Figure 6, the result of the join depends on the evaluations of predicate  $p^1(\mathbf{r}, \mathbf{a}) = \mathbf{r}.rx = \mathbf{a}.x \text{ AND } \mathbf{r}.ry = \mathbf{a}.y$ . We make the outcomes of  $p^1$  available to Phase 2 via calls to `writeJOIN2(③, r.ρ, a.ρ)` in Line 6. Note that we chose to not log  $p^1$ 's actual Boolean value but, equivalently, the fact that rows  $\mathbf{r}$  and  $\mathbf{a}$  are join partners—this refinement saves us from logging the `false` outcomes of  $p^1$  and also simplifies Phase 2. The invocation of `writeJOIN2` performs log writing and then returns a newly generated row identifier that represents the joined row  $t$ .

In the window-based query enclosing the join, evaluation depends on the partitioning and ordering criteria that determine the placement of row  $t$  inside window  $w$  (Lines 13 and 14 in Figure 6). Both criteria are functions of  $t$ , namely  $f^1(t) = (t.r_x1, t.r_y1)$  and  $g^1(t) = \text{sqrt}((t.r_rx - 17)^2 + (t.r_ry - 10)^2)$ . Phase 2 will not be able to evaluate either function once computation has shifted from column values to dependency sets. The invocation of `writeWIN` in Lines 2 to 3 thus writes the required log entries. Here, again, we do not log the values of  $f^1(t)$  and  $g^1(t)$  as is, but equivalently record `FIRST_VALUE(t.ρ) OVER (w)` and `RANK() OVER (w)`: the former represents  $t$ 's partition in terms of the identifier of that partition's first row, the latter gives  $t$ 's position inside that partition. Once both criteria are logged, the `writeWIN(④, t.ρ, ...)` call returns  $t.ρ$ .

### 2.3 Phase 2: Interpretation

**Definition 3** (Interpreter, Phase 2). Interpreter  $q^2$  for instrumented query  $q^1$  exclusively manipulates dependency sets: if the evaluation of a subexpression  $e^1$  of  $q^1$  depended on the input table cells  $i_1, i_2, \dots, i_n$ , its interpreted counterpart  $e^2$  in  $q^2$  evaluates to the dependency set  $\{i_1, i_2, \dots, i_n\}$ .

The definition implies that interpreter  $q^2$  reads and outputs tables of the same shape (cardinality and width) as instrumented query  $q^1$ : where Phase 1 reads table  $r^1$ , the interpreter reads  $r^2$  whose cells hold dependency sets (see table `map2` in Figure 7 on the right). Note that corresponding rows in  $r^1$  and  $r^2$  share their identifiers  $\rho$  to establish a one-to-one correspondence between the cells of both tables.

Singleton dependency sets in source table cells indicate that each of these cells only depends on itself. In table `map2`, unique identifier  $\mathbf{x}_{(x,y)}$  represents the cell in column  $\mathbf{x}$  of the row with  $\rho = m_{(x,y)}$ ; likewise,  $\mathbf{y}_{(x,y)}$  and  $\mathbf{a}_{(x,y)}$  represent cells in columns  $\mathbf{y}$  and  $\mathbf{alt}$ , respectively. These cell identifiers are entirely abstract and never computed with (cf. with the *colors* of [5]).

The interpreter for CTE `max_scan` is shown in Figure 8. CTE `max_scan2` preserves the syntactic shape of `max_scan1` in Figure 6: a window-based aggregation consumes the result of the join between tables `rays2` and `angles2`. Computation, however, is over dependency sets instead of values. Rather than committing early to one of many viable relational set representations [7, 29, 45], `max_scan2` uses the usual operators  $\cup/\cup$  where these sets are combined/aggregated.

Following the above definition, the non-standard interpretation of functions  $p^1, f^1, g^1$  yields variants  $_2$  collecting the dependencies for those columns that influence the functions' evaluation (cf. with Section 2.2):

$$\begin{aligned} p^2(\mathbf{r}, \mathbf{a}) &= \mathbf{r.r_x} \cup \mathbf{a.a_x} \cup \mathbf{r.r_y} \cup \mathbf{a.a_y} \\ f^2(t) &= t.r_{x1} \cup t.r_{y1} \\ g^2(t) &= t.r_{rx} \cup \emptyset \cup t.r_{ry} \cup \emptyset. \end{aligned}$$

As described in Section 2.1, these functions exclusively manipulate dependency sets of type  $\mathbb{P}$ . The literals 17 and 10 map to  $\emptyset$  in  $g^2$  since both do not depend on any input data whatsoever. Set aggregate  $\bigcup t.a\_angle$  OVER ( $w$ ) in Line 4 interprets `MAX(t.a_angle) OVER (w)` in `max_scan1`: according to the SQL semantics, all  $t.a\_angle$  values inside current window  $w$  are aggregated to evaluate the `MAX` window function [47, § 4.16.3] and thus influence the function's result.

The interpreter uses  $Y(D)$  to indicate that dependency set  $D$  contains cells describing *why*-provenance instead of the default *where*-provenance. We construct the *why*-dependency set  $Y(p^2(\mathbf{r}, \mathbf{a}))$  in Line 12 to reflect that predicate  $p$  inspects exactly these cells to decide whether rows  $\mathbf{r}$  and  $\mathbf{a}$  are join partners. (We use `LATERAL` to bind this set to  $Y_{join}$  as it is referenced multiple times later on.) Likewise, we form  $Y_{win}$  in Lines 15 and 16 to collect the cells  $Y(f^2(t)) \cup Y(g^2(t))$  that are inspected to decide how window frames are formed. Line 4 then adds these *why*-dependencies to the provenance of the `MAX` window aggregate.

`max_scan2` reads the logs written in Phase 1 to (1) reenact  $p^1$ 's filtering decisions and (2) to reconstruct the window frames formed by  $f^1$  and  $g^1$ . If `read_JOIN2`( $\textcircled{3}, \mathbf{r}, \rho, \mathbf{a}, \rho$ ) returns a join row identifier, rows  $\mathbf{r}$  and  $\mathbf{a}$  have been found to partner in Phase 1. `read_IN`( $\textcircled{4}, t, \rho$ ) retrieves partition representative `win.part` and in-partition position `win.rank` to

output		
x	y	visible?
⋮	⋮	⋮
Ⓛ { $\mathbf{x}_{(2,12)}$ }	{ $\mathbf{y}_{(2,12)}$ }	$\left\{ \begin{array}{l} \mathbf{x}_{(2,12)}, \mathbf{y}_{(2,12)}, \mathbf{a}_{(2,12)}, \\ \mathbf{x}_{(3,12)}, \mathbf{y}_{(3,12)}, \mathbf{a}_{(3,12)}, \\ \dots \\ \mathbf{x}_{(15,10)}, \mathbf{y}_{(15,10)}, \mathbf{a}_{(15,10)}, \\ \mathbf{x}_{(16,10)}, \mathbf{y}_{(16,10)}, \mathbf{a}_{(16,10)} \end{array} \right\}$
⋮	⋮	⋮
Ⓛ { $\mathbf{x}_{(3,4)}$ }	{ $\mathbf{y}_{(3,4)}$ }	$\left\{ \begin{array}{l} \mathbf{x}_{(3,4)}, \mathbf{y}_{(3,4)}, \mathbf{a}_{(3,4)}, \\ \mathbf{x}_{(4,5)}, \mathbf{y}_{(4,5)}, \mathbf{a}_{(4,5)}, \\ \dots \\ \mathbf{x}_{(15,9)}, \mathbf{y}_{(15,9)}, \mathbf{a}_{(15,9)}, \\ \mathbf{x}_{(16,10)}, \mathbf{y}_{(16,10)}, \mathbf{a}_{(16,10)} \end{array} \right\}$
⋮	⋮	⋮

Figure 9: Where-provenance of the visibility of spots 1 and 2 (see Figure 4) as derived by interpretation in Phase 2.

enable the `WINDOW` clause to place row  $t$  inside its proper frame.

**Output.** Interpretation for the visibility query of Figure 3 yields the dependency set table of Figure 9. For a spot in the terrain located at  $(x, y)$ , we learn that its coordinates have been copied over from input table `map` (the cells in column  $\mathbf{x}$  solely depend on  $\mathbf{x}_{(x,y)}$ ; likewise for column  $\mathbf{y}$ ). Spot visibility, however, depends on the terrain's altitude along the ray from  $(x, y)$  to  $\boxtimes$ . Indeed, Figure 4 simply is a visualization of the dependency sets found in column `visible?` of table `output` in Figure 9.

### 3. INTERPRETING SQL IN SQL

The query instrumentation of Phase 1 and the construction of the interpreter of Phase 2 are based on a pair of rule-based SQL source transformations. We first *normalize* the input query to facilitate transformation rules that do not face large monolithic `SELECT` blocks but may focus on a single SQL clause at a time.

**Definition 4** (Normalized Query). All `SELECT` blocks in the normalized query for subject query  $q$  adhere to the syntactic form shown in Figure 10. Normalization preserves the semantics of  $q$ .

Normalization of the input query rests on the following two cornerstones:

**Explicitness.** Expand the column list implicit in `SELECT *`.

In `SELECT` clauses, name expressions  $e$  explicitly ( $e$  AS  $c$ ).

In `FROM` clauses, introduce explicit row aliases for tables or subqueries  $q$  ( $q$  AS  $t$ ). In expressions, use qualified column references ( $t.c$ ) only. Expand `DISTINCT` into `DISTINCT ON`. Trade inline window specifications for explicit `WINDOW` clauses. Inline the bodies of non-recursive UDFs (like `dist` of Figure 3). Remove syntactic sugar to reduce query diversity, e.g., supply empty `GROUP BY` criteria  $g \equiv ()$ , or make defaults like `OFFSET 0` and `LIMIT ALL` explicit, should any of these be missing.

**Clause isolation.** Traverse the query syntax tree bottom up. Inside a `SELECT` block, isolate its SQL clauses by placing each clause inside a separate subquery. This leads to “onion-style” uncorrelated nesting in the `FROM` clause, cf. the sketch of the resulting normal form in Figure 10. On completion, transformation rules like `WINDOW` or `GROUP` (see Figure 12, discussed below) may assume that they encounter single-table `FROM q AS t` clauses only.

```

SELECT ...
FROM (SELECT DISTINCT ON(...) ...
FROM (SELECT ... AGG(...) OVER(w φ) ...
FROM (SELECT ... AGG(...) ...
FROM (SELECT ...
FROM q, ..., q
WHERE p) AS t
GROUP BY g
HAVING p) AS t
WINDOW w AS (...)) AS t
ORDER BY o) AS t
ORDER BY o
OFFSET n
LIMIT n

```

**Figure 10:** Syntactic shape of a normalized `SELECT` block after SQL clause isolation. Any but the innermost layer of the “onion” may be missing.

As an example, see Figure 5 where the `WINDOW` clause has been isolated from the join of `rays` and `angles`.

Normalization preserves query semantics as well as data provenance. This holds, in particular, for clause isolation: from inner to outer, the onion’s layers adhere to the evaluation order defined for SQL clauses in a `SELECT` block [47, § 7.5ff].

**Definition 5** (Syntactic Transformation  $\Rightarrow$ ). *Given a normalized subject query  $q$ , the syntax-directed mapping*

$$q \Rightarrow \langle q^{\mathbb{1}}, q^{\mathbb{2}} \rangle$$


derives both  $q$ ’s instrumented variant  $q^{\mathbb{1}}$  and interpreter  $q^{\mathbb{2}}$ . Mapping  $\Rightarrow$  is collectively defined by the inferences rules of Figure 12 and Figure 21 (in Appendix A).

The synchronized derivation allows  $q^{\mathbb{1}}$  and  $q^{\mathbb{2}}$  to readily share information about call sites  $\mathbb{O}$  when we place a call to  $write_{\square}(\mathbb{O}, \dots)$  in  $q^{\mathbb{1}}$  and its associated  $read_{\square}(\mathbb{O}, \dots)$  call in  $q^{\mathbb{2}}$ . (The inference rules invoke  $\mathbb{O} = site()$  to obtain arbitrary yet fresh call site identifiers  $\mathbb{O}$ .)

Figure 12 displays a representative subset of the complete rule set. Taken jointly with the additions of Figure 21 in the appendix, the rules cover the rich SQL dialect characterized in the introduction and can translate the visibility query of Figure 3 as well as the 22 queries of the TPC-H benchmark (see Section 4 below). In the rules’ antecedents, we use  $|q_i \Rightarrow \langle \cdot, \cdot \rangle|_{i=1, \dots, n}$  to indicate that all (sub)queries  $q_1, \dots, q_n$  are to be transformed.

Mapping  $\Rightarrow$  proceeds bottom-up and first establishes trivial interpreters for SQL’s syntactic leaf constructs. No logging is required in these cases. Rule `LIT`: A literal  $l$  represents itself: its interpreter thus returns the empty set  $\emptyset$  of input data dependencies. Rule `COL`: In Phase 2, a column reference  $t.c$  holds a set of cell identifiers that represents  $t.c$ ’s data dependencies (see Definition 3). The rule thus simply returns this set. Rule `TABLE` ensures that Phase 1 operates over regular base data held in the cells of  $table^{\mathbb{1}}$  while Phase 2 reads (singleton) dependency sets from  $table^{\mathbb{2}}$  that represent these cells (cf. Figure 7).

Non-leaf rules first invoke  $\Rightarrow$  on constituent queries and assemble the results to form composite instrumentations and interpreters. Rule `BUILTIN` manifests that the evaluation of a built-in SQL operator  $\oplus$  (returning a single scalar, row, or array value) depends on all of its  $n$  arguments  $e_i$ . The interpreter thus unions the arguments’ dependency sets  $e_i^{\mathbb{2}}$ . Rule `WITH` invokes  $\Rightarrow$  recursively on the common table expression  $q_i$  but otherwise preserves the syntactic shape of the input query (Section 2.1). The rule does, however, extend

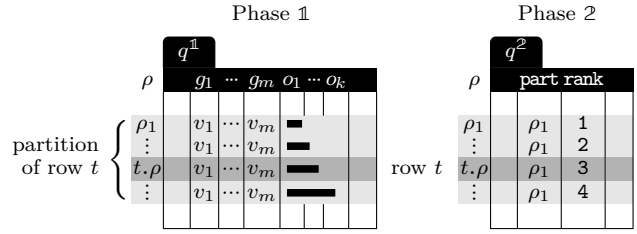

**Figure 11:** Placement of row  $t$  in a windowed table with clause `WINDOW  $w$  AS (PARTITION BY  $g_1, \dots, g_m$  ORDER BY  $o_1, \dots, o_k$ )`. All rows in  $t$ ’s partition agree on `FIRST_VALUE( $t.\rho$ ) OVER ( $w$ ) =  $\rho_1$` . In its partition,  $t$  ranks 3rd (bars  $\blacksquare$  picture the ordering criteria). Pair  $(\rho_1, 3)$  thus exactly pinpoints  $t$ ’s placement in Phase 2.

the schemata of all CTEs to expose new column  $\rho$  whose row identifiers help to relate the results of Phases 1 and 2 (again, see Figure 7). Shape preservation in Rule `WITH`, specifically, presents the opportunity to use SQL’s `WITH` to assign a name, say  $t$ , to any intermediate query result of interest. After interpretation, table  $t^{\mathbb{2}}$  will hold the *where*- and *why*-provenance of the intermediate result. The ability to inspect such intermediate provenance (as computed by common table expression `max_scan^2`, for example, see Figure 8) can be instrumental in the analysis and debugging of very complex queries.

Rule `JOIN` infers the instrumentation and interpreter for  $m$ -fold joins. Such joins (or its simpler variants, see Appendix A) form the innermost layer of the onion. All other SQL clauses of the current `SELECT` block are placed in enclosing layers.

As discussed in Section 2.2, instrumented query  $i^{\mathbb{1}}$  invokes  $write_{join(m)}$  to record which combinations of rows satisfied join predicate  $p$  and to obtain a new row identifier  $\rho$  that represents the joined row—otherwise, the input query and  $i^{\mathbb{1}}$  perform the same computation. Interpreter  $i^{\mathbb{2}}$  re-enacts the join based on the log and  $read_{join(m)}$  as described in Section 2.3. Since, in the input query, the evaluation of  $p$  determined the inclusion of a joined row with its columns  $c_1, \dots, c_n$ , we collect  $e_i^{\mathbb{2}} \cup Y(p^{\mathbb{2}})$  to form the full *where*- and *why*-provenance for column  $c_i$ .

Rule `GROUP` instruments `GROUP BY` queries to collect the row identifiers of the current group (via the set aggregate  $\bigcup \{t.\rho\}$ ).  $write_{grp}$  logs the resulting row identifier set along with a unique group identifier  $\rho$ . When Phase 2 processes row  $t$ , it invokes  $read_{grp}(\mathbb{O}, t.\rho)$  to retrieve the identifier  $group.\rho$  of  $t$ ’s group as a stand-in grouping criterion. The interpreter thus faithfully re-enacts the grouping performed in Phase 1. In Phase 2, Rule `AGG` turns a value-based aggregate  $AGG(e^{\mathbb{1}})$  into a set aggregate  $\bigcup e^{\mathbb{2}}$  that collects the dependencies of all evaluations of its argument  $e$  (this models SQL’s aggregate semantics [47, § 4.16.4]). To this *where*-provenance, Rule `GROUP` adds the *why*-provenance  $\bigcup Y_{group}$  to reflect (1) that the criteria  $g_i$  jointly determined which group a row belongs to and (2) that `HAVING` predicate  $p$  decided the group’s inclusion in the result.

The rows of a windowed table are partitioned and then ordered before a window—or: frame—of rows is formed around each input row  $t$  [47, § 4.15.14]. Rule `WINDOW` thus injects a call to  $write_{win}$  that logs the identifier of  $t$ ’s partition as well as the row’s intra-partition position (Figure 11 illustrates). Later, the interpreter reads the pair back (cf. `win.part` and `win.rank` in  $i^{\mathbb{2}}$ ) to correctly place  $t$  among its

$$\begin{array}{c}
\oplus \in \{ \cdot + \cdot, \cdot \leftarrow \cdot, \text{ROW}(\cdot, \dots, \cdot), \cdot \text{ IN } (\cdot, \dots, \cdot), \dots \} \\
\frac{l \Rightarrow \langle l, \emptyset \rangle \text{ (LIT)}}{t.c \Rightarrow \langle t.c, t.c \rangle \text{ (COL)}} \quad \frac{\text{table} \Rightarrow \langle \text{table}^1, \text{table}^2 \rangle \text{ (TABLE)}}{e_i \Rightarrow \langle e_i^1, e_i^2 \rangle \Big|_{i=1..n} \text{ (BUILTIN)}}{\oplus(e_1, \dots, e_n) \Rightarrow \langle \oplus(e_1^1, \dots, e_n^1), e_1^2 \cup \dots \cup e_n^2 \rangle} \\
\frac{|q_i \Rightarrow \langle q_i^1, q_i^2 \rangle \Big|_{i=0..n} \quad i^1 = \text{WITH [RECURSIVE]} \begin{array}{l} t_1^1(\rho, c_{11}, \dots, c_{1k_1}) \text{ AS } (q_1^1), \dots, \\ t_n^1(\rho, c_{n1}, \dots, c_{nk_n}) \text{ AS } (q_n^1) \\ q_0^1 \end{array}}{\text{WITH [RECURSIVE]} \begin{array}{l} t_1^2(\rho, c_{11}, \dots, c_{1k_1}) \text{ AS } (q_1^2), \dots, \\ t_n^2(\rho, c_{n1}, \dots, c_{nk_n}) \text{ AS } (q_n^2) \\ q_0^2 \end{array} \quad i^2 = \text{WITH [RECURSIVE]} \begin{array}{l} t_1^2(\rho, c_{11}, \dots, c_{1k_1}) \text{ AS } (q_1^2), \dots, \\ t_n^2(\rho, c_{n1}, \dots, c_{nk_n}) \text{ AS } (q_n^2) \\ q_0^2 \end{array}}{\text{WITH [RECURSIVE]} \begin{array}{l} t_1(c_{11}, \dots, c_{1k_1}) \text{ AS } (q_1), \dots, \\ t_n(c_{n1}, \dots, c_{nk_n}) \text{ AS } (q_n) \\ q_0 \end{array} \Rightarrow \langle i^1, i^2 \rangle} \text{ (WITH)} \\
\frac{m \geq 1 \quad |e_i \Rightarrow \langle e_i^1, e_i^2 \rangle \Big|_{i=1..n} \quad |q_i \Rightarrow \langle q_i^1, q_i^2 \rangle \Big|_{i=1..m} \quad p \Rightarrow \langle p^1, p^2 \rangle \quad \textcircled{O} = \text{site}()}{\begin{array}{l} \text{SELECT } \text{write}_{\text{JOIN}(m)}(\textcircled{O}, t_1 \cdot \rho, \dots, t_m \cdot \rho) \text{ AS } \rho, \\ e_1^1 \text{ AS } c_1, \dots, e_n^1 \text{ AS } c_n \\ \text{FROM } q_1^1 \text{ AS } t_1, \dots, [\text{LATERAL}] q_m^1 \text{ AS } t_m \\ \text{WHERE } p^1 \end{array} \quad \begin{array}{l} \text{SELECT } \text{join} \cdot \rho \text{ AS } \rho, e_1^2 \cup Y_{\text{join}} \text{ AS } c_1, \dots, e_n^2 \cup Y_{\text{join}} \text{ AS } c_n \\ q_1^2 \text{ AS } t_1, \dots, [\text{LATERAL}] q_m^2 \text{ AS } t_m, \\ \text{LATERAL read}_{\text{JOIN}(m)}(\textcircled{O}, \langle t_1 \cdot \rho, \dots, t_m \cdot \rho \rangle) \text{ AS } \text{join}(\rho), \\ \text{LATERAL } Y(p^2) \text{ AS } Y_{\text{join}} \end{array}}{\begin{array}{l} \text{SELECT } e_1 \text{ AS } c_1, \dots, e_n \text{ AS } c_n \\ \text{FROM } q_1 \text{ AS } t_1, \dots, [\text{LATERAL}] q_m \text{ AS } t_m \Rightarrow \langle i^1, i^2 \rangle \\ \text{WHERE } p \end{array}} \text{ (JOIN)} \\
\frac{q \Rightarrow \langle q^1, q^2 \rangle \quad p \Rightarrow \langle p^1, p^2 \rangle \quad |e_i \Rightarrow \langle e_i^1, e_i^2 \rangle \Big|_{i=1..n} \quad |g_i \Rightarrow \langle g_i^1, g_i^2 \rangle \Big|_{i=1..m} \quad \textcircled{O} = \text{site}()}{\begin{array}{l} \text{SELECT } \text{write}_{\text{GRP}}(\textcircled{O}, \bigcup \{t \cdot \rho\}) \text{ AS } \rho, \\ e_1^1 \text{ AS } c_1, \dots, e_n^1 \text{ AS } c_n \\ \text{FROM } q_1^1 \text{ AS } t \\ \text{GROUP BY } g_1^1, \dots, g_m^1 \\ \text{HAVING } p^1 \end{array} \quad \begin{array}{l} \text{SELECT } \text{group} \cdot \rho \text{ AS } \rho, e_1^2 \cup \bigcup Y_{\text{group}} \text{ AS } c_1, \dots, e_n^2 \cup \bigcup Y_{\text{group}} \text{ AS } c_n \\ q^2 \text{ AS } t, \\ \text{LATERAL read}_{\text{GRP}}(\textcircled{O}, t \cdot \rho) \text{ AS } \text{group}(\rho), \\ \text{LATERAL } Y(g_1^2 \cup \dots \cup g_m^2 \cup p^2) \text{ AS } Y_{\text{group}} \end{array}}{\begin{array}{l} \text{SELECT } e_1 \text{ AS } c_1, \dots, e_n \text{ AS } c_n \\ \text{FROM } q \text{ AS } t \\ \text{GROUP BY } g_1, \dots, g_m \Rightarrow \langle i^1, i^2 \rangle \\ \text{HAVING } p \end{array}} \text{ (GROUP)} \\
\frac{e \Rightarrow \langle e^1, e^2 \rangle}{\text{AGG}(e) \Rightarrow \langle \text{AGG}(e^1), \bigcup e^2 \rangle} \text{ (AGG)} \quad \frac{\text{AGG}(e) \Rightarrow \langle a^1, a^2 \rangle \quad Y = \bigcup Y_{\text{win}} \text{ OVER } (w \phi)}{\text{AGG}(e) \text{ OVER } (w \phi) \Rightarrow \langle a^1 \text{ OVER } (w \phi), a^2 \text{ OVER } (w \phi) \cup Y \rangle} \text{ (AGGWIN)} \\
\frac{q \Rightarrow \langle q^1, q^2 \rangle \quad |e_i \Rightarrow \langle e_i^1, e_i^2 \rangle \Big|_{i=1..n} \quad |g_i \Rightarrow \langle g_i^1, g_i^2 \rangle \Big|_{i=1..m} \quad |o_i \Rightarrow \langle o_i^1, o_i^2 \rangle \Big|_{i=1..k} \quad \textcircled{O} = \text{site}()}{\begin{array}{l} \text{SELECT } \text{write}_{\text{WIN}}(\textcircled{O}, t \cdot \rho, \text{FIRST\_VALUE}(t \cdot \rho) \text{ OVER } (w), \\ \text{RANK}() \text{ OVER } (w)) \text{ AS } \rho, \\ e_1^1 \text{ AS } c_1, \dots, e_n^1 \text{ AS } c_n \\ \text{FROM } q_1^1 \text{ AS } t \\ \text{WINDOW } w \text{ AS } (\text{PARTITION BY } g_1^1, \dots, g_m^1 \\ \text{ORDER BY } o_1^1 \text{ dir}_1, \dots, o_k^1 \text{ dir}_k) \end{array} \quad \begin{array}{l} \text{SELECT } t \cdot \rho \text{ AS } \rho, e_1^2 \text{ AS } c_1, \dots, e_n^2 \text{ AS } c_n \\ \text{FROM } q^2 \text{ AS } t, \\ \text{LATERAL read}_{\text{WIN}}(\textcircled{O}, t \cdot \rho) \text{ AS } \text{win}(\text{part}, \text{rank}), \\ \text{LATERAL } Y(o_1^2 \cup \dots \cup o_k^2) \text{ AS } Y_{\text{win}} \end{array}}{\begin{array}{l} \text{SELECT } e_1 \text{ AS } c_1, \dots, e_n \text{ AS } c_n \\ \text{FROM } q \text{ AS } t \\ \text{WINDOW } w \text{ AS } (\text{PARTITION BY } g_1, \dots, g_m \\ \text{ORDER BY } o_1 \text{ dir}_1, \dots, o_k \text{ dir}_k) \Rightarrow \langle i^1, i^2 \rangle \end{array}} \text{ (WINDOW)}
\end{array}$$

Figure 12: Excerpt of inference rules  $q \Rightarrow \langle i^1, i^2 \rangle$  that derive instrumented query  $i^1$  and interpreter  $i^2$  from input query  $q$ .

peers. Since the interpretation of windowed aggregates preserves their original frame clause  $\phi$  (see Rule AGGWIN), Phase 2 builds *where*-provenance from exactly those dependency sets found in the frame around row  $t$ .<sup>2</sup> Again, this coincides with the SQL window aggregate semantics [47, §4.16.3]. Much like in the GROUP BY case, the rules add *why*-provenance based on the partitioning and ordering criteria  $g_i$  and  $o_j$ , respectively (these are collected in  $Y_{\text{win}}$  and then added in Rule AGGWIN).

<sup>2</sup>The `max_scan` CTE of Figure 3 omits the default frame clause  $\phi \equiv \text{RANGE BETWEEN UNBOUNDED PRECEDING AND CURRENT ROW}$ . Rules AGGWIN and WINDOW work for arbitrary frames.

**Rule characteristics.** The mapping rules for  $\Rightarrow$  discussed here exhibit general properties that are characteristic for the full rule set:

- *Why*-provenance may be optionally derived in addition to *where*-provenance. If we omit the lighter subexpressions in the definitions of the  $i^2$ , interpretation will compute *where*-provenance only. Since the *why*-provenance of an output cell can be substantial (e.g., in Rules AGG and AGGWIN, the rows of an entire group or window frame contribute their dependency sets), we can expect significant time and space savings if we skip the derivation of *why*-dependencies.
- During interpretation, provenance sets grow monotonically (once found, dependencies are never thrown away). This

<pre> write<sub>JOIN(m)</sub>(<math>\mathcal{O}, \rho_1, \dots, \rho_m</math>):   {<math>\rho</math>} <math>\leftarrow</math> get<sub>JOIN</sub>(<math>\mathcal{O}, \langle \rho_1, \dots, \rho_m \rangle</math>)   if {<math>\rho</math>} = <math>\emptyset</math> then       <math>\rho \leftarrow</math> put<sub>JOIN</sub>(<math>\mathcal{O}, \langle \rho_1, \dots, \rho_m \rangle, row()</math>)     return <math>\rho</math>  write<sub>GRP</sub>(<math>\mathcal{O}, \{\rho_1, \dots, \rho_n\}</math>):   {<math>\rho</math>} <math>\leftarrow</math> get<sub>GRP</sub>(<math>\mathcal{O}, \{\rho_1, \dots, \rho_n\}</math>)   if {<math>\rho</math>} = <math>\emptyset</math> then       <math>\rho \leftarrow</math> put<sub>GRP</sub>(<math>\mathcal{O}, \{\rho_1, \dots, \rho_n\}, row()</math>)     return <math>\rho</math>  write<sub>WIN</sub>(<math>\mathcal{O}, \rho, \rho_{part}, rank</math>):   if get<sub>WIN</sub>(<math>\mathcal{O}, \rho</math>) = <math>\emptyset</math> then       put<sub>WIN</sub>(<math>\mathcal{O}, \rho, \langle \rho_{part}, rank \rangle</math>)     return <math>\rho</math> </pre>	<pre> read<sub>JOIN(m)</sub>(<math>\mathcal{O}, \langle \rho_1, \dots, \rho_m \rangle</math>):   return get<sub>JOIN</sub>(<math>\mathcal{O}, \langle \rho_1, \dots, \rho_m \rangle</math>)  read<sub>GRP</sub>(<math>\mathcal{O}, \rho</math>):   return get<sub>GRP</sub>(<math>\mathcal{O}, \underbrace{\{\dots, \rho, \dots\}}_{\substack{\text{match sets P} \\ \text{with } \rho \in P}}</math>)  read<sub>WIN</sub>(<math>\mathcal{O}, \rho</math>):   return get<sub>WIN</sub>(<math>\mathcal{O}, \rho</math>) </pre>
---	---

**Figure 13: Pseudo code:  $write_{\square}/read_{\square}$  function pairs for log writing and reading,  $\square \in \{JOIN(m), GRP, WIN\}$ .**

helps to devise a simple and efficient internal representation of provenance sets.

### 3.1 Log Writing and Reading

In the absence of concrete values, the interpreters consult logs (via  $read_{\square}$  calls) to re-enact relevant value-based computations performed in Phase 1. Pseudo code for three  $read_{\square}$  functions and their  $write_{\square}$  pendants is shown in Figure 13. These functions invoke lower-level routines  $put_{\square}$  and  $get_{\square}$  that write to and read from log file  $log_{\square}$ . The log files may be realized in various forms, *e.g.*, in terms of operating system files or indexed relational tables. Below, we discuss the details of logging but abstract from any particular implementation. Appendix B.1 shows concrete log contents for a set of sample tables and queries and also elaborates on a purely relational, indexed encoding of log files. The SQL-based implementation described there has been used in the upcoming Section 4.

Lower-level logging routines are:

- $put_{\square}(\mathcal{O}, k, e)$ : add record  $\langle \mathcal{O}, k, e \rangle$  to file  $log_{\square}$ , then return entry  $e$ .
- $get_{\square}(\mathcal{O}, k)$ : from  $log_{\square}$ , return the set of  $e$  found in records  $\langle \mathcal{O}, k, e \rangle$ . Return  $\emptyset$  if there are no matching records.
- $row()$ : generate and return a new unique row identifier.

A record  $\langle \mathcal{O}, \langle \rho_1, \dots, \rho_m \rangle, \rho \rangle$  in file  $log_{JOIN}$  indicates that a **FROM** clause at site  $\mathcal{O}$  joined  $m$  rows  $\rho_1, \dots, \rho_m$  to yield a new row  $\rho$ . Function  $write_{JOIN(m)}$  ensures that this fact is recorded *once* in the log: only if a join of  $\rho_1, \dots, \rho_m$  at  $\mathcal{O}$  has not been encountered before (*i.e.*,  $get_{JOIN}(\mathcal{O}, \langle \rho_1, \dots, \rho_m \rangle) = \emptyset$ ), a log entry with a fresh  $\rho$  is made. Phase 1 may attempt such repeated identical writes to  $log_{JOIN}$  if site  $\mathcal{O}$  is located inside a subquery which the query optimizer decided to evaluate more than once (this may happen in the TPC-H benchmark, for example, see Section 4). In such scenarios,  $write_{JOIN(m)}$  makes sure that its side-effect on  $log_{JOIN}$  is not carried out repeatedly. This *write once* safeguard also ensures that  $read_{JOIN(m)}(\mathcal{O}, \langle \rho_1, \dots, \rho_m \rangle)$  will either yield a set of 0 or 1 row identifiers—recall that the interpreter  $i^2$  of Rule JOIN uses this behavior to properly re-enact the join semantics. Analogous remarks apply to  $write_{GRP}/read_{GRP}$  and  $write_{WIN}/read_{WIN}$ .

## 4. THE PROVENANCE TAX

Provenance derivation processes substantially more data than the value-based computation it explains. First, we trade the value-based query  $q$  for the pair  $\langle q^1, q^2 \rangle$ : effectively, the subject query is executed twice. Second, we expect that  $q^1$  is **costly**: The two queries communicate via log files. Log file writes in  $q^1$  lead to additional data movement and incur side effects that may constrain the query optimizer.

$q^2$  is **costly**: Where  $q$  outputs 1NF cell values,  $q^2$  returns entire sets of dependencies. These dependency sets may be large, *e.g.*, if  $q$  invokes aggregate functions.

This section aims to quantify how high this “provenance tax” indeed is and how it correlates with general query characteristics. On the way, we demonstrate how variations of the provenance granularity, dependency set representation, and an awareness of the properties of set operations can lead to significant runtime improvements.

The experiments below derive the full *where-* and *why-* provenance for all 22 queries of the TPC-H benchmark [50]. Here, we set the benchmark’s scale factor to 1, *i.e.*, table `lineitem` holds about 6 000 000 rows. A repetition of the experiments at TPC-H scale factor 10 shows how the approach scales with growing database instances: see Appendix C which reports slowdowns and speed-ups nearly identical to those observed in the discussion below.

All queries execute on a PostgreSQL 9.5 engine hosted on a Linux (kernel 4.4) machine with two 4-core Intel Xeon 5570 CPUs, 70 GB of RAM, and harddisk-based secondary storage. We report the average performance of five runs with best and worst execution times ignored. Instead of absolute wall clock times we focus on the slowdown—or speed-up—we observe once we switch from value to dependency set computation. In all plots below, a slowdown of  $\times 1$  represents the evaluation time of the original TPC-H queries (no provenance derived). Queries  $Q1$  to  $Q22$  are displayed across the horizontal axes; the plots are thus best read column by column.

**The (non-)impact of normalization.** Figure 14 summarizes the impact of the individual phases of provenance derivation. The “onion-style” query normalization (Figure 10) does not alter the semantics and—on its own—also appears to preserve query performance (see the points  $\square$  cluster around  $\times 1$ ). We have found RDBMSs to successfully remove the simple uncorrelated nesting in the **FROM** clause and generate plans identical to those for the original TPC-H queries. For  $Q9$ , the explicit onion nesting leads PostgreSQL to aggregate first and sort later which even beats the system’s usual planning in which these operations are swapped. (Out of curiosity, we also fed the 22 original and normalized queries into HyPer [36] with its advanced query unnesting procedure [38] and found no plan differences at all.)

An analysis of the experiments reveals four major subject query characteristics that influence the overhead of provenance derivation in Phases 1 and 2. Figure 15 shows these query categories and how the 22 TPC-H queries fit in. We discuss this categorization below, phase by phase.

### 4.1 Phase 1: Impact of Logging

Relative to the original TPC-H queries, we observe a geometric mean slowdown of 3.4 in Phase 1 (see  $\blacksquare$  in Figure 14). The gaps  $\square^{\blacksquare}$  are a measure of the logging effort that the instrumented queries invest. The log sizes and call site counts



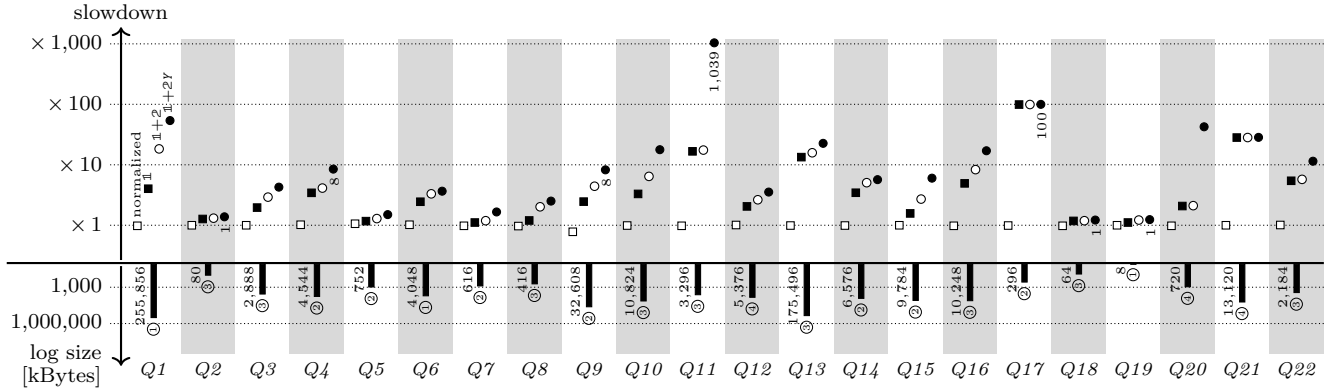


Figure 14: Normalization ( $\square$ ), Phase 1 ( $\blacksquare$ ), Phases 1+2 ( $\circ$  without/ $\bullet$  with *why*-provenance) relative to value-based TPC-H.

Query Characteristic	Yes	No
	(High Overhead)	(Low Overhead)
1 non-selective? (high # of log writes)	<i>Q1, Q13</i>	<i>Q2, Q5, Q7, Q17, Q18, Q19</i>
correlation? (repeated side effects)	<i>Q4, Q11, Q17, Q21, Q22</i>	<i>Q1, Q5, Q6, Q7, Q12, Q18</i>
2 high dependency set cardinality?	<i>Q1, Q9, Q11, Q13, Q15, Q16, Q20, Q22</i>	<i>Q2, Q3, Q10, Q17, Q19</i>
expensive <i>why</i> -provenance?	<i>Q1, Q11, Q20</i>	<i>Q5, Q6, Q8, Q14, Q18, Q19, Q21</i>

Figure 15: Query characteristics that influence provenance overhead in Phases 1 and 2 (all TPC-H queries categorized).

in  $\circ$  at the bottom of Figure 14 show that, on average, a TPC-H query contains 2.5 *write* $_{\square}$  call sites that log just below 24 MB of data if we use the tabular representation of logs described in Appendix B.1.

**Selectivity and logging overhead.** Selective filters and joins reduce data *as well as* log volume (recall the placement of *write* $_{\text{JOIN}(m)}$  in Rule JOIN). Queries *Q2, Q18, Q19* show this most clearly and only induce negligible overhead in Phase 1. The opposite holds for *Q1* (whose non-selective predicates let almost all 6 000 000 rows of *lineitem* pass) and *Q13* (in which a left outer join requires the logging of the identifiers of both qualifying and non-qualifying pairs of rows). Both queries log substantial data volumes and exhibit large Phase 1 overhead.

**Correlation and side-effecting log writes.** *write* $_{\square}$  call sites located in a subquery that the RDBMS fails to decorrelate and unnest (a problem that already occurs with the original TPC-H query [4]) trigger the functions’ guard against writing identical log entries repeatedly, see Section 3.1. In our implementation, this increases the cost of *write* $_{\square}$  to about 0.14 ms per call. Queries *Q4, Q11, Q17, Q21, and Q22* contain such correlated subqueries in their **WHERE** and **HAVING** clauses and show the Phase 1 cost of avoiding these unwanted side effects.

**Logging without side effects?** *Tupling* [31] suggests a functionally pure implementation alternative in which a row is extended by an *extra column* that holds its associated log entry: instead of issuing a side-effecting log write, *write* $_{\text{JOIN}(2)}$  constructs and returns a pair  $(\rho, \langle \rho_1, \rho_2 \rangle)$  to indicate that rows  $\rho_1$  and  $\rho_2$  were joined to form a new row  $\rho$ , for example. For *Q17* and *Q21*, this shows a promising runtime

improvement of factor 76 and 28 in Phase 1, respectively. However, tupling complicates the treatment of constructs like scalar or **IN** subqueries which, effectively, now need to be executed twice (once yielding the original, once the extended rows). Queries like *Q18* thus are penalized. Tupling bears a promising performance advantage in Phase 1 but we would (1) lose fully compositional query transformation (the use of tupling would be conditioned on the absence of the mentioned query constructs) and (2) sacrifice query shape preservation (Section 2.1) and ultimately face the same problems as *Perm* and *GProM* (Section 4.4).

We consider the conditional use of tupling an interesting item of future work.

## 4.2 Phase 2: Computing with Dependency Sets

We derive provenance through the composition of Phases 1 and 2. Measurement  $\circ$  in Figure 14 thus reflects the *overall slowdown if both phases are executed in sequence*. We find a mean slowdown of factor 4.6 (visualized by the  $\square^{\circ}$  gaps) compared to value-based query evaluation.

**Dependency set cardinality.** Where a value-based query manipulates an 1NF cell value  $v$ , its interpreter will construct  $v$ ’s—possibly large—dependency set: if we consider the entire TPC-H benchmark and form the mean, we find that each output data cell depends on about 10 000 input cells. When a single cell holds an aggregate of a group (or window) of rows, its dependency set cardinality directly reflects the group (or window) size, see Rule AGG. Foremost, this affects *Q1* and its eight aggregates, one of which (column *sum\_charge*) yields a *where*-dependency set of about 4 500 000 elements per output cell. As an aggregation-heavy OLAP benchmark, TPC-H generally constitutes a challenging workload in this respect (see Figure 15).

**Expensive *why*-provenance.** Recall that we can selectively enable the derivation of *why*-provenance in Phase 2. If we do, we experience larger overall overheads as marked by the points  $\bullet$  in Figure 14, with a mean overall slowdown of factor 9.0. While the logs encode the outcome of a predicate  $p$ , this does not suffice to derive *why*-provenance: we now also need to interpret  $p$  (*i.e.*, evaluate  $p^2$ ) to learn which input items influenced  $p$ ’s value. For *Q11*, in particular, this requires the interpretation of a complex **HAVING** clause where  $p$  contains a three-way join and aggregation. *Q1* now additionally derives how aggregates depend on grouping criteria (see subexpressions  $g_i$  in Rule GROUP), dou-

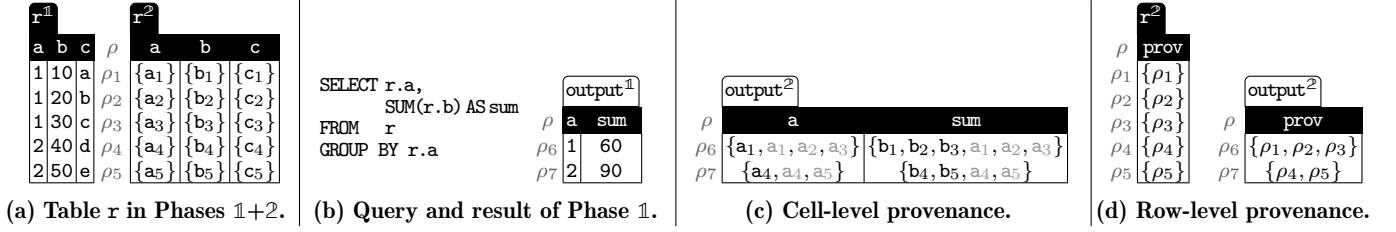


Figure 16: Provenance derivation at cell and row granularities for a simple GROUP BY query.

bling `sum_charge`'s dependency cardinality to 9 000 000 input cells per output cell.

**Dependency set representation.** Given these substantial dependency cardinalities, it is expected that Phase 2 can benefit from efficient set representations. Appendix D indeed makes this observation if we replace the PostgreSQL-native set encoding based on type `int[]` by bit sets [7].

**Beneficial effects of logging.** Logging incurs overhead in Phase 1, but Phase 2 can benefit from the effort. To exemplify, in the original *Q19*, a join between `lineitem` and `part` accounts for 98% of the execution time. In the interpreted *Q19*, table `logJOIN2` acts much like a join index or access support relation [35, 51] from which the row identifiers of the join partners are read off directly. As a result, interpretation is about 10 $\times$  faster than value-based evaluation. The situation is similar for *Q21*, where `logJOIN4` assumes the role of a join index for an expensive four-way join. Additionally, the interpreter saves the evaluation effort for two complex `[NOT] EXISTS(...)` subqueries: the identifier of the row that constitutes the existential quantifier's *why*-provenance is simply read off the log tables. Access support relations that materialize provenance relationships between rows have shown very similar beneficial effects in [34].

### 4.3 Switching From Cell to Row Granularity

The present approach derives provenance at the granularity of *individual table cells*: each output cell is assigned the set of input cells that influenced its value. We obtain highly detailed insight into input-output data dependencies but surely pay a price in terms of interpreter overhead and size of the resulting provenance. It turns out that this level of granularity is not firmly baked into the method. We can straightforwardly adapt it to operate at the less detailed *row* level which suffices for many uses and also is the granularity provided by the majority of existing work [11, 13, 15, 20, 26]. Below, we contrast both granularity levels, sketch how row-level interpretation can be realized, and assess the resulting performance advantage.

For the cell granularity case, consider 5-row input table  $r$  whose Phase 1 and 2 variants are shown in Figure 16(a). In  $r^2$ , each cell is assigned a singleton dependency set (cf. Figure 7). If we use the GROUP BY query of Figure 16(b) as the subject query, Phase 1 yields the `output1` table shown in the same figure. Phase 2 preserves the shape of the output but returns a table whose cells hold dependency sets (Figure 16(c)). Cell identifier shades indicate the provenance kind (*where*, *why*): to arrive at the aggregate value 90 of row  $\rho_7$ , the query had to sum the input cells `b4`, `b5` (holding 40, 50) and decide group membership based on cells `a4`, `a5` (both holding 2).

If we switch to row granularity, Phase 1 remains unchanged. Phase 2 entirely abstracts from the input's columns and thus

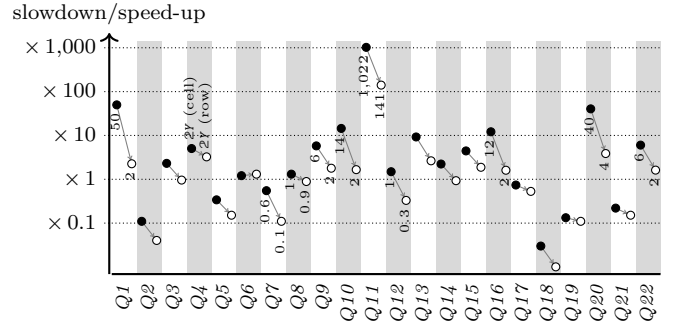


Figure 17: Deriving cell-level (●) vs. row-level provenance (○).

assigns one singleton identifier set per row, see the modified two-column version of  $r^2$  in Figure 16(d). A simplified interpreter (discussed below) tracks row dependencies and finally emits the `output2` table in Figure 16(d). We learn that aggregate value 60 of output row  $\rho_6$  depends on input rows  $\rho_1, \rho_2, \rho_3$ , *i.e.*, exactly those rows of table  $r$  that constitute the group in which column `a` = 1.

The rules of Figures 12 and 21 adapt to row granularity in a systematic fashion. As mentioned, the definitions of the instrumented queries  $i^1$  remain as is. Where the cell-level interpreters  $i^2$  track dependencies column by column, the new row-level interpreters collect dependencies held in the single `prov` column. In Rule JOIN,  $i^2$  is now defined as

```

SELECT join. $\rho$ , t1.prov  $\cup \dots \cup$  tm.prov AS prov
i2 = FROM   q12 AS t1, ..., [LATERAL] qm2 AS tm,
           LATERAL readJOIN( $\langle m \rangle$ ) ( $\odot$ ,  $\langle t_1.\rho, \dots, t_m.\rho \rangle$ ) AS join( $\rho$ )

```

At row granularity level, we process narrow two-column tables (columns  `$\rho$` , `prov`) regardless of the width of the input and output tables. Also, compared to the cell-level variant, the interpreter evaluates fewer  $\cup/\cup$  operations that build smaller dependency sets: in TPC-H, one output row has about 2 500 dependencies on input rows (mean across the benchmark). Figure 17 documents how the interpretation overhead drops by an order of magnitude once we switch from cell- (●) to row-level (○) dependencies.

### 4.4 A Comparison with Perm and GProM

The computation of row-level dependencies also paves the way for a direct comparison with *Perm* [20–22, 24], a long-running research effort that makes a genuine attempt at provenance derivation for SQL. In *Perm*, input queries are translated into a multiset algebra, rewritten and augmented for provenance computation, and then translated back into SQL for execution on PostgreSQL. Unlike the present work, *Perm* opts for an invasive approach and

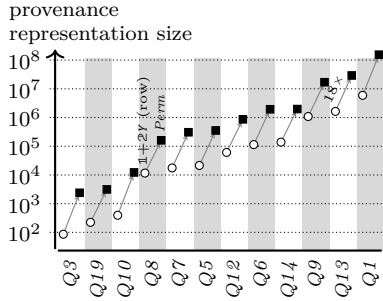


Figure 19: Size of provenance representation: dependency sets (o) vs. *Perm* (■).

adds code that sits between the query rewriter and planner of PostgreSQL 8.3. To any output row  $o$ , *Perm* attaches all columns of those input rows that influence  $o$ 's computation (influence contribution semantics [21])—if  $o$  has  $n$  influencing rows,  $o$  is repeated  $n$  times in the result. For table **r** and the **GROUP BY** query of Figures 16(a) and (b), *Perm* thus emits the table of Figure 18. Row (a, sum) = (1, 60), for example, is contained three times as it depends on all

		output							
		a	sum	r	a	r	b	r	c
result	1	60	1	10	a				
	2	90	2	40	d				
provenance	1	60	1	20	b				
	1	60	1	30	c				
	2	90	2	50	e				

Figure 18: *Perm*'s fully normalized representation of result and provenance (■) for the **GROUP BY** query of Figure 16(b).

input rows with  $a = 1$ . Recall that row-level SQL interpretation represents the same provenance information in the **output**<sup>2</sup> table of Figure 16(d). In practice, the resulting redundancy can be significant, as Figure 19 illustrates: across the TPC-H benchmark queries, *Perm*'s normalized representation of provenance consistently requires more space than dependency sets (we measured a mean factor of 19).

**Row-level interpretation vs. *Perm*.** These space considerations and our earlier observations about query characteristics (Sections 4.1 and 4.2) are also reflected in Figure 20. In this head-to-head slowdown comparison of row-level SQL interpretation (o, including Phases 1 and 2) and *Perm* (■), a trend  $\sigma$  indicates that interpretation showed less slowdown than *Perm*. Over all executable queries, row-level interpretation levies a provenance tax of factor 5.1 while *Perm* imposes a factor of 18.9 (geometric means).

Figure 20 shows that the advantage of interpretation over *Perm* increases with query complexity. *Perm*'s log-free approach pays off in category ① of scans or simple joins and (grouped) aggregation. The price of writing a large log and correlation in Phase 1 (see Section 4.1) makes *Q21* the only complex TPC-H query for which *Perm* outperforms interpretation. As discussed above, tupling for *Q21* could tip the scales in favor of interpretation, though. The queries in ② are characterized by increasing predicate complexity and join width, with the latter contributing to the discussed space overhead: *Perm* generates queries that emit wide rows (of 62 instead of the original 2 columns for TPC-H query *Q8*, for example). Some queries in ② and all queries in ③ feature nested subqueries, which amplify *Perm*'s provenance

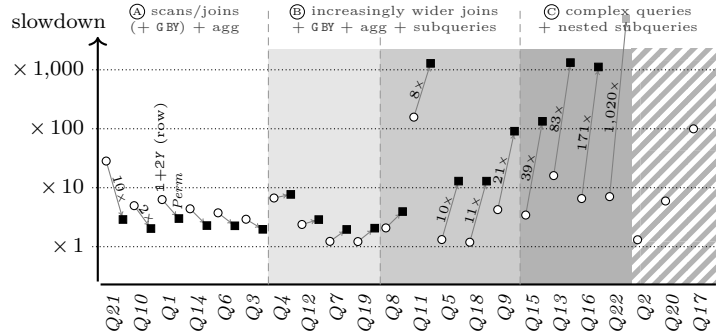


Figure 20: Head-to-head: interpretation at row granularity (o) and *Perm* (■).

representation size problem:<sup>3</sup> a row of the outer query is replicated  $n$  times if the subquery emits  $n$  rows—even if the subquery is existentially quantified [23]. Three queries in category ③ that *Perm* failed to process within 4 hours are marked  $\text{///}$  in Figure 20.

**GProM-style provenance-aware query optimization.** After rewriting for provenance, *Perm* has been found to generate query shapes that significantly deviate from the original subject query. Plans take on a form that challenges existing query processors or may lead to the duplication of work (e.g., see *Perm*'s **GROUP BY** translation rule **R5** in [21]). These observations led to follow-up work on successor project *GProM* that identifies specific algebraic optimizations tuned to cope with challenging query structure [2, 40, 41]. These provenance-aware optimizations primarily target grouping and aggregation and, for some queries, can offer a speed-up of up to factor 3 (personal communication with the author and [41]). With these—partially heuristic, partially cost-based—algebraic rewrites, *GProM* reaches even deeper into the underlying RDBMS than *Perm*.

However, provenance-specific optimizations also apply to the interpretation of SQL. The principle can be adapted to

- match our provenance model (dependency sets),
- be non-invasive, i.e., not reach inside the RDBMS kernel,
- be easily expressible on the SQL language level, i.e., in terms of a shape-preserving source-level transformation.

One particular transformation relates to the occurrence of a closed (non-correlated) subquery  $q_1$  under an aggregate. In Phase 2 we have:

$$\bigcup_{r \in x^2} (q_1 \cup q_2(r)) \equiv q_1 \cup \bigcup_{r \in x^2} q_2(r) \quad , r \text{ not free in } q_1.$$

Note that this rewrite is specific for set aggregation and would be incorrect in a subject query that uses **SUM/+**, for example. In TPC-H, such constellations arise for *Q11*, *Q16*, *Q18*, *Q20*, and *Q22*, where the transformation reduces interpretation time in Phase 2 by factors between 2 and 160 (the latter for *Q22*). The experiments of this section have been performed with the transformation enabled.

## 5. MORE RELATED WORK

The traced evaluation of subject queries is a defining feature of the present work. Phase 1 identifies rows that *actually*

<sup>3</sup>We thus omitted these queries from Figure 19—for *Q22* and its two scalar and existentially quantified subqueries, *Perm* incurs a representation size overhead of factor 25 000.

participated in query evaluation; Phase 2 adds cell-level dependencies and aggregates the Phase 1 findings as needed. This places the approach in the landscape of established provenance notions.

To form *where*-provenance, we collect those input cells that were *used to compute the value* of an output cell—this includes those input cells that were copied verbatim and thus generalizes the notion of *where*-provenance as defined by Buneman in [6]. *Perm* [21] argues for and implements the same generalization. If we combine the *where*- and *why*-provenance derived by interpretation, for each output cell  $o$  we obtain *one* set of input cells that witness  $o$ . This provides a cell-level analog to *lineage* [15] or *influence contribution* [20, 21], concepts originally established at the coarser row level. In deviation from Buneman’s definition of *why*-provenance, we do not derive all possible witnesses but the particular set of input cells that were indeed used by the system to produce  $o$ . This is invaluable in declarative query debugging where such database size reductions can help to prevent users from “drowning in a sea of observations” [16]. Let us note that non-standard interpretation is a member of the *annotation propagation* family of approaches [5] which fail to derive provenance in the presence of empty intermediate results [8].

The shift from values to computation over dependency sets  $\mathbb{P}$  relates to the *provenance semiring* that derives lineage for the positive bag algebra by Green *et al.* [26]. In a nutshell, Phase 2 realizes a SQL semantics interpreted in the particular semiring  $(\mathbb{P}, \perp, \emptyset, \cup_L, \cup_S)$ ,<sup>4</sup> in which rows are annotated with dependency sets. To illustrate, in the treatment of  $\sigma_{\mathbf{P}}(R)$  in [26], rows  $t$  that fail to satisfy predicate  $\mathbf{P}$  are mapped to  $\perp$  which effectively discards  $t$ ’s provenance contribution (case **selection** of Definition 3.2 in [26]). In the present work, this role of  $\mathbf{P}$  is assumed by the **LATERAL** join with function  $read_{\text{JOIN}(m)}$  which discards  $t$  if  $t.p$  cannot be found in the associated log (see the redefinition of interpreter  $i^2$  of Rule JOIN in Section 4.3, set  $m = 1$  to obtain a direct correspondence with [26]).

We understand provenance derivation as dynamic data dependency analysis and share this view with Cheney *et al.* [10, 11]. The interpreters defined in the rules of Figures 12 and 21 propagate and accumulate dependency sets much like the *provenance tracking semantics* defined in Figures 5 and 6 of [10]. The authors state that “[*d*]ynamic provenance may be [*expensive to compute and*] non-trivial to implement in a standard relational database system.” Our present effort addresses just this challenge.

Given a piece  $o$  of the output, *backward slicing* [9, 49, 54] finds those parts—or: slices—of a program that are involved in producing  $o$ . In [37, 42], we demonstrated the derivation of provenance through the application of slicing to imperative programs that simulate the semantics of SQL queries. In the present work, instead, we directly realize a dynamic variant of slicing for SQL but are only interested in input data slices on which  $o$ ’s value depends. If, however, we associate identifiers with SQL subexpressions (instead of cells), interpretation could instead identify the subject query slices relevant to the computation of  $o$ . This paves the way for a notion of *how*-provenance [12] whose findings directly relate to SQL’s surface syntax (instead of algebraic plans, say).

<sup>4</sup>See [12, Sections 1.3 and 5.1] for the definitions of  $\cup_L$ ,  $\cup_S$  and their interaction with  $\perp$ .

C. Barry Jay has explored the decomposition of data structures into their *shape* and contained values [32, 33]. We have deliberately designed a two-phase approach that preserves data shape (original input and output tables share row width and cardinality with those of Phases 1/2, respectively) and query shape (recall the discussion of parametricity of Section 2.1). We reap the benefits in terms of a straightforward, extensible formulation of inference rules and plans that do not swamp the DBMS’s optimizer and executor. This focus on shape preservation tells this work apart from related efforts where data and its provenance are tightly bundled and then threaded jointly through the computation [5, 10, 11, 18, 21, 53]. This reshapes input, intermediate, and output data as well as the computation process itself—sometimes dramatically so—and ultimately leads to restrictions on what data and query sizes are considered tractable [11, 40]. Bundling has the advantage that queries may post-process data and its provenance together, however. We can offer this integrated view through a join of the Phase 1 and 2 outputs: consider  $\text{output}^1 \bowtie_p \text{output}^2$  in Figure 16, for example.

## 6. WRAP-UP

The desire to move complex computation—like tasks in machine learning or graph processing—close to their data sources led to a steep growth in query complexity. As this trend will only continue, this work is an attempt to develop provenance derivation for SQL that catches up and helps to explain the resulting intricate queries. We shift from value- to dependency-based computation through a non-standard interpretation of the SQL semantics that can derive provenance at either the cell level or the coarser row granularity. The approach embraces a rich dialect of SQL constructs—including recursion, windowed aggregates, or table-valued and user-defined functions—and relies on a two-phase evaluation process designed to not overwhelm the underlying database system.

This work is extensible in several dimensions. We believe that the idea of non-standard interpretation does not break if further SQL constructs are added to the dialect. Currently, we explore the treatment of SQL DML statements (**INSERT**, **UPDATE**, **DELETE**) and functions defined in PL/SQL—this is also related to recent work on the re-enactment of transactions [39]. Further, the provenance model realized by the approach is subject to tuning. Phase 1, for example, may employ “lazy” or “greedy” variants of **EXISTS** to decide whether the provenance of a subquery includes one particular row or all rows that satisfied the quantifier (see [22] for a discussion of possible semantics).

We pursue optimizations that can help to boost Phase 1. Data flow analysis can reveal inclusion relationships between log files and thus render *write<sub>o</sub>* at some call sites obsolete. Likewise, we can statically infer particular *write once* safeguards (Section 3.1) to be superfluous.

Lastly, the “onion-style” normalization of SQL has helped to keep the inference rule set of Figures 12 and 21 orthogonal and compact. We conjecture that this syntactic normal form can generally benefit efforts that rely on a source-level analysis and transformation of SQL. We will follow up in an independent thread of work.

## 7. REFERENCES

- [1] M. Armbrust, R. Xin, C. Lian, Y. Huai, D. Liu, J. Bradley, X. Meng, T. Kaftan, M. Franklin, A. Ghodsi, and M. Zaharia. Spark SQL: Relational Data Processing in Spark. In *Proc. SIGMOD*, New York, USA, 2015.
- [2] S. Bahareh, S. Feng, B. Glavic, S. Lee, X. Niu, and Q. Zeng. GProM—A Swiss Army Knife for Your Provenance Needs. *IEEE Data Engineering Bulletin*, 41(1), 2018.
- [3] O. Benjelloun, A. Sarma, A. Halevy, and J. Widom. ULDBs: Databases with Uncertainty and Lineage. In *Proc. VLDB*, Seoul, Korea, 2006.
- [4] P. Boncz, T. Neumann, and O. Erling. TPC-H Analyzed: Hidden Messages and Lessons Learned from an Influential Benchmark. In *Proc. TPCTC*, Riva del Garda, Italy, 2013.
- [5] P. Buneman, J. Cheney, and S. Vansummeren. On the Expressiveness of Implicit Provenance in Query and Update Languages. *ACM TODS*, 33(4), 2008.
- [6] P. Buneman, S. Khanna, and W.-C. Tan. Why and Where: A Characterization of Data Provenance. In *Proc. ICDT*, London, UK, 2001.
- [7] S. Chambi, D. Lemire, O. Kaser, and R. Godin. Better Bitmap Performance with Roaring Bitmaps. *Software: Practice and Experience*, 46(11), 2016.
- [8] A. Chapman and H. Jagadish. Why Not? In *Proc. SIGMOD*, Providence, RI, USA, 2009.
- [9] J. Cheney. Program Slicing and Data Provenance. *IEEE Data Engineering Bulletin*, 30(4), 2007.
- [10] J. Cheney, A. Ahmed, and U. Acar. Provenance as Dependency Analysis. *Mathematical Structures in Computer Science*, 21(6), 2011.
- [11] J. Cheney, A. Ahmed, and U. Acar. Database Queries that Explain their Work. In *Proc. PPDP*, 2014.
- [12] J. Cheney, L. Chiticariu, and W.-C. Tan. Provenance in Databases: Why, How, and Where. *Foundations and Trends in Databases*, 1(4), 2007.
- [13] Z. Chothia, J. Liagouris, F. McSherry, and T. Roscoe. Explaining Outputs in Modern Data Analytics. *PVLDB*, 9(12):1137–1148, 2016.
- [14] Y. Cui and J. Widom. Lineage Tracing for General Data Warehouse Transformations. In *Proc. VLDB*, Rome, Italy, 2001.
- [15] Y. Cui, J. Widom, and J. Wiener. Tracing the Lineage of View Data in a Warehousing Environment. *ACM TODS*, 25(2), 2000.
- [16] B. Dietrich, T. Müller, and T. Grust. The Best Bang for Your Bu(ck)g—When SQL Debugging and Data Provenance Go Hand in Hand. In *Proc. EDBT*, Bordeaux, France, 2016.
- [17] J. Fan, A. Gerald, S. Raj, and J. Patel. The Case Against Specialized Graph Analytics Engines. In *Proc. CIDR*, Asilomar, CA, USA, 2015.
- [18] S. Fehrenbach and J. Cheney. Language-Integrated Provenance. *Science of Computer Programming*, 2017.
- [19] J. Freire, P. Bonnet, and D. Shasha. Computational Reproducibility: State-of-the-Art, Challenges, and Database Research Opportunities. In *Proc. ACM SIGMOD*, Scottsdale, AZ, USA, 2012.
- [20] B. Glavic. *Perm: Efficient Provenance Support for Relational Databases*. PhD thesis, University of Zürich, Switzerland, 2010.
- [21] B. Glavic and G. Alonso. Perm: Processing Provenance and Data on the Same Data Model Through Query Rewriting. In *Proc. ICDE*, Shanghai, China, 2009.
- [22] B. Glavic and G. Alonso. Provenance for Nested Subqueries. In *Proc. EDBT*, Saint Petersburg, Russia, 2009.
- [23] B. Glavic and G. Alonso. Provenance for Nested Subqueries. In *Proc. EDBT*, Saint Petersburg, Russia, 2009.
- [24] B. Glavic, R. Miller, and G. Alonso. Using SQL for Efficient Generation and Querying of Provenance Information. *Lecture Notes in Computer Science*, 8000, 2013.
- [25] G. Graefe. Sorting and Indexing with Partitioned B-trees. In *Proc. CIDR*, Asilomar, USA, 2003.
- [26] T. Green, G. Karvounarakis, and V. Tannen. Provenance Semirings. In *Proc. PODS*, Beijing, China, 2007.
- [27] T. Grust and J. Rittinger. Observing SQL Queries in their Natural Habitat. *ACM TODS*, 38(1), 2013.
- [28] J. Hellerstein, C. Ré, F. Schoppmann, D. Wang, E. Fratkin, A. Gorajek, K. Ng, C. Welton, X. Feng, K. Li, and A. Kumar. The MADlib Analytics Library: Or MAD Skills, the SQL. *PVLDB*, 5(12):1700–1711, 2012.
- [29] S. Helmer and G. Moerkotte. A Performance Study of Four Index Structures for Set-Valued Attributes of Low Cardinality. *VLDB Journal*, 12(3), 2003.
- [30] M. Herschel, R. Diestelkämper, and H. Lahmar. A Survey on Provenance: What For? What Form? What From? *VLDB Journal*, 26(6), 2017.
- [31] Z. Hu, H. Iwasaki, M. Takeichi, and A. Takano. Tupling Calculation Eliminates Multiples Data Traversals. In *Proc. ICFP*, 1997.
- [32] C. Jay. Shape in Computing. *ACM Computing Surveys*, 28(2), 1996.
- [33] C. Jay and R. Cockett. Shapely Types and Shape Polymorphism. In *Proc. ESOP*, Edinburgh, UK, 1994.
- [34] G. Karvounarakis, Z. Ives, and V. Tannen. Querying Data Provenance. In *Proc. SIGMOD*, Indianapolis, USA, 2010.
- [35] A. Kemper and G. Moerkotte. Access Support Relations: An Indexing Method for Object Bases. *Information Systems*, 17(2), 1992.
- [36] A. Kemper and T. Neumann. HyPer: A Hybrid OLTP/OLAP Main Memory Database System Based on Virtual Memory Snapshots. In *Proc. ICDE*, Hannover, Germany, 2011.
- [37] T. Müller and T. Grust. Provenance for SQL Based on Abstract Interpretation: Value-less, but Worthwhile. *PVLDB*, 8(12):1872–1875, 2015.
- [38] T. Neumann and A. Kemper. Unnesting Arbitrary Queries. In *Proc. BTW*, Hamburg, Germany, 2015.
- [39] X. Niu, B. Arab, S. Lee, F. Su, X. Zou, D. Gawlick, V. Krishnaswamy, Z. Liu, and B. Glavic. Debugging Transactions and Tracking their Provenance with Reenactment. *PVLDB*, 10(12):1857–1860, 2017.
- [40] X. Niu, R. Kapoor, B. Glavic, D. Gawlick, Z. Liu, V. Krishnaswamy, and V. Radhakrishnan.

Provenance-Aware Query Optimization. In *Proc. ICDE*, San Diego, CA, USA, 2017.

- [41] X. Niu, R. Kapoor, B. Glavic, D. Gawlick, Z. Liu, V. Krishnaswamy, and V. Radhakrishnan. Heuristic and Cost-Based Optimization for Diverse Provenance Tasks. *IEEE TKDE*, 2018.
- [42] D. O’Grady, T. Müller, and T. Grust. How ‘How’ Explains What ‘What’ Computes—How-Provenance for SQL and Query Compilers. In *Proc. TaPP*, London, UK, 2018.
- [43] *The PostgreSQL Relational Database System (Documentation)*. [postgresql.org/docs](http://postgresql.org/docs).
- [44] F. Psallidas and E. Wu. Smoke: Fine-grained Lineage at Interactive Speed. *PVLDB*, 11(6):719–732, 2018.
- [45] K. Ramasamy, J. Patel, J. Naughton, and R. Kaushik. Set Containment Joins: The Good, the Bad, and the Ugly. In *Proc. VLDB*, Cairo, Egypt, 2000.
- [46] *Database Languages–SQL–Part 2: Foundation*. ISO/IEC 9075-2:2003.
- [47] *Database Languages–SQL–Part 2: Foundation*. ISO/IEC 9075-2:2016.
- [48] W.-C. Tan. Provenance in Databases: Past, Present, and Future. *IEEE Data Engineering Bulletin*, 32(4), 2007.
- [49] F. Tip. A Survey of Program Slicing Techniques. Technical report, CWI, Amsterdam, The Netherlands, 1994.
- [50] *The TPC Benchmark H*. [tpc.org/tpch](http://tpc.org/tpch).
- [51] P. Valduriez. Join Indices. *ACM TODS*, 12(2), 1987.
- [52] P. Wadler. Theorems for Free! In *Proc. ICFP*, London, UK, 1989.
- [53] Y. Wang and S. Madnick. A Polygen Model for Heterogeneous Database Systems: The Source Tagging Perspective. In *Proc. VLDB*, Brisbane, Australia, 1990.
- [54] M. Weiser. Program Slicing. *IEEE Transactions on Software Engineering*, SE-10(4), 1984.

## APPENDIX

### A. EXTENDED INFERENCE RULE SET

We extend the set of inference rules for mapping  $q \mapsto \langle i^1, i^2 \rangle$  that derives the instrumented variant  $i^1$  and interpreter  $i^2$  for SQL query  $q$ . Jointly, the rules of Figures 12 and 21 handle a SQL dialect that covers the example query of Figure 3, all 22 queries of the TPC-H benchmark [50], as well as recursive queries (expressed via `WITH RECURSIVE`). This rule set extension retains the compositionality property of the rules of Figure 12. None of the core rule principles discussed in Section 3 need to be reworked.

Rule `TBLFUN` derives instrumentation  $i^1$  and interpreter  $i^2$  for invocations of table-valued functions  $f$  (like the built-in `generate_series`). Instrumentation wraps calls  $f(e_1^1, \dots, e_n^1)$  such that `writeTBLF` can attach a unique identifier  $\rho$  to every row emitted by  $f$ . Interpretation does not re-run  $f$  but instead uses `readTBLF` to reproduce these identifiers from the log. In the present variant of Rule `TBLFUN`, we assume that all rows output by  $f$  depend on all function arguments— $i^2$  thus assigns the union of the dependency sets  $\text{args}(D) \equiv e_1^2 \cup \dots \cup e_n^2$  as the rows’ *where*-provenance. More specific provenance derivation rules for particular table functions  $f$  can easily be added to the rule set.

Rule `MAP` offers a simplified treatment for the specific case of a single-table `FROM` clause that is not accompanied by a `WHERE` predicate. Since no value-based decisions are made, instrumentation and logging are not required. (The general case of an  $m$ -table `FROM` clause with `WHERE` predicate is handled by Rule `JOIN` of Figure 12.)

Rule `CASE` transforms an  $(n + 1)$ -way `CASE-WHEN` conditional. (We use the notation  $\text{CASE}^v$  here to indicate that the guard and branch expressions  $e_{w,i}$ ,  $e_{t,i}$  depend on a single row variable  $v$ —normalization can always ensure this syntactic restriction.) Phase 1 identifies the `WHEN` branch taken ( $\text{branch} \in \{0, 1, \dots, n\}$ ) and uses `writeCASE` to save this decision for the interpreter. Note that the rule duplicates the `CASE` expression but each guard  $e_{w,i}^1$  and branch expression  $e_{t,i}^1$  is evaluated at most once. Phase 2 interprets the selected branch—say  $i$ —and adds *why*-provenance for *all preceding* guard expressions  $e_{w,1}^2, \dots, e_{w,i}^2$  (this reflects top-down guard evaluation as specified by the SQL standard [47, §6.12]).

A SQL subquery may refer to—and thus depend on—a *free* row variable  $v$  that has been bound outside the subquery (correlated subquery, see [47, §7.6]). To make the dependence on this free row variable explicit for mapping  $\mapsto$ , query normalization introduces a local binding that shadows the outer binding for  $v$  but otherwise does not alter query semantics (assume that the rows bound to  $v$  have columns  $c_1, \dots, c_n$ ):

$$\begin{array}{ccc} \text{SELECT } e(v, t) & & \text{SELECT } e(v, t) \\ \text{FROM } q \text{ AS } t & \xrightarrow{\text{normalize}} & \text{FROM } (\text{BIND } c_1, \dots, c_n) \text{ AS } v, . \\ & & q \text{ AS } t \end{array}$$

Here, `BIND` is a pseudo SQL construct that is subsequently traded for a SQL `SELECT` by Rule `BIND`. We are left with a regular join that Rule `JOIN` will transform as described earlier in Section 3. In particular, the dependence of expression  $e$  on row variables  $v$  (formerly free) and  $t$  will be handled correctly. We exploit the semantic similarities of SQL’s correlation and join: both form Cartesian products of row variable bindings. Rule `BIND` transforms the former into the latter, once more rendering the rule set more compact.

Rule `NESTEDSUBQUERY`: A parenthesized subquery, evaluating to a—possibly singleton—set of values and optional set membership ( $e$  `[NOT] IN`) or emptiness tests (`[NOT] EXISTS`) are retained in Phase 1. Phase 2 collects the dependencies of  $e$  and all set members to form the subquery’s overall provenance. Note that a single rule suffices to process both correlated and non-correlated subqueries, thanks to the preparatory work performed by normalization as well as Rules `JOIN` and `BIND` (see above).

The design of this rule implies that the derivation of provenance for subqueries with existential semantics directly follows that of the underlying RDBMS. In particular, interpretation is as lazy as value-based evaluation: if the system shortcuts a membership (`IN`) or existence (`EXISTS`) test as soon as one element  $v$  is found, the *where*-dependencies of the subquery will be the dependencies of  $v$ , disregarding all other elements (if any). This deviates from the greedy semantics of *Perm*’s sublink query provenance [23] which collects all values returned by the subquery. *Perm*’s design has significant consequences for provenance representation size as discussed in Section 4.4.

In Rule `LEFTJOIN`,  $i^1$  logs the join pairs generated by a left outer join via `writeLEFT`( $\rho, t_1.\rho, t_2.\rho$ ). Here, row identifier  $t_2.\rho$  will be `NULL` should  $t_1$  fail to find a join partner.

$$\begin{array}{c}
f :: \tau_1 \times \dots \times \tau_n \rightarrow \text{TABLE}(c_1 \tau'_1, \dots, c_m \tau'_m) \quad |e_i \mapsto \langle e_i^1, e_i^2 \rangle|_{i=1..n} \quad \textcircled{\text{O}} = \text{site}() \\
\hline
i^1 = \frac{(\text{SELECT } \text{write}_{\text{TBLF}}(\textcircled{\text{O}}) \text{ AS } \rho, t.c_1 \text{ AS } c_1, \dots, t.c_m \text{ AS } c_m \\ \text{FROM } f(e_1^1, \dots, e_n^1) \text{ AS } t(c_1, \dots, c_m))}{f(e_1, \dots, e_n) \mapsto \langle i^1, i^2 \rangle} \quad (\text{TBLFUN}) \\
i^2 = \frac{(\text{SELECT } \text{set}.\rho \text{ AS } \rho, \text{args.D AS } c_1, \dots, \text{args.D AS } c_m \\ \text{FROM } (\text{VALUES } (e_1^2 \cup \dots \cup e_n^2)) \text{ AS } \text{args}(\text{D}), \\ \text{read}_{\text{TBLF}}(\textcircled{\text{O}}) \text{ AS } \text{set}(\rho))}{f(e_1, \dots, e_n) \mapsto \langle i^1, i^2 \rangle} \\
\hline
|e_i \mapsto \langle e_i^1, e_i^2 \rangle|_{i=1..n} \quad q \mapsto \langle q^1, q^2 \rangle \quad i^1 = \frac{\text{SELECT } t.\rho \text{ AS } \rho, e_1^1 \text{ AS } c_1, \dots, e_n^1 \text{ AS } c_n \\ \text{FROM } q^1 \text{ AS } t}{\text{SELECT } e_1 \text{ AS } c_1, \dots, e_n \text{ AS } c_n \\ \text{FROM } q \text{ AS } t} \quad i^2 = \frac{\text{SELECT } t.\rho \text{ AS } \rho, e_1^2 \text{ AS } c_1, \dots, e_n^2 \text{ AS } c_n \\ \text{FROM } q^2 \text{ AS } t}{\text{SELECT } e_1 \text{ AS } c_1, \dots, e_n \text{ AS } c_n \\ \text{FROM } q \text{ AS } t} \quad (\text{MAP}) \\
\hline
\begin{array}{ccc}
|e_{w,i} \mapsto \langle e_{w,i}^1, e_{w,i}^2 \rangle|_{i=1..n} & |e_{t,i} \mapsto \langle e_{t,i}^1, e_{t,i}^2 \rangle|_{i=1..n} & \textcircled{\text{O}} = \text{site}() \\
\text{CASE WHEN } e_{w,1}^1 \text{ THEN } 1 & \text{CASE } \text{write}_{\text{CASE}}(\textcircled{\text{O}}, v.\rho, \text{branch}) & \text{CASE } \text{read}_{\text{CASE}}(\textcircled{\text{O}}, v.\rho) \\
\vdots & \text{WHEN } 1 \text{ THEN } e_{t,1}^1 & \text{WHEN } 1 \text{ THEN } e_{t,1}^2 \cup Y(e_{w,1}^2) \\
\vdots & \vdots & \vdots \\
\text{WHEN } e_{w,n}^1 \text{ THEN } n & \text{WHEN } n \text{ THEN } e_{t,n}^1 & \text{WHEN } n \text{ THEN } e_{t,n}^2 \cup Y(e_{w,1}^2 \cup \dots \cup e_{w,n}^2) \\
\text{ELSE } 0 & \text{ELSE } e_{t,0}^1 & \text{ELSE } e_{t,0}^2 \cup Y(e_{w,1}^2 \cup \dots \cup e_{w,n}^2) \\
\text{END} & \text{END} & \text{END} \\
\hline
\text{CASE}^v \text{ WHEN } e_{w,1} \text{ THEN } e_{t,1} & & \\
\vdots & & \\
\text{WHEN } e_{w,n} \text{ THEN } e_{t,n} \mapsto \langle i^1, i^2 \rangle & & \\
\text{ELSE } e_{t,0} & & \\
\text{END} & & \\
\hline
i = \frac{(\text{SELECT } v.\rho \text{ AS } \rho, v.c_1 \text{ AS } c_1, \dots, v.c_n \text{ AS } c_n) \text{ AS } v}{(\text{BIND } c_1, \dots, c_n) \text{ AS } v \mapsto \langle i, i \rangle} \quad (\text{BIND}) \\
\hline
q \mapsto \langle q^1, q^2 \rangle \quad e \mapsto \langle e^1, e^2 \rangle \quad i^1 = [e^1 \text{ [NOT] IN | [NOT] EXISTS}] \frac{(\text{SELECT } t.c \text{ AS } c \\ \text{FROM } q^1 \text{ AS } t)}{[e \text{ [NOT] IN | [NOT] EXISTS}] \frac{(\text{SELECT } t.c \text{ AS } c \\ \text{FROM } q \text{ AS } t)}{\mapsto \langle i^1, i^2 \rangle}} \quad (\text{NESTEDSUBQUERY}) \\
i^2 = \frac{(\text{SELECT } [e^2 \cup] \bigcup \{t.c\} \\ \text{FROM } q^2 \text{ AS } t)}{[e \text{ [NOT] IN | [NOT] EXISTS}] \frac{(\text{SELECT } t.c \text{ AS } c \\ \text{FROM } q \text{ AS } t)}{\mapsto \langle i^1, i^2 \rangle}} \\
\hline
|e_i \mapsto \langle e_i^1, e_i^2 \rangle|_{i=1..n} \quad |q_i \mapsto \langle q_i^1, q_i^2 \rangle|_{i=1,2} \quad p \mapsto \langle p^1, p^2 \rangle \quad \textcircled{\text{O}} = \text{site}() \\
\hline
i^1 = \frac{\text{SELECT } \text{write}_{\text{LEFT}}(\textcircled{\text{O}}, t_1.\rho, t_2.\rho) \text{ AS } \rho, \\ e_1^1 \text{ AS } c_1, \dots, e_n^1 \text{ AS } c_n \\ \text{FROM } q_1^1 \text{ AS } t_1 \text{ LEFT OUTER JOIN } q_2^1 \text{ AS } t_2 \text{ ON } (p^1)}{\text{SELECT } \text{join}.\rho \text{ AS } \rho, e_1^2 \cup Y_{\text{join}} \text{ AS } c_1, \dots, e_n^2 \cup Y_{\text{join}} \text{ AS } c_n \\ \text{FROM } q_1^2 \text{ AS } t_1 \text{ CROSS JOIN LATERAL } \text{read}_{\text{LEFT}}(\textcircled{\text{O}}, t_1.\rho) \text{ AS } \text{join}(\rho, \text{right}) \\ \text{LEFT OUTER JOIN } q_2^2 \text{ AS } t_2 \text{ ON } (\text{join}.\text{right} = t_2.\rho), \\ \text{LATERAL } Y(p^2) \text{ AS } Y_{\text{join}}} \quad (\text{LEFTJOIN}) \\
\hline
\text{SELECT } e_1 \text{ AS } c_1, \dots, e_n \text{ AS } c_n \\ \text{FROM } q_1 \text{ AS } t_1 \text{ LEFT OUTER JOIN } q_2 \text{ AS } t_2 \text{ ON } (p) \mapsto \langle i^1, i^2 \rangle
\end{array}
\end{array}$$

Figure 21: Mapping  $q \mapsto \langle i^1, i^2 \rangle$ : additions to the inference rule set of Figure 12. (Continued on next page.)

These NULLs are retrieved when  $\text{read}_{\text{LEFT}}(\textcircled{\text{O}}, t_1.\rho)$  reads the row identifiers  $\text{join}.\text{right}$  of  $t_1$ 's join partners from the log in Phase 2. If  $\text{join}.\text{right}$  indeed is NULL, the left outer join with  $q_2^2$  will fail and generate a NULL binding for row variable  $t_2$  (just like in Phase 1). Dependency set operations like  $\cup$  and  $\bigcup$  interpret NULL as  $\emptyset$  such that left join-generated NULLs effectively make no provenance contribution, as desired. Inference rules for right and full outer joins are not shown here but operate likewise.

From the viewpoint of Rule DISTINCT, SQL's DISTINCT ON<sup>5</sup>

<sup>5</sup>Normalization rewrites occurrences of DISTINCT into equivalent DISTINCT ON clauses. This also helps to avoid that the prepended row identifier columns  $\rho$  impact duplicate removal.

acts like a filter: in Phase 1, the rule uses  $\text{write}_{\text{FILTER}}$  to log the row identifiers  $t.\rho$  of those rows  $t$  that survive duplicate elimination. A row  $t$  remains if the evaluation of the expressions  $o_1, \dots, o_m$  yields a unique combination of values. For these remaining rows, Phases 2 thus assembles *why*-provenance from the associated dependency sets  $o_1^2, \dots, o_m^2$ .

Similar observations apply to Rule ORDERBY: once rows have been ordered by ORDER BY  $o_1, \dots, o_m$ , rows are eliminated by clauses OFFSET  $k$  and LIMIT  $l$  [47, §4.15.3]. The instrumented query  $i^1$  calls  $\text{write}_{\text{FILTER}}$  to log the identifiers  $t.\rho$  of all rows that remain. The interpreter  $i^2$  uses  $\text{read}_{\text{FILTER}}$  to re-enact this filtering behavior in Phase 2. While the filtering semantics of ORDER BY-OFFSET-LIMIT is relevant for

	$q \Rightarrow \langle q^1, q^2 \rangle \quad \left  e_i \Rightarrow \langle e_i^1, e_i^2 \rangle \right _{i=1..n} \quad \left  o_i \Rightarrow \langle o_i^1, o_i^2 \rangle \right _{i=1..m+l} \quad \textcircled{0} = \text{site}()$			
$i^1 =$	<pre>SELECT write<sub>FILTER</sub>(<math>\textcircled{0}</math>, t, <math>\rho</math>) AS <math>\rho</math>, t.c<sub>1</sub> AS c<sub>1</sub>, ..., t.c<sub>n</sub> AS c<sub>n</sub> FROM (SELECT DISTINCT ON (o<sub>1</sub><sup>1</sup>, ..., o<sub>m</sub><sup>1</sup>) t.<math>\rho</math> AS <math>\rho</math>,       e<sub>1</sub><sup>1</sup> AS c<sub>1</sub>, ..., e<sub>n</sub><sup>1</sup> AS c<sub>n</sub> FROM q<sup>1</sup> AS t ORDER BY o<sub>1</sub><sup>1</sup>, ..., o<sub>m</sub><sup>1</sup>, ..., o<sub>m+l</sub><sup>1</sup>) AS t</pre>	$i^2 =$	<pre>SELECT filter.<math>\rho</math> AS <math>\rho</math>, e<sub>1</sub><sup>2</sup> <math>\cup</math> Y<sub>filter</sub> AS c<sub>1</sub>, ..., e<sub>n</sub><sup>2</sup> <math>\cup</math> Y<sub>filter</sub> AS c<sub>n</sub> FROM q<sup>2</sup> AS t, LATERAL read<sub>FILTER</sub>(<math>\textcircled{0}</math>, t, <math>\rho</math>) AS filter(<math>\rho</math>), LATERAL Y(o<sub>1</sub><sup>2</sup> <math>\cup</math> ... <math>\cup</math> o<sub>m</sub><sup>2</sup>) AS Y<sub>filter</sub></pre>	
		<pre>SELECT DISTINCT ON (o<sub>1</sub>, ..., o<sub>m</sub>) e<sub>1</sub> AS c<sub>1</sub>, ..., e<sub>n</sub> AS c<sub>n</sub> FROM q AS t ORDER BY o<sub>1</sub>, ..., o<sub>m</sub>, ..., o<sub>m+l</sub></pre>	$\Rightarrow \langle i^1, i^2 \rangle$	(DISTINCT)
	$q \Rightarrow \langle q^1, q^2 \rangle \quad \left  e_i \Rightarrow \langle e_i^1, e_i^2 \rangle \right _{i=1..n} \quad \left  o_i \Rightarrow \langle o_i^1, o_i^2 \rangle \right _{i=1..m} \quad \textcircled{0} = \text{site}()$			
$i^1 =$	<pre>SELECT write<sub>FILTER</sub>(<math>\textcircled{0}</math>, t, <math>\rho</math>) AS <math>\rho</math>, t.c<sub>1</sub> AS c<sub>1</sub>, ..., t.c<sub>n</sub> AS c<sub>n</sub> FROM (SELECT t.<math>\rho</math> AS <math>\rho</math>, e<sub>1</sub><sup>1</sup> AS c<sub>1</sub>, ..., e<sub>n</sub><sup>1</sup> AS c<sub>n</sub> FROM q<sup>1</sup> AS t ORDER BY o<sub>1</sub><sup>1</sup>, ..., o<sub>m</sub><sup>1</sup> OFFSET k LIMIT l) AS t</pre>	$i^2 =$	<pre>SELECT filter.<math>\rho</math> AS <math>\rho</math>, e<sub>1</sub><sup>2</sup> <math>\cup</math> Y<sub>filter</sub> AS c<sub>1</sub>, ..., e<sub>n</sub><sup>2</sup> <math>\cup</math> Y<sub>filter</sub> AS c<sub>n</sub> FROM q<sup>2</sup> AS t, LATERAL read<sub>FILTER</sub>(<math>\textcircled{0}</math>, t, <math>\rho</math>) AS filter(<math>\rho</math>), LATERAL Y(o<sub>1</sub><sup>2</sup> <math>\cup</math> ... <math>\cup</math> o<sub>m</sub><sup>2</sup>) AS Y<sub>filter</sub></pre>	
		<pre>SELECT e<sub>1</sub> AS c<sub>1</sub>, ..., e<sub>n</sub> AS c<sub>n</sub> FROM q AS t ORDER BY o<sub>1</sub>, ..., o<sub>m</sub> OFFSET k LIMIT l</pre>	$\Rightarrow \langle i^1, i^2 \rangle$	(ORDERBY)

Figure 21 (continued): Mapping  $q \Rightarrow \langle i^1, i^2 \rangle$ : additions to the inference rule set.

dependency set computation, row ordering itself is not: note that  $i^2$  does not feature an ORDER BY clause. Since row inclusion is decided by the ordering criteria  $o_1, \dots, o_m$ , the rule augments all result cells with *why*-provenance  $o_1^2 \cup \dots \cup o_m^2$ .

## B. LOG FILE CONTENTS AND RELATIONAL IMPLEMENTATION

Log files enable the interpreters of Phase 2 to re-enact particular decisions and computation performed by the value-based Phase 1. The inference rules of Figures 12 and 21 define how queries are augmented to write to and read from these logs. Section 3.1 describes the behavior of the associated *write*<sub>□</sub>/*read*<sub>□</sub> routines and how these call on the lower-level routines *put*<sub>□</sub> and *get*<sub>□</sub> to interact with the log files. Here, we show the actual log contents produced by representative SQL queries in Phase 1. Logging and log files may be implemented in a variety of ways. Below in Appendix B.1, we discuss one possible in-RDBMS implementation of logging.

All log files exhibit the following general properties:

- Log files *never* hold actual input table cell values but exclusively (see a comment on *log*<sub>WIN</sub> below) store compact call site and row identifiers:  $\textcircled{0}$  and  $\rho_i$ . Log file sizes thus are not impacted by large cell contents like text, arrays, or multimedia data. This is reminiscent of the use of row identifiers in the *rid-indexes* of [44].
- A call to *put*<sub>□</sub>( $\textcircled{0}$ ,  $k$ ,  $e$ ) adds a log entry  $\langle \text{site} = \textcircled{0}, \text{key} = k, \text{entry} = e \rangle$  to log file *log*<sub>□</sub>. Only unique (*site, key*) combinations are entered (*write once* safeguard, see Section 3.1): log files *never* need to hold duplicate entries.
- A lookup *get*<sub>□</sub>( $\textcircled{0}$ ,  $k$ ) in Phase 2 retrieves  $e$  from the unique entry  $\langle \text{site} = \textcircled{0}, \text{key} = k, \text{entry} = e \rangle$  in *log*<sub>□</sub>. Lookups *never* rely on entry order.

To illustrate log file contents, we evaluate three deliberately simple SQL queries over two input tables **r** and **s**. All queries contain a single logging call site  $\textcircled{0}$ . Figure 22(a) shows the Phase 1 variants of both tables in which the row identifiers  $\rho_i$

are exposed. The instrumented queries—generated following the rules of Figure 12—and the log file contents they create are displayed in Figure 22(b):

Query  $Q_j$ : Entry  $\langle \text{site} = \textcircled{0}, \text{key} = \langle \rho_1, \rho_6 \rangle, \text{entry} = \rho_{10} \rangle$  in *log*<sub>JOIN(2)</sub> indicates that the query has joined rows  $\rho_1$  of **r** and  $\rho_6$  of **s** to form a new joined row  $\rho_{10}$ . Subsequently, *e.g.*, in queries embracing subquery  $Q_j$ , only  $\rho_{10}$  is used to represent the joined pair, but *log*<sub>JOIN(2)</sub> allows to trace back the pair’s provenance to input rows  $\rho_{1,6}$ .

Note that the number of log file entries depends on the selectivity of join predicate  $t_1.b = t_2.c$ : only successfully joined pairs find their way into the log. Section 4.1 discusses how this helps to reduce the provenance tax.

Query  $Q_g$ : Entry  $\langle \text{site} = \textcircled{0}, \text{key} = \{ \rho_1, \rho_3, \rho_5 \}, \text{entry} = \rho_{13} \rangle$  in *log*<sub>GRP</sub> records that rows  $\rho_{1,3,5}$  of **r** are members of group  $\rho_{13}$ . Each group formed is represented by one log entry. Since keys are of variable size and *read*<sub>GRP</sub> performs lookup by group member (see Section 3.1), it may pay off to normalize the representation of *key* (see a relational implementation below).

Query  $Q_w$ : in *log*<sub>WIN</sub>, the entry  $\langle \text{site} = \textcircled{0}, \text{key} = \rho_3, \text{entry} = \langle \rho_1, 2 \rangle \rangle$  shows that row  $\rho_3$  of **r** has been placed at rank 2 in the same window as  $\rho_1$  (the first row in that window). Section 3 and Figure 11 explain how this suffices to re-enact the behavior of SQL’s window functions.

### B.1 Relational Logging

Hosting the logs inside the database itself opens the opportunity to devise a purely relational implementation of data provenance for SQL. The simple log file structures lead to straightforward relational implementations. Figure 23 shows the resulting tables for the log files *log*<sub>JOIN(2)</sub> and *log*<sub>GRP</sub> of Figure 22(b). The experiments of Figure 14 have used exactly the following tabular log file encodings, indexes, and SQL functions.

It is apparent from Figure 23(a) that the tabular *log*<sub>JOIN(2)</sub> takes the form of a join index between tables **r** and **s** [51]. The creation of an index on (*site, left, right*) benefits Phase 2



	$r^{\perp}$			$s^{\perp}$	
	a	b		c	
$\rho_1$	1	1			
$\rho_2$	2	0			
$\rho_3$	3	1	$\rho$		
$\rho_4$	4	0	$\rho_6$	1	
$\rho_5$	5	1	$\rho_7$	2	

$Q_j$ :

```
SELECT writeJOIN(2)(ⓐ, t1.ρ, t2.ρ),
       e(t1, t2)
FROM   r⊥ AS t1, s⊥ AS t2
WHERE  t1.b = t2.c
```

$log_{JOIN(2)}$		
site	key (left/right partner)	entry (pair)
ⓐ	$\langle \rho_1, \rho_6 \rangle$	$\rho_{10}$
ⓐ	$\langle \rho_3, \rho_6 \rangle$	$\rho_{11}$
ⓐ	$\langle \rho_5, \rho_6 \rangle$	$\rho_{12}$

$Q_g$ :

```
SELECT writeGRP(ⓐ, ⋃ {t.ρ}),
       AGG(e(t))
FROM   r⊥ AS t
GROUP  BY t.b
```

$log_{GRP}$		
site	key (members)	entry (group)
ⓐ	$\{\rho_1, \rho_3, \rho_5\}$	$\rho_{13}$
ⓐ	$\{\rho_2, \rho_4\}$	$\rho_{14}$

$Q_w$ :

```
SELECT writeWIN(ⓐ, t.ρ,
                FIRST_VALUE(t.ρ) OVER (w),
                RANK() OVER (w))
       AGG(e(t)) OVER (w)
FROM   r⊥ AS t
WINDOW w AS (PARTITION BY t.b ORDER BY t.a)
```

$log_{WIN}$		
site	key (row)	entry (placement in window)
ⓐ	$\rho_1$	$\langle \rho_1, 1 \rangle$
ⓐ	$\rho_3$	$\langle \rho_1, 2 \rangle$
ⓐ	$\rho_5$	$\langle \rho_1, 3 \rangle$
ⓐ	$\rho_2$	$\langle \rho_2, 1 \rangle$
ⓐ	$\rho_4$	$\langle \rho_2, 2 \rangle$

(a) Tables  $r$  and  $s$  in Phase 1.

(b) Sample instrumented join, grouping, and window queries, instrumented for Phase 1. When these queries are evaluated over input tables  $r$  and  $s$  (left), the log files  $log_{\square}$  shown here are created as a side effect.

Figure 22: Sample queries and the log file contents they create in Phase 1. Later on, Phase 2 uses (site, key) to lookup entry.

$log_{JOIN(2)}$			
site	left	right	pair
ⓐ	$\rho_1$	$\rho_6$	$\rho_{10}$
ⓐ	$\rho_3$	$\rho_6$	$\rho_{11}$
ⓐ	$\rho_5$	$\rho_6$	$\rho_{12}$

(a) Table  $log_{JOIN(2)}$ .

$log_{GRP}$		
site	member	group
ⓐ	$\rho_1$	$\rho_{13}$
ⓐ	$\rho_3$	$\rho_{13}$
ⓐ	$\rho_5$	$\rho_{13}$
ⓐ	$\rho_2$	$\rho_{14}$
ⓐ	$\rho_4$	$\rho_{14}$

(b) Table  $log_{GRP}$  (normalized).

Figure 23: Tabular encodings of log files  $log_{JOIN(2)}$  and  $log_{GRP}$ .

which then saves the actual join effort, resulting in interpretation that may beat regular evaluation by an order of magnitude (Section 4). An additional index with flipped key (site, pair) admits the efficient lookup of the provenance relationship between a joined pair and its two source rows. This is reminiscent of the use of access support relations [35] in the work on the provenance language ProQL by Karvounarakis, Ives, and Tannen [34].

Figure 23(b) displays the tabular encoding of log file  $log_{GRP}$ . The table uses a normalized representation in which each group member occupies one row. An index on (site, member) constitutes a purely index-based implementation of function  $read_{GRP}(\textcircled{a}, \rho_i)$  that retrieves the identifier of the group containing member row  $\rho_i$ . Similar to the join case, the flipped index (site, group) returns all member rows that form the provenance for the given group. This flipped index directly relates to the 1-to- $N$  rid-indexes used by [44, Section 3.1] to represent the backward lineage of **GROUP BY**.

If we employ  $B^+$ -trees, note that the leading site column in the above index keys effectively builds site-partitioned indexes, an efficient single-table encoding of the log entries for multiple call sites [25].

**SQL implementations of  $write_{\square}/read_{\square}$ .** The tabular log files are accompanied by user-defined SQL functions that implement the actual log writing and reading. For  $log_{JOIN(2)}$ , Figure 24 shows the PostgreSQL variants of these UDFs. These functions have been used in the experiments of Section 4.

The code for  $write_{JOIN2}$  rolls the semantics of  $write_{JOIN(2)}$  and  $put_{JOIN(2)}$  (see Section 3.1) into a single SQL UDF for efficiency reasons. The *write once* safeguard is implemented in terms of a **UNIQUE\_VIOLATION** that is triggered whenever a duplicate (site, left, right) insertion would violate the pri-

```
1 CREATE FUNCTION writeJOIN2(ⓐ int, (ρ1 rid, ρ2 rid))
2 RETURNS rid AS
3 $$
4 DECLARE ρjoin rid;
5 BEGIN
6   INSERT INTO logJOIN(2)(site, left, right, pair)
7     VALUES (ⓐ, ρ1, ρ2, DEFAULT)
8     RETURNING pair INTO ρjoin;
9   RETURN ρjoin; -- return row ID of joined pair
10 EXCEPTION
11   WHEN UNIQUE_VIOLATION THEN
12     RETURN readJOIN2(ⓐ, (ρ1, ρ2));
13 END;
14 $$ LANGUAGE PLPGSQL VOLATILE

1 CREATE FUNCTION readJOIN2(ⓐ int, (ρ1 rid, ρ2 rid))
2 RETURNS TABLE(ρ rid) AS
3 $$
4 SELECT log.pair
5 FROM   logJOIN(2) AS log
6 WHERE  log.site = ⓐ AND (log.left, log.right) = (ρ1, ρ2)
7 $$ LANGUAGE SQL STABLE
```


Figure 24: Companion SQL UDFs  $write_{JOIN2}$  and  $read_{JOIN2}$ . Type rid represents row identifiers.

mary key of table  $log_{JOIN(2)}$ .<sup>6</sup> The assignment of new join pair identifiers in column pair—i.e.,  $\rho_{10,11,12}$  in Figure 22(b)—is realized using an auto-incrementing SQL sequence. Note that  $write_{JOIN2}$  has been marked as **VOLATILE** to announce its side effect on the logging table [43, §37.6]. This constrains the optimizer’s rewriting choices for instrumented queries—we quantify the effects in Section 4.


Companion UDF  $read_{JOIN2}$ , instead, acts like a pure (SQL: **STABLE**) function. The routine performs a simple index-supported lookup for key (site, left, right) in table  $log_{JOIN(2)}$  and returns a table of zero or one join pair identifiers as required by Rule JOIN (Figure 12).

## C. SCALABILITY EXPERIMENT (TPC-H SCALE FACTOR 10)

<sup>6</sup>SQL’s **ON CONFLICT DO NOTHING** or **MERGE** clauses [47, §14.12] provide alternative implementations of the *write once* safeguard.

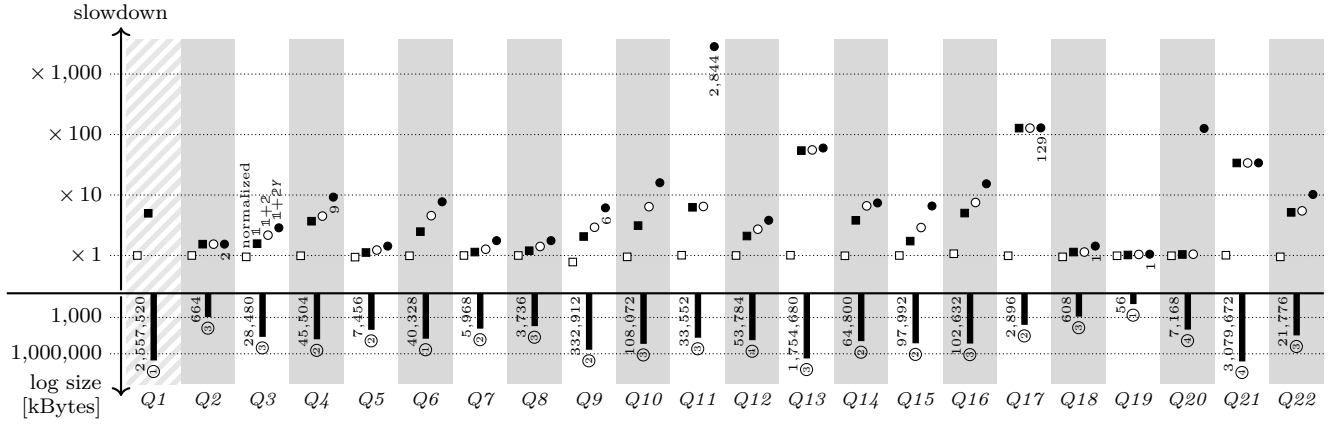

**Figure 25: Repetition of experiments reported in Figure 14 at TPC-H scale factor 10. Slowdown of normalization (□), Phase 1 (■), Phases 1+2 (○ without ● with *why*-provenance) relative to value-based TPC-H. The dependency set cardinality for query *Q1* exceeded the PostgreSQL size limit for array type `int[]`.**

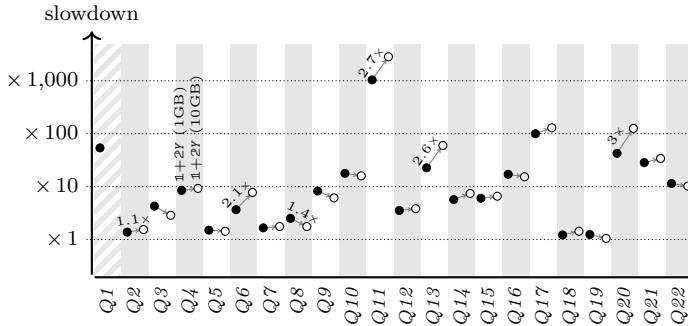

**Figure 26: Phases 1 + 2 (with *why*-provenance): slowdown remains stable for TPC-H scale factors 1 (●) and 10 (○).**

To assess the scalability of cell-level provenance derivation through the non-standard interpretation of SQL, we repeated the TPC-H-based experiments reported in Figure 14 on a larger database instance. Here, we set the benchmark’s scale factor  $sf = 10$  such that central table `lineitem` holds 60 000 000 rows. Otherwise, the experimental setup exactly matches that of Section 4. In particular, we did not modify the instrumented queries (Phase 1) or interpreters (Phase 2) that were fed into PostgreSQL.

Figure 25 summarizes our observations regarding logging effort and provenance tax. Compared to Figure 14, we see that log sizes consistently grow by a factor of 10. This is expected due to the nature of TPC-H in which the sizes of intermediate results grow linearly and selectivities remain stable [4, 50]. The scale-up does not, however, affect the number of `write()` call sites (shown in ○) as these exclusively depend on the syntactic structure of the subject queries.

Most importantly, we find that the provenance tax remains stable: regarding slowdown, Figure 25 largely presents a mirror image of Figure 14. Indeed, we find a mean ratio  $\text{slowdown}(sf=10)/\text{slowdown}(sf=1)$  of 1.18 across the benchmark. Figure 26 aims to visualize that the slowdown essentially remains stable. Partly, deviations from perfect scalability, *i.e.*, a horizontal trend ●→○, are to be attributed to PostgreSQL’s plan choices. If we force PostgreSQL to stick to an indexed

nested loops join to interpret *Q6*, for example, the slowdown at scale factors 1 and 10 is identical.<sup>7</sup> For other queries, the figure documents that a growth in data volume amplifies the effects we have already discussed in Sections 4.1 and 4.2:

- correlation in *Q11* now requires Phase 1 to avoid duplicate entries in log files of ten-fold the size,
- the comparably large log tables written by *Q13* stress the database buffer (an enlarged buffer restores almost perfect scalability, though),
- the occurrence of subqueries nested to depth two in the `WHERE` clause of *Q20* leads to a disproportionate growth of *why*-dependencies (by a factor of about 200 instead of 10). Note that this constitutes a property of the query and the dependencies it induces, not a defect of the approach.

High provenance sizes in *Q1* exceeded the 1 GB size limit for PostgreSQL’s array type `int[]` which we have used throughout this paper to represent dependency sets (also see Appendix D below). Specifically, the grouped aggregate over table `lineitem`


$$\text{SUM}(1\_extendedprice * (1-1\_discount) * (1+1\_tax))$$

collects about 3 (columns)  $\times$  60 000 000 (rows)  $\div$  4 (groups) = 45 000 000 *where*-dependencies for each individual output cell. With *why*-dependencies enabled, this number doubles due to the dependencies incurred by three additional columns (the two grouping criteria `1_returnflag`, `1_linestatus` and column `1_shipdate` that is referenced in the query’s `WHERE` predicate, see Rules JOIN and GROUP). A deployment of the approach on a specific RDBMS should take such high-volume dependencies—that are inherent to the source data and query workload—into account when an implementation type for  $\mathbb{P}$  is chosen.

## D. DEPENDENCY SET REPRESENTATION

The shift from values to dependency sets in Phase 2 brings with it a significant increase in data volume that has to be processed. The original query *Q1* returns  $40 = 4 \times 10$  (rows  $\times$  columns) cells of scalar values. Given the same query, *where*-

<sup>7</sup>It is important to note that, here, we enforce plan choices solely to find causes of query slowdown/speed-up. We pursue query shape preservation precisely to support the RDBMS in identifying efficient plans on its own.

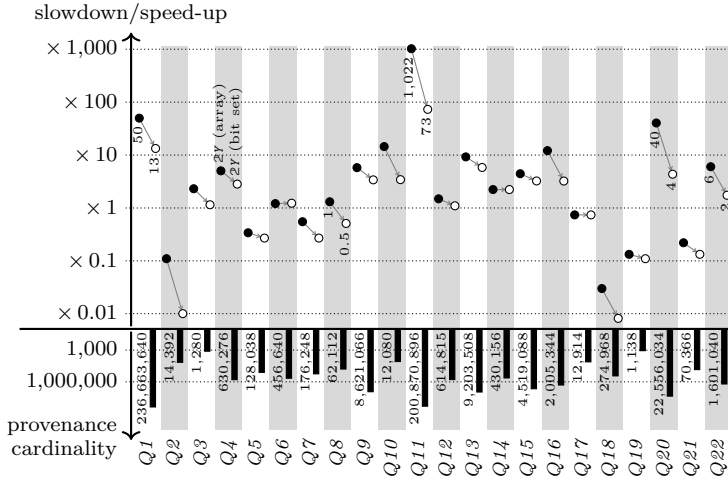

**Figure 27: Efficient dependency set representations reduce interpretation overhead in Phase 2: native (●) vs. bit set (○).**

and *why*-provenance derivation accumulates 40 dependency sets which together contain 236 663 640 cell identifiers. For the TPC-H benchmark, the mean size of a dependency set is about 10 000 elements. The bottom of Figure 27 gives an impression of the overall provenance cardinalities we obtain for the 22 queries. It is expected that the interpreters spend significant time in building these large dependency sets and that the choice of set representation will have a measurable impact on Phase 2.

In the experiments of Figures 14 and 25, we represent the dependency set type  $\mathbb{P}$  in terms of PostgreSQL’s array

type `int[]`. The set operations  $\cup$  and  $\bigcup$  map to array concatenation `||` and aggregation `array_agg`, respectively. Set semantics is enforced via explicit duplicate elimination at the query top-level. If we trade this native (but naive) implementation for a bit set representation—based on the dynamically growing *roaring bitmaps* [7]—we significantly reduce the running time of Phase 2, up to an order of magnitude (see the slowdown drops  $\circ$  in Figure 27). Across the benchmark, we see a geometric mean improvement of factor 2.1. Interpreters for queries like *Q1*, *Q11*, and *Q20* which spend 75–90% of their execution time building huge dependency sets particularly benefit. Unlike these, the evaluation of *Q17* and *Q19* collects comparably tiny sets and thus see no improvement. Indeed, when query interpretation requires few dependency set operations (as for *Q6/Q14*: one/two set aggregations  $\bigcup$  only) or is dominated by non-set operations (as for *Q5* whose evaluation is dominated by a large six-way join), a change of set representation has a lesser impact.

We see that, as query complexity and dependency set cardinalities grow, it pays off to invest in efficient representations for type  $\mathbb{P}$ . The bitmap-based sets discussed above come packaged as a PostgreSQL extension and thus do reach inside the RDBMS—unlike the rest of the approach. With its SQL:2003 revision [46, §4.10.3], however, the SQL standard has introduced the data type *a* `MULTISET` that represents bags (and sets) of elements of type *a*. Type `int MULTISET` thus provides another native implementation for the type  $\mathbb{P}$  of dependency sets. In this alternative,  $\cup$  and  $\bigcup$  map directly to the standard operations `· MULTISET UNION DISTINCT ·` and `SET(FUSION(·))`, respectively. The bitmap-based set representation effectively adds support for type `int MULTISET` and its operations to PostgreSQL.