

Out-of-Sample Extrapolation with Neuron Editing

Matthew Amodio¹

Ruth Montgomery²

Guy Wolf^{3,2,1}

Smita Krishnaswamy^{3,2,1}

Abstract—While neural networks can be trained to map from one specific dataset to another, they usually do not learn a generalized transformation that can extrapolate accurately outside the space of training. For instance, a generative adversarial network (GAN) exclusively trained to transform images of cars from light to dark might not have the same effect on images of horses. This is because neural networks are good at generation within the manifold of the data that they are trained on. However, generating new samples outside of the manifold or extrapolating “out-of-sample” is a much harder problem that has been less well studied. To address this, we introduce a technique called *neuron editing* that learns how neurons encode an edit for a particular transformation in a latent space. We use an autoencoder to decompose the variation within the dataset into activations of different neurons and generate transformed data by defining an editing transformation on those neurons. By performing the transformation in a latent trained space, we encode fairly complex and non-linear transformations to the data with much simpler distribution shifts to the neuron’s activations. We show-case our technique on image domain/style transfer and two biological applications: removal of batch artifacts representing unwanted noise and modeling the effect of drug treatments to predict synergy between drugs.

I. INTRODUCTION

Many experiments in biology are conducted to study the effect of a treatment or a condition on a set of samples. For example, the samples can be groups of cells and the treatment can be the administration of a drug. However, experiments and clinical trials are often performed on only a small subset of samples from the entire population. Usually, it is assumed that the effects generalize in a context-independent manner without mathematically attempting to model the effect and potential interactions with the context. However, mathematically modeling the effect and potential interactions with background information would give us a powerful tool that would allow us to assess how the treatment would generalize beyond the samples measured.

We propose a neural-network based method for learning a general edit function corresponding to treatment in the biomedical setting. While neural networks offer the power and flexibility to learn complicated ways of transforming data from one distribution to another, they are often overfit to the training dataset in the sense that they only learn how to map one specific data manifold to another, and not a general edit function. Indeed, popular neural network architectures

like GANs pose the problem as one of learning to *generate* the post-treatment data distributions from pre-treatment data distributions. Instead, we reframe the problem as that of learning an edit function between the pre- and post-treatment versions of the data, that could be applied to other datasets.

We propose to learn such an edit, which we term *neuron editing*, in the latent space of an autoencoder neural network with non-linear activations. First we train an autoencoder on the entire population of data which we are interested in transforming. This includes all of the pre-treatment samples and the post-treatment samples from the subset of the data on which we have post-treatment measurements.

The internal layers of this autoencoder represent the data with all existing variation decomposed into abstract features (neurons) that allow the network to reconstruct the data accurately [1], [2], [3], [4]. Neuron editing involves extracting differences between the observed pre-and post-treatment activation distributions for neurons in this layer and then applying them to pre-treatment data from the rest of the population to synthetically generate post-treatment data. Thus performing the edit node-by-node in this space actually encodes complex multivariate edits in the ambient space, performed on denoised and meaningful features, owing to the fact that these features themselves are complex non-linear combinations of the input features.

There are three key advantages of operating in the internal space of an autoencoder. First, we seek to model complex distribution-to-distribution transformations between large samples in high-dimensional space. While this can be generally intractable due to difficulty in estimating joint probability distributions, research has provided evidence that working in a lower-dimensional manifold facilitates learning transformations that would otherwise be infeasible in the original ambient space [5], [6], [7]. The non-linear dimensionality reduction performed by autoencoders finds intrinsic data dimensions that essentially *straighten* the curvature of data in the ambient space. Thus complex effects can become simpler shifts in distribution that can be computationally efficient to apply.

Second, by performing the edit to the neural network internal layer, we allow for the modeling of some context dependence. Some neurons of the internal layer have a drastic change between pre- and post-treatment versions of the experimental subpopulation, while other neurons such as those that encode background context information not directly associated with treatment have less change in the embedding layer. The latter neurons are less heavily edited but still influence the

Corresponding author: matthew.amodio@yale.edu

¹Department of Computer Science, Yale University

²Department of Genetics, Yale University

³Department of Applied Math, Yale University

output jointly with edited neurons due to their integration in the decoding layers. These edited neurons interact with the data-context-encoding neurons in complex ways that may be more predictive of treatment than the experimental norm of simply assuming widespread generalization of results context-free.

Third, editing in a low-dimensional internal layer allows us to edit on a denoised version of the data. Because of the reconstruction penalty, more significant dimensions are retained through the bottleneck dimensions of an autoencoder while noise dimensions are discarded. Thus, by editing in the hidden layer, we avoid editing noise and instead edit significant dimensions of the data.

We note that neuron editing makes the assumption that the internal neurons have semantic consistency across the data, i.e., the same neurons encode the same types of features for every data manifold. We demonstrate that this holds in our setting because the autoencoder learns a joint manifold of all of the given data including pre- and post-treatment samples of the experimental subpopulation and pre-treatment samples from the rest of the population. Recent results show that neural networks prefer to learn patterns over memorizing inputs even when they have the capacity to do so [8]. We demonstrate this effect by showing that if we do not let the autoencoder learn the joint manifold of all the data, then the transformation does not perform as well.

We demonstrate that neuron editing extrapolates better than generative models on two important criteria. First, as to the original goal, the predicted change on extrapolated data more closely resembles the predicted change on interpolated data. Second, the editing process produces more complex variation, since it simply preserves the existing variation in the data rather than needing a generator to learn to create it. We compare the predictions from neuron editing to those of several generation-based approaches: a traditional GAN, a GAN implemented with residual blocks (ResnetGAN) to show generating residuals is not the same as editing [9], and a CycleGAN [10]. While in other applications, like natural images, GANs have shown an impressive ability to generate plausible individual points, we illustrate that they struggle with these two criteria. We also motivate why neuron editing is performed on inference by comparing against a regularized autoencoder that performs the internal layer transformations during training, but the decoder learns to undo the transformation and reconstruct the input unchanged [11].

In the following section, we detail the neuron editing method. Then, we motivate the extrapolation problem by trying to perform natural image domain transfer on the canonical CIFAR dataset [12]. We then move to two biological applications where extrapolation is essential: correcting the artificial variability introduced by measuring instruments (batch effects), and predicting the combined effects of multiple drug treatments (combinatorial drug effects) [13].

II. MODEL

Let $S, T, X \in \mathbb{R}^d$ be d -dimensional source, target, and extrapolation distributions, respectively. We seek a transformation that has two properties: when applied to S it produces T ,

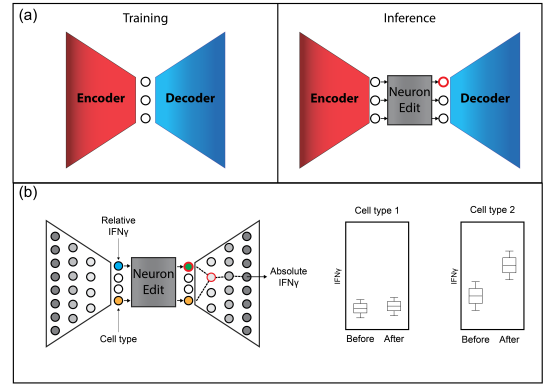


Fig. 1. (a) Neuron editing interrupts the standard feedforward process, editing the neurons of a trained encoder/decoder to include the source-to-target variation (Equation 1), and letting the trained decoder cascade the resulting transformation back into the original data space. (b) The network can incorporate context information, like cell type, that is encoded in other neurons as changes induced by the editing transformation cascade through the decoder.

and when applied to T it is the identity function. GANs learn a transformation with these properties, and when parameterized with ReLU or leaky ReLU activations, as they often are, this transformation also has the property that it is piecewise linear [14], [15]. However, the GAN optimization paradigm produces transformations that do not behave comparably on both S and X . Thus, instead of *learning* such a transformation, we *define* a transformation with these properties on a *learned* space (summarized in Figure 1).

We first train an encoder/decoder pair E/D to map the data into an abstract neuron space decomposed into high-level features such that it can also decode from that space, i.e. an objective L :

$$L(S, T, X) = MSE((S, T, X), D(E(S, T, X)))$$

where MSE is the mean-squared error. Then, without further training, we separately extract the activations of an n -dimensional internal layer of the network for S and T : $a_S, a_T \in \mathbb{R}^n$. We define a piecewise linear transformation, called *NeuronEdit*, which we apply to these distributions of activations:

$$NeuronEdit(a) = \begin{cases} \left(\frac{a - p_0^s}{p_1^s - p_0^s} \cdot (p_1^T - p_0^T) \right) + p_0^T & a < p_1^s \\ \left(\frac{a - p_j^s}{p_{j+1}^s - p_j^s} \cdot (p_{j+1}^T - p_j^T) \right) + p_j^T & a \in [p_j^s, p_{j+1}^s) \\ \left(\frac{a - p_{99}^s}{p_{100}^s - p_{99}^s} \cdot (p_{100}^T - p_{99}^T) \right) + p_{99}^T & a \geq p_{99}^s \end{cases} \quad (1)$$

where p_j^i is the j^{th} percentile of the activations for distribution i . The *NeuronEdit* function operates on distributions discretized by percentile, and transforms the input distribution based on the difference between the source and target distributions.

We note that the *NeuronEdit* function has the three properties of a GAN's generator: 1) $NeuronEdit(a_S) = a_T$ 2) $NeuronEdit(a_T) = a_T$ 3) piecewise linearity. However, we are also able to guarantee that the neuron editing performed on the source distribution S will be the same as that performed

on the extrapolation distribution X , which would not be the case with the generator in a GAN.

To apply the learned transformation to X , we first extract the activations of the internal layer computed by the encoder, a_X . Then, we cascade the transformations applied to the neuron activations through the decoder without any further training. Thus, the transformed output \hat{X} is obtained by:

$$\hat{X} = D(\text{NeuronEdit}(E(X)))$$

Crucially, the nomenclature of an *autoencoder* no longer strictly applies. If we allowed the encoder or decoder to train with the transformed neuron activations, the network could learn to undo these transformations and still produce the identity function. However, since we freeze training and apply these transformations exclusively on inference, we turn an autoencoder into a generative model that need not be close to the identity.

Training a GAN in this setting could exclusively utilize the data in S and T , since we have no real examples of the output for X to feed to the discriminator. Neuron editing, on the other hand, is able to model the variation intrinsic to X in an unsupervised manner despite not having real post-transformation data for X . Since we know *a priori* that X will differ substantially from S , this provides significantly more information.

Furthermore, GANs are notoriously tricky to train [16], [17], [18]. Adversarial discriminators suffer from oscillating optimization dynamics [19], uninterpretable losses [20], [21], and most debilitatingly, mode collapse [22], [23], [24]. Mode collapse refers to the discriminator being unable to detect differences in variability between real and fake examples. In other words, the generator learns to generate a point that is very realistic, but produces that same point for most (or even all) input, no matter how different the input is. In practice, we see the discriminator struggles to detect differences in real and fake distributions even without mode collapse, as evidenced by the generator favoring ellipsoid output instead of the more complex and natural variability of the real data. Since our goal is not to generate convincing *individual examples* of the post-transformation output, but the more difficult task of generating convincing *entire distributions* of the post-transformation output, this is a worrisome defect of GANs.

Neuron editing avoids all of these traps by learning an unsupervised model of the data space with the easier-to-train autoencoder. The essential step that facilitates generation is the isolation of the variation in the neuron activations that characterizes the difference between source and target distributions.

There is a relationship between neuron editing and the well-known word2vec embeddings in natural language processing [25]. There, words are embedded in a latent space where a meaningful transformation such as changing the gender of a word is a constant vector in this space. This vector can be learned on one example, like transforming *man* to *woman*, and then extrapolated to another example, like *king*, to predict the location in the space of *queen*. Neuron editing is an extension in complexity of word2vec’s vector arithmetic, because instead

of transforming a single point into another single point, it transforms an entire distribution into another distribution.

III. EXPERIMENTS

In this section we compare neuron interference as an editing method to various generating methods: a regularized autoencoder, a standard GAN, a ResnetGAN, and a CycleGAN. For the regularized autoencoder, the regularization penalized differences in the distributions of the source and target in a latent layer using maximal mean discrepancy [11], [26]. The image experiment used convolutional layers with stride-two filters of size four, with 64-128-256-128-64 filters in the layers. All other models used fully connected layers of size 500-250-50-250-500. In all cases, leaky ReLU activation was used with 0.2 leak. Training was done with minibatches of size 100, with the adam optimizer [27], and a learning rate of 0.001.

A. CIFAR Image Background Transformation

We first consider a motivational experiment on the canonical image dataset of CIFAR-10 [12]. If we want to learn a transformation that turns a given image with a white background into that same image with a dark background, a natural approach would be to collect two sets of images, one with a white background and one with a dark background, and teach a generative model to map between them. The problem with this approach is that the learned model will only be able to apply a dark background to images similar to those in the collection, unable to extrapolate.

This is illustrated in Figure 2a, where we collect images from all classes except horses with a white background and try to map to the set of all classes except horses with a dark background. The GAN models produce convincingly realistic images with dark backgrounds on the in-sample input, but when they try to extrapolate to the never-before-seen class of horses with a white background, they produce meaningless blobs of dark pixels. The GANs are unable to extrapolate and generate horses with a dark background without having examples of this in the training data.

Neuron editing, on the other hand, successfully isolated the variation that distinguishes the wide variety of white background images from the wide variety of dark background images, i.e. the color of the background. It transforms a given horse in a way that maintains the composition, lines, and relative color of the original image while darkening the background. It does this without ever seeing horses with a dark background during training.

Crucially, the GANs learned to produce output like the images in the target set, so even in-sample they learned transformations that changed more aspects of the data than just the color of the background. Neuron editing successfully modeled the transformation implied by the two datasets by identifying the change in background color as the variation separating them, leaving the other aspects of the image intact. In the applications that follow, this ability to model the transformation as opposed to outputting data like the target becomes essential.

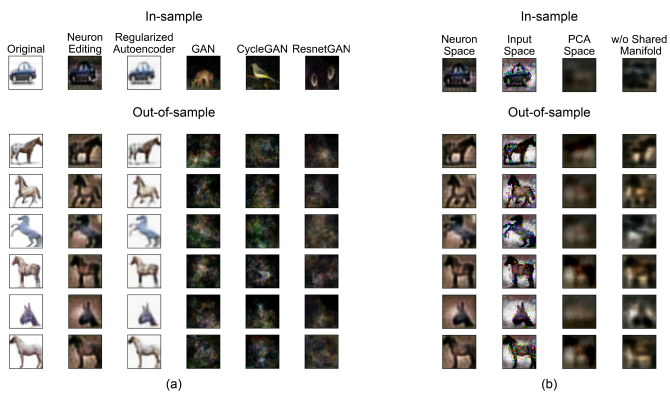


Fig. 2. Data from CIFAR-10 where the source data consists of white background images from all classes other than horses and the target data consists of dark background images from all classes other than horses. The extrapolation is then applied to horses with white backgrounds. (a) A comparison of neuron editing against other models. The GANs produce sharp images in-sample, but only neuron editing successfully applies a black background to the extrapolated data. (b) An illustration that neuron editing must be applied to the neurons of a deep network, as opposed to the input space directly or principle components, and that this network should learn the manifold of the source, target, and extrapolation data together.

In Figure 2b, we motivate why we need to perform the *NeuronEdit* transformation on the internal layer of a neural network, as opposed to applying it directly on the ambient space or after some other transformation like PCA. Only in the neuron space has this complex and abstract transformation of changing the background color been decomposed into a relatively simple and piecewise linear shift. We also show the necessity of letting the autoencoder develop the unsupervised manifold from the extrapolation data, even where we do not have target output.

B. Batch correction by out-of-sample extension from Spike-in Samples

We next demonstrate another application of neuron editing’s ability to learn to transform a distribution based on a separate source/target pair: batch correction. Batch effects are differences in the observed data that are caused by technical artifacts of the measurement process. In other words, we can measure the same sample twice and get two rather different datasets back. When we measure different samples, batch effects get confounded with the true difference between the samples. Batch effects are a ubiquitous problem in biological experimental data that (in the best case) prevent combining measurements or (in the worst case) lead to wrong conclusions. Addressing batch effects is a goal of many new models [28], [29], [30], [31], including some deep learning methods [32], [11].

One method for grappling with this issue is to repeatedly measure an identical control (spike-in) set of cells with each sample, and correct that sample based on the variation in its version of the control [33]. In our terminology of generation, we choose our source/target pair to be Control1/Control2, and then extrapolate to Sample1. Our transformed Sample1 can then be compared to raw Sample2 cells, rid of any variation induced by the measurement process. We would expect this

to be a natural application of neuron editing as the data distributions are complex and the control population is unlikely to be similar to any (much less all) of the samples.

The dataset we investigate in this section comes from a mass cytometry [34] experiment which measures the amount of particular proteins in each cell in two different individuals infected with dengue virus [11]. The data consists of 35 dimensions, where Control1, Control2, Sample1, and Sample2 have 18919, 22802, 94556, and 55594 observations, respectively. The two samples were measured in separate runs, so in addition to the true difference in biology creating variation between them, there are also technical artifacts creating variation between them. From the controls, we can see one such batch effect characterized by artificially low readings in the amount of the protein InfG in Control1 (the x-axis in Figure 3a).

We would like our model to identify this source of variation and compensate for the lower values of InfG without losing other true biological variation in Sample1. For example, Sample1 also has higher values of the protein CCR6, and as the controls show, this is a true biological difference, not a batch effect (the y-axis in Figure 3a). Because the GANs never trained on cells with high CCR6 and were never trained to generate cells with high CCR6, it is unsurprising that all of them remove that variation. Worryingly, the GAN maps almost all cells to the same values of CCR6 and InfG (Figure 3d), and the CycleGAN maps them to CCR6 values near zero (Figure 3f). This means later comparisons would not only lose the information that these cells were exceptionally high in CCR6, but now they would even look exceptionally low in it. The ResnetGAN does not fix this problem, as it is intrinsic to the specification of the generation objective, which only encourages the production of output like the target distribution, and in this case we want output different from the target distribution. As in the previous examples, the ResnetGAN also learns residuals that produces more ellipsoid data, rather than preserving the variation in the original source distribution or even matching the variation in the target distribution. The regularized autoencoder has learned to undo the transformations to its latent space and produced unchanged data.

Neuron editing, on the other hand, decomposes the variability into just the separation between controls (increases in InfG), and edits the sample to include this variation. This removes the batch effect that caused higher readings of InfG, while preserving all other real variation, including both the intra-sample variation and the variation separating the populations in CCR6.

Unlike the other generative models, neuron editing produced the intended transformations for the proteins InfG and CCR6, and here we go on to confirm that its results are accurate globally across all dimensions. In Figure 4a, a PCA embedding of the whole data space is visualized for Control1 (light blue), Control2 (light red), Sample1 (dark blue), and post-transformation Sample1 (dark red). The transformation from Control1 to Control2 mirrors the transformation applied to Sample1. Notably, the other variation (intra-sample variation) is preserved. In Figure 4b, we see that for every dimension, the variation between the controls corresponds accurately to the variation introduced by neuron editing into the sample. These

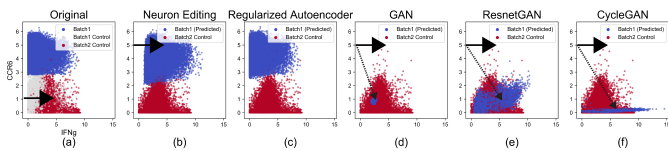


Fig. 3. The results of learning to batch correct a sample based on the difference in a repeatedly-measured control population measured. The true transformation is depicted with a solid arrow and the learned transformation with a dashed arrow. There is a batch effect that should be corrected in IFNg (horizontal) with true variation that should be preserved in CCR6 (vertical). All of the GANs attempt to get rid of all sources of variation (but do so only partially because the input is out-of-sample). The autoencoder does not move the data at all. Neuron editing corrects the batch effect in IFNg while preserving the true biological variation in CCR6.




Fig. 4. (a) The global shift in the two controls (light blue to red) is isolated and this variation is edited into the sample (dark blue to red), with all other variation preserved. (b) The median change in the sample in each dimension corresponds accurately with the evidence in each dimension in the controls.

global assessments across the full data space offer additional corroboration that the transformations produced by neuron editing reasonably reflect the transformation as evidenced by the controls.

C. Combinatorial drug treatment prediction on single-cell data

Finally, we consider biological data from a combinatorial drug experiment on cells from patients with acute lymphoblastic leukemia [13]. The dataset we analyze consists of cells under four treatments: no treatment (basal), BEZ-235 (Bez), Dasatinib (Das), and both Bez and Das (Bez+Das). These measurements also come from mass cytometry, this time on 41 dimensions, with the four datasets consisting of 19925, 20078, 19843, and 19764 observations, respectively. In this setting, we define the source to be the basal cells, the target to be the Das cells, and then extrapolate to the Bez cells. We hold out the true Bez+Das data and attempt to predict the effects of applying Das to cells that have already been treated with Bez.

A characteristic effect of applying Das is a decrease in p4EBP1 (seen on the x-axis of Figure 5). No change in another dimension, pSTATS, is associated with the treatment (the y-axis of Figure 5). Neuron editing accurately models this horizontal change, without introducing any vertical change or losing variation within the extrapolation dataset (Figure 5a). The regularized autoencoder, as before, does not change the output at all, despite the manipulations within its internal layer (Figure 5b). None of the three GAN models accurately predict the real combination: the characteristic horizontal shift is identified, but additional vertical shifts are introduced and much of the original within-Bez variability is lost (Figure 5c-e).

We note that since much of the variation in the target distribution already exists in the source distribution and the shift is a relatively small one, we might expect the ResnetGAN

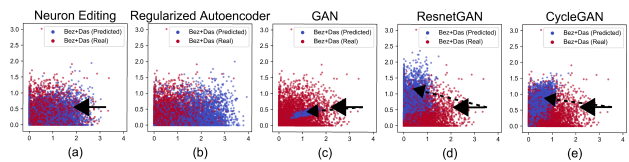


Fig. 5. Combinatorial drug data showing predicted (blue) and real (red) under both Bez and Das drug treatments. The true transformation is depicted with a solid arrow and the predicted transformation with a dashed arrow. All of the GANs have trouble learning to generate the full variability of the target distribution, especially from out-of-sample data. The autoencoder does not even make the slight transformation necessary, and instead leaves the data unchanged. Neuron editing results in meaningful edits that best models the true combination.

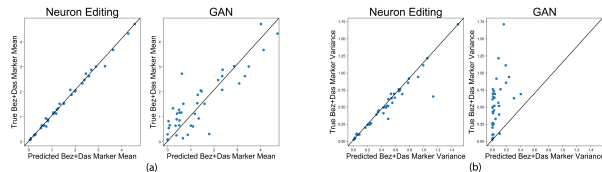


Fig. 6. A comparison of real and predicted means and variances per dimension. Neuron editing more accurately predicts the change in mean than the GAN and better preserves the true variance than the GAN. The GAN almost uniformly generates lower variance data than really exist.

to be able to easily mimic the target. However, despite the residual connections, it still suffers from the same problems as the other model using the generating approach: namely, the GAN objective encourages all output to be like the target it trained on.

That the GANs are not able to replicate even two-dimensional slices of the target data proves that they have not learned the appropriate transformation. But to further evaluate that neuron editing produces a meaningful transformation globally, we here make a comparison of every dimension. Figure 6 compares the real and predicted means (in 6a) and variances (in 6b) of each dimension. Neuron editing more accurately predicts the principle direction and magnitude of transformation across all dimensions. Furthermore, neuron editing better preserves the variation in the real data. In almost all dimensions, the GAN generates data with less variance than really exists.

IV. DISCUSSION

In this paper, we tackled a data-transformation problem inspired by biological experimental settings: that of generating transformed versions of data based on observed pre- and post-transformation versions of a small subset of the available data. This problem arises during clinical trials or in settings where effects of drug treatment (or other experimental conditions) are only measured in a subset of the population, but expected to generalize beyond that subset. Here we introduce a novel approach that we call *neuron editing*, for applying the treatment effect to the remainder of the dataset. Neuron editing makes use of the encoding learned by the latent layers of an autoencoder and extracts the changes in activation distribution between the observed pre-and post treatment measurements. Then, it applies these same edits to the internal layer encodings of other data to mimic the transformation. We show that

performing the edit on neurons of an internal layer results in more realistic transformations of image data, and successfully predicts synergistic effects of drug treatments in biological data. Moreover, we note that it is feasible to learn complex data transformations in the non-linear dimensionality reduced space of a hidden layer rather than in ambient space where joint probability distributions are difficult to extract. Finally, learning edits in a hidden layer allows for interactions between the edit and other context information from the dataset during decoding. Future work along these lines could include training parallel encoders with the same decoder, or training to generate conditionally.

REFERENCES

- [1] Pascal Vincent, Hugo Larochelle, Yoshua Bengio, and Pierre-Antoine Manzagol. Extracting and composing robust features with denoising autoencoders. In *Proceedings of the 25th international conference on Machine learning*, pages 1096–1103. ACM, 2008.
- [2] Pierre Baldi. Autoencoders, unsupervised learning, and deep architectures. In *Proceedings of ICML workshop on unsupervised and transfer learning*, pages 37–49, 2012.
- [3] Quoc V Le. Building high-level features using large scale unsupervised learning. In *Acoustics, Speech and Signal Processing (ICASSP), 2013 IEEE International Conference on*, pages 8595–8598. IEEE, 2013.
- [4] Hoo-Chang Shin, Matthew R Orton, David J Collins, Simon J Doran, and Martin O Leach. Stacked autoencoders for unsupervised feature learning and multiple organ detection in a pilot study using 4d patient data. *IEEE transactions on pattern analysis and machine intelligence*, page 1, 2012.
- [5] Jun-Yan Zhu, Philipp Krähenbühl, Eli Shechtman, and Alexei A Efros. Generative visual manipulation on the natural image manifold. In *European Conference on Computer Vision*, pages 597–613. Springer, 2016.
- [6] Vishal M Patel, Hien Van Nguyen, and René Vidal. Latent space sparse subspace clustering. In *Proceedings of the IEEE International Conference on Computer Vision*, pages 225–232, 2013.
- [7] Pascal Vincent, Hugo Larochelle, Isabelle Lajoie, Yoshua Bengio, and Pierre-Antoine Manzagol. Stacked denoising autoencoders: Learning useful representations in a deep network with a local denoising criterion. *Journal of machine learning research*, 11(Dec):3371–3408, 2010.
- [8] Chiyuan Zhang, Samy Bengio, Moritz Hardt, Benjamin Recht, and Oriol Vinyals. Understanding deep learning requires rethinking generalization. *arXiv preprint arXiv:1611.03530*, 2016.
- [9] Christian Szegedy, Sergey Ioffe, Vincent Vanhoucke, and Alexander A Alemi. Inception-v4, inception-resnet and the impact of residual connections on learning. In *AAAI*, volume 4, page 12, 2017.
- [10] Jun-Yan Zhu, Taesung Park, Phillip Isola, and Alexei A Efros. Unpaired image-to-image translation using cycle-consistent adversarial networks. *arXiv preprint*, 2017.
- [11] Matthew Amodio, David van Dijk, Krishnan Srinivasan, William S Chen, Hussein Mohsen, Kevin R Moon, Allison Campbell, Yujiao Zhao, Xiaomei Wang, Manjunatha Venkataswamy, et al. Exploring single-cell data with deep multitasking neural networks. *bioRxiv*, page 237065, 2018.
- [12] Alex Krizhevsky, Vinod Nair, and Geoffrey Hinton. Cifar-10 (canadian institute for advanced research).
- [13] Benedict Anchang, Kara L Davis, Harris G Fienberg, Brian D Williamson, Sean C Bendall, Loukia G Karacosta, Robert Tibshirani, Garry P Nolan, and Sylvia K Plevritis. Drug-nem: Optimizing drug combinations using single-cell perturbation response to account for intratumoral heterogeneity. *Proceedings of the National Academy of Sciences*, 115(18):E4294–E4303, 2018.
- [14] Ian Goodfellow, Jean Pouget-Abadie, Mehdi Mirza, Bing Xu, David Warde-Farley, Sherjil Ozair, Aaron Courville, and Yoshua Bengio. Generative adversarial nets. In *Advances in neural information processing systems*, pages 2672–2680, 2014.
- [15] Artur Kadurin, Alexander Aliper, Andrey Kazennov, Polina Mamoshina, Quentin Vanhaelen, Kuzma Khrabrov, and Alex Zhavoronkov. The cornucopia of meaningful leads: Applying deep adversarial autoencoders for new molecule development in oncology. *Oncotarget*, 8(7):10883, 2017.
- [16] Tim Salimans, Ian Goodfellow, Wojciech Zaremba, Vicki Cheung, Alec Radford, and Xi Chen. Improved techniques for training gans. In *Advances in Neural Information Processing Systems*, pages 2234–2242, 2016.
- [17] Ishaan Gulrajani, Faruk Ahmed, Martin Arjovsky, Vincent Dumoulin, and Aaron C Courville. Improved training of wasserstein gans. In *Advances in Neural Information Processing Systems*, pages 5767–5777, 2017.
- [18] Xiang Wei, Boqing Gong, Zixia Liu, Wei Lu, and Liqiang Wang. Improving the improved training of wasserstein gans: A consistency term and its dual effect. *arXiv preprint arXiv:1803.01541*, 2018.
- [19] Jerry Li, Aleksander Madry, John Peebles, and Ludwig Schmidt. Towards understanding the dynamics of generative adversarial networks. *arXiv preprint arXiv:1706.09884*, 2017.
- [20] Shane Barratt and Rishi Sharma. A note on the inception score. *arXiv preprint arXiv:1801.01973*, 2018.
- [21] Martin Arjovsky, Soumith Chintala, and Léon Bottou. Wasserstein gan. *arXiv preprint arXiv:1701.07875*, 2017.
- [22] Akash Srivastava, Lazar Valkoz, Chris Russell, Michael U Gutmann, and Charles Sutton. Veegan: Reducing mode collapse in gans using implicit variational learning. In *Advances in Neural Information Processing Systems*, pages 3308–3318, 2017.
- [23] Taeksoo Kim, Moonsu Cha, Hyunsoo Kim, Jung Kwon Lee, and Jiwon Kim. Learning to discover cross-domain relations with generative adversarial networks. *arXiv preprint arXiv:1703.05192*, 2017.
- [24] Vaishnavh Nagarajan and J Zico Kolter. Gradient descent gan optimization is locally stable. In *Advances in Neural Information Processing Systems*, pages 5585–5595, 2017.
- [25] Yoav Goldberg and Omer Levy. word2vec explained: deriving mikolov et al.’s negative-sampling word-embedding method. *arXiv preprint arXiv:1402.3722*, 2014.
- [26] Gintare Karolina Dziugaite, Daniel M Roy, and Zoubin Ghahramani. Training generative neural networks via maximum mean discrepancy optimization. *arXiv preprint arXiv:1505.03906*, 2015.
- [27] Diederik P Kingma and Jimmy Ba. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*, 2014.
- [28] Rachel Finck, Erin F Simonds, Astraea Jager, Smita Krishnaswamy, Karen Sachs, Wendy Fantl, Dana Pe’er, Garry P Nolan, and Sean C Bendall. Normalization of mass cytometry data with bead standards. *Cytometry Part A*, 83(5):483–494, 2013.
- [29] Po-Yuan Tung, John D Blischak, Chiaowen Joyce Hsiao, David A Knowles, Jonathan E Burnett, Jonathan K Pritchard, and Yoav Gilad. Batch effects and the effective design of single-cell gene expression studies. *Scientific reports*, 7:39921, 2017.
- [30] Andrew Butler and Rahul Satija. Integrated analysis of single cell transcriptomic data across conditions, technologies, and species. *bioRxiv*, page 164889, 2017.
- [31] Laleh Haghverdi, Aaron TL Lun, Michael D Morgan, and John C Marioni. Batch effects in single-cell rna-sequencing data are corrected by matching mutual nearest neighbors. *Nature biotechnology*, 36(5):421, 2018.
- [32] Uri Shaham, Kelly P Stanton, Jun Zhao, Huamin Li, Khadir Raddassi, Ruth Montgomery, and Yuval Kluger. Removal of batch effects using distribution-matching residual networks. *Bioinformatics*, 33(16):2539–2546, 2017.
- [33] Rhonda Bacher and Christina Kendzierski. Design and computational analysis of single-cell rna-sequencing experiments. *Genome biology*, 17(1):63, 2016.
- [34] Dmitry R Bandura, Vladimir I Baranov, Olga I Ornatsky, Alexei Antonov, Robert Kinach, Xudong Lou, Serguei Pavlov, Sergey Vorobiev, John E Dick, and Scott D Tanner. Mass cytometry: technique for real time single cell multitarget immunoassay based on inductively coupled plasma time-of-flight mass spectrometry. *Analytical chemistry*, 81(16):6813–6822, 2009.