

# Effect of walking-distance on a queuing system of totally asymmetric simple exclusion process equipped with functions of site assignments

Satori Tsuzuki<sup>a</sup>, Daichi Yanagisawa<sup>a</sup>, Katsuhiro Nishinari<sup>a</sup>

<sup>a</sup>Research Center for Advanced Science and Technology, The University of Tokyo, 4-6-1, Komaba, Meguro-ku, Tokyo 153-8904, Japan

---

## Abstract

This paper proposes a totally asymmetric simple exclusion process on a traveling lane, which is equipped with a queueing system and functions of site assignments along the parking lane. In the proposed system, new particles arrive at the rear of the queue existing at the leftmost site of the system. A particle at the head of the queue selects one of the empty sites in the parking lane and reserves it for stopping at once during its travel. The arriving time and staying time in the parking sites follow half-normal distributions. The random selections of empty sites are controlled by the bias of the exponential function. Our simulation results show the unique shape of site usage distributions. In addition, the number of reserved sites is found to increase with an S-shape curve as the bias to the rightmost site increases. To describe this phenomena, we propose an approximation model, which is derived from the birth-death process and extreme order statistics. A queueing model that takes the effect of distance from the leftmost site of the traveling lane into consideration is further proposed. Our approximation model properly describes the distributions of site usage, and the proposed queueing model shows good agreement with the simulation results.

*Key words:* Totally Asymmetric Simple Exclusion Process, Queueing Model, Statistical Mechanics, Assignment Problems, Multi-Particle Physics

---

## 1. Introduction

The queueing theory, which was started by A. K. Erlang[1] at the beginning of 20th century, has attracted many scientists and researchers. Most of the theory is still in veil; nevertheless, a strong demand for this theory exists not only in academic studies of non-equilibrium statistical physics but also in many engineering fields such as traffic system[2], human dynamics[3, 4], and molecular motor transport[5, 6]. The study of queueing systems has been associated with the totally asymmetric simple exclusion process (TASEP) because of two main features: transportation in a one-way direction and volume exclusion effect, which are suitable for the simulation of queueing systems[7, 8, 9].

This paper proposes a totally asymmetric simple exclusion process on a traveling lane, which is equipped with a queueing system and site assignments along the

parking lane, under open boundary conditions. In the proposed system, new particles arrive at the rear of the queue existing at the leftmost site of the system. Thereafter, a particle at the head of the queue selects one of the empty sites in the parking lane and reserves it for stopping once during its travel. The arriving time and staying time in the parking sites follow half-normal distributions. The random selections of empty sites in the site assignments are controlled by the bias of the exponential function.

Similar mechanics of the proposed system can be observed in many real-world cases (e.g. parking problems in highways, airplane boarding, and airport ground transportations). Therefore, studying the proposed system is meaningful in many application fields. In particular, it is important to investigate the relationship between the occupancy of parking sites and the ways of site assignments because they are closely related with each other. The major scope of this research is to describe the relationship between the effect of site assignments in the proposed system and the occupancy of parking sites.

The proposed model is distinguished from the models

---

*Email addresses:*

tsuzuki@jamology.rcast.u-tokyo.ac.jp (Satori Tsuzuki),  
 tDaichi@mail.ecc.u-tokyo.ac.jp (Daichi Yanagisawa),  
 tknishi@mail.ecc.u-tokyo.ac.jp (Katsuhiro Nishinari)

Preprint submitted to Phys. Rev.E

January 27, 2023

in previous studies. Many studies have been reported on multiple-lane systems, exemplified by [10, 11] for parallel-lane systems under periodic conditions, [12] for triple parallel-lane systems with Langmuir Kinetics, and [11, 12, 13, 14, 15, 16, 17] for two parallel-lane systems with Langmuir Kinetics). However, queueing problems are not taken into accounts in these studies. Regarding the function of site assignments, our previous research[18] is a pioneering study on site-assignment for parallel-lane systems; however, the problem of queueing was not discussed in that study.

In the modeling of queues, we consider the effect of walking distance from the entrance. Several previous studies have worked on this problem of walking-distance for specific cases, exemplified by the D-Fork system[19], D-Parallel system[20], and combinational queueing system of D-Fork with D-Parallel system[21]. A distinguishing factor of the proposed system compared to these previous systems is that the parking sites (service sites) push the particle back to the traveling lane, whereas in the previous studies, the particles pass through the service sites and exit from the opposite side of the traveling lane. Since the particle reentering the traveling lane causes delay in the traveling lane, the ways of site usage distributions affect the queueing system. Hence, the mechanics in the proposed system are different from those of the previous studies. In this paper, we propose an approximation model to describe the site usage distribution of the proposed system on the basis of birth-death process for the spatial direction and extreme order statistics for the time direction.

The remainder of this paper is structured as follows. Section 2 provides a summary of the target system and that of the classical  $M/M/c$  queueing model. Section 3 investigates the dependence of the utilization of parking sites on the distribution parameter of the exponential function through simulations. In Section 4, we propose an approximation model that describes the site usage distribution of the proposed system on the basis of the birth-death process and extreme order statistics. Section 5 summarizes our results and concludes this paper.

## 2. Models

### 2.1. Target System

A schematic view of the target system is depicted in Fig.1. The system consists of two parallel lanes: a traveling lane, which is composed of  $L$  sites, and a parking lane, which is composed of  $N_s$  sites ( $N_s = L/2$ ). In this system, a particle arrives at the rear of the queue, which emerges at the leftmost site. The interval of the arrival

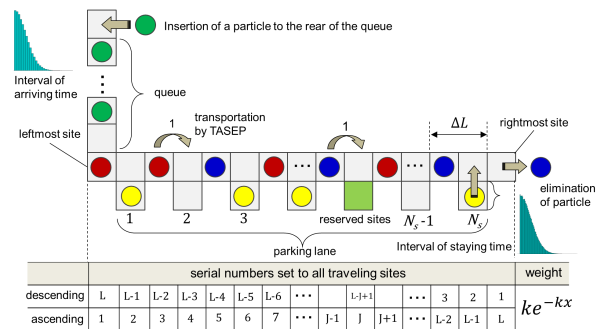


Figure 1: Schematic view of the target system.

time is set to follow a half-normal distribution; the mean  $\tau_{in}$  and deviation  $\sigma_{in}$  of the interval of arrival time are given as follows:

$$\tau_{in} = \bar{\tau}_{in} + \bar{\sigma}_{in} \sqrt{\frac{2}{\pi}} \quad (1)$$

$$\sigma_{in} = \bar{\sigma}_{in}^2 \left(1 - \frac{2}{\pi}\right) \quad (2)$$

Here,  $\bar{\tau}_{in}$  and  $\bar{\sigma}_{in}$  are the mean and deviation of the original normal distribution, respectively.

A particle at the head of the queue selects one of the empty sites in the parking lane and reserves it for stopping once during its travel. Similar to that of the arrival time, the interval of the staying time is also set to follow a half-normal distribution:

$$\tau_s = \bar{\tau}_s + \bar{\sigma}_s \sqrt{\frac{2}{\pi}} \quad (3)$$

$$\sigma_s = \bar{\sigma}_s^2 \left(1 - \frac{2}{\pi}\right) \quad (4)$$

Here,  $\tau_s$  and  $\sigma_s$  are the mean and deviation of the half-normal distribution, while  $\bar{\tau}_s$  and  $\bar{\sigma}_s$  are those of the original normal distribution, respectively. Unless otherwise noted, the mean and deviation of the two cases are indicated by  $\tau_{in}$ ,  $\sigma_{in}$ ,  $\tau_s$ , and  $\sigma_s$  in this paper.

After staying in the parking site, the particle goes back to the traveling lane, changing its state from the yellow-colored state to the blue-colored state, and then moves towards the rightmost site. In the simulations, a particle takes four different colors, while a parking site takes three kinds of states (reserved state, occupied state, and empty state). Additionally, we call both the occupied state and reserved state simply as “a busy state” in this study. For the time integration, we adopt the parallel update method; all the particles are simultaneously updated during simulations.

Two important rules are made to the system. The particle at the head of the queue is not permitted to reserve

the parking site that has already been reserved by the other particle unless the site releases the particle. In addition, the yellow particles in the parking sites have priority access to the upper site on the traveling lane compared to the red/blue colored particle, which is to access the same parking site. The particle in the traveling lane is eliminated from the system at the next step after moving to the rightmost site.

The random selection of an empty parking site by the particle at the head of the queue is controlled by the exponential function  $ke^{-kx}$  ( $x \geq 0, k > 0$ ). In the case of “ascending” in Fig.1, the random selection of the empty sites becomes biased toward the leftmost site as the parameter increases. In the case of “descending” in Fig.1, the random selection becomes biased toward the opposite rightmost site by setting the reversed sequential number to the number of sites  $L$ . Note that the inverse transform sampling (ITS) [22, 23] is introduced to generate random variables that follow the exponential distribution.

We denote the latter type of bias by multiplying the negative sign to parameter  $k$  for the sake of easy view. Namely, in the notation of  $ke^{-kx}$ , the random selection gets biased towards the leftmost site as parameter  $k$  increases while  $k > 0$ . In contrast, it gets biased towards the rightmost site as parameter  $k$  decreases while  $k < 0$ . In the case of setting parameter  $k$  to be zero, no external bias is given to the random selection.

## 2.2. The classical $M/M/c$ queue

In this section, we overview the classical queueing theory. A queueing system is characterized by six stochastic properties: the arrival process  $A$ , service process  $B$ , number of servers in the system  $C$ , maximum number of possible customers who will arrive at the system  $K$ , number of sources of customers  $N$ , and service discipline  $D$ . All these properties are summarized as  $A/B/C/K/N/D$  by Kendall’s notation[24]. The effects of  $K$  and  $N$  are sometimes approximated as infinity and the notation  $D$  is abbreviated for the sake of simplicity. In such cases, the system is represented simply as  $A/B/C$ . The proposed system in this study is categorized into  $M/M/c$  queueing systems because the arriving time and staying time follows Markov process and the system has finite number of parking sites  $N_s$ . Note that the left and right  $M$  indicate the Markov process, and the notation  $c$  indicates the number of servers (the  $c$  corresponds to  $N_s$  in the system). In this section, several important formulas of the classical  $M/M/c$  queueing system are enumerated. For more details on queueing theories, refer to[20, 25]

On the condition that all the servers have equal values of arrival ratio  $\lambda$  and service ratio  $\mu$ , which are given as constant parameters, a distribution of probability  $P_n$  that the whole system (including queue) has  $n$  customers at a stationary state is obtained as a consequence of solving the transition equation of length of queue between the time step  $n$  and time step  $n + 1$ .

$$P_n = \begin{cases} \frac{a^n}{n!} P_0 & (n = 1, 2, \dots, c) \\ \frac{a^n}{c^{n-c} c!} P_0 & (n = c + 1, c + 2, \dots) \end{cases} \quad (5)$$

$$P_0 = \left\{ \sum_{n=0}^{c-1} \frac{a^n}{n!} + \frac{a^c}{c!} \frac{1}{1-\rho} \right\}^{-1} \quad (6)$$

$$a = \frac{\lambda}{\mu} \quad (7)$$

$$\rho = \frac{\lambda}{c\mu} \quad (8)$$

Additionally, the length of queue  $L_q$ , total number of customers in the whole system  $L$ , and the number of utilized servers  $U$  are obtained from Eq.(5) to Eq.(8), as follows:

$$L_q = \sum_{n=c+1}^{\infty} (n-c)P_n = C(c, a) \frac{a}{c-a} \quad (9)$$

$$C(c, a) = \frac{c}{c-a} \frac{a^c}{c!} P_0 \quad (10)$$

$$L = \sum_{n=0}^{\infty} nP_n = L_q + a \quad (11)$$

$$U = L - L_q = a \quad (12)$$

Consequently, the utilization of servers corresponds to the parameter  $a$ , which is defined as the value of arrival ratio divided by service ratio, as shown in Eq.(7).

In the case of  $c = 1$  ( $M/M/1$  queue), the arrival ratio  $\lambda$  and service ratio  $\mu$  are defined as the inversed values of arrival time and service time, as follows:

$$\lambda = \tau_{in}^{-1} \quad (13)$$

$$\mu = \tau_s^{-1} \quad (14)$$

Even in general cases of  $c > 1$ , all the servers are assumed to have same the values of arrival ratio  $\lambda$  and service ratio  $\mu$  defined by Eq.(13) and Eq.(14), respectively, similar to the  $M/M/1$  queue in the classical  $M/M/c$  queueing model. However, this assumption causes a non-negligible deviation from real-world systems because the effect of walking distance to each server is not considered in the classical queueing theory. In particular, this assumption becomes a serious problem in the proposed system because the reentering customer causes a delay in transportation on the traveling

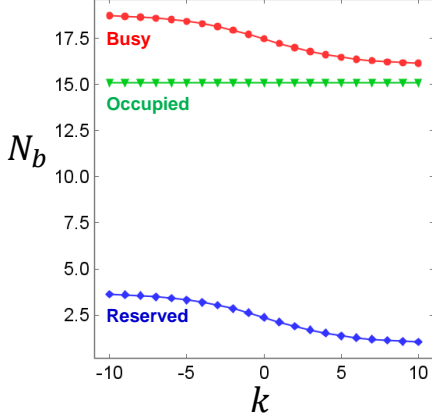


Figure 2: Dependence of the number of reserved/occupied sites and the number of busy sites (the sum of reserved sites and occupied sites) on the different values of distribution parameter  $k$  between -10 and 10.

lane. To solve this problem, in this paper, approximation models that consider the effect of walking distance are proposed in Section 4.

### 3. Simulations

The particle flux at the rightmost site was measured in proportion to the number of parking sites and the number of total time steps to determine the condition of reaching the stationary state. Thereafter, we set the total number of parking sites  $N_s$  to be 48 and set the number of total time steps to be 2,000,000.

Figure 2 shows the dependence of the number of reserved/occupied sites and the number of busy sites (the sum of reserved sites and occupied sites) on the different values of distribution parameter  $k$  between -10 and 10. It was observed that the number of busy sites  $N_b$  increases with a gentle S-shape curve as the parameter  $k$  decreases. Substantially, the increase in the number of busy sites  $N_b$  is found to be determined only by the increase in reserved sites  $N_r$ . On the other hand, the number of occupied sites  $N_o$  remained constant during the simulations. The result in Fig.2 indicates that the utilization of servers  $U$  in the classical M/M/c queueing theory corresponds not to the number of occupied sites  $N_o$ , but to the number of busy sites  $N_b$  in the proposed system. This is because a parking site becomes accessible every time the previous busy time is over. In the next

section, we investigate the relationship between  $N_b$  and the distribution parameter  $k$  of the exponential function.

## 4. Analysis

### 4.1. First-order analysis

At the beginning of this study, we proposed a fundamental model, which is simulated by the concept of D-Fork system. By considering the effect of walking distance from the leftmost site, the occupied time  $T_i$  of the  $i$ -th parking site can be modeled as follows:

$$T_i = \tau_s + i\Delta l + \alpha \quad (15)$$

Here,  $\alpha$  is a constant parameter and  $\Delta l$  is the distance between two parking sites. The maximum bound  $\mu_{max}$ , the lower bound  $\mu_{min}$ , and the average value of the service ratio of the system  $\mu_{avr}$  are obtained as follows:

$$\mu_{max} = T_{N_s}^{-1} \quad (16)$$

$$\mu_{min} = T_1^{-1} \quad (17)$$

$$\mu_{avr} = \left\{ \tau_s + \frac{1}{N_s} \sum_{i=1}^{N_s} (i\Delta l + \alpha) \right\}^{-1} \quad (18)$$

$$= \left\{ \tau_s + \frac{\Delta l}{2} N_s + \frac{\Delta l}{2} + \alpha \right\}^{-1} \quad (19)$$

The utilization of servers  $U$  (which is equal to the number of busy sites  $N_b$ ) is obtained by dividing Eq.(13) by Eq.(19), as follows:

$$U = \frac{\lambda}{\mu_{avr}} \quad (20)$$

$$= \left( \frac{\Delta l}{2\tau_{in}} \right) N_s + \frac{1}{\tau_{in}} \left( \tau_s + \frac{\Delta l}{2} + \alpha \right) \quad (21)$$

Equation (21) shows that the number of busy sites  $N_b$  is a linear function of the number of sites  $N_s$ . Figure 3 shows the simulation result of the dependence of the number of busy sites  $N_b$  on the total number of sites  $N_s$ , in the case of  $k = 0$ . It was observed that the break in line occurs at around  $N_s = 17$ , which is because all the sites are in use due to the lack of capacity of sites. In comparison with Fig.2, the y-intercept value of the fitting line in Fig.3 corresponds to the value of the number of occupied sites  $N_o$ . This is because the increment of the number of busy sites  $N_b$  depends only on the increase in the number of reserved sites  $N_r$ . By fitting the line at  $N_s > 17$  according to Eq.(21), the parameter  $\alpha$  is obtained to be 6.215 as a fitting result. It was confirmed from Fig.4 that the simulation results are bounded between the maximum case and the minimum case. The averaged case of classical M/M/c with the parameter  $\alpha$  is found to semi-experimentally correspond to the case of  $k = 0$ .

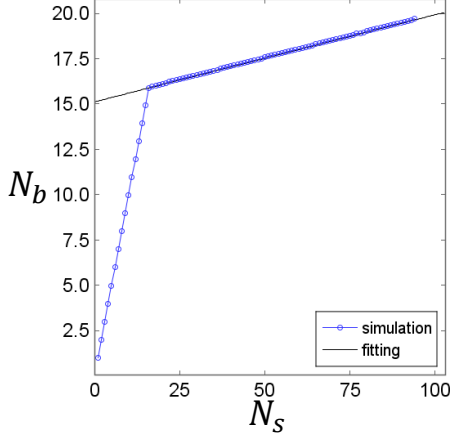


Figure 3: Dependence of the number of busy sites  $N_b$  on the total number of sites  $N_s$  in the case of  $k = 0$ .

#### 4.2. Second-order analysis

On the basis of an assumption that the site usage distributions obey the exponential function  $ke^{-kx}$ , we correct Eq.(19) by replacing the arithmetic mean by the weighted average using the exponential function  $ke^{-kx}$ . In this analysis, the utilization of servers  $U$  (= the number of busy sites  $N_b$ ) is calculated as follows:

$$U = \frac{\tau_s}{\tau_{in}} + \frac{1}{\tau_{in}} \frac{\sum_{i=1}^{N_s} (i\Delta l + \alpha) E_i}{\sum_{i=1}^{N_s} E_i} \quad (22)$$

$$E_i = k \cdot \exp(-k \frac{i}{N_s}) \quad (23)$$

Figure 5 shows the comparison of the simulation results in Fig.4 and the estimated values obtained using Eq.(22). It was confirmed that the feature of S-shape curve is observed in both simulations and approximations. However, the number of busy sites  $N_b$  calculated by Eq.(22) becomes overestimated/underestimated at the both sides of  $k < 0$  and  $k > 0$ .

In order to clarify the reason for the deviation, the site usage distributions were investigated. Figure 6 shows all the distributions for different values of parameter  $k$  between  $-10$  and  $10$ . Obviously, the shape of each distribution is different from that of the exponential function. It should be noted that the reason why the distribution gets slightly biased to the leftmost site in the case of  $k = 0$  is that the parking site, which is closer to the

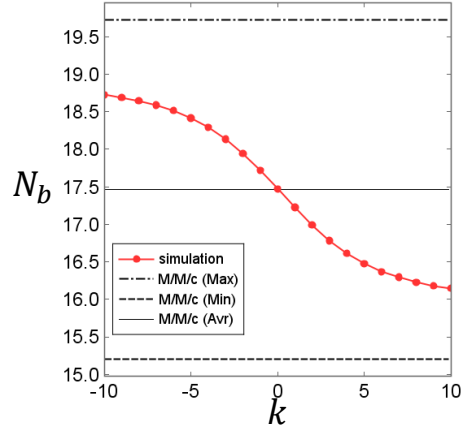


Figure 4: Comparison of the simulation results in Fig.2 with the classical  $M/M/c$  queueing theories for different values of distribution parameter  $k$  between  $-10$  and  $10$ .

leftmost site has a higher turnover rate because of the shorter walking distance.

#### 4.3. Third-order analysis

##### 4.3.1. Birth-death process for walking direction

In this section, we describe the site usage distributions by introducing the birth-death process for walking direction. Namely, the particles in transport before stopping at a site on the parking lane (red colored particles in Fig.1) are regarded as “surviving”. On the contrary, an event in which a particle stops at a site indicates the “death” of the particle.

We define a random variable  $X$ , which donates a position on the traveling lane,  $f(x)$  is defined as the probability density function of  $X$ . From these definitions, the cumulative density function  $F(x)$  of  $f(x)$  can be expressed as follows:

$$F(x) := P(X \leq x) = \int_0^x f(x) dx \quad (24)$$

$F(x)$  represents the probability of “death” at position  $x$ . Conversely, we define  $S(x)$  as the probability of surviving at position  $x$ , as follows:

$$S(x) := 1 - F(x) = P(X > x) \quad (25)$$

Besides, a hazard function  $h(x)$  is defined as follows:

$$h(x) := \lim_{\Delta \rightarrow 0} \frac{1}{\Delta} \cdot P(x < X < x + \Delta | X > x) \quad (26)$$

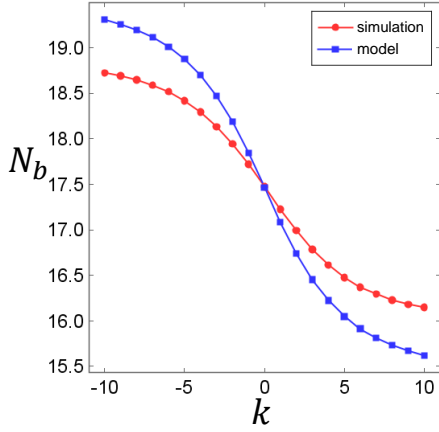


Figure 5: Comparison of the simulation results in Fig.4 and the estimated values obtained using Eq.(22) for different values of distribution parameter  $k$  between -10 and 10.

$h(x)$  is the probability density that a particle stops at a site at the position between  $x$  and  $x + \Delta$ . Equation.(26) can be transformed as follows:

$$= \lim_{\Delta \rightarrow 0} \frac{1}{\Delta} \cdot \frac{P\{(x < X < x + \Delta) \cap (X > x)\}}{P(X > x)} \quad (27)$$

$$= \lim_{\Delta \rightarrow 0} \frac{1}{\Delta} \cdot \frac{P(x < X < x + \Delta)}{P(X > x)} \quad (28)$$

From Eq.(24) and Eq.(25),

$$= \frac{1}{P(X > x)} \lim_{\Delta \rightarrow 0} \frac{F(x + \Delta) - F(x)}{\Delta} \quad (29)$$

$$= \frac{F'(x)}{S(x)} \quad (30)$$

$$= -\frac{S'(x)}{S(x)} = -\frac{d}{dx}(\log(S(x))) \quad (31)$$

Next, we impose an initial condition  $S(0) = 1$  to Eq.(31), since the probability that a particle survives at the position of zero always becomes 1. Then, the differential equation Eq.(31) can be solved as follows:

$$S(x) = \exp(-H(x)) \quad (32)$$

Here, we introduce the  $H(x)$ , as follows:

$$H(x) := \int_0^x h(x) dx \quad (33)$$

We obtain  $F(x)$  and  $f(x)$  from Eq.(32) as follows:

$$F(x) = 1 - \exp(-H(x)) \quad (34)$$

$$f(x) = h(x) \cdot \exp(-H(x)) \quad (35)$$

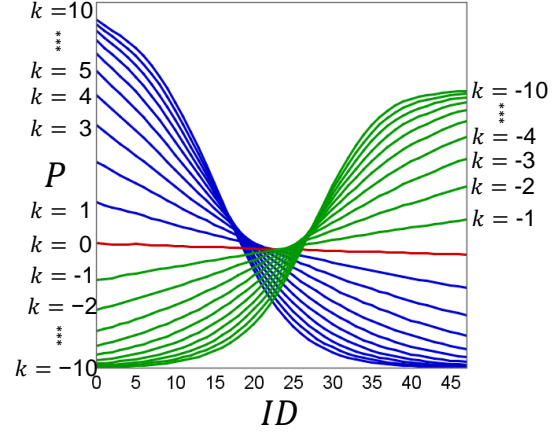


Figure 6: All the distributions for different values of parameter  $k$  between -10 and 10.

$f(x)$  corresponds to the probability distribution of site usage since  $F(x)$  is the probability of death at position  $x$ . We have successfully obtained a general formula for site usage distribution in the proposed system. We introduce extreme statistics in the next section to determine the specific formula of  $H(x)$ .

#### 4.3.2. Approximation by extreme statistics

##### Introduction of order statistics

A concept of order statistics is introduced in this section in order to obtain the specific formula of  $H(x)$ . Let us define the random independent variables as  $X_1, X_2, \dots, X_n$ , assuming that the variables follow an identical cumulative density function  $A(x)$  as follows:

$$A(x) := P(X_i \leq x), \quad (i = 1, 2, \dots, n) \quad (36)$$

Here,  $n$  indicates the number of total time steps. The order statistics of  $X_1, X_2, \dots, X_n$  are defined as follows:

$$X_{(1:n)} \leq X_{(2:n)} \leq \dots \leq X_{(n:n)} \quad (37)$$

Then, the cumulative density function of the  $m$ -th order statistic  $X_{(m:n)}$  is represented as follows:

$$A_{X_{(m:n)}}(x) = \sum_{j=m}^n {}_n C_j A(x)^j (1 - A(x))^{n-j} \quad (38)$$

Equation (38) indicates the probability that contains all the patterns of time hysteresis in that a particle stops at

a parking site, which is located at a position equal to or less than the position  $x$  during time step  $n$ .

Because the probability of  $A(x)$  at each step is unknown, it is impossible to derive the probability distribution of site usage directly from Eq.(38). To solve this problem, we propose to approximate the site usage distribution by the asymptotic distribution of extreme order statistics.

#### Description by extreme statistics

The maximum order statistics  $Z_n$  and the minimum order statistics  $Y_n$  are introduced, respectively, as follows:

$$Z_n := X_{(n:n)} = \max\{X_1, X_2, \dots, X_n\} = \max_{1 \leq i \leq n} X_i \quad (39)$$

$$Y_n := X_{(1:1)} = \min\{X_1, X_2, \dots, X_n\} = \min_{1 \leq i \leq n} X_i \quad (40)$$

The identical distributions of  $Z_n$  and  $Y_n$  are defined, respectively, as follows:

$$A(x) := P(X_i \leq x), \quad (i = 1, 2, \dots, n) \quad (41)$$

$$B(x) := 1 - A(x) = P(X_i > x), \quad (i = 1, 2, \dots, n) \quad (42)$$

Then, the asymptotic distributions of  $A(x)$  and  $B(x)$  are defined as follows:

$$\lim_{n \rightarrow \infty} A(x) := G(x) \quad (43)$$

$$\lim_{n \rightarrow \infty} B(x) := W(x) \quad (44)$$

Here, the following mathematical relationship between the distribution of maximum order statistics  $Z_n$  and its identical distribution  $A(x)$  is satisfied:

$$P(Z_n \leq x) = P\left(\max_{1 \leq i \leq n} X_i \leq x\right) \quad (45)$$

$$= P\left(X_i \leq x, i = 1, 2, \dots, n\right) \quad (46)$$

$$= \prod_{i=1}^n P(X_i \leq x) \quad (47)$$

$$= A^n(x) \quad (48)$$

Equation (48) indicates that the extreme distribution of maximum order variables  $Z_n$  corresponds to  $A(x)$  to the power of  $n$ . In extreme statistic theory, a population distribution  $F$  is assumed to belong to a domain of attraction of an extreme value distribution  $G$ ; this assumption is denoted as  $F \in \mathcal{D}(G)$ . R.A. Fisher and L.H.C Tippett[26] mathematically proved the following relationship for maximum order statistics:

$$F \in \mathcal{D}(G) \Leftrightarrow \lim_{n \rightarrow \infty} F(a_n x + b_n) = G(x), \quad a_n > 0, b_n \in \mathbb{R} \quad (49)$$

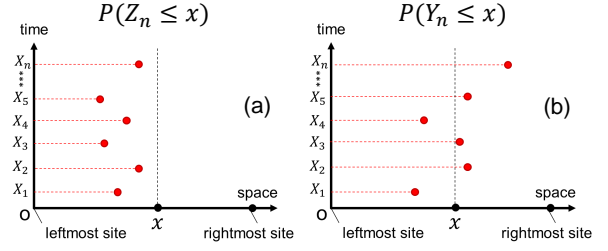


Figure 7: Schematic view of two extreme order statistics.

Here,  $(a_n, b_n)$  are normalizing constants, which are selected to convert the location and scale of  $F$  so that the extreme value distribution  $G$  does not diverge and degenerate. After considerable efforts, mathematicians Fréchet[27], R. A. Fisher and L.H.C Tippett[26], and Gnedenko[28] proved a notable fact that only three types of extreme distributions exist, which are as follows:

$$\text{Gumbel : } G(x) = \exp[-\exp(-x)], \quad x \in \mathbb{R} \quad (50)$$

$$\text{Fréchet : } G(x) = \exp(-x^{-\alpha}), \quad x \geq 0, \alpha > 0 \quad (51)$$

$$\text{Weibull : } G(x) = \exp[-(-x)^\alpha], \quad x \leq 0, \alpha \geq 0 \quad (52)$$

The series of equations from Eq.(50) to Eq.(52) is called Trinity Theorem, which indicates that any population distribution  $F$  is asymptotic to one of the three kinds of extreme distributions listed from Eq.(50) to Eq.(52), on the condition that the relation  $F \in \mathcal{D}(G)$  is satisfied.

We obtain the asymptotic distribution for the case in which the random variables of  $X_1, X_2, \dots, X_n$  follow exponential distributions, as follows. A cumulative exponential function is written as follows:

$$V(x) := 1 - \exp(-kx) \quad (53)$$

Here, we use the following identity equation:

$$V^n(a_n x + b_n) = \left\{ 1 + \frac{-n[1 - V(a_n x + b_n)]}{n} \right\}^n \quad (54)$$

By selecting  $a_n = 1$  and  $b_n = k^{-1} \log(n)$ ,

$$-n[1 - V(a_n x + b_n)] = -\exp(-kx), \quad x \geq 0. \quad (55)$$

By substituting Eq.(55) into Eq.(54),

$$\lim_{n \rightarrow \infty} V(a_n x + b_n) = \lim_{n \rightarrow \infty} \left( 1 + \frac{-e^{-kx}}{n} \right)^n \quad (56)$$

$$= \exp(-e^{-kx}) \quad (57)$$

Equation (57) indicates that the asymptotic distribution of maximum order statistics  $Z_n$ , when the random variables  $X_1, X_2, \dots, X_n$  follow an exponential distribution, belongs to the family of Eq.(50) in the Trinity Theorem.



We approximate the probability distribution of site usage by the asymptotic distribution of extreme order statistics. Here, we have two candidates:

$$P(Z_n \leq x) \quad (58)$$

$$P(Y_n \leq x) \quad (59)$$

Let us consider the physical meaning of these two extreme order statistics. As shown in Fig.7(a),  $P(Z_n \leq x)$  describes the probability that not a single  $X_i$  becomes larger than the position  $x$  during the time step  $n$ . Obviously, the situation depicted in Fig.7(a) seldom occurs in the proposed system. Therefore, replacing the random variables  $X_n$  in Eq.(24) by the maximum order statistics of  $Z_n$  is not appropriate. On the contrary, as shown in Fig.7(b),  $P(Y_n \leq x)$  describes the probability that at least one of  $X_i$  becomes smaller than the position  $x$  during time step  $n$ . It is clear that replacing  $X_n$  in Eq.(24) by the minimum order statistics of  $Y_n$  is considered to be suitable for describing the behaviors of the proposed system, compared to the former case.

By substituting  $Y_n$  into Eq.(24),

$$F(x) := P(Y_n \leq x) \quad (60)$$

$$= P\left(\min_{1 \leq i \leq n} X_i \leq x\right) \quad (61)$$

$$= P\left(\max_{1 \leq i \leq n} \{-X_i\} \geq -x\right) \quad (62)$$

Here, we use the following mathematical relationship[29]:

$$\lim_{n \rightarrow \infty} P\left(\max_{1 \leq i \leq n} \{-X_i\} \geq -x\right) = 1 - G(-x) \quad (63)$$

We obtain the distribution  $F(x)$  of the proposed system:

$$F(x) = 1 - \exp(-e^{kx}) \quad (64)$$

The probability density function  $f(x)$  is obtained as follows:

$$f(x) = k \cdot \exp(kx) \cdot \exp[-\exp(kx)] \quad (65)$$

From Eq.(65), the cumulative hazard function  $H(x)$  is found to become an exponential function:

$$H(x) = e^{kx} \quad (66)$$

The selection of  $Y_n$  is validated from the point of mathematical derivation. If we select  $Z_n$ , the right hand side of Eq.(64) becomes  $\exp(-e^{-kx})$ . This description contradicts with the formula obtained in Eq.(34). In this case, the relationship between Eq.(34) and Eq.(35) is not satisfied.

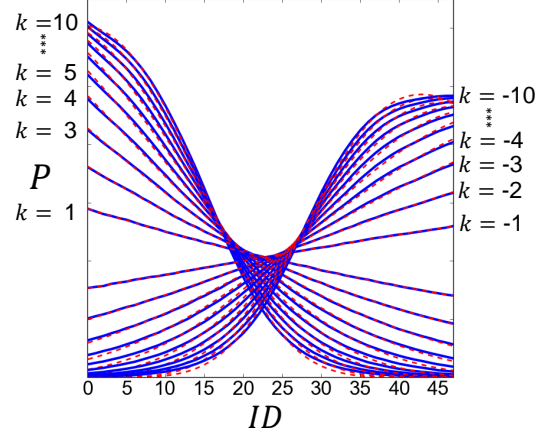


Figure 8: All the cases of exponential distributions fitted by Eq.(67) for different values of parameter  $k$  between  $-10$  and  $10$ .

#### 4.3.3. Corrections of the $M/M/c$ queueing model

Let us get back to the subject of queueing theory. We attempt to correct the weighted calculation in Eq.(22) by replacing the exponential function by the fitting function of the simulation results. We adopt Eq.(65) as the fitting function, admitting the transformation of the scale and position of Eq.(65) by using constant parameters  $a$ ,  $b$ , and  $c$ , as follows:

$$f(x) = ak \cdot \exp\left(\frac{kx-c}{b}\right) \cdot \exp\left[-\exp\left(\frac{kx-c}{b}\right)\right], \quad a > 0, b > 0, c \in \mathbb{R} \quad (67)$$

Figure 8 shows all the cases of exponential distributions fitted by Eq.(67) for different values of parameter  $k$  between  $-10$  and  $10$ . The dashed red colored lines indicate fitting results by the least squares method. Figure 9 shows the dependence of the chi-square of fitting results in Fig.8 on the different values of parameter  $k$ . Obviously, in Fig.9, it was observed that the accuracy of curve fitting deteriorates as the bias to the right/left side increases. The reason for this is interpreted as follows. As the bias to the right/left side increases, congestion occurs in the neighboring area of the rightmost/leftmost site. Because the effect of congestion is not considered in the deviation of Eq.(67), the difference at both sides of the edges emerges.

We correct the weighted calculations of the proposed queueing model in Eq.(22) by replacing the weighted



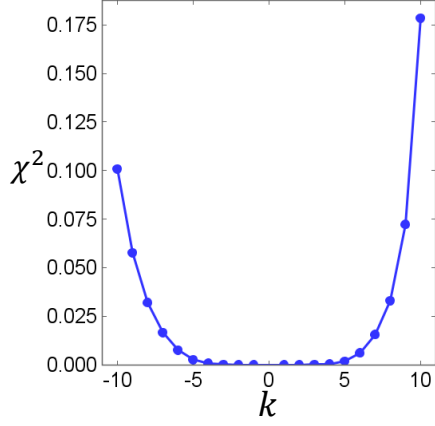


Figure 9: Dependence of the chi-square of fitting results in Fig.8 on the different values of parameter  $k$ .

function with the function in Eq.(67), as follows:

$$U = \frac{\tau_s}{\tau_{in}} + \frac{1}{\tau_{in}} \frac{\sum_{i=1}^{N_s} (i\Delta l + \alpha) E_i}{\sum_{i=1}^{N_s} E_i} \quad (68)$$

$$E_i := f\left(\frac{i}{N_s}\right) \quad (69)$$

Figure 10 shows a comparison of (a) the simulation results in Fig.5 with (b) the estimated values obtained using Eq.(22) and (c) the estimated values obtained using Eq.(68). It was confirmed that our proposed model shows a good agreement with the simulation results compared to the model exhibited in Eq.(22). This result indicates that the proposed method, which estimates the service ratio  $\mu_s$  by using weighted calculations of the site usage distributions, is an effective approach under certain conditions.

## 5. Conclusion

We introduced a totally asymmetric simple exclusion process on a traveling lane equipped with a queueing system and functions of site assignments along the parking lane. In this study, we investigated the relationship between the utilization of parking sites and the effect of site assignments in the proposed system. The contributions of this study are as follows:

We proposed an approximation model to describe the site usage distributions of the proposed system on the basis of birth-death process for the spatial direction and

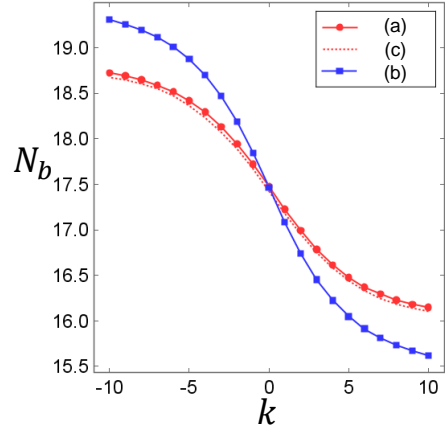


Figure 10: (a) the simulation results in Fig.5, (b) second-order proposed model exhibited in Eq.(22), and (c) third-order proposed model exhibited in Eq.(68).

extreme order statistics for the time direction. The specific formula in the case where the random variables follow exponential distributions are described. In addition, our proposed  $M/M/c$  queueing model, whose service ratio is determined by the weighted calculation of site usage distributions, shows good agreement with the simulation results.

As mentioned in the introduction, the major scope of the current research is to describe the relationship between the utilization of parking sites and the effect of site assignments in the proposed system. Accordingly, we obtained insightful results from the findings of this study.

## Acknowledgements

This research was supported by MEXT as ‘‘Post-K Computer Exploratory Challenges’’ (Exploratory Challenge 2: Construction of Models for Interaction Among Multiple Socioeconomic Phenomena, Model Development and its Applications for Enabling Robust and Optimized Social Transportation Systems), partly supported by JSPS KAKENHI Grant Numbers 25287026 and 15K17583. We would like to thank Editage ([www.editage.jp](http://www.editage.jp)) for English language editing.

## References

- [1] A. K. ERLANG, The theory of probabilities and telephone conversations, *Nyt. Tidsskr. Mat. Ser. B* **20**, 33 (1909).
- [2] D. Helbing, Traffic and related self-driven many-particle systems, *Rev. Mod. Phys.* **73**, 1067 (2001).
- [3] J. Walraevens, T. Demoor, T. Maertens, and H. Bruneel, Stochastic queueing-theory approach to human dynamics, *Phys. Rev. E* **85**, 021139 (2012).
- [4] P. Blanchard and M.-O. Hongler, Modeling human activity in the spirit of barabasi's queueing systems, *Phys. Rev. E* **75**, 026102 (2007).
- [5] S. Choubey, Nascent rna kinetics: Transient and steady state behavior of models of transcription, *Phys. Rev. E* **97**, 022402 (2018).
- [6] C. Baker, T. Jia, and R. V. Kulkarni, Stochastic modeling of regulation of gene expression by multiple small rnas, *Phys. Rev. E* **85**, 061915 (2012).
- [7] C. Arita, Queueing process with excluded-volume effect, *Phys. Rev. E* **80**, 051119 (2009).
- [8] C. Arita and A. Schadschneider, Exact dynamical state of the exclusive queueing process with deterministic hopping, *Phys. Rev. E* **84**, 051127 (2011).
- [9] C. Arita and A. Schadschneider, Dynamical analysis of the exclusive queueing process, *Phys. Rev. E* **83**, 051128 (2011).
- [10] T. Ezaki and K. Nishinari, Positive Congestion Effect on a Totally Asymmetric Simple Exclusion Process with an Adsorption Lane., *Phys. Rev. E* **84**, 061149 (2011).
- [11] S. Ichiki, J. Sato, and K. Nishinari, Totally Asymmetric Simple Exclusion Process on a Periodic Lattice with Langmuir Kinetics depending on the Occupancy of the Forward Neighboring Site, *Eur. Phys. J. B* **89**, 135 (2016).
- [12] A. K. Verma, A. K. Gupta, and I. Dhiman, Phase Diagrams of Three-Lane Asymmetrically Coupled Exclusion Process with Langmuir Kinetics, *Europhys. Lett.* **112**, 30008 (2015).
- [13] A. Parmeggiani, T. Franosch, and E. Frey, Totally Asymmetric Simple Exclusion Process with Langmuir Kinetics, *Phys. Rev. E* **70**, 046101 (2004).
- [14] S. Ichiki, J. Sato, and K. Nishinari, Totally Asymmetric Simple Exclusion Process with Langmuir Kinetics depending on the Occupancy of the Neighboring Sites, *J. Phys. Soc. Jpn.* **85**, 044001 (2016).
- [15] D. Yanagisawa and S. Ichiki, Totally Asymmetric Simple Exclusion Process on an Open Lattice with Langmuir Kinetics Depending on the Occupancy of the Forward Neighboring Site, *Lect. Notes Comput. Sci.* **9863**, 405 (2016).
- [16] I. Dhiman and A. K. Gupta, Two-Channel Totally Asymmetric Simple Exclusion Process with Langmuir Kinetics: The Role of Coupling Constant, *Europhys. Lett.* **107**, 20007 (2014).
- [17] R. Wang, R. Jiang, M. Liu, J. Liu, and Q. S. Wu, Effects of Langmuir Kinetics on Two-Lane Totally Asymmetric Exclusion Processes of Molecular Motor Traffic, *J. Mod. Phys. C* **18**, 1483 (2007).
- [18] S. Tsuzuki, D. Yanagisawa, and K. Nishinari, Effect of self-deflection on a totally asymmetric simple exclusion process with functions of site assignments, *Phys. Rev. E* **97**, 042117 (2018).
- [19] F. Spitzer, Interaction of markov processes, *Advances in Mathematics* **5**, 246 (1970).
- [20] *Queueing Networks* (Wiley-Blackwell, 2001), chap. 7, pp. 263–309, <https://onlinelibrary.wiley.com/doi/pdf/10.1002/0471200581.ch7>.
- [21] D. Yanagisawa *et al.*, Walking-distance introduced queueing model for pedestrian queueing system: Theoretical analysis and experimental verification, *Transportation Research Part C: Emerging Technologies* **37**, 238 (2013).
- [22] C. Vogel, *Computational Methods for Inverse Problems* (The SIAM series on Frontiers in Applied Mathematics, 2002).
- [23] L. Devroye, *Non-uniform Random Variate Generation* (Springer-Verlag, 1986).
- [24] D. G. Kendall, Stochastic processes occurring in the theory of queues and their analysis by the method of the imbedded markov chain, *Ann. Math. Statist.* **24**, 338 (1953).
- [25] D. Gross, J. F. Shortle, J. M. Thompson, and C. M. Harris, *Fundamentals of Queueing Theory*, 4th ed. (Wiley-Interscience, New York, NY, USA, 2008).
- [26] R. A. Fisher and L. H. C. Tippett, Limiting forms of the frequency distribution of the largest or smallest member of a sample, *Mathematical Proceedings of the Cambridge Philosophical Society* **24**, 180190 (1928).
- [27] M. -. Frecht, Sur la loi de probabilit de l'cart maximum, 1928.
- [28] B. Gnedenko, Sur la distribution limite du terme maximum d'une serie aleatoire, *Annals of Mathematics* **44**, 423 (1943).
- [29] M. R. Leadbetter, G. Lindgren, and H. Rootzn, *Extremes and related properties of random sequences and processes* (MIR, 1989).