



Hamiltonian Monte Carlo Sampling for Fields

Christoph Lienhard

Torsten A. Enßlin

Abstract

HMCF “Hamiltonian Monte Carlo for Fields” is a software add-on for the **NIFTy** “Numerical Information Field Theory” framework implementing Hamiltonian Monte Carlo (HMC) sampling in Python. **HMCF** as well as **NIFTy** are designed to address inference problems in high-dimensional spatially correlated setups such as image reconstruction. They are optimized to deal with the typically high number of degrees of freedom.

HMCF adds an HMC sampler to **NIFTy** that automatically adjusts the many free parameters steering the HMC sampling machinery. A wide variety of features ensure efficient full-posterior sampling for high-dimensional inference problems. These features include integration step size adjustment, evaluation of the mass matrix, convergence diagnostics, higher order symplectic integration and simultaneous sampling of parameters and hyperparameters in Bayesian hierarchical models.

Keywords: Python, Bayesian statistics, field inference, Hamiltonian sampling.

1. Introduction

1.1. Purpose

HMCF implements a Hamiltonian Monte Carlo (HMC) sampler (Duane, Kennedy, Pendleton, and Roweth 1987) for the **NIFTy** (“Numerical Information Field Theory”) framework (Selig, Bell, Junkewitz, Oppermann, Reinecke, Greiner, Pachajoa, and Enßlin 2013; Steininger, Dixit, Frank, Greiner, Hutschenreuter, Knollmüller, Leike, Porqueres, Pumpe, Reinecke *et al.* 2017; Martin Reinecke 2018)). It is available for **Python3** on Unix-like systems. The main purpose of **HMCF** is to create samples which are distributed according to arbitrary, once-differentiable probability distributions. These samples can, for example be used to approximate expectation values in cases where brute-force integration is infeasible.

NIFTy is a Python library developed for computational work with information field theory (IFT, Enßlin, Frommert, and Kitaura (2009); Enßlin and Weig (2010)). IFT extends clas-

sical probability theory onto functional spaces. **NIFTy** is interesting for spatially correlated inference problems such as image reconstruction (Selig, Vacca, Oppermann, and Enßlin 2015; Junklewitz, Bell, Selig, and Enßlin 2016; Pumpe, Reinecke, and Enßlin 2018) or work on geospatial datasets (Daniel Buscombe 2016). A main advantage is the resolution-independent calculation of statistical estimates.

With **HMCF**, Bayesian models already implemented in **NIFTy** can be reused for an HMC sampling approach, easily. This can help estimating the impact of approximations present in other approaches, or enable tackling entirely new problems.

1.2. Features

At the heart of **HMCF** lies the `HMCSampler` class which constructs an HMC sampler based on a predefined **NIFTy Energy** class describing a probability distribution $P(x)$ as an *energy* $\Psi(s) = -\log(P(x))$. Samples drawn from this distribution are saved to the disk as **HDF5** archives (The HDF Group 2018).

To ensure a successful sampling process **HMCF** implements a variety of additional features. The sampler calculates a convergence measure to determine when the burn-in phase has finished. Several predefined strategies on how to exactly calculate the measure are available and can be chosen from. It is critical for an HMC sampler to use a proper *mass matrix* which is why **HMCF** can recalculate it several times during burn-in achieving better performance by orders of magnitude in comparison to the usage of an identity as mass matrix. Another important sampling parameter, the *integration step size* of the symplectic integrator, is also adjusted such that a predefined acceptance rate is matched. Again, the exact adjusting strategy can be chosen from a predefined set of options. Although for most purposes a second order leapfrog integrator is sufficient, higher order integrators are available as well. Furthermore, **HMCF** uses multi-processing in that individual Markov chains use separate cores.

HMCF is optimized to ease the work with HMC sampling. All of the above can be done in only a few lines of code if a well-defined **NIFTy Energy** class is available.

1.3. Comparison to other Packages

There are many software packages for HMC sampling available in many different languages. But unlike **HMCF** most packages are static in that they use in general the identity as the mass matrix or need a mass matrix specified in the beginning. Since especially in high-dimensional cases a good mass matrix estimation is crucial for a successful sampling process we will concentrate on packages which estimate the mass matrix.

A very popular cross-platform package for HMC is **Stan** (Stan Development Team 2017). **Stan** provides interfaces for R, Python, shell, MATLAB, Julia, Stata, Mathematica and Scala. Its biggest advantage is the C++ back-end which makes it by far the fastest sampler if the same parameters such as integration step size and mass matrix are chosen. Another notable advantage over **HMCF** is an implementation of the no-u-turn sampler (NUTS, Hoffman and Gelman (2014)) which can be seen as an extension to the standard HMC approach.

In **Stan** the mass matrix is set to the identity initially, but is recalculated from the generated samples during the burn-in phase. The mass matrix can but does not have to be restricted to a diagonal matrix. **HMCF** differs in that the user is able to define their own mass matrix

which can be an advantage in some cases (see e.g. [Taylor, Ashdown, and Hobson \(2008\)](#)). The **Stan** developers announced such a feature in future versions, though. Using the samples generated by the initial chain itself involves the risk of having highly correlated samples in case the sampler was malfunctioning due to the usage of the initial mass matrix. To avoid this, **HMCF** uses samples drawn from the curvature of the full posterior at the current position to reevaluate the mass matrix. We found this approach to be much more efficient. Reevaluated mass matrices are always diagonal in **HMCF** but since it is targeted at high-dimensional problems where non-sparse matrices can not be represented explicitly this is not really a disadvantage. Furthermore, more recent **NIFTy** based algorithms use harmonic space degrees of freedom as field variables ([Knollmüller, Steininger, and Enßlin 2017](#)) which fits better to a mass matrix being diagonal in these field parameters.

Another important package for HMC sampling in Python is **pyMC3** ([Salvatier, Wiecki, and Fonnesbeck 2018](#)). **pyMC3** provides a huge variety of different samplers among other functions for statistical applications. When it comes to the HMC sampler in **pyMC3** the main difference to **HMCF** is that the mass matrix is again evaluated based on the samples of the Markov chain itself which might be problematic as described in the paragraph above. Again **pyMC3** has a NUTS feature.

Apart from that the main advantage of **HMCF** is that it is easy to use for already written algorithms in **NIFTy** and its optimization for high-dimensional statistical problems.

1.4. Structure of this Paper

This introduction is followed by a short installation guide. In section 3 we give an introduction to HMC sampling on a theoretical / mathematical level. Afterwards, we illustrate the work with **NIFTy** and **HMCF** using a simple Bayesian hierarchical model as an example in section 4. This document ends with a short summary in section 5 on why there is a need for a distinct **HMCF** package.

2. Installation

2.1. Dependencies

HMCF relies on the following other Python packages:

NumPy : The very basic Python package for numerical analysis on multidimensional arrays.

SciPy ([Oliphant 2007](#)) : Library implementing advanced algorithms and functions in Python.

h5py : A Python wrapper for the HDF5 file format.

NIFTy (4.1.0 or newer, [Steininger *et al.* \(2017\)](#); [Martin Reinecke \(2018\)](#)) : A package for statistical field inference problems.

matplotlib ([Hunter 2007](#)), optional : A package for producing figures. Necessary for the **HMCF tools** sub-package.

PyQt5 optional : Necessary for the **tools** sub-package.

NIFTy supports multi-processing in many calculations via **mpi4py** (Dalcin, Paz, and Storti (2005)) but **HMCF** needs to restrict each individual Markov chain to one core. If **mpi4py** is already installed the user should switch multi-processing off by setting the environment variables `MKL_NUM_THREADS` and `OMP_NUM_THREADS` to 1 in a terminal:

```
export MKL_NUM_THREADS = 1
export OMP_NUM_THREADS = 1
```

2.2. Installing via Git

Installing **HMCF** along with all required packages is possible via

```
pip install git+https://gitlab.mpcdf.mpg.de/ift/HMCF
```

3. Hamiltonian Monte Carlo Sampling

The goal of most statistical problems is to find expectation values $\langle f(x) \rangle_{P(x)}$ of a function $f(x)$ given a distribution $P(x)$, with

$$\langle f(x) \rangle_{P(x)} = \int_{\mathcal{X}} f(x) P(x) dx,$$

where \mathcal{X} is the space of all possible values for x . However, especially in high dimensional cases the integral may become intractable. One approach to circumvent this problem is to use a form of Monte Carlo integration. Samples (x_i) which are distributed like $P(x)$ are used to approximate the expectation value:

$$\langle f(x) \rangle_{P(x)} \approx \frac{1}{N} \sum_{i=1}^N f(x_i) \quad (1)$$

The law of large numbers ensures that this approximation converges to the true expectation value in non-pathological situations. Then, the problem is reduced to finding a strategy to generate the samples (x_i) . While there are straight forward solutions in some cases such as normal distributions, often more advanced algorithms are needed. A large subset of such algorithms are Markov chain Monte Carlo (MCMC) methods which have in common that a Markov process is constructed which ultimately converges to the wanted *target distribution* $P(x)$. HMC sampling is a MCMC method especially applicable for once-differentiable probability distributions on high-dimensional spaces.

3.1. The Algorithm

The Hamilton Monte Carlo (HMC) approach (first introduced by Duane *et al.* (1987), good summaries: Neal *et al.* (2011); Betancourt (2017)) uses a variation of the Metropolis-Hastings algorithm (Hastings 1970; Metropolis, Rosenbluth, Rosenbluth, Teller, and Teller 1953) with less random walk behavior. The idea is to describe the Markov process as a physical Hamiltonian time evolution, exploiting for MCMC methods advantageous properties of the dynamics of this system. The samples (x_i) can then be thought of as snapshots of the trajectory of

a particle moving through an energy landscape $\Psi(x)$. This *energy* is defined by the target distribution $P(x)$ via

$$\Psi(x) := -\log(P(x))$$

This convention originates from statistical physics where the probability of a system being in state i with energy $E(i)$ is

$$P(x) \propto \exp(-\beta E(i))$$

where β is a temperature-dependent scaling parameter.

Additionally, a new normal distributed random variable $p \in \mathcal{X}$ with covariance M called *momentum* is introduced. The negative logarithm of the joint distribution $P(x, p)$ then looks like a typical physical Hamiltonian:

$$H(x, p) = \frac{1}{2} p^\top M^{-1} p + \Psi(x) + \text{const}$$

The central idea of HMC sampling is to evolve this system in time according to Hamilton's equations of motion

$$\begin{aligned} \dot{x}^k &= \frac{\partial H}{\partial p^k} = [M^{-1}p]^k \\ \dot{p}^k &= -\frac{\partial H}{\partial x^k} = -\frac{\partial \Psi}{\partial x^k} \end{aligned} \tag{2}$$

for $k = 1, \dots, \dim(\mathcal{X})$. After some time T the position we arrived at is considered as a new Metropolis-Hastings proposal $(x(T), p(T)) =: (x', p')$. This approach is possible since Hamiltonian dynamics have some convenient properties such as volume preservation. Also, in theory, the new sample is exactly as probable as the starting point since the process is energy conserving. In practice however, the discretization of the integration in time leads to errors in the energy conservation, which is why a accept-reject step is necessary where the proposal is accepted with probability

$$\rho_A = \min(1, \exp(-\Delta E)) , \tag{3}$$

where $\Delta E = H(x', p') - H(x, p)$.

The whole algorithm then looks like this:

Set initial x_0

for $i = 1$ **to** $\#samples$ **do**

Generate momentum sample $p \sim \mathcal{N}(0, M)$ Evolve system for time T New position: $(x', p') = (x(T), p(T))$	}	MH proposal
--	---	-------------

Generate sample $r \sim \mathcal{U}([0, 1])$

if $r \leq \rho_A$ **then**

| Set $x_i = x'$

else

| Set $x_i = x_{i-1}$

end

end

The resampling of p in each iteration ensures that the whole parameter space \mathcal{X} can be reached. At this point we omit the full proof that the samples (x_i) are then distributed like $P(x)$. See Neal *et al.* (2011) for details.

3.2. Further Technicalities

For HMC to work, the integrator for the time evolution of the system needs to be symplectic. Most of the time the *leapfrog* integrator is used, which is a second order symplectic integrator. Symplectic integrators of higher orders based on work presented in [Yoshida \(1990\)](#) are possible as well in **HMCF**. They have proven to be advantageous for HMC sampling in high-dimensional non-linear cases ([Blanes, Casas, and Sanz-Serna 2014](#)).

One step in time of length ϵ with the leapfrog integrator is calculated via

$$\begin{aligned} p\left(t + \frac{\epsilon}{2}\right) &= p(t) - \frac{\epsilon}{2} \frac{\partial \Psi}{\partial x} \Big|_{x(t)} \\ x(t + \epsilon) &= x(t) + \epsilon M^{-1} p \\ p(t + \epsilon) &= p\left(t + \frac{\epsilon}{2}\right) - \frac{\epsilon}{2} \frac{\partial \Psi}{\partial x} \Big|_{x(t+\epsilon)}. \end{aligned} \tag{4}$$

This single leapfrog step is applied L times to generate a new sample such that $T = \epsilon L$. The integration step size ϵ determines the overall acceptance rate of the sampling process. The advantages of HMC are only present if the acceptance rate is in the range of 0.6 to 0.9 ([Beskos, Pillai, Roberts, Sanz-Serna, Stuart *et al.* 2013](#); [Betancourt, Byrne, and Girolami 2014](#)). To relate ϵ to the acceptance rate we developed an approximation further discussed in [appendix A](#).

Finally, for an HMC sampling process to work properly it is crucial to find a good mass matrix M , which serves as covariance of the momentum p . There are several approaches but one very popular strategy is to use samples from the chain itself and base the mass matrix on the variance of these samples.

$$M^{-1} = \frac{1}{N} \sum_{i=1}^N \left((x_i - \mu)(x_i - \mu)^\top \right) \tag{5}$$

with μ being the mean value. However, in specific cases other approaches might be better, for example as documented in [Taylor *et al.* \(2008\)](#). We found that using samples from the chain itself is unfeasible in high-dimensional cases ($\dim(\mathcal{X}) > 10000$) because a bad initial mass matrix leads to extremely small integration step sizes and highly correlated samples. Thus, in **HMCF** the samples are generated by drawing samples from the curvature of $\Psi(x)$ at the current position of the chain. In other words: For the purpose of estimating the mass matrix, we approximate the target distribution $P(x)$ with a normal distribution and then draw samples from this distribution.

4. Using HMCF

In this section we try to provide some intuition in working with **HMCF**. It is assumed that the reader is familiar with **Python**.

We will use a simple Bayesian hierarchical model as an example to introduce the most important functionalities of **HMCF**. For a comprehensive documentation of all features see [appendix B](#). An implementation of this example is part of the **HMCF** repository and can be found in `demos/multi_field_demo.py`. We first introduce the model on a theoretical level, then give

a short overview on how the model is implemented within **NIFTy** in section 4.2. In section 4.3 we show how sampling with **HMCF** works and finally introduce features for retrieving and displaying the results in section 4.4.

4.1. A Simple Hierarchical Model

Consider a telescope observing the large-scale structure of the universe. Billions of galaxies producing photons eventually reaching the earth. This photon flux reaching the sensors of the telescope is denoted x . The spatial properties of x can be described as a mathematical field living on a continuous space.

Our telescope measures this photon flux x which means that it converts it into an electronic signal based on how many photons reach each of its CCD sensors. Errors in lenses and small differences between individual sensors alter the true nature of the original x field but can be coped with by calibration. In our model, this transformation is represented by a linear *response* operator R acting on x . Note, that the domain and the target domain of R are different. Whereas, in theory, the domain of x is continuous, the output of the telescope is definitely discretized. Additionally to the response of the instrument, we assume a certain Gaussian noise due to imperfect electronics with known covariance N . The measured data d produced by the telescope is then described by the measurement equation

$$d = R(x) + n. \quad (6)$$

What we are interested in is the “true” signal, based on the data d we got from the telescope. This information is reflected in the conditional probability $P(x|d)$. In terms of Bayesian statistics this is often referred to as the *posterior* and Bayes formula relates the posterior to our assumed model and prior knowledge we may have on our signal x :

$$P(x|d) \propto P(d|x)P(x)$$

While the *likelihood* $P(d|x)$ is defined by our model in equation (6) and the noise statistics, the *prior* $P(x)$ needs more consideration. Observations dating back to [Hubble \(1934\)](#) suggest that for the large-scale structure, at least to some extent, a log-normal prior is sufficient. We therefore introduce another field $s = \log(x)$ with a multivariate Gaussian distribution and covariance S such that x is log-normal distributed. We further want to ensure that our field s is somewhat smooth. This can be enforced by imposing a power law $P(k)$ on the covariance S in its harmonic representation,

$$S_{kk'} = \delta_{k,k'} P(k).$$

This power law can be chosen such that high curvatures in the position space get punished and are therefore improbable. For illustration, we assume a power law

$$P(k) = \left(\frac{l_c}{1 + l_c k} \right)^4 \quad (7)$$

with the *correlation length* l_c essentially defining how strong curvature is allowed to be.

If we do not know the correlation length, we can treat it as a free hyperparameter making the problem a full Bayesian hierarchical model. Since l_c is strictly positive we assume another log-normal prior

$$P(l_c) \propto \frac{1}{l_c} \exp \left(-\frac{(\log l_c - \mu_c)^2}{2\sigma_c^2} \right)$$

where μ_c and σ_c^2 are appropriate parameters for this hyperprior.

Our full posterior then turns into

$$P(s, l_c | d) \propto P(d|s)P(s|l_c)P(l_c) \quad (8)$$

with the likelihood

$$\begin{aligned} P(d|s) &= \int \delta(d - Re^s - n)P(n)dn \\ &\propto \exp\left(-\frac{1}{2}(d - Re^s)^\top N^{-1}(d - Re^s)\right) \end{aligned}$$

and the prior for s

$$P(s|l_c) = |2\pi S|^{-\frac{1}{2}} \exp\left(-\frac{1}{2}s^\top S^{-1}s\right)$$

The dependence on l_c is encoded in the covariance S . The norm of S is defined as the determinant

$$|S| = \det S = \prod_k P(k)$$

However, for HMC sampling we need a potential $\Psi(s, l_c)$ i.e., the negative logarithm of the posterior in (8). For better readability, we divide the potential in a prior and a likelihood part as well, such that

$$\Psi(s, l_c) = \Psi_1(s, l_c) + \Psi_p(l_c) \quad (9)$$

with

$$\begin{aligned} \Psi_1(s, l_c) &= -\log P(d|s) - \log P(s|l_c) \\ \Psi_p(l_c) &= -\log P(l_c) \end{aligned}$$

We omit terms constant in l_c and s since they are not important for HMC sampling and arrive at

$$\begin{aligned} \Psi_1(s, l_c) &= \frac{1}{2}(d - Re^s)^\top N^{-1}(d - Re^s) + \frac{1}{2}\left(s^\top S^{-1}s + \sum_k \log(P(k))\right) \\ \Psi_p(l_c) &= \frac{1}{2}\left(\frac{1}{\sigma_c^2}(\log l_c - \mu_c)^2\right) + \log(l_c) \end{aligned} \quad (10)$$

Additionally, the gradient of the potential $\Psi(s, l_c)$ is needed for the time evolution part during HMC sampling. For the likelihood part the gradient boils down to the following expressions:

$$\begin{aligned} \partial_s \Psi_1 &= S^{-1}s - (Re^s) \odot N^{-1}(d - Re^s) \\ \partial_{l_c} \Psi_1 &= s^\top \left(\partial_{l_c} S^{-1}\right) s + 4 \sum_k \left(\frac{1}{l_c} - \frac{k}{1 + l_c k}\right) \end{aligned} \quad (11)$$

where \odot denotes point-wise multiplication of vectors. For deriving the exact expression for $\partial_{l_c} S^{-1}$, observe that $[S^{-1}]_{kk'} = \delta_{kk'} (P(k))^{-1}$ and therefore

$$[\partial_{l_c} S^{-1}]_{kk'} = -4 \frac{(1 + l_c k)^3}{l_c^5} \delta_{kk'}$$

For the prior part of the potential the gradient can be written as

$$\begin{aligned}\partial_s \Psi_p &= 0 \\ \partial_{l_c} \Psi_p &= \frac{1}{l_c} \left(\frac{1}{\sigma_c^2} (\log l_c - \mu_c) - 1 \right).\end{aligned}\tag{12}$$

4.2. Implementation in NIFTy

In this section we will take a look at how such a model can be implemented in **NIFTy** in general. For more details on **NIFTy** see [Martin Reinecke \(2018\)](#).

In **NIFTy** there are a variety of classes representing certain aspects of a typical inference problem, among which the most important ones are:

Domain : A base class representing the underlying space. For example a regular grid can be defined as a **RGSpace** which inherits from **Domain**.

Field / MultiField : A class representing fields such as x , n or d . It carries information about the underlying **Domain** as well as the field's value on this domain. The **Field** supports every arithmetic operation. Other operations such as trigonometric or exponential functions can be applied point-wise using e.g., `ift.exp(x)`. The notation for these functions is the same as the one used by **NumPy**. **MultiFields** are essentially dictionaries of **Fields** which also support all operations above. This can be used to represent all free parameters in a hierarchical model in just one object.

LinearOperator : An abstract base class for explicitly or implicitly defined linear operators such as the response R . The **LinearOperator** class carries information about the operator's **Domain** as well as its target domain. The operator can be applied to a **Field** \mathbf{x} in various ways by calling one of the methods `times(x)`, `inverse_times(x)`, `adjoint_times(x)`, or `adjoint_inverse_times(x)`, although not every of these methods is available for every linear operator.

Energy : An abstract base class representing the negative logarithm of a distribution $P(x)$. The **Energy** class is only defined at a certain value of a **Field** or **MultiField** but the same energy for a different **Field** \mathbf{y} on the same **Domain** can be obtained by calling the `at(y)` method. Additionally, the **Energy** class defines a gradient at the position as well as the curvature. This class is the most important one for **HMCF** since it defines the potential $\Psi(s, l_c)$ and thereby the whole model.

The model introduced in the previous section can be implemented as an **NIFTy Energy** but since this paper is about **HMCF** we will not go into detail with this. The curious reader can, however, look into the demonstration script and will find the implementations of the likelihood and the prior energy from (10) along with their respective gradients in (11) and (12) in `/demos/energies.py` in the package's repository.

Implementation of the Hierarchical Model in NIFTy

This and the following section summarize the `demos/multi_field_demo.py` script. The reader may want to have a look at the script, to have an overview.

We first import **NIFTy** and **HMCF** among other packages via

```
import nifty4 as ift
import hmcf
```

A mock dataset for our algorithm to operate on is generated using the `get_hierarchical_data` function which was written for this purpose only.

```
d, sl, R, N = get_hierarchical_data()
```

It returns **NIFTy** objects for the data field d , the free parameters s and l_c (as the **MultiField** `sl`), the response R and the noise covariance N . `d` is a **Field** containing the data, `sl` is a **MultiField** with entries `'signal'` for s and `'l_c'` for l_c . The mock dataset is generated by first sampling a signal field s with the power spectrum defined in (7) and a pre-defined value for l_c . Together with a noise drawn from a normal distribution with covariance N the measurement equation (6) is applied and the mock data set is available. The signal space as well as the data space consist of 100×100 pixels which means that, together with l_c , our problem has 10,001 free parameters. In figure 1 this mock data set generated with random seed 41 can be observed. For this simple example the instrument R transforms the photon flux perfectly to an electrical signal, except for a square in the bottom right region of the image where the instrument is broken and just returns zeros. For our sampling process we wrote

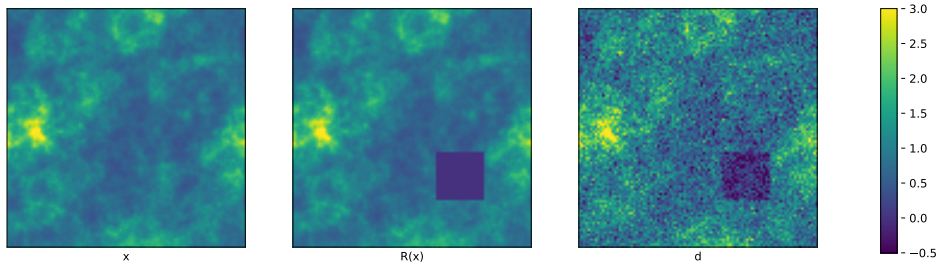


Figure 1: Output of the `get_hierarchical_data` function. The first image on the left displays the original photon flux x before it hits the detector. For this simple example the instrument transforms the photon flux perfectly to an electrical signal, except for a square in the bottom left region of the image where it is broken. The instrument returns just zeros in that region. The resulting image is displayed in the middle figure. Finally in the right figure, the data field d is displayed where Gaussian random noise was added.

an **NIFTy** Energy class called `SimpleHierarchicalEnergy` which implements the potential $\Psi(s, l_c)$ described in (9). The constructor needs the following arguments:

`position` : **NIFTy** **MultiField**

The position (s, l_c) where the energy $\Psi(s, l_c)$ is evaluated. The **MultiField** has two entries: `'signal'` and `'l_c'`. The **NIFTy** Field in `'signal'` is the harmonic representation of the s parameter.

d : **NIFTy** Field
The data vector.

R : **NIFTy** LinearOperator
The instrument's response.

N : **NIFTy** LinearOperator
The covariance of the noise.

l_c_mu : float
Hyperparameter for the log-normal distribution of l_c .

l_c_sig2 : float
Hyperparameter for the log-normal distribution of l_c .

HT : **NIFTy** LinearOperator
Harmonic transformation operator, capable of transforming the `position['signal']` field from the harmonic representation to the position space.

inverter : **NIFTy** Minimizer
Numerical method for inverting **NIFTy** LinearOperators. This is necessary to be able to sample from the curvature of the energy which is required if the mass matrix is supposed to be reevaluated.

Using a `MultiField` as position enables us to sample the signal and the hyperparameter l_c at the same time. `d`, `R` and `N` are already given by the `get_hierarchical_data` function. Values for `l_c_mu` and `l_c_sig2` are chosen such that values for l_c in the range of 0.05 to 10. are probable (the true value used during data generation is 0.6). A harmonic transformation operator is easily defined via

```
s_space = sl['signal'].domain
HT = ift.HarmonicTransformOperator(s_space)
```

and as the inverter needed for the mass reevaluation we use a conjugate gradient implementation in **NIFTy**:

```
ICI = ift.GradientNormController(iteration_limit=2000,
                                tol_abs_gradnorm=1e-3)
inverter = ift.ConjugateGradient(controller=ICI)
```

Finally, for the initial definition of the energy we use the `sl` as position since it has the correct `MultiField` structure. An instance of the energy for our model is then created by calling the constructor

```
energy = SimpleHierarchicalEnergy(sl, d, R, N, HT, -0.3, 2.,
                                inverter=inverter)
```

4.3. Sampling with HMCF

Up to this point we only introduced and used **NIFTy** objects. But now that an **Energy** is properly defined we can start using **HMCF**. First, we create an instance of the **HMCSampler** class. This object represents the HMC sampler and the constructor has only one required argument: The potential Ψ . However, for this example we also set the optional `num_processes` argument which states the number of chains or CPU cores we use during sampling and the `sample_transform` argument which is necessary since we sample s but are mainly interested in the photon flux $x = \exp(s)$.

```
def sample_trafo(s):
    val = dict(s)
    val['signal'] = ift.exp(HT(val['signal']))
    return ift.MultiField(val=val)

sampler = hmcf.HMCSampler(energy, num_processes=6,
                          sample_transform=sample_trafo)
```

The `sample_transform` argument requires a function and represents essentially f in (1). It is important that the `sample_transform` function takes **NIFTy** **Fields** or **MultiFields** of the same kind as the position argument of the **Energy** instance which is passed to the constructor of the **HMCSampler** class (in particular they need to live on the same domain). The output of the function can be any kind of **Field** or **MultiField** regardless of what was put in.

Before we start sampling we need to define initial positions for the Markov chains. In principle this could be completely random but unfortunately, in high-dimensional cases we need to be somewhere close to non-vanishing parts of the target distribution because otherwise the gradients are so large that numerical integration during time evolution will fail in any case. In this example we know the true signal `s1` and will use small derivations from that, but under real circumstances one would need to first use an approximating algorithm to get close to the mean or maximum-a-posteriori solution of the problem and start from there. This can be done using algorithms already implemented in **NIFTy**. Afterwards, we call the `run` method of our sampler which has again only one required argument: The number of samples per Markov chain drawn after the burn-in phase has finished. Additionally, we set the optional argument `x_initial` with a list of initial positions (the length of this list does not have to be the same as the number of Markov chains).

```
x_initial = [s1*c for c in [.5, .7, 1.5, 2.]]
sampler.run(500, x_initial=x_initial)
```

This will initiate a sampling process where the sampler starts in a burn-in phase during which the integration step size ϵ from (4) is adjusted to meet the default target acceptance rate of 0.8. Additionally, the mass matrix is reevaluated once in the beginning and then the sampler waits until the individual Markov chains have converged with respect to a measure based on diagnostics first introduced by [Gelman and Rubin \(1992\)](#). All these things can be adjusted to the users needs and specific problem and a detailed description of all options can be found in [appendix B](#). The whole sampling process may take up to 10 minutes depending on the machine the script is executed on. If the sampling process seems to freeze in the beginning this is probable due to the mass reevaluation which can take some time. A much shorter execution time is possible by setting the `n_pixels` argument of the `get_hierarchical_data` function to 10.

4.4. Retrieving Results after Sampling

After some time the sampler is finished and one can access the mean value (of the transformed samples) as a **NIFTy** MultiField via the `mean` attribute of the `sampler`. To get the photon flux values as a **NumPy** array one can write

```
mean_val = sampler.mean['signal'].to_global_data()
```

The `'signal'` statement selects the **NIFTy** Field representing the signal s and the `to_global_data()` method returns the Field's value on the regular grid as a **NumPy** array. To get the inferred mean value of the correlation length l_c as a float the following statement does the trick:

```
l_c_val = sampler.mean['l_c'].to_global_data()[0]
print(l_c_val)
```

```
0.637494646985
```

The same thing is possible by loading the mean value from the respective **HDF5** file:

```
mean_val = hmcf.load_mean(path/to/file)['signal']
l_c_val = hmcf.load_mean(path/to/file)['l_c'][0]
```

Obviously, this is possible even if the `HMCSampler` instance was deleted already (for example after a reboot of your system).

The variance of the samples can be obtained in the same way using the `var` attribute of the `HMCSampler` class or calling the `load_var` function. The results of the sampling process are displayed in figure 2.

The most prominent difference between the original flux x and the HMC mean value is where the instrument was broken in the bottom right region. In particular, the standard deviation of the samples drawn from the full posterior distribution is remarkably high there as one would expect since information is missing.

The samples itself can be loaded by either using the `samples` attribute of the `HMCSampler` class or calling the `load` function of **HMCF**. As an example the shape of the returned **NumPy** array can be displayed with

```
print(hmcf.load(path/to/file.h5)['signal'].shape)
```

```
(6, 500, 100, 100)
```

where the first element reflects the number of independent Markov chains, the second element is the number of sample each chain generated and the third and fourth element reflect the regular grid on which the whole process was carried out.

To have a better overview of these samples we can use the `show_trajectories` function of **HMCF** which displays the chain trajectories through parameter space by pixel. It is an interactive GUI consisting of two graphs as depicted in figure 3. The left graph shows the inferred mean value and the right graph trajectories of each chain for one selected pixel. The pixel can either be set in the top row by defining the coordinates and then clicking on “show” or by just clicking on some pixel in the left graph. The function itself is located in the **HMCF** `tools` sub-package and can be called by executing

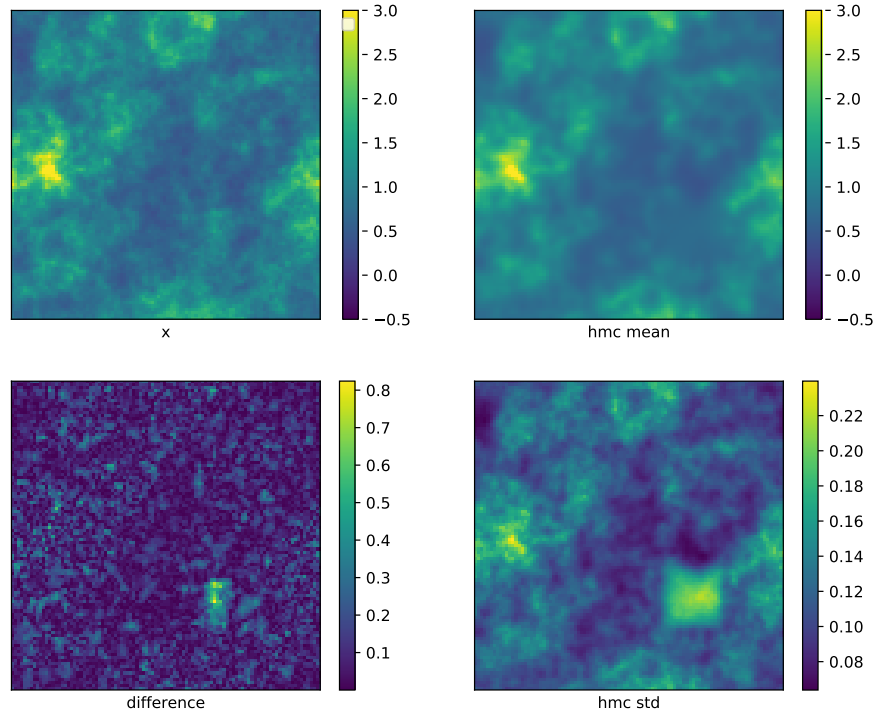


Figure 2: Results of the `multi_field_demo.py` script. In the upper row the true photon flux x along with the reconstructed picture based on the samples generated by the HMC algorithm. The reconstructed picture gets very blurry where the instrument was broken in the bottom right region and information got lost. In the second row the absolute difference between the original flux and the reconstructed picture and the standard deviation of the HMC samples is displayed. Again, the region in which the instrument is broken is very prominent in both cases.

```
from hmcf.tools import show_trajectories

show_trajectories(path/to/file, field_name='signal')
```

where the `field_name` statement defines which element of the `MultiField` is displayed.

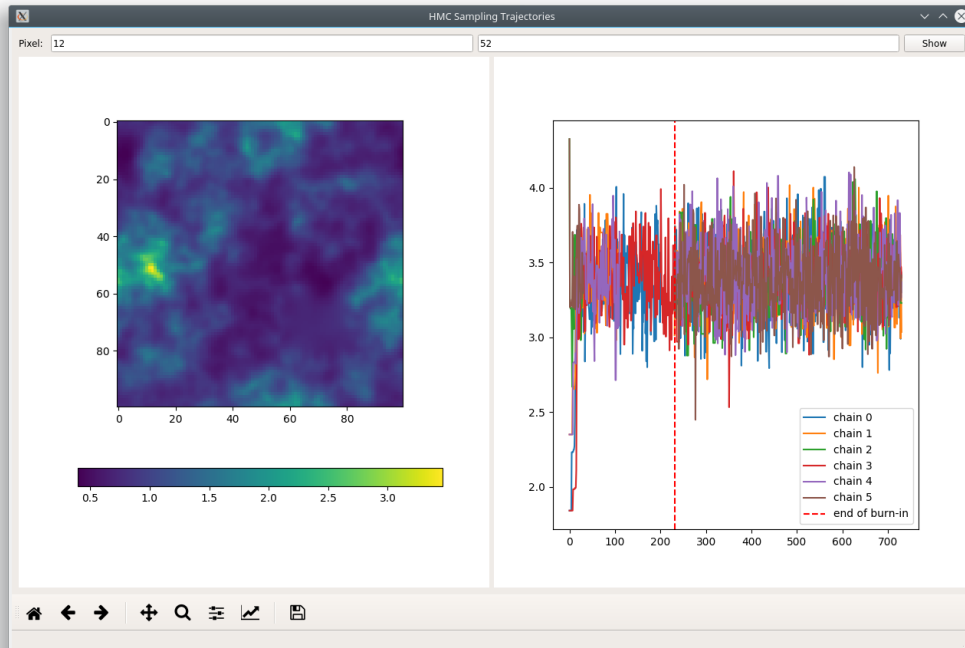


Figure 3: The evaluation GUI for displaying the Markov chain trajectories of selected pixels. On the left the mean value for s in our example is displayed. In the right graph the trajectories of the six Markov chains at the pixel coordinates $(x = 12, y = 52)$ (as stated in the top row) are shown.

5. Summary

Efficient HMC sampling with the high number of degrees of freedom of a numerically represented field is a very complicated task. **HMCF** takes care of most challenges arising while working on such problems. It provides good default values and adjusting strategies for crucial parameters such as the integration step size or the mass matrix. Nonetheless the user is still able to customize many details of how the sampler deals with a given problem. These features include

- Simultaneous sampling of all free parameters and hyperparameters
- Setting the order of the symplectic integrator
- Defining the adjustment strategy for ϵ and related properties
- Defining the convergence measure strategy and related properties
- Defining how often and how well the mass matrix is reevaluated
- Providing a clear, in-depth overview of relevant parameters of all chains especially during burn-in phase

Apart from a diverse set of different options to choose from the structure of the module even eases the creation of new, customized options. We explained the usage of **HMCF** and demonstrated its performance using the demonstrator coming with the **HMCF** package.

Acknowledgments

We would like to thank all members of the Information Field Theory group at MPA for many useful discussions in particular, and alphabetical order: Philipp Arras, Jakob Knollmüller, Daniel Pumpe, Reimar Leike and Martin Reinecke.

References

- Beskos A, Pillai N, Roberts G, Sanz-Serna JM, Stuart A, *et al.* (2013). “Optimal tuning of the hybrid Monte Carlo algorithm.” *Bernoulli*, **19**(5A), 1501–1534.
- Betancourt M (2017). “A conceptual introduction to Hamiltonian Monte Carlo.” *arXiv preprint arXiv:1701.02434*.
- Betancourt M, Byrne S, Girolami M (2014). “Optimizing the integrator step size for Hamiltonian Monte Carlo.” *arXiv preprint arXiv:1411.6669*.
- Blanes S, Casas F, Sanz-Serna J (2014). “Numerical integrators for the Hybrid Monte Carlo method.” *SIAM Journal on Scientific Computing*, **36**(4), A1556–A1580.
- Dalcin L, Paz R, Storti M (2005). “MPI for Python.” *Journal of Parallel and Distributed Computing*, **65**(9), 1108 – 1115. ISSN 0743-7315. doi:<https://doi.org/10.1016/j.jpdc.2005.03.010>. URL <http://www.sciencedirect.com/science/article/pii/S0743731505000560>.
- Daniel Buscombe (2016). **PySESA**: Python framework for spatially explicit spectral analysis. Python package version 0.0.19, URL <https://github.com/dbuscombe-usgs/pysesas>.
- Duane S, Kennedy AD, Pendleton BJ, Roweth D (1987). “Hybrid monte carlo.” *Physics letters B*, **195**(2), 216–222.
- Enßlin TA, Frommert M, Kitaura FS (2009). “Information field theory for cosmological perturbation reconstruction and nonlinear signal analysis.” *Physical Review D*, **80**(10), 105005.
- Enßlin TA, Weig C (2010). “Inference with minimal Gibbs free energy in information field theory.” *Physical Review E*, **82**(5), 051112.
- Gelman A, Rubin DB (1992). “Inference from iterative simulation using multiple sequences.” *Statistical science*, pp. 457–472.
- Hanson KM (2001). “Markov Chain Monte Carlo posterior sampling with the Hamiltonian method.” In *Medical Imaging 2001: Image Processing*, volume 4322, pp. 456–468. International Society for Optics and Photonics.
- Hastings WK (1970). “Monte Carlo sampling methods using Markov chains and their applications.” *Biometrika*, **57**(1), 97–109.
- Hoffman MD, Gelman A (2014). “The No-U-turn sampler: adaptively setting path lengths in Hamiltonian Monte Carlo.” *Journal of Machine Learning Research*, **15**(1), 1593–1623.
- Hubble E (1934). “The distribution of extra-galactic nebulae.” *The Astrophysical Journal*, **79**, 8.
- Hunter JD (2007). “Matplotlib: A 2D Graphics Environment.” *Computing in Science Engineering*, **9**(3), 90–95. ISSN 1521-9615. doi:[10.1109/MCSE.2007.55](https://doi.org/10.1109/MCSE.2007.55).

- Junklewitz H, Bell M, Selig M, Enßlin T (2016). “RESOLVE: A new algorithm for aperture synthesis imaging of extended emission in radio astronomy.” *Astronomy & Astrophysics*, **586**, A76.
- Knollmüller J, Steininger T, Enßlin TA (2017). “Inference of signals with unknown correlation structure from non-linear measurements.” *arXiv preprint arXiv:1711.02955*.
- Martin Reinecke Theo Steininger MS (2018). **nifty4**: a package implementing numerical methods for Information Field Theory. Max-Planck-Society. Python package version 4.1.0, URL <http://ift.pages.mpcdf.de/NIFTy>.
- Metropolis N, Rosenbluth AW, Rosenbluth MN, Teller AH, Teller E (1953). “Equation of state calculations by fast computing machines.” *The journal of chemical physics*, **21**(6), 1087–1092.
- Neal RM, *et al.* (2011). “MCMC using Hamiltonian dynamics.” *Handbook of Markov Chain Monte Carlo*, **2**(11).
- Oliphant TE (2007). “Python for Scientific Computing.” *Computing in Science Engineering*, **9**(3), 10–20. ISSN 1521-9615. doi:10.1109/MCSE.2007.58.
- Pumpe D, Reinecke M, Enßlin TA (2018). “Denoising, Deconvolving and Decomposing multi-Dimensional Photon Observations-The D4PO Algorithm.” *arXiv preprint arXiv:1802.02013*.
- Python Software Foundation (2018). **logging**: Python framework for logging messages. Part of Python since 2.3 including 3.x, URL <https://docs.python.org/3.6/library/logging.html>.
- Salvatier J, Wiecki T, Fonnesbeck C (2018). **pyMC3**: Python package for all sorts of MCMC algorithms. Python package version 3.4.1, URL <https://docs.pymc.io>.
- Selig M, Bell MR, Junklewitz H, Oppermann N, Reinecke M, Greiner M, Pachajoa C, Enßlin TA (2013). “NIFTY - Numerical Information Field Theory. A versatile PYTHON library for signal inference.” *Astronomy & Astrophysics*, **554**, A26. doi:10.1051/0004-6361/201321236. 1301.4499.
- Selig M, Vacca V, Oppermann N, Enßlin TA (2015). “The denoised, deconvolved, and decomposed Fermi γ -ray sky-An application of the D3PO algorithm.” *Astronomy & Astrophysics*, **581**, A126.
- Stan Development Team (2017). **PyStan**: Python package for HMC and NUTS. Python package version 2.16.0.0, URL <http://mc-stan.org>.
- Steininger T, Dixit J, Frank P, Greiner M, Hutschenreuter S, Knollmüller J, Leike R, Porqueres N, Pumpe D, Reinecke M, *et al.* (2017). “NIFTy 3-Numerical Information Field Theory-A Python framework for multicomponent signal inference on HPC clusters.” *arXiv preprint arXiv:1708.01073*.
- Taylor J, Ashdown M, Hobson M (2008). “Fast optimal CMB power spectrum estimation with Hamiltonian sampling.” *Monthly Notices of the Royal Astronomical Society*, **389**(3), 1284–1292.

The HDF Group (2018). **HDF5**. URL <https://portal.hdfgroup.org>.

Yoshida H (1990). “Construction of higher order symplectic integrators.” *Physics letters A*, **150**(5-7), 262–268.

A. Dynamic Step-Size Adjustment

Hamiltonian Monte Carlo needs much more computation time per sample proposal than other MCMC approaches. This is a disadvantage that is compensated by much higher acceptance rates and lower autocorrelation between samples. Because of the energy conserving property of Hamiltonian dynamics, the acceptance rate is only dependent on the performance of the numerical integrator. The numerical integrator has one free parameter: the step size ϵ . In principle the bigger it is the bigger is the integration error ΔE and thereby the smaller the acceptance rate. On the other hand, a too small value for ϵ results in a sampler which does not explore the typical set on bearable timescales. In practice an acceptance rate of 0.7 to 0.9 (Beskos *et al.* 2013; Betancourt *et al.* 2014) is said to be ideal for an HMC sampler to make up for the higher computation time.

To this end we adjust ϵ during the burn-in phase such that a user-defined acceptance rate is matched. The first step in constructing a good strategy is to derive a relation between acceptance rate r_A and the integration error ΔE . We developed the following approximation. Given the acceptance probability ρ_A from equation (3), the *expected* acceptance rate is given by

$$r_A(\epsilon) = \langle \rho_A(\Delta E) \rangle_{P(\Delta E|\epsilon)} = \left\langle \min \left(1, e^{-\Delta E} \right) \right\rangle_{P(\Delta E|\epsilon)} \quad (13)$$

where $P(\Delta E|\epsilon)$ is the probability distribution for ΔE conditioned on ϵ .

To tackle the min function properly it is assumed that the probability distribution for the sign of ΔE is not dependent on the absolute value of ΔE :

$$P(\Delta E) \approx P(|\Delta E|)P(\text{sgn}(\Delta E))$$

This reflects the plausible situation that errors are symmetrically probable displacements of trajectories in regions of the phase space that are dominated by a potential gradient and not by a minimum. In this case we can further assume that

$$P(\text{sgn}(\Delta E) = 1) \approx P(\text{sgn}(\Delta E) = -1) \approx 0.5 .$$

With this, equation (13) can be written as

$$r_A(\epsilon) = \frac{1}{2} \left(1 + \left\langle e^{-|\Delta E|} \right\rangle_{P(|\Delta E||\epsilon)} \right) \approx \frac{1}{2} (2 - \langle |\Delta E| \rangle) + \mathcal{O}(\langle |\Delta E|^2 \rangle),$$

where the exponential-function was expanded to first order.

In practice a certain value for r_A like 0.8 is recommended. This means for ΔE

$$\langle |\Delta E| \rangle \stackrel{!}{=} 2(1 - r_A(\epsilon)) =: \Delta E_{\text{wanted}} \quad (14)$$

This is the relation that lies at the core of most epsilon-adjusting strategies available in **HMCF**. Note that even if a step is accepted for sure because ΔE is negative, adjusting ϵ is still possible since only the absolute value of ΔE is needed. This is of great use in cases where nearly every step during burn-in produces a negative ΔE (This happens sometimes if the Markov chains start far off the mean value). For more on how ϵ is adjusted exactly see section B.3.

B. Detailed Software Description

This section describes all features and functionalities of **HMCF**.

B.1. The `HMCSampler` Class

The **HMCF** package is optimized for a fast HMC implementation for a **NIFTy Energy** class. At its heart lies the `HMCSampler` class handling the whole sampling process. It is able to run several Markov chains on different CPUs using the Python **multiprocessing** module. The samples are saved to an HDF5-file which is generated every time a new run is initialized and can be loaded back as needed via the package's own `load` function. During the burn-in phase `HMCSampler` takes care of adjusting the integration step size ϵ (see equation (4)) such that a user defined acceptance rate is reached, as well as setting and possibly reevaluating the mass matrix M . After a run has finished the mean of the samples is calculated.

Of course in practice one may want to fine-tune some of the specific features and parameters implemented in **HMCF**. This section is dedicated to introduce and explain those.

Instantiating

An instance of `HMCSampler` is created with the following arguments of which only the first is mandatory:

`potential` : **NIFTy Energy**

The HMC potential $\Psi(x)$. Also defines the domain on which the sampling takes place through its position attribute.

`sample_transform` : `func`, optional

In some cases it is preferable to sample a field not in its position space, but in another domain, such as in its harmonic space representation, or maybe even in a domain where there is no linear transformation to the position space. To ensure correct calculation of expectation values such as the mean or the variance the samples are transformed by `sample_transform` before being saved to disk. The `sample_transform` function has to have exactly one argument which is a `Field` or `MultiField` similar to the `position` attribute of the **NIFTy Energy** given as the `potential` argument. The `sample_transform` function has to return a `Field` or `MultiField`. There are, however, no further restrictions on the exact structure of this `Field` or `MultiField`.

`num_processes` : `int`

Number of cores involved in the sampling process. This is equal to the number of individual Markov chains started when the instance method `run` is called.

Default: 1

`sampler_dir_path` : `str`

A path where the HDF5-file containing the samples is going to go.

Default: a new folder called "samples" in the '`__main__`' script's directory

Running the Sampling Process

In principle the sampling process can be started immediately after creating an instance of

`HMCSampler` by calling the `run()` method with the following arguments of which again only the first is mandatory.

`num_samples : int`

Number of samples to be drawn per chain after burn in.

`max_burn_in : int, optional`

Maximum number of steps for the chain to converge before it is forced into sampling mode. If no value is stated, forced transition is not going to happen. In this case the chain will only start the actual sampling process if it has converged.

`convergence_tolerance : float, optional`

If the convergence measure for the sampling process falls below this value, the chain is assumed to have converged and starts with the actual sampling process. If no value is stated the `tolerance` property of the `HMCSampler` property `convergence` is used. The default value for said property is 1. For more on this see section [B.2](#).

`target_acceptance_rate : float, optional`

Value between 0. and 1., stating what ratio of accepted / rejected samples is preferred. The integration step size is adjusted during burn-in to approximately match this ratio. If not stated the corresponding property of the `epsilon` property is used (for which the default value is 0.8).

`order : int`

The order of the symplectic integrator. The default value corresponds to a simple leapfrog integration. Default: 2

`mass : NIFTy EndomorphicOperator, optional`

HMC mass matrix used during sampling (or until it is reevaluated). For more on the mass matrix see section [B.4](#). If no mass is given, an identity matrix is used (at least as initial guess).

`x_initial : NIFTy Field or list of NIFTy Fields, optional`

Starting point(s) for the HMC sampler. If more than one Markov chain needs to be initialized they get their respective initial positions by iterating through the list. The list does not have to have the same length as the number of chains. If there are more chains than elements in the `list`, some starting positions are reused for the additional chains. If only a `Field` is given, all chains get the same initial position. If no initial field is passed, a random sample is drawn from a Gaussian distribution centered at the position of the `Energy` instance given to the constructor of `HMCSampler` with the `Energy`'s metric as covariance.

Getting the Results of an HMC-Run

After a run has finished, the sampled mean as a `NIFTy Field` or `MultiField` is accessible via the instance's property `'mean'`.

```
1 | In [1]: hmc_sampler = HMCSampler(nifty_energy, num_processes=5)
2 | In [2]: hmc_sampler.run(200)
```

```

3 | In [3]: hmc_sampler.mean
4 | Out[3]: nifty4.Field instance
5 |         - domain = DomainTuple, len: 1
6 |           RGSpace(shape=(256, 256), distances=(0.5, 0.5),
7 |                 harmonic=True)
8 |         - val     = array([[ 0.63, -0.16, ..., 1.04, -0.64],
9 |                            ...,
10 |                            [ 0.03 , 0.02, ..., 1.22, 0.21 ]])

```

Accessing the values of the samples is possible via calling the `samples` property. It consists of a $2+n$ dimensional **NumPy** `ndarray` where the first dimension represents the different Markov Chains, the second dimension represents the individual samples and the other n dimensions represent the value of the sampled **NIFTy** `Fields`. If the sampled objects were **MultiFields** an dictionary with **NumPy** `ndarrays` is returned. Remember though that calling this will load all samples into memory which might crash the process if not enough memory is available.

```

11 | In [4]: all_samples = hmc_sampler.samples
12 | In [5]: all_samples.shape
13 | Out[5]: (5, 200, 256, 256)

```

Attributes and Properties of HMCsampler

The `HMCsampler` has a number of other properties and attributes which are mostly used for fine-tuning the sampling process. These are:

potential : **NIFTy** Energy, read-only

The potential Ψ for the HMC sampler.

sampler_dir : `str`

Setting or getting the path to the directory where the sample-files are stored. Corresponds to the parameter of the same name passed in the constructor of `HMCsampler` class.

save_burn_in_samples : `bool`

Whether or not to save the samples generated during burn-in phase to disk. Be aware of the fact that if set to `True` (default value) together with a high or non-existent `max_burn_in` parameter (in the constructor of `HMCsampler` class) could fill your hard drive.

Default: `True`

burn_in_samples : **NumPy** `ndarray` or `dict(str -> ndarray)`, read-only

The same as the `samples` property but with the samples generated during burn-in phase.

var : **NIFTy** `Field` or `MultiField`, read-only

The variance of the samples (after `sample_transform`).

convergence : **HMCF** Convergence

For choosing how to calculate the convergence measure (see section [B.2](#)).

Default: `HansonConvergence` if `num_processes == 1` else `GelmanRubinConvergence`

epsilon : HMCF Epsilon

For choosing how to adjust the integration step size parameter during burn-in (see section B.3).

Default: `EpsilonPowerLawDivergence`

mass : HMCF Mass

For choosing how to handle the HMC mass during sampling. For more on this see section B.4.

display : HMCF Display

For choosing how to display the progress of the sampling process (see section B.5)

Default: `LineByLineDisplay`

n_limits : list of ints

To avoid periodic trajectories the number of leapfrog integration steps is randomized. `n_limits` defines the range from which the number of integration steps is drawn uniformly.

Default: `[60, 70]`

B.2. Convergence

The `Convergence` class handles everything related to the convergence of the Markov chain(s). In principle a chain in `HMCF` has converged if a *convergence measure* calculated for each degree of freedom in the sampled `NIFTy Field` or `MultiField` drops below a given *tolerance*. Additionally `HMCF` implements intermediate steps of convergence via so-called *convergence levels*. For the time being their main purpose is to define a time where the HMC mass is reevaluated during burn-in (See also section B.4). A chain is said to have converged with respect to its current convergence level, if

$$\max(\text{measure}) < \text{tolerance} \cdot 10^{\text{level}} \quad (15)$$

In other words: The level is the number of digits the decimal separator of the tolerance is shifted to the left.

The idea behind this is to decrease the level by one each time an intermediate convergence is reached, while at that point recalculating the mass matrix.

If the level drops to zero, equation (15) simplifies to $\max(\text{measure}) < \text{tolerance}$ and the next time this requirement is met, the Markov chain has finished the burn-in phase.

It remains to explain how the convergence measure is calculated. There are several different approaches implemented in `HMCF` as child classes of the `Convergence` class. Choosing one of them is done by setting the `convergence` property of the `HMCSampler` class with one of the `Convergence`'s child classes, e.g.:

```
hmc_sampler.convergence = GelmanRubinConvergence
```

For now there are four different possibilities:

MeanConvergence This rather simple way of calculating the convergence needs at least two Markov chains. It compares the mean of the samples from all chains (`total_mean`) to the

mean of each individual chain (`chain_means`). The measure is defined as `abs(chain_mean / total_mean - 1.)` such that it fulfills the non-negativity and the identity of indiscernibles criteria for metrics. It proves to be rather unstable if e.g. the total mean is close to zero.

VarConvergence Very similar to **MeanConvergence** only with the variances of individual chains and all chains. Measure is equal to `abs(chain_var / total_var - 1.)`.

HansonConvergence So far the only convergence measure which can be used even if there is only one chain. It follows [Hanson \(2001\)](#) (Again: the measure is the absolute value of the ratio minus one).

GelmanRubinConvergence An implementation of the among MCMC folks very popular Gelman and Rubin convergence criteria [Gelman and Rubin \(1992\)](#) (Again: the measure is the absolute value of the ratio minus one).

Attributes and Properties of Convergence

Regardless of which **Convergence** child class has been used additional features can be set via its class properties, e.g. the `locality` property which defines the number of recent samples considered when calculating the `convergence` (see below for details):

```
hmc_sampler.convergence = GelmanRubinConvergence
hmc_sampler.convergence.locality = 200
```

For the common user the following properties are the most important ones:

locality : int

The number of recent samples to be considered in calculating the convergence measure. On the one hand this is a form of ‘forgetting’ very old parts of the chain’s trajectory which do not represent the current state of convergence. On the other hand this is necessary because of memory issues i.e. if the burn-in phase takes very long the memory would blow up since every sample ever created has to be available to calculate the measure.

Default: 250

tolerance : float

Equivalent to the `convergence_tolerance` parameter of the `HMCSampler`’s `run` method. In fact, setting this property as described above has only an effect if the (optional) `convergence_tolerance` parameter is not passed to the `run` method.

In practice the latter approach might be slightly more convenient. If the maximum value of a chain’s convergence measure is below this value the chain is said to have converged and transitions from the burn-in phase into the sampling phase. See also: [converged](#) (below)

Default: 1.

The following additional properties of **Convergence** are mostly only important for `HMCSampler` itself and not of relevance for the common user:

converged : **NumPy** ndarray of bool (1 dim)

Contains the information of whether the individual chains have converged with respect to the following law:

`converged = measure_max < tolerance * 10**level`

measure : **NumPy** ndarray (1 + n dim)

Represents the value of the measure (calculated dependent on which child class of the **Convergence** class has been used) for each element of the degrees of freedom in the sampled **NIFTy** Field. The first dimension represents the individual chains.

measure_max : **NumPy** ndarray (1 dim)

The highest value of the **Convergence** class property 'measure' per chain.

level : **NumPy** ndarray of int (1 dim)

See class property **converged**. The idea is that after a Markov chain has converged with respect to its current level the level is decreased by one. There are **Convergence** class methods `dec_level` and `inc_level` for decreasing and increasing the level by 1, respectively. For more details on these methods see below.

Setting this property is also possible with a simple **int** which sets the whole **NumPy** ndarray to that value.

quota : **NumPy** ndarray of float(1 dim)

The ratio of elements in the sampler's position **NIFTy** Field which have converged with respect to **tolerance** and **level** (i.e. the 'intermediate' convergence)

Additional Methods of Convergence

Internally the convergence levels are decreased and increased by calling

`dec_level(chain_identifier=None)`

Decreases the convergence level of `chain_identifier` (**int**) by one. If `chain_identifier` is **None** the level of all chains is decreased by one. Either way if the level of a chain is already zero it is left unchanged.

`inc_level(chain_identifier=None)`

Increases the convergence level of `chain_identifier` (**int**) by one. If `chain_identifier` is **None** the level of all chains is increased by one.

The convergence level is set under the hood dependent on specific properties of the **Mass** class in the beginning of the **HMCSampler**'s `run` method.

B.3. Epsilon

The ϵ parameter defines the leapfrog integration step size (equation (4)). In principle the bigger it is the bigger is the integration error ΔE and thereby the smaller the acceptance rate. To achieve an approximate acceptance rate defined via the `target_acceptance_rate` parameter of **HMCSampler**'s `run` method, ϵ has to be adjusted during burn-in. Every adjusting-strategy relies on thoughts presented in appendix A connecting the `target_acceptance_rate`

to the integration error ΔE . In **HMCF** the **Epsilon** class, much like the **Convergence** class, is just a base class and much more interesting for the common user are its child classes defining exactly how ϵ is adjusted.

The class also keeps track of how much ϵ has changed in recent steps and how close the mean value of recent integration errors $\langle \Delta E \rangle$ is to ΔE_{wanted} . If ϵ has not changed very much and $\langle \Delta E \rangle \approx \Delta E_{\text{wanted}}$, **Epsilon** is said to have converged.

If **Epsilon** has converged its value is locked.

Available Adjusting Strategies

EpsilonConst ϵ stays constant throughout the whole sampling process. The value can be set by setting its `val` attribute:

```
hmc_sampler.epsilon = EpsilonConst
hmc_sampler.epsilon.val = 0.005
```

EpsilonSimple ϵ gets reduced or increased if ΔE is bigger or smaller than ΔE_{wanted} respectively independent of the absolute value of ΔE .

In practice, **EpsilonSimple** has an attribute `change_range` (float between 0 and 1, Default: 0.1), which can be set via:

```
hmc_sampler.epsilon = EpsilonSimple
hmc_sampler.epsilon.change_range = 0.2
```

This attribute is only available in **EpsilonSimple**. Given the `change_range` the current value of ϵ is multiplied by a factor drawn from a uniform distribution $\mathcal{U}([a, b])$ where

$$[a, b] = \begin{cases} [1 - \text{change_range}, 1] & \text{if } \Delta E > \Delta E_{\text{wanted}} \\ [1, 1 + \text{change_range}] & \text{if } \Delta E < \Delta E_{\text{wanted}} \end{cases}$$

The randomness is necessary to prevent recurrent behavior if the integration error ΔE is very sensitive to ϵ .

EpsilonPowerLaw ϵ gets adjusted just like **EpsilonSimple** but the `change_range` is now defined by the relative difference between ΔE and ΔE_{wanted} (**EpsilonPowerLaw** has no attribute `change_range`!).

Given this class's attribute `power` (positive int, Default: 5), set via

```
hmc_sampler.epsilon = EpsilonPowerLaw
hmc_sampler.epsilon.power = 4
```

the `change_range` in **EpsilonSimple** is defined as:

$$\text{change_range} = \left| \frac{\Delta E - \Delta E_{\text{wanted}}}{\Delta E + \Delta E_{\text{wanted}}} \right|^{\text{power}} \quad (16)$$

EpsilonPowerLawDivergence In practice working with Poissonian or log-normal distributions on high dimensional spaces the integration error ΔE proved to be very sensitive to small changes in ϵ . With this class ϵ is adjusted just like **EpsilonPowerLaw** with the

difference, that in case of a divergent ΔE (e.g. during integration an overflow occurs) the `change_range` becomes more sensitive.

A `divergence_counter` keeps track of the number of times a divergent behavior was detected and the `change_range` defined in equation (16) gets a prefactor $2^{-\text{divergence_counter}}$

EpsilonExponential In this case a simple connection between ΔE and ϵ is assumed:

$$|\Delta E|(\epsilon) = a \cdot \epsilon^b \quad (17)$$

where $a > 0$ and $b > 0$ are fitting parameters. This assumption is motivated by the fact that ΔE tends to zero if ϵ does and diverges for large ϵ . Former ‘measurements’, i.e. sampling steps of ΔE given ϵ are used to calculate a and b . This approach asks for a rather large value for the `locality` property (see below). ϵ is adjusted by rearranging equation (17) such that:

$$\epsilon_{\text{new}} = \left(\frac{1}{a} |\Delta E_{\text{wanted}}| \right)^{\frac{1}{b}} \quad (18)$$

EpsilonOneOverX In this case another connection between ΔE and ϵ is assumed:

$$|\Delta E|(\epsilon) = \frac{a}{(\epsilon_0 - \epsilon)^b} + \text{const} \quad (19)$$

where $a > 0$ and $b > 1$ are again fitting parameters and `const` is such that $|\Delta E|(\epsilon = 0) = 0$. The idea behind this relation is an updated version of **EpsilonExponential** where there is a finite ϵ_0 for which ΔE diverges already. a and b are again fitted with former ΔE s given ϵ , whereas ϵ_0 is set to the current value of ϵ every time a divergent behavior is detected. ϵ gets adjusted by rearranging equation (19), such that

$$\epsilon_{\text{new}} = \epsilon_0 \left(1 - \left(1 + \frac{\epsilon_0^b \Delta E_{\text{wanted}}}{a} \right)^{\frac{1}{b}} \right) \quad (20)$$

Attributes and Properties of Epsilon

Regardless of which **Epsilon** class has been used, additional features can be set via its class properties, e.g. the `locality` property which defines the scope of fitting points for classes like **EpsilonExponential** and for calculating the convergence measure (see below for details):

```
hmc_sampler.epsilon = EpsilonPowerLawDivergence
hmc_sampler.epsilon.locality = 20
```

For the common user the following properties and attributes are the most important ones:

val : float

The (current) value of ϵ . It is possible to use this property to set a good initial guess (although most of the time unnecessary).

Default: 0.005

`locality : int`

The number of recent samples to be considered in calculating the convergence measure of `epsilon`.

Default: 50

`target_acceptance_rate : float`

Equivalent to the `target_acceptance_rate` parameter of the `HMCSampler`'s `run` method. In fact, setting this property only has an effect if the (optional) `target_acceptance_rate` parameter is not passed to the `run` method.

Default: 0.8

`convergence_tolerance : float`

Essentially the same thing as the `tolerance` property of `Convergence` (section B.2) but for `epsilon`. A value > 1 is unreasonable because of how the convergence measure for `epsilon` is calculated (see below)

Default: 0.5

`divergence_threshold : float`

The value of ΔE for which the integration is said to have diverged.

Default: $1E50$

`epsilon_limits : list of float`

Minimum and maximum value for `Epsilon`. If the adjusting algorithm proposes a value 'out of range' the value gets coerced.

Default: $[1.E-40, 10]$

Under the hood `HMCSampler` uses the following additional properties of `Epsilon`:

`converged : bool, read-only`

Whether or not `epsilon` has converged or not, i.e. whether the `convergence_measure` is smaller than the `convergence_tolerance`

`measure : list of float, read-only`

The convergence measure for `epsilon` contains two values. The first is the relative variance of the value ϵ , the second represents how close the mean value of ΔE is to ΔE_{wanted} . If both are smaller than `convergence_tolerance`, `epsilon` has converged.

B.4. Mass

Finding an appropriate mass matrix is the most challenging task for a good HMC sampler. `HMCF` provides the user with the standard evaluation procedure introduced in equation (5) as well as the possibility to define a problem specific mass matrix.

(Re-)evaluation is done by drawing samples $\{x^{(i)}\}$ from the curvature at the current position of the `NIFTy` Energy given as `potential` parameter in the constructor. To keep the complexity of the problem bearable only the diagonal of the mass matrix in equation (5) is calculated and used:

$$M_{jk} = \delta_{jk} \frac{1}{N-1} \left(\sum_{i=1}^N x_j^{(i)2} \right)^{-1} \quad (21)$$

This also removes the problem that for a non-degenerate mass matrix in n dimensions at least n independent samples are required. For typical applications in **NIFTy** $n = 10^6 \dots 10^8$ easily.

The idea behind the **HMCF Mass** class is to easily define a strategy of handling the mass matrix of an HMC process. This includes reevaluating the mass matrix several times during burn-in phase and defining an initial mass matrix. As default the identity is used as mass matrix but an initial mass matrix can be evaluated without reaching any level of convergence. By default there is one such initial mass evaluation and no reevaluations.

`get_initial_mass` : bool

Whether or not to evaluate an initial mass. Setting this to `True/False` will increase/decrease `reevaluations` by 1 respectively.

Default: `True`

`reevaluations` : **NumPy** ndarray of int

The number of reevaluations (including the initial one if set) for each chain. Reevaluation takes place if the chain has converged with respect to its current convergence level introduced in section B.2. Setting the number of reevaluations is also possible (and recommended) with a simple `int` which sets all chains to that `int`.

Default: `numpy.ones(num_chains)` (i.e. one reevaluation for every chain)

`operator` : **NIFTy** EndomorphicOperator

The actual mass operator. If there is a problem specific mass operator it can be set with this property before initiating the run. If `get_initial_mass` is `True`, setting `operator` will set `get_initial_mass` to `False` and decrease `reevaluations` by 1.

Default: Identity (as **NIFTy** DiagonalOperator)

`num_samples` : int

Defines the number of samples drawn from the curvature when reevaluating the mass matrix.

Default: 50

`shared` : bool

If `True` reevaluating a mass matrix is done at the mean of all individual chain positions. All chains have to meet the conditions for evaluation mentioned above. Afterwards each chain gets the same mass matrix. If `False` each chain reevaluates its mass matrix individually if the chain meets the conditions for evaluation.

Default: `False`

B.5. Display

Naturally HMC sampling can take quite a while. Disadvantageous settings of parameters might lead to a malfunctioning sampling process. To be able to discover a pathological run can save hours or even days. For this reason **HMCF** offers a number of display modes for diagnostic purposes. On the other hand displaying indicators of tens of parallel running chains might be overwhelming. All available display options have in common that they display more or less information based on a *logging level* just like the logging levels in the **logging** package (Python Software Foundation 2018) of the Python standard library. It is in fact possible to use the appropriate module variables from the **logging** package. These are:

CRITICAL (numerical value: 50)

ERROR (numerical value: 40)

WARNING (numerical value: 30)

INFO (numerical value: 20)

DEBUG (numerical value: 10)

NOSET (numerical value: 0)

The logging level can be set using the `display` method `setLevel` e.g.,

```
from logging import INFO
hmc_sampler.display.setLevel(INFO)
```

Similar to the `Epsilon` and `Convergence` classes there are several `Display` classes which define the three displaying modes.

Display : Displays nothing at all. Serves as base class for the two other display classes.

LineByLineDisplay : If the level of the **HMCF** logger is set to `INFO` or below certain indicators are printed at every sampling step as depicted in figure 4a). Otherwise only warnings and errors are printed.

TableDisplay : The most advanced version of displaying indicators. A table is generated and dynamically updated, containing information for each chain as depicted in figure 4b). This class relies heavily on the **curse**s Python package and therefore alters the terminal behavior during sampling.

The columns in `TableDisplay` display the following parameters:

<code>ch</code>	The chain number or 'identifier'.
<code>acc. rate</code>	The acceptance rate for each chain. During burn in this is only the acceptance rate of the last 10 samples since this highly depends on the value of Epsilon . After burn in <code>acc. rate</code> displays the overall acceptance rate.
<code>dEnergy</code>	The most recent value of the integration error ΔE .
Convergence	
<code>conv.</code>	Whether the chain has converged with respect to the current convergence level.
<code>lev</code>	The current convergence level.
<code>meas</code>	The maximum value of the convergence level of the chain.
<code>quota</code>	The percentage of points in the sampled NIFTy Field which have converged with respect to the current convergence level.
Epsilon	
<code>value</code>	The current value of Epsilon .
<code>conv.</code>	Whether or not Epsilon has converged with respect to its measure.
<code>meas.</code>	The maximum value of the Epsilon convergence measure.

Additional Methods of Display

Regardless of which `Display` class has been used the quantity of displayed information can be changed via the `setLevel` method.

```

() prelude — Konsole
File Edit View Bookmarks Settings Help
dEnergy: -3.22E-01, ConvMeas: 2.14E+05, Epsilon: 4.45E-05
-----
chain 3
Accepted: True , Converged: False, ConvLevel: 1
dEnergy: -3.70E-01, ConvMeas: 2.14E+05, Epsilon: 4.37E-05
-----
chain 2
Accepted: True , Converged: False, ConvLevel: 1
dEnergy: -2.79E-01, ConvMeas: 2.13E+05, Epsilon: 4.54E-05
-----
chain 0
Accepted: True , Converged: False, ConvLevel: 1
dEnergy: -3.57E-01, ConvMeas: 2.12E+05, Epsilon: 4.62E-05
-----
chain 4
Accepted: True , Converged: False, ConvLevel: 1
dEnergy: -3.23E-01, ConvMeas: 2.10E+05, Epsilon: 4.42E-05
-----
chain 1
Accepted: True , Converged: False, ConvLevel: 1
dEnergy: -3.21E-01, ConvMeas: 2.11E+05, Epsilon: 4.45E-05
-----

```

a) LineByLineDisplay with level = DEBUG during burn in

```

demos: ipython — Konsole
File Edit View Bookmarks Settings Help
ch. | acc. | dEnergy | Convergence | Epsilon
   | rate |         | conv. lev meas.  | value conv. meas.
-----|-----|-----|-----|-----|-----
0 | 0.90 | 2.72E-01 | False 0 1.08E+01 99.76% | 2.12E-01 True 1.34E-01
1 | 0.70 | 5.87E-01 | False 0 5.26E+00 99.97% | 1.80E-01 True 1.71E-01
2 | 1.00 | -2.98E-01 | False 0 5.27E+00 99.97% | 9.00E-02 False 6.14E-01
3 | 0.90 | -6.34E-01 | False 0 5.29E+00 99.97% | 4.79E-02 False 7.43E-01
4 | 1.00 | 2.57E-01 | False 0 1.08E+01 99.76% | 2.34E-01 True 2.95E-02

15:19:08 - INFO: chain004: Mass matrix reevaluated. (step 5)
15:19:09 - INFO: chain000: Mass matrix reevaluated. (step 5)
15:19:12 - INFO: chain001: Mass matrix reevaluated. (step 6)
15:19:46 - INFO: chain002: Mass matrix reevaluated. (step 1)
15:19:46 - INFO: chain003: Mass matrix reevaluated. (step 1)

```

b) TableDisplay with level = DEBUG during burn in

Figure 4

`setLevel(level)`

This is equivalent to the `setLevel` function in the Python package `logging`. Default: `logging.INFO`

B.6. Additional Functions

HMCF provides a number of additional functions targeted at easing the handling of the HDF5-files generated during sampling. These files have rather cryptic default names of the form ‘runYYYY-MM-DD_hh-mm-ss.h5’, where Y, M, D, h, m and s represent year, month, day, hour, minute and second digits at the time of the initialization of that run, respectively. There are three functions handling data stored in these files: `load`, `load_mean`, `load_var`

The load Function

The `load` function takes the following arguments of which only the first is mandatory. Keep in mind that for high dimensional problems the amount of data loaded to memory can easily be several GiBytes.

`path : str`

Either the path to the HDF5 file or a path to the directory where the HDF5 file(s) are stored. If (path) is a directory, the latest ‘run’ file (with respect to the file name) is loaded.

`attr_type : str`

The ‘attribute’ to load. For files generated with the `HMCSampler` class possible values are: ‘burn_in’ and ‘samples’. For ‘burn_in’ the samples generated during burn in are loaded (of course, this is only possible if the `HMCSampler` class attribute `save_burn_in_samples` was set to `True`). For ‘samples’ the samples generated after burn in are loaded. Default: ‘samples’

`start : int`

Only loads the samples from step `start` onward.
Default: 0

`stop : int, optional`

Only loads the samples up to step `stop`. Loads until the end if no value is passed

`step : int`

Only loads every n th sample, where n is given by `step`.
Default: 1

In all cases the function returns a **NumPy** ndarray if `Fields` were sampled and Python dictionaries if `MultiFields` were sampled. In the latter case the respective **NumPy** ndarray for each individual field can be obtained by using the key used in the `MultiField`. In all cases the array has $2 + n$ dimensions, where again, the first and second dimension represent chains and steps respectively. If not all chains have the same number of samples (e.g. `attr_type = ‘burn_in’`, every chain needs a different number of steps to reach convergence) shorter chains are filled with `numpy.nans` in the output array to match the size of the longest chain.

The load_mean Function

The `load_mean` function calculates the mean value based on the samples saved to a HDF5 file.

path : str

Either the path to the HDF5 file or a path to the directory where the HDF5 file(s) are stored. If (path) is a directory, the latest 'run' file (with respect to the file name) is loaded.

domain : **NIFTy** Domain or **NIFTy** MultiDomain , optional

If domain is given the function output is a **NIFTy** Field or a **NIFTy** MultiField with the respective domain and the calculated mean as value.

The function returns the mean value either as **NumPy** ndarray a Python dictionary of **NumPy** ndarrays, a **NIFTy** Field or a **NIFTy** MultiField dependent on what was sampled originally and whether the domain argument is given.

The load_var Function

The `load_var` function calculates the variance value based on the samples saved to an HDF5 file.

path : str

Either the path to the HDF5 file or a path to the directory where the HDF5 file(s) are stored. If (path) is a directory, the latest 'run' file (with respect to the file name) is loaded.

domain : **NIFTy** Domain, optional

If domain is given the function output is a **NIFTy** Field with domain domain and the calculated variance as value.

The function returns the variance either as **NumPy** ndarray a Python dictionary of **NumPy** ndarrays, a **NIFTy** Field or a **NIFTy** MultiField dependent on what was sampled originally and whether the domain argument is given.

B.7. Tools

Tools is a sub-module of **HMCF** which provides two handy functions to evaluate an already finished sampling process. The one, `show_trajectories`, provides a GUI to quickly visualize the individual Markov chains, the other, `get_autocorrelation`, calculates the autocorrelation of the chains.

The show_trajectories Function

A simple GUI for visualizing Markov chains based on one- or two-dimensional problems. The GUI is divided into two graphs as displayed in figure 3. The left one represents the underlying problem space i.e. its geometry with either the 'mean' value or a similar user-defined field. The right graph displays the trajectory of the different chains for a selected pixel in the left

graph. A pixel can be selected by either entering its coordinates in the top row and clicking on show, or by just clicking on it in the left reference picture.

The function takes the following parameters of which only the first is mandatory:

path : str

Either the path to an HDF5 file or a path to the directory where the HDF5 file(s) are stored. If (path) is a directory, the latest 'run' file (with respect to the file name) in said directory is loaded.

reference_field : NIFTy Field or MultiField, NumPy ndarray or dict(str -> ndarray), optional

The field displayed on the left graph of the GUI. If none is given, the mean value of the samples is used as reference.

field_name : str, optional

If MultiFields were used, this argument is mandatory and specifies which of the sub-fields is supposed to be displayed.

solution : NIFTy Field or MultiField, NumPy ndarray or dict(str -> ndarray), optional

In case a 'right' answer is available (e.g. a mock data example) it can be passed here and is displayed in the trajectories graph as horizontal line as additional reference.

start : int

Only loads the samples from step **start** onward.
Default: 0

stop : int, optional

Only loads the samples up to step **stop**. Loads until the end if no value is passed

step : int

Only loads every n th sample, where n is given by **step**.
Default: 1

The get_autocorrelation Function

Calculates the autocorrelation of the samples (after burn in) for a given t , where t is the shift in

$$\text{auto_corr}[t] = \sum_i x(i)\bar{x}(i+t) \quad (22)$$

The function takes the following two arguments:

path : str

Either the path to an HDF5 file or a path to the directory where the HDF5 file(s) are stored. If (path) is a directory, the latest 'run' file (with respect to the file name) in said directory is loaded.

shift : int

The shift t as described above.
Default: 1

`field_name` : str, optional

If `MultiFields` were used, this argument is mandatory and specifies which of the sub-fields is supposed to be used.

The function returns a $1+n$ dimensional **NumPy** `ndarray` where the first dimension represents the different chains and the other n dimensions the dimensionality of the problem.

Affiliation:

Christoph Lienhard
Max Planck Institut for Astrophysics
Karl-Schwarzschild-Str. 1
D-85741 Garching, Germany
and
Ludwig-Maximilians-Universität München
Geschwister-Scholl-Platz 1
80539 Munich, Germany
and
Technische Universität München
Arcisstr. 21
80333 Munich, Germany
E-mail: christoph.lienhard@tum.de

Torsten Enßlin
Max Planck Institut for Astrophysics
Karl-Schwarzschild-Str. 1
D-85741 Garching, Germany
and
Ludwig-Maximilians-Universität München
Geschwister-Scholl-Platz 1
80539 Munich, Germany