MLCapsule: Guarded Offline Deployment of Machine Learning as a Service

Lucjan Hanzlik Stanford University, CISPA Helmholtz Center for Information Security

> Ahmed Salem CISPA Helmholtz Center for Information Security

Yang Zhang CISPA Helmholtz Center for Information Security

Max Augustin
Max Planck Institute for
Informatics

Mario Fritz
CISPA Helmholtz Center for
Information Security

Kathrin Grosse CISPA Helmholtz Center for Information Security

Michael Backes CISPA Helmholtz Center for Information Security

ABSTRACT

With the widespread use of machine learning (ML) techniques, ML as a service has become increasingly popular. In this setting, an ML model resides on a server and users can query it with their data via an API. However, if the user's input is sensitive, sending it to the server is undesirable and sometimes even legally not possible. Equally, the service provider does not want to share the model by sending it to the client for protecting its intellectual property and pay-per-query business model.

In this paper, we propose MLCapsule, a guarded offline deployment of machine learning as a service. MLCapsule executes the model locally on the user's side and therefore the data never leaves the client. Meanwhile, MLCapsule offers the service provider the same level of control and security of its model as the commonly used server-side execution. In addition, MLCapsule is applicable to offline applications that require local execution. Beyond protecting against direct model access, we couple the secure offline deployment with defenses against advanced attacks on machine learning models such as model stealing, reverse engineering, and membership inference.

KEYWORDS

Machine learning as a service, secure enclave, offline deployment, defense for machine learning models

ACM Reference Format:

1 INTRODUCTION

Machine learning as a service (MLaaS) has become increasingly popular during the past five years. Leading Internet companies,

such as Google, ¹ Amazon, ² and Microsoft ³ have deployed their own MLaaS. It offers a convenient way for a service provider to deploy a machine learning (ML) model and equally an instant way for a user/client to make use of the model in various applications. Such setups range from image analysis over translation to applications in the business domain.

While MLaaS is convenient for the user, it also comes with several limitations. First, the user has to trust the service provider with the input data. Typically, there are no means of ensuring data privacy and recently proposed encryption mechanisms [8] come at substantial computational overhead especially for state-of-the-art deep learning models containing millions of parameters. Moreover, MLaaS requires data transfer over the network which constitutes to high volume communication and provides new attack surface [29, 34]. This motivates us to come up with a client-side solution such that perfect data privacy and offline computation can be achieved.

As a consequence, this (seemingly) comes with a loss of control of the service provider, as the ML model has to be transfered and executed on the client's machine. This raises concerns about revealing details of the model or granting unrestricted access to the user. The former damages the intellectual property of the service provider, while the latter breaks the commonly enforced pay-per-query business model. Moreover, there is a broad range of attack vectors on ML models that raise severe security and privacy risks [36]. A series of recent papers have shown different attacks on MLaaS that can lead to reverse engineering [32, 46] and training data leakage [16, 17, 39, 40, 49]. Many of these threats are facilitated by repeated probing of the ML model that the service provider wants to protect against. Therefore, we need a mechanism to enforce that the service provider remains in control of the model access as well as provide ways to deploy defense mechanisms to protect the model.

¹https://cloud.google.com/ml-engine/

²https://aws.amazon.com/machine-learning/

³https://azure.microsoft.com/en-us/services/machine-learning-studio/

1.1 Our Contributions

We propose MLCapsule, a guarded offline deployment of machine learning as a service. MLCapsule follows the popular MLaaS paradigm, but allows for client-side execution where model and computation remain secret. With MLCapsule, the service provider controls its ML model which allows for intellectual property protection and business model maintenance. Meanwhile, the user gains perfect data privacy and offline execution, as the data never leaves the client and the protocol is transparent

We assume that the client's platform has access to an Isolated Execution Environment (IEE). MLCapsule uses it to provide a secure enclave to run an ML model classification. Moreover, since IEE provides means to prove execution of code, the service provider is assured that the secrets that it sends in encrypted form can only be decrypted by the enclave. This keeps this data secure from other processes running on the client's platform.

To support security arguments about MLCapsule, we propose the first formal model for reasoning about the security of local ML model deployment. The leading idea of our model is a property called *ML model secrecy*. This definition ensures that the client can simulate MLCapsule using only a server-side API. In consequence, this means that if the client is able to perform an attack against MLCapsule, the same attack can be performed on the server-side API.

We also contribute by a proof-of-concept of our solution. Due to its simplicity and availability we implemented our prototype on a platform with Intel SGX, despite the fact that the current generation should not be used due to a devastating attack (see [11]). Note that our solution can be used on any IEE platform for which we can argue that it implements the abstract requirements defined in section 6.

In more details, in our solution we design so called MLCapsule layers, which encapsulate standard ML layers and are executed inside the IEE. Those layers are able to decrypt (unseal) the secret weight provisioned by the service provider and perform the computation in isolation. This modular approach makes it easy to combine layers and form large networks. For instance, we implement and evaluate the VGG-16 [42] and MobileNet [20] neural networks. In addition, we provide an evaluation of convolution and dense layers and compare the execution time inside the IEE to a standard implementation.

The isolated code execution on the client's platform renders MLCapsule ability to integrate advanced defense mechanism for attacks against machine learning models. For demonstration, we propose two defense mechanisms against reverse engineering [32] and membership inference [39, 40], respectively, and utilize a recent proposed defense [24] for model stealing attacks [46]. We show that these mechanisms can be seamlessly incorporated into MLCapsule, with a negligible computation overhead, which further demonstrates the efficacy of our system.

1.2 Organization

Section 2 presents the requirements of MLCapsule. We provide the necessary technical background in Section 3 and Section 4 summarizes the related work in the field. In Section 5, we present MLCapsule in detail and formally prove its security in Section 6. Section 7 discusses the implementation and evaluation of MLCapsule. We show how to incorporate advanced defense mechanisms in Section 8. Section 9 provides a discussion, and the paper is concluded in Section 10.

2 REOUIREMENTS AND THREAT MODEL

In this section, we introduce security requirements we want to achieve in MLCapsule.

2.1 Model Secrecy and Data Privacy

User Side. MLCapsule deploys MLaaS locally. This provides strong privacy guarantees to a user, as her data never leaves her device. Meanwhile, executing machine learning prediction locally avoids the Internet communication between the user and the service provider. Therefore, possible attacks due to network communication [29, 34] are automatically eliminated.

Server Side. Deploying a machine learning model on the client side naively, i.e., providing the trained model to the user as a white box, harms the service provider in the following two perspectives.

- Intellectual Property. Training an effective machine learning model is challenging, the MLaaS provider needs to get suitable training data and spend a large amount of efforts for training the model and tuning various hyperparameters [47]. All these certainly belong to the intellectual property of the service provider and providing the trained model to the client as a white box will result in the service provider completely losing these valuable information. In this paper we consider the ML model architecture public and only consider the model parameters as private information. However, our approach can easily be extended to also protect the model architecture by using tools that protect the privacy of the code executed inside the IEE (e.g. using [6]).
- Pay-per-query. Almost all MLaaS providers implement the pay-per-query business model. For instance, Google's vision API charges 1.5 USD per 1,000 queries. Deploying a machine learning model at the client side naturally grants a user unlimited number of queries, which breaks the pay-per-query business model.

To mitigate all these potential damages to the service provider, MLCapsule needs to provide the following guarantees:

- Protecting intellectual property
- Enable the pay-per-query business model

In a more general way, we aim for a client-side deployment being indistinguishable from the current server-side deployment.

2.2 Protection against Advanced Attacks

Several recent works show that an adversary can perform multiple attacks against MLaaS by solely querying its API (black-box access). Attacks of such kind include model stealing [46, 47], reverse engineering [32], and membership inference [39, 40]. These attacks are however orthogonal to the damages discussed in Section 2.1, as they only need black-box access to the ML model instead of white-box

 $^{^4} https://cloud.google.com/vision/pricing \\$

access. More importantly, it has been shown that the current MLaaS cannot prevent against these attacks neither [32, 40, 46, 47].

We consider mitigating these threats as the requirements of MLCapsule as well. Therefore, we propose defense mechanisms against these advanced attacks and show that these mechanisms can be seamlessly integrated into MLCapsule.

3 BACKGROUND

In this section, we focus on the properties of Intel's IEE implementation called Software Guard Extensions (SGX) and recall a formal definition of Attested Execution proposed by Fisch et al. [15]. We would like to stress that MLCapsule works with any IEE that implements this abstraction. We also formalize a public key encryption scheme, which we will use for the concrete instantiation of our system. We stress

3.1 SGX

SGX is a set of commands included in Intel's x86 processor design that allows to create isolated execution environments called enclaves. According to Intel's threat model, enclaves are designed to trustworthily execute programs and handle secrets even if the host system is malicious and the system's memory is untrusted.

Properties. There are three main properties of Intel SGX.

- Isolation. Code and data inside the enclave's protected memory cannot be read or modified by any external process.
 Enclaves are stored in a hardware guarded memory called Enclave Page Cache (EPC), which is currently limited to 128 MB with only 90 MB for the application. Untrusted applications can execute code inside the enclave using entry points called Enclave Interface Functions ECALLs, i.e., untrusted applications can use enclaves as external libraries that are defined by these call functions.
- Sealing. Data stored in the host system is encrypted and authenticated using a hardware-resident key. Every SGX-enabled processor has a special key called Root Seal Key that can be used to derive a so called Seal Key which is specific to the identity of the enclave. This key can then be used to encrypt/decrypt data which can later be stored in untrusted memory. One important feature is that the same enclave can always recover the Seal Key if instantiated on the same platform, however it cannot be derived by other enclaves.
- Attestation. Attestation provides an unforgeable report attesting to code, static data and meta data of an enclave, as well as the output of the performed computation. Attestation can be local and remote. In the first case, one enclave can derive a shared Report Key using the Root Seal Key and create a report consisting of a Message Authentication Code (MAC) over the input data. This report can be verified by a different enclave inside the same platform, since it can also derive the shared Report Key. In case of remote attestation, the actual report for the third party is generated by a so called Quoting Enclave that uses an anonymous group signature scheme (Intel Enhanced Privacy ID [10]) to sign the data.

Side-channel Attacks. Due to its design, Intel SGX is prone to side-channel attacks. This includes physical attacks (e.g., power

analysis), yet successful attacks have not yet been demonstrated. On the other hand, several software attacks have been demonstrated in numerous papers [9, 25, 48]. An attack specifically against secure ML implementations was presented by Hua et al. [6]. Those kinds of attacks usually target flawed implementations and a knowledgeable programmer can write the code in a data-oblivious way, i.e., the software does not have memory access patterns or control flow branches that depend on secret data. In particular, those attacks are not inherent to SGX-like systems [13]. Recently, Bulck et al. [11] presented a devastating attack on SGX that compromises the whole system making the current generation of the SGX technology useless. Even though the current SGX generation should not be used in practice, future instantiations should provide a real-world implementation of the abstract security requirements needed to secure MLCapsule.

Rollback. The formal model described in the next subsection assumes that the state of the hardware is hidden from the users platform. SGX enclaves store encryptions of the enclave's state in the untrusted part of the platform. Those encryptions are protected using a hardware-generated secret key, yet this data is provided to the enclave by an untrusted application. Therefore, SGX does not provide any guarantees about freshness of the state and is vulnerable to rollback attacks. Fortunately, there exist hardware solutions relying on counters [44] and distributed software-based strategies [28] that can be used to prevent rollback attacks.

3.2 Definition for SGX-like Hardware

There are many papers that discuss hardware security models in a formalized way. The general consensus is that those abstractions are useful to formally argue about the security of the system.

Barbosa et al. [5] define a generalized ideal interface to represent SGX-like systems that perform attested computation. A similar model was proposed by Fisch et al. [15] but was designed specifically to abstract Intel's SGX and support local and remote attestation. Pass, Shi, and Tramèr [37] proposed an abstraction of attested execution in the universal composability (UC) model. In this paper we will focus on the formal hardware model by Fisch et al. [15]. We decided to use this particular model because it was specifically defined to abstract the features that are supported by SGX which is the hardware used by our implementation. However, since we will only use remote attestation in our instantiation, we omit the local attestation part and refer the reader to the original paper for a full definition.

Informally, this ideal functionality allows a registered party to install a program inside an enclave, which can then be resumed on any given input. An instance of this enclave possesses internal memory that is hidden from the registering party. However, the main property of attested execution is that the enclave creates an attestation of execution. This attestation provides a proof for third parties that the program was executed on a given input yielding a particular output.

Formal Definition. We define a secure hardware as follows.

Definition 1. A secure hardware functionality HW for a class of probabilistic polynomial time programs Q consists of the following interface: HW.Setup, HW.Load, HW.Run, HW.RunQuote_{skquote},

HW.QuoteVerify. HW has also an internal state state that consists of a variable $HW.\text{sk}_{\text{quote}}$ and a table T consisting of enclave state tuples indexed by enclave handles. The variable $HW.\text{sk}_{\text{quote}}$ will be used to store signing keys and table T will be used to manage the state of the loaded enclave.

- HW.Setup(1ⁿ): given input security parameter 1ⁿ, it generates the secret key sk_{quote} and stores it in HW.sk_{quote}. It also generates and outputs public parameters params.
- HW.Load(params, Q): given input global parameters params and program Q it first creates an enclave, loads Q, and then generates a handle hdl that will be used to identify the enclave running Q. Finally, it sets T[hdl] = Ø and outputs hdl.
- HW.Run(hdl, in): it runs Q at state T[hdl] on input in and records the output out. It sets T[hdl] to be the updated state of Q and outputs out.
- HW.RunQuote_{skquote} (hdl, in): executes a program in an enclave similar to HW.Run but additionally outputs an attestation that can be publicly verified. The algorithm first executes Q on in to get out, and updates T[hdl] accordingly. Finally, it outputs the tuple quote = $(md_{hdl}, tag_Q, in, out, \sigma)$: md_{hdl} is the metadata associated with the enclave, tag_Q is a program tag for Q and σ is a signature on $(md_{hdl}, tag_Q, in, out)$.
- HW.QuoteVerify(params, quote): given the input global parameters params and quote this algorithm outputs 1 it the signature verification of σ succeeds. It outputs 0 otherwise.

Correctness. A HW scheme is correct if the following holds. For all aux, all programs Q, all in in the input domain of Q and all handles hdl we have:

- if there exist random coins r (sampled in run time and used by Q) such that out = Q(in), then
- Pr[HW.QuoteVerify(params, quote) = 0] = negl(λ), where quote = HW.RunQuote_{sk_{quote}}(hdl, in).

Remote attestation unforgeability is modeled by a game between a challenger C and an adversary \mathcal{A} .

- (1) \mathcal{A} provides an aux.
- (2) C runs HW.Setup(1 n , aux) in order to obtain public parameters params, secret key sk_{quote} and an initialization string state. It gives params to \mathcal{A} , and keeps sk_{quote} and state secret in the secure hardware.
- (3) C initialized a list query = $\{\}$.
- (4) A can run HW.Load on any input (params, Q) of its choice and get back hdl.
- (5) \mathcal{A} can also run HW.RunQuote_{skquote} on input (hdl, in) of its choice and get quote = (md_{hdl}, tag_Q, in, out, σ), where the challenger puts the tuple (md_{hdl}, tag_Q, in, out) into query.
- (6) \mathcal{A} finally outputs quote* = (md*_{hdl}, tag*_O, in*, out*, σ *).

 \mathcal{A} wins the above game if HW.QuoteVerify(params, quote*) = 1 and $(\mathsf{md}^*_{\mathsf{hdl}}, \mathsf{tag}^*_{\mathcal{Q}}, \mathsf{in}^*, \mathsf{out}^*) \notin \mathsf{query}$. The hardware model is remote attestation unforgeable if no adversary can win this game with non-negligible probability.

```
\begin{split} & \underbrace{\mathsf{Exp}_{\mathsf{Enc}}, \mathcal{A}(\lambda)} \\ & (\mathsf{sk}, \, \mathsf{pk}) = \mathsf{KeyGen}(1^n) \\ & (m_0, \, m_1) \leftarrow \mathcal{A}(\mathsf{pk}); \ b \leftarrow_\$ \{0, \, 1\} \\ & c \leftarrow \mathsf{Enc}(\mathsf{pk}, \, m_b); \ \hat{b} \leftarrow \mathcal{A}(\mathsf{pk}, \, c) \\ & \mathsf{return} \ \hat{b} = b \end{split}
```

Figure 1: IND-CPA - security experiment.

3.3 Public Key Encryption

Definition 2. Given a plaintext space \mathcal{M} we define a public key encryption scheme as a tuple of probabilistic polynomial time algorithms:

- KeyGen(1ⁿ): on input security parameters, this algorithm outputs the secret key sk and public key pk.
- Enc(pk, m): on input public key pk and message m ∈ M, this algorithm outputs a ciphertext c.
- Dec(sk, c): on input secret key sk and ciphertext c, this algorithm outputs message m.

Correctness. A public key encryption scheme is correct if for all security parameters 1^n , all messages $m \in \mathcal{M}$ and all keypairs $(sk, pk) = \text{KeyGen}(1^n)$ we have Dec(sk, Enc(pk, m)) = m.

Ciphertext Indistinguishability Against CPA (Chosen Plaintext Attack). We say that the public key encryption scheme is indistinguishable against chosen plaintext attacks if there exists no adversary for which $|\Pr[\mathsf{Exp}_{\mathsf{Enc},\mathcal{A}}=1]-\frac{1}{2}|$ is non-negligible, where experiment $\mathsf{Exp}_{\mathsf{Enc},\mathcal{A}}$ is defined in Figure 1.

4 RELATED WORK

In this section, we review related works in the literature. We start by discussing cryptography and ML, concentrating on SGX and homomorphic encryption. We then turn to mechanisms using watermarking to passively protect ML models. In the end, we describe several relevant attacks against ML models including model stealing, reverse engineering, and membership inference.

SGX for ML. Ohrimenko et al. [33] investigated oblivious data access patterns for a range of ML algorithms applied in SGX. Their work focuses on neural networks, support vector machines and decision trees. Additionally, Hynes et al. [23], and Hunt et al. [22] used SGX for ML - however in the context of training convolutional neural network models. Tramèr et al. [45] introduced Slalom, a system which distributes parts of the computation from SGX to a GPU in order to preserve integrity and privacy of the data. Gu et al. [18] consider convolutional neural networks and SGX at test time. They propose to split the network, where the first layers are executed in an SGX enclave, and the latter part outside the enclave. The core of their work is to split the network as to prevent the user's input to be reconstructed. Compared to [45] and [18], MLCapsule is the first secure and privacy-preserving machine learning system for offline deployment coupled with several defense mechanisms addressing state-of-the-art blackbox-based attacks.

Cryptographic Solutions for ML Models. Homomorphic encryption has been used to keep both input and result private from

an executing server [3, 8, 14, 26, 31]. In contrast to our approach, however, homomorphic encryption lacks efficiency, especially for deep learning models containing millions of parameters. Moreover, it does not allows for implementing transparent mechanisms to defend attacks on the ML model: the user cannot be sure which code is executed. Furthermore, a server-side model protection might require further computations on the encrypted user data and sometimes also a function of this data in plaintext (e.g. to decide whether to accept a query). Lastly, cryptographic based solutions usually do not achieve what we call perfect-privacy (even an unbounded adversary cannot retrieve any information about the user's data), which is one of the main advantages of MLCapsule.

Watermarking ML Models. Recently, watermarking has been introduced to claim ownership of a trained ML model. Adi et al. [1] propose to watermark a model by training it to yield a particular output for a number of points, thereby enabling identification. Zhang et al. [50], in contrast, add meaningful content to samples used as watermarks. Watermarking as a passive defense mechanism is opposed to our work in two perspectives. First, MLCapsule deployed on the client-side is indistinguishable from the server-side deployment. Second, MLCapsule allows us to deploy defense mechanisms to actively mitigate advanced attacks against ML models.

Model Stealing and Reverse Engineering. Model stealing has been introduced by Tramèr et al. [46]. The attacker's goal here is to duplicate a model that is accessible only via an API. Recently, a defense to model stealing called Prada has been proposed by Juuti et al. [24]. We will evaluate Prada's feasibility in MLCapsule. Also passive defenses to model stealing have been proposed under the term of watermarking, for example by Adi et al. [1] and Zhang et al. [50]. MLCapsule, however, allows to actively mitigate model stealing attacks. A different line of work aims to infer specific details of the model such as architecture, training method and type of nonlinearities, rather than its behavior. Such attacks are called reverse engineering and were proposed by Oh et al. [32]. We propose a defense against this attack and also show it can be integrated in MLCapsule with little overhead.

Membership Inference. In the setting of membership inference, the attacker aims to decide whether a data point is in the training set of the target ML model. Shokri et al. are among the first to perform effective membership inference against ML models [40]. Recently, several other attacks have been proposed [19, 39, 49]. In this paper, we propose a defense mechanism to mitigate the membership privacy risks which can be easily implemented in MLCapsule.

5 MLCAPSULE

In existing MLaaS system, the service provider gives the user access to an API, which she can then use for training and classification. This is a classic client-server scenario, where the service is on the server's side and the user is transferring the data. We focus on the scenario where the service provider equips the user with an already trained model and classification is done on the client's machine. In this scenario, the trained model is part of the service. This introduces the previously discussed problems, like for example protecting the IP of the service provider or the user's privacy. In this section we introduce MLCapsule to tackle those issues and then




Figure 2: Our scheme with all steps of initialization.

argue how the requirements are met. We would like to stress that the main advantage of MLCapsule is its simplicity.

5.1 Overview

We start with an overview of the participants and then introduce MLCapsule with its different execution phases.

Participants. In MLCapsule, we distinguish two participants of the system. On the one hand, we have the service provider (SP) that possesses private training data that it uses to train an ML model. On the other hand, we have users that want to use the pre-trained model as previously discussed in Section 2.

We focus for the rest of the paper on deep networks, as they have recently drawn attention due to their good performance. Additionally, their size make both implementation and design a challenge. Yet, MLCapsule generalizes to other linear models, as these can be expressed as a single layer of a neural network.

We consider the design of the applied network to be publicly known. The service provider's objective is to protect the trained weights and biases of all layers.

Approach. We now describe MLCapsule, which fulfills the requirements from Section 2. To start, we assume that all users have a platform with an isolated execution environment. Note that this is a viable assumption: Intel introduced SGX with the Skylake processor line. Additionally, the latest Kaby Lake generation of processors supports SGX. It is further reasonable to assume that Intel will provide support for SGX with every new processor generation and over time every PC with an Intel processor will have SGX.

The core idea of MLCapsule is to leverage the properties of the IEE to ensure that the user has to attest that the code is running in isolation before it is provided the secrets by the SP. This step is called the *setup phase* and is depicted in Figure 2. Once the setup is done, the client can use the enclave for the classification task. This step is called the *inference phase* and is depicted in Figure 3. The isolation of the enclave ensures that the user is not able to infer more information about the model than given API access to a server-side model. Next, we describe MLCapsule in more details.




Figure 3: Our scheme with all steps of offline classification.

Setup Phase. The user and the service provider interact to set up a working enclave on the users platform. The user has to download the enclave's code and the code of a service application that will set up the enclave on the user's side. The enclave's code is provided by the SP, where the code of the service app can be provided by the SP but it can also be implemented by the user or any third party that she trusts. Note that the user can freely inspect the enclave's code and check what data is exchanged with the SP. This inspection ensures that the user's input to the ML model will be hidden from the SP, as the classification is run locally and the input data never leaves the user's platform.

After the user's platform attests that an enclave instance is running, the SP provides the enclave with secret data composed of among others the weights of the network. Finally, the enclave seals all secrets provided by the service provider and the service application stores it for further use. Sealing hides this data for other processes on the user's platform. With the end of the setup phase, no further communication with the SP is needed.

Inference Phase. To perform classification, the user executes the service app and provides the test data as input. The service app restores the enclave, which can now be used to perform classification. Since the enclave requires the model parameters, the service app loads the sealed data stored during the setup phase. Before classification, the enclave can also perform an access control procedure that is based on the user's input data (available to the enclave in plaintext) and the current state of the enclave. Due to some limitations (e.g. limited memory of the IEE), the enclave can be implemented in a way that classification is performed layer wise, i.e. the service app provides sealed data for each layer of the network separately. In the end, the enclave outputs the result to the service app and might as well update its state, which is stored inside the sealed data. This process is depicted in Figure 3.

5.2 Discussion on Requirements

Next, we discuss how MLCapsule fulfills the requirements stated in Section 2.

User Input Privacy. MLCapsule is executed locally by the user. Moreover, the user is allowed to inspect the code executed in the secure hardware. This means that she can check for any communication command with the SP and stop execution of the program. Moreover, off-line local execution ensures that the user's input data is private because there is no communication required with the SP. We conclude that MLCapsule perfectly protects the user input.

Pay-per-query. To enforce the pay-per-query paradigm, the enclave will be set up during provision with a threshold. Moreover, the enclave will store a counter that is increased with every classification performed. Before performing classification, it is checked whether the counter exceeds this threshold. In case it does, the enclave returns an error instead of the classification. Otherwise, the enclave works normally.

This solution ensures that the user cannot exceed the threshold, which means that she can only query the model for the number of times she paid. Unfortunately, it does not allow for a fine-grained pay-per-query, where the user can freely chose if she wants more queries at a given time. On the other hand, this is also the model currently used by server-side MLaaS, where a user pays for a fixed number of queries (e.g. 1000 in case of Google's vision API). MLCapsule can also be configured in a way that to perform offline inference the user has to receive a signature of the service provider under some function of the queried data, where this value is send in the clear by the user. The function has be to collision-resistant, so that the user cannot use the signature for two or more queries, and lossy, so that this value loses most of the information of the preimage. A practical candidate are cryptographic hash functions. This configuration allow for a more fine-grained access to model but at the same time provides similar security guarantees to the offline mode.

Intellectual Property. MLCapsule protects the service provider's intellectual property by ensuring that the isolation provided by the hardware simulates in a way the black-box access in the standard server-side model of MLaaS. In other words, the user gains no additional advantage in stealing the intellectual property in comparison to an access to the model through an server-side API.

6 SECURITY ANALYSIS

In this section, we introduce a formal model for MLCapsule and show a concrete instantiation using the abstracted hardware model by Fisch et al. [15] and a standard public key encryption scheme, which we recalled in Section 3. The goal is to prove that our construction possesses a property that we call ML model secrecy. We define it as a game that is played between the challenger and the adversary. The challenger chooses a bit which indicates whether the adversary is interacting with the real system or with a simulator. This simulator gets as input the same information as the adversary. In a nutshell, this means that the user can simulate MLCapsule using a server-side API ML model. Hence, classification using an IEE should not give the user more information about the model than using an oracle access to the model (e.g. as it is the case for a server-side API access). We would like to stress that this highlevel view on security is currently the best we can provide. Any definition that tries to somehow quantify security of the model by bounding the leakage of model queries has to be based on empirical data. Thus, we circumvent this by stating that MLCapsule does not

leak more information about the model than a model accessed by a server-side API.

We begin the description of the model by binding it with the high level description presented in Section 5 using three algorithms that constitute the interactive setup phase (Train, Obtain and Provide) and the local inference phase (Classify). An overview of how MLCapsule fits into this composition and details about the instantiation are given in Figure 4. Moreover, in the next subsection we describe the security model in more details and then present our formal instantiation of MLCapsule.

6.1 Formalization of MLCapsule

We now define in more detail the inputs and outputs of the four algorithms that constitute the model for MLCapsule. Afterwards, we show what it means that MLCapsule is correct and show a game based definition of ML model secrecy.

- Train(train_{data}): this probabilistic algorithm is executed by the service provider in order to create a machine learning model $ML_{model} = (ML_{def}, ML_{sk})$ based on training data train_{data}, where ML_{def} is the definition of the ML model and ML_{sk} are the secret weights and biases. To obtain the classification output_{data} for a given input data input_{data} one can execute output_{data} = ML_{model} (input_{data}).
- Obtain(ML_{def}): this algorithm is executed by the user to create a request ML_{req} to use model with definition ML_{def}.
 Further, this algorithm is part of the setup phase and shown in steps 1 and 2 in Figure 2.
- Provide(ML_{def}, ML_{sk}, ML_{req}): this probabilistic algorithm is executed by the service provider to create a hidden ML model HML_{model} based on the request ML_{req}. Figure 2 depicts this algorithm in step 3 of the setup phase.
- Classify(HML_{model}, input_{data}): this algorithm is executed by the user to receive the output output_{data} of the classification. Hence, it models the inference phase depicted in Figure 3.

Correctness. We say that MLCapsule is correct if for all training data train_{data}, all ML models $(ML_{def}, ML_{sk}) = Train(train_{data})$, all input data input_{data} and all requests $ML_{req} = Obtain(ML_{def})$ we have $ML_{model}(input_{data}) = Classify(HML_{model}, input_{data})$, where $HML_{model} = Provide(ML_{def}, ML_{sk}, ML_{req})$.

ML Model Secrecy. We define model secrecy as a game played between a challenger C and an adversary \mathcal{A} . Depending on the bit chosen by the challenger, the adversary interacts with the real system or a simulation. More formally, we say that MLCapsule is ML model secure if there exists a simulator $\operatorname{Sim} = (\operatorname{Sim}_1, \operatorname{Sim}_2)$ such that the probability that $|\operatorname{Pr}[\operatorname{Exp}_{\operatorname{MLCapsule},\mathcal{A}}^{\operatorname{secrecy}} - 0(\lambda) = 1] - \operatorname{Pr}[\operatorname{Exp}_{\operatorname{MLCapsule},\mathcal{A}}^{\operatorname{secrecy}} - 1(\lambda) = 1]|$ is negligible for any probabilistic polynomial time adversary \mathcal{A} .

6.2 Instantiation of MLCapsule

The idea behind our instantiation is as follows. The user retrieves a program Q from the SP and executes it inside a secure hardware. This secure hardware outputs a public key and an attestation that the code was correctly executed. This data is then send to the SP, which encrypts the secrets corresponding to the ML model and sends it back to the user. This ciphertext is actually the hidden

Algorithm 1: Hardware Program Q

machine learning model, which is decrypted by the hardware and the plaintext is used inside the hardware for classification. ML model secrecy follows from the fact that the user cannot produce forged attestations without running program Q in isolation. This also means that the public key is generated by the hardware and due to indistinguishability of chosen plaintext of the encryption scheme, we can replace the ciphertext with an encryption of 0 and answer hardware calls using the model directly and not the Classify algorithm. Below we present this idea in more details.

- Train(train_{data}): executes $ML_{model} = (ML_{def}, ML_{sk}) = Q("train", train_{data})$. Output ML_{def} .
- Obtain(ML_{def}): given ML_{def}, set up the hardware parameters params by running HW.Setup(1ⁿ). Load program Q using HW.Load(params, Q), further receive a handle to the enclave hdl. Execute the HW setup command for program Q by running HW.RunQuote_{skquote}(hdl, ("setup", 0)) and receive a quote (that includes the public key pk). Finally, set ML_{req} = (params, quote).
- Provide(ML_{def}, ML_{sk}, ML_{req}): abort if the quote verification failed: HW.QuoteVerify(params, quote) = 0. Parse quote = $(\cdot, \cdot, \cdot, pk, \cdot)$, compute ciphertext $c = \text{Enc}(pk, ML_{sk})$ and set HML_{model} = (ML_{def}, c) .
- Classify(HML_{model}, input_{data}): parse the hidden model HML_{model} as (ML_{def}, c) and return the output of

```
HW.Run(hdl, ("classify", (ML_{def}, c, input_{data}))).
```

6.3 Security

Theorem 1. The MLCapsule presented in Section 6.2 is model secure if in the used public key encryption is indistinguishable under chosen plaintext attacks and the hardware functionality HW is remote attestation unforgeable.

PROOF. We prove this theorem using the game based approach starting with $GAME_0$ that models the original ML model security experiment with bit b=1 and end the proof with $GAME_4$, which is the experiment for b=0.

GAME₁. Similar to GAME₀, but we abort in case the adversary outputs a valid request ML_{req} without running program Q. It is easy

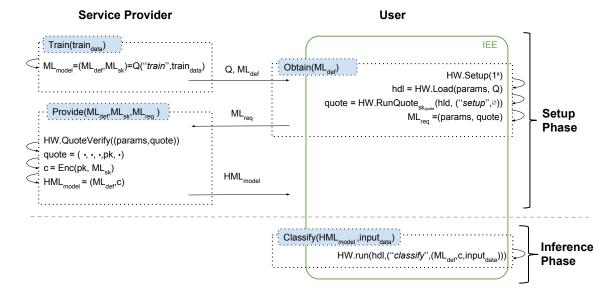


Figure 4: Formal instantiation of MLCapsule.

```
\begin{split} & \frac{\mathsf{Exp}_{\mathsf{MLCapsule},\mathcal{A}}^{\mathsf{secrecy}} - b(\lambda)}{\mathsf{ML}_{\mathsf{model}} = (\mathsf{ML}_{\mathsf{def}}, \mathsf{ML}_{\mathsf{sk}}) \leftarrow \mathsf{Train}(\mathsf{train}_{\mathsf{data}})} \\ & \mathsf{ML}_{\mathsf{req}} \leftarrow \mathcal{A}(\mathsf{ML}_{\mathsf{def}}) \\ & \mathsf{if} \ b = 0 \ \mathsf{HML}_{\mathsf{model}} \leftarrow \mathsf{Sim}_1(\mathsf{ML}_{\mathsf{def}}, \mathsf{ML}_{\mathsf{req}}) \\ & \mathsf{else} \ \mathsf{HML}_{\mathsf{model}} \leftarrow \mathsf{Provide}(\mathsf{ML}_{\mathsf{def}}, \mathsf{ML}_{\mathsf{sk}}, \mathsf{ML}_{\mathsf{req}}) \\ & \mathsf{return} \ \hat{b} \leftarrow \mathcal{A}^{O(\mathsf{ML}_{\mathsf{model}}, \mathsf{HML}_{\mathsf{model}}, \cdot)}(\mathsf{HML}_{\mathsf{model}}) \\ & \underline{O(\mathsf{ML}_{\mathsf{model}}, \mathsf{HML}_{\mathsf{model}}, \mathsf{input}_{\mathsf{data}})} \\ & \mathsf{parse} \ \mathsf{ML}_{\mathsf{model}} = (\mathsf{ML}_{\mathsf{def}}, \cdot) \\ & \mathsf{if} \ b = 0 \ \mathsf{return} \ \mathsf{Sim}_2(\mathsf{ML}_{\mathsf{model}}, \mathsf{input}_{\mathsf{data}}) \\ & \mathsf{else} \ \mathsf{return} \ \mathsf{Classify}(\mathsf{ML}_{\mathsf{def}}, \mathsf{HML}_{\mathsf{model}}, \mathsf{input}_{\mathsf{data}}) \\ & \mathsf{else} \ \mathsf{return} \ \mathsf{Classify}(\mathsf{ML}_{\mathsf{def}}, \mathsf{HML}_{\mathsf{model}}, \mathsf{input}_{\mathsf{data}}) \\ \end{split}
```

Figure 5: ML model secrecy experiment.

to see that by making this change, we only lower the adversary's advantage by a negligible factor. In particular, an adversary for which we abort GAME₁ can be used to break the remote attestation unforgeability of the hardware model.

GAME₂. We now replace the way oracle O works. On a given query of the adversary, we always run $Sim_2(ML_{model}, input_{data}) = ML_{model}(input_{data})$. Note that this does not change the adversary's advantage, since both outputs should by correctness of MLCapsule give the same output on the same input.

GAME₃. We now replace the ciphertext given as part of $\mathsf{HML}_{\mathsf{model}} = (\mathsf{ML}_{\mathsf{def}}, c)$ to the adversary, i.e. we replace c with an encryption of 0. This change only lowers the adversary's advantage by the advantage of breaking the security of the used encryption scheme. Note that by GAME_1 we ensured that pk inside the request $\mathsf{ML}_{\mathsf{req}}$

is chosen by the secure hardware and can be set by the reduction. Moreover, oracle O works independently of $\mathsf{HML}_{\mathsf{model}}$.

GAME₄. We change how HML_{model} is computed. Instead of running Provide(ML_{def}, ML_{sk}, ML_{req}), we use Sim₂(ML_{def}, ML_{req}) = (ML_{def}, Enc(pk, 0)), where ML_{req} = (·, (·, ·, ·, pk, ·)). It is easy to see that this game is actually the experiment Exp^{secrecy}_{MLCapsule, \mathcal{A}} $-0(\lambda)$ and we can conclude that our instantiation is ML model secure because the difference between experiments Exp^{secrecy}_{MLCapsule, \mathcal{A}} $-0(\lambda)$ and Exp^{secrecy}_{MLCapsule, \mathcal{A}} $-1(\lambda)$ is negligible.

7 SGX IMPLEMENTATION AND EVALUATION

In the setup phase, MLCapsule attests the execution of the enclave and decrypts the data send by the service provider. Both tasks are standard and supported by Intel's crypto library [2]. Thus, in the evaluation we focus on the inference phase and overhead the IEE introduces to classification.

7.1 Implementation

We used an Intel SGX enabled desktop PC with Intel(R) Core(TM) i7-6700 CPU @ 3.40GHz that was running Ubuntu 18.04. The implementation was done using C++ and based on the code of Slalom [45], which uses a custom lightweight C++ library for feed-forward networks based on Eigen. If not stated otherwise, we used the -O3 compiler optimization and C++11 standard. Yet, porting well-known ML frameworks (for example TensorFlow) to SGX is not feasible at this point, because enclave code cannot access OS-provided features (e.g. multi-threading, disk, and driver IO). However, any model used in those frameworks can be easily translated into MLCapsule.

We wrap standard layers to create new MLCapsule layers. Those layers take the standard input of the model layer but the weights are given in sealed form. Inside the enclave, the secret data is unsealed

Table 1: Average dense layer overhead for 100 executions. This comparison includes two ways of compiling the code, i.e. with and without the g++ optimization parameter -O3.

Matrix Dimension	MLCapsule Layer (no -O3)	MLCapsule Layer	Standard Layer (no -O3)	Standard Layer
256×256	0.401ms	0.234ms	0.164ms	0.020ms
512×512	1.521ms	0.865ms	0.637ms	0.062ms
1024×1024	6.596ms	4.035ms	2.522ms	0.244ms
2048×2048	37.107ms	26.940ms	10.155ms	1.090ms
4096×4096	128.390ms	96.823ms	40.773ms	4.648ms

Table 2: Average convolution layer (above) and depthwise separable convolution layer (below) overhead for 100 executions and 3×3 filters.

Input/Output Size	MLCapsule Layer	Standard Layer	Factor
64×224×224	80ms	66ms	1.21
512×28×28	61ms	51ms	1.20
512×14×14	30ms	13ms	2.31
64×224×224	41ms	27ms	1.52
512×28×28	7ms	7ms	1.00
512×14×14	2ms	2ms	1.00

Table 3: Average neural network evaluation overhead for 100 executions.

Network	MLCapsule Layer	Standard Layer	Factor
VGG-16	1145ms	736ms	1.55
MobileNet	427ms	197ms	2.16

MLCapsule layer Standard layer Unsealing Uns

Figure 6: Difference between MLCapsule and standard layer.

and forwarded to the standard layer function. MLCapsule layers are designed to be executed inside the enclave by providing ECALL's. See Figure 6 for more details. This approach provides means to build MLCapsule secure neural networks in a modular way.

Since the sealed data is provided from outside the enclave, it has to be copied to the enclave before unsealing. Otherwise, unsealing will fail. We measure the execution time of MLCapsule layers as the time it takes to: (1) allocate all required local memory, (2) copy the sealed data to the inside of the enclave, (3) unseal the data, (4) perform the standard computation using the unsealed weights and plaintext input and finally (5) free the allocated memory.

Implementation Issues. Applications are limited to 90 MB of memory, because there is currently no SGX support for memory swapping. Linux provides an OS based memory swap, but the enclave size has to be final and should not expand to prevent page faults and degraded performance. This performance issue is visible in our results for a dense layer with weight matrix of size 4096×4096 . In this case, the MLCapsule layer allocates $4\times4096\times4096=64$ MB for the matrix and a temporary array of the same size for the sealed data. Thus, we exceed the 90 MB limit, which leads to a decrease in performance. In particular, the execution of such a layer took 1s and after optimization, the execution time decreased to 0.097s.

We overcome this problem by encrypting the data in chunks of 2 MB. This way the only large data array allocated inside the MLCapsule layer is the memory of the weight matrix. Using 2 MB chunks the MLCapsule layers requires only around 2×2 MB more memory than implementations of standard ML layers. We implemented this optimization only for data that requires more than 48 MB, e.g. in case of a VGG-16 network we used it for the first and second dense layer.

7.2 Evaluation

Evaluation of Layers. Comparisons between MLCapsule and standard layers are given in Table 1 and Table 2. It is worth noting that those results can be used to approximate the overhead of MLCapsule for arbitrarily networks. However, below we evaluate two full networks for image recognition. We do not compare directly to state-of-the-art cryptographic solutions because they use a server side ML model architecture. On the other hand, we compare the direct execution of the computation on the CPU and inside SGX, as those results provide the overhead of implementing MLCapsule.

From Table 2, we see that the overhead for convolutional layers averages around 1.2, with a peak to 2.3 with inputs of size $512 \times 14 \times 14$. In case of depth-wise separable convolutional layers, the execution time of MLCapsule layers is comparable with the execution time of standard layers. In this case, the difference is almost not noticeable for smaller input sizes. Applying additional activation functions or/and pooling after the convolution does not significantly influence the execution time. In case of dense layers,

we observe a larger overhead. For all the kernel dimension the overhead is not larger than 25 times. We also evaluate dense layers without -O3 optimization. The results show that in such a case the overhead of MLCapsule is around the factor 3. We suspect that the compiler is able to more efficiently optimize the source code that does not use SGX specific library calls. Hence, the increase in performance is due to the optimized compilation.

Evaluation of Full Classification. In this subsection we combine MLCapsule layers to form popular ML networks, i.e. VGG-16 and MobileNet. The first network can be used to classify images and work with the ImageNet dataset (size of images $224 \times 224 \times 3$). Similar, the second network can also be used for the same task. It is easy to see from Table 3 that MLCapsule has around 2-times overhead in comparison to an execution of the classification using standard layer and without the protection of SGX.

8 ADVANCED DEFENSES

Recently, researchers have proposed multiple attacks against MLaaS: reverse engineering [32], model stealing [46, 47], and membership inference [39, 40]. As mentioned in Section 2, these attacks only require a black-box access (API) to the target ML model, therefore, their attack surface is orthogonal to the one caused by providing the model's white-box access to an adversary. As shown in the literature, real-world MLaaS suffers from these attacks [39, 46].

In this section, we propose two new defense mechanisms against reverse engineering and membership inference (test-time defense). We show that these mechanisms together with a proposed defense for model stealing can be seamlessly integrated into MLCapsule.

8.1 Detecting Reverse Engineering

Oh et al. have shown that by only having black box access to neural network model, a wide variety of model specifics can be inferred [32]. Such information includes training procedure, type of nonlinearities, and filter sizes, which thereby turns the model step by step into a white-box model. This equally affects the safety of intellectual property and increases attack surface.

Methodology. Up to now, no defense has been proposed to counter this attack. We propose the first defense in this domain and show that it can be implemented seamlessly into MLCapsule. We observe that the most effective method proposed by Oh et al. [32] relies on crafted input patterns that are distinct from benign input. Therefore, we propose to train a classifier that detects such malicious inputs. Once a malicious input is recognized, service can be immediately denied which stops the model from leaking further information. Note that also this detection is running on the client and therefore the decision to deny service can be taken on the client and does not require interaction with a server.

We focus on the kennen-io method by Oh et al. [32] as it leads to the strongest attack. We also duplicate the test setup on the MNIST dataset.⁵ In order to train a classifier to detect such malicious inputs, we generate 4,500 crafted input image with the kennen-io method and train a classifier against 4,500 benign MNIST images. We use

the following deep learning architecture:

```
Input Image \rightarrow conv2d(5×5, 10) \max(2\times2) \operatorname{conv2d}(5\times5, 20) \max(2\times2) \operatorname{FullyConnected}(50) \operatorname{FullyConnected}(2) \operatorname{softmax} \rightarrow \operatorname{Output}
```

where $conv2d(a \times a, b)$ denotes a 2d convolution with a by a filter kernel and b filters, $max(c \times c)$ denotes max-pooling with a kernels size of c by c, FullyConnected(d) denotes a fully connected layer with d hidden units and softmax a softmax layer. The network uses ReLU non-linearties and drop-out for regularization. We represent the output as 2 units – one for malicious and one for benign. We use a cross-entropy loss to train the network with the ADAM optimizer.

Evaluation. We compose a test set of additional 500 malicious input samples and 500 benign MNIST samples that are disjoint from the training set. The accuracy of this classifier is 100%, thereby detecting each attack on the first malicious example, which in turn can be stopped immediately by denying the service. Meanwhile, no benign sample leads to a denied service. This is a very effective protection mechanism that seamlessly integrates into our deployment model and only adds 0.832 ms (per image classification) to the overall computation time. While we are able to show very strong performance on this MNIST setup, it has to be noted that the kennen-io method is not designed to be "stealthy" and future improvements of the attack can be conceived that make detection substantially more difficult.

8.2 Detecting Model Stealing

Model stealing attacks aim at obtaining a copy from an MLaaS model [35, 46]. Usually, this is done by training a substitute on samples rated by the victim model, resulting in a model with similar behavior and/or accuracy. Hence, successful model stealing leads to the direct violation of the service provider's intellectual property. Very recently, Juuti el al. [24] propose a defense, namely Prada, to mitigate this attack which we implement in MLCapsule.

Prada maintains a growing set of user-submitted queries. Whether a query is appended to this growing set depends on the minimum distance to previous queries and a user set threshold. Benign queries lead to a constant growing set, whereas Juuti et al. show that malicious samples generally do not increase set size. Hence, an attack can be detected by the difference in the growth of those sets.

As the detection is independent of the classifier, it can be easily implemented in MLCapsule. The resulting computation overhead depends heavily on the user submitted queries [24]. We thus measure the general overhead of first loading the data in the enclave and second of further computations.

Juuti et al. state that the data needed per client is 1-20MB. We plot the overhead with respect to the data size in Figure 7. We observe that the overhead for less than 45MB is below 0.1s. Afterwards, there is a sharp increase, as the heap size of the enclave is 90MB: storing more data requires several additional memory operations. For each new query, we further compute its distance to all previous

⁵http://yann.lecun.com/exdb/mnist/

Table 4: Overhead of detecting a model stealing attack, Prada. We assume 3000 samples in the detection set, enough to query 5000 benign samples.

Dataset	Size	SGX	Outside SGX	Factor
MNIST	1×28×28	35ms	2.6ms	13.5
CIFAR	$3\times32\times32$	38ms	10.1ms	3.8
GTSRB	$3\times215\times215$	2200ms	440ms	5




Figure 7: Overhead in seconds to load additional data for a defense mechanism preventing model stealing, namely Prada [24].

queries in the set—a costly operation. We assume a set size of 3,000, corresponding to roughly 5,000 benign queries. Table 4 shows that a query on the GTSRB dataset⁶ is delayed by almost 2s, or a factor of five. For datasets with smaller samples such as CIFAR ⁷ or MNIST, the delay is around 35ms.

Membership Inference

Shokri et al. demonstrate that ML models are vulnerable to membership inference [40] due to overfitting: A trained model is more confident facing a data point it was trained on than facing a new one (reflected in the model's posterior). They propose to use a binary classifier to perform membership inference, and rely on shadow models to derive the data for training the classifier. Even though the attack is effective, it is complicated and expensive to mount. More recently, Salem et al. relax the assumption of the threat model by Shokri et al. and show that an adversary only needs the posterior's entropy to achieve a similar performance [39]. This attack causes more severe privacy damages, thus we use it in our evaluation. However, we emphasize that our defense is general and can be applied to other membership inference attacks as well.

Algorithm 2: Noising mechanism to mitigate membership inference attack.

Input: Posterior of a data point *P*, Noise posterior T

Output: Noised posterior P'

1: Calculate $\eta(P)$ # the entropy of P

2: $\alpha = 1 - \frac{\eta(P)}{\log |P|}$ # the magnitude of the noise 3: $P' = (1 - c\alpha)P + c\alpha T$

4: return P'

Methodology. We define the posterior of an ML model predicting a certain data point as a vector P, and each class i's posterior is denoted by P_i . The entropy of the posterior is defined as:

$$\eta(P) = -\sum_{P_i \in P} P_i \log P_i.$$

Lower entropy implies the ML model is more confident on the corresponding data point. Following Salem et al., the attacker predicts a data point with entropy smaller than a certain threshold as a member of the target model's training set, and vice versa [39].

The principle of our defense is adding more (less) noise to a posterior with low (high) entropy, and publishing the noised posterior. The method is listed in Algorithm 2. In Step 1, we calculate $\eta(P)$. In Step 2, we derive from $\eta(P)$ the magnitude of the noise, i.e.,

$$\alpha = 1 - \frac{\eta P}{\log |P|}.$$

Here, $\frac{\eta P}{\log |P|}$ is the normalized $\eta(P)$ which lies in the range between 0 and 1. Hence, lower entropy implies higher α , i.e., larger noise, which implements the intuition of our defense. However, according to our experiments, directly using α generates too much noise to P. Thus, we introduce a hyperparameter, c, to control the magnitude α : c is in the range between 0 and 1, its value is set following cross validation. In Step 3, we add noise T to P with $c\alpha$ as the weight. There are multiple ways to initialize *T*, here, we define it as the class distribution of the training data. Larger $c\alpha$ will cause the final noised P' to be more similar to the prior, which reduces the information provided by the ML model.

Our defense is a test-time defense, i.e., it does not modify the original ML model. Meanwhile, previous defense mechanisms modify the ML model which may affect the model's performance [39, 40]. Moreover, previous mechanisms treat all data points equally, even those that are unlikely to be in the training data. In contrary, our defense mechanism adds different noise based on the entropy of the posterior.

Evaluation. For demonstration, we perform experiments with VGG-16 trained on the CIFAR-100 dataset. Our experimental setup

⁶http://benchmark.ini.rub.de/

⁷https://www.cs.toronto.edu/~kriz/cifar.html.

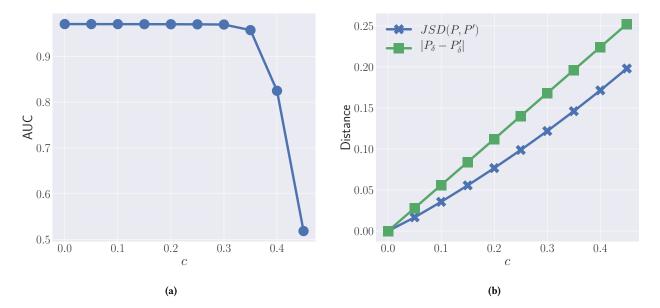


Figure 8: The relation between the hyperparameter controlling the noise magnitude, i.e., c, and (a) membership prediction performance and (b) target model utility. $\mathcal{J}SD(P,P')$ denotes the Jensen-Shannon divergence between the original posterior P and the noised P', while $|P_{\delta} - P'_{\delta}|$ is the absolute difference between the correct class's posterior (P_{δ}) and the noised one (P'_{δ}) .

follows previous works [39]. Mainly, we divide the dataset into two equal parts, and use one part to train the VGG model, i.e., the training set, the other part is referred to as the testing set. Every data point in the training set is essentially a member for membership inference, while every data point in the testing set is a non-member.

Figure 8a shows the result. As we can see, setting c to 0, i.e., not adding any noise, results in a high AUC score (0.97) which means the attack is very effective. The AUC score starts dropping when increasing the value of c as expected. When the value of c approaches 0.5, the AUC score drops to almost 0.5, this means the best an attacker can do is random guessing the membership state of a point.

We also study the utility of our defense, i.e., how added noise affects the performance of the original ML model. From Algorithm 2, we see that our defense mechanism only adjusts the confidence values in a way that the predicted labels stay the same. This means the target model's accuracy does not change.

To perform an in-depth and fair utility analysis, we report the amount of noise added to the posterior. Concretely, we measure the Jensen-Shannon divergence between the original posterior (P) and the noised one (P'), denoted by JSD(P, P'), following previous works [4, 30]. Formally, JSD(P, P') is defined as:

$$JSD(P, P') = \sum_{P_i \in P} P_i \log \frac{P_i}{M_i} + P'_i \log \frac{P'_i}{M_i}$$

where $M_i = \frac{P_i + P_i'}{2}$. Moreover, we measure the absolute difference between the correct class's original posterior (P_δ) and its noised version (P_δ') , i.e., $|P_\delta - P_\delta'|$, this is also referred to as the expected estimation error in the literature [7, 41, 51]. In Figure 8b, we see that both $\Im SD(P,P')$ and $|P_\delta - P_\delta'|$ increase monotonically with the

amount of noise being added (reflected by c). However, when c is approaching 0.5, i.e., our defense mechanism can mitigate the membership inference risk completely, JSD(P,P') and $|P_{\delta}-P'_{\delta}|$ are still both below 0.25: Our defense mechanism is able to preserve the target model's utility to a large extent.

We measure the overhead of this defense and it only adds 0.026ms to the whole computation. This indicates our defense can be very well integrated into MLCapsule.

9 DISCUSSION

Our formal proof shows that our setting is indistinguishable from the access to an MLaaS API. We want to emphasize that cryptographic proofs do not guarantee security in the case of side channel attacks, for example timing attacks. Also other attacks on classifiers than the ones discussed here exist, for example evasion attacks. Such evasion attacks were found to be hard to defend [12]. Current state-of-the-art defenses are however applied before inference [21, 27, 38], and can thus be integrated into MLCapsule without overhead. Additionally, any defense or mitigation in MLCapsule is transparent, as the code can be inspected, and thus MLCapsule does not rely on security by obscurity.

Finally, in MLCapsule, the detection of an attack is promising: in contrast to the standard MLaaS setting, an enclave is tied to a particular person. It is hence possible to identify a user who submitted malicious data. Additionally, setting up a fresh enclave requires some effort. This implies that the service provider is actually able to persecute or expel clients who are found out to run attacks.

10 CONCLUSION

We have presented a novel deployment mechanism for ML models. It provides the same level of security of and control over the model as conventional server-side MLaaS execution. At the same time, it provides perfect privacy of the user data as it never leaves the client. In addition, we show the extensibility of our approach and how it facilities a range of features from pay-per-view monetization to advanced model protection mechanisms – including the very latest work on model stealing and reverse engineering.

We believe that this is an important step towards the overall vision of data privacy in machine learning [36] as well as secure ML and AI [43]. Beyond the presented work and direct implications on data privacy and model security – this line of research implements another line of defense that in the future can help to tackle several problems in security related issues of ML that the community has been struggling to make sustainable progress. For instance, a range of attacks from membership inference, reverse engineering to adversarial perturbations rely on repeated queries to a model. Our deployment mechanism provides a framework that is compatible with wide spread use of ML models – but yet can control or mediate access to the model directly (securing the model) or indirectly (advanced protection against inference attacks).

REFERENCES

- Yossi Adi, Carsten Baum, Moustapha Cisse, Benny Pinkas, and Joseph Keshet. 2018. Turning Your Weakness Into a Strength: Watermarking Deep Neural Networks by Backdooring. In Proceedings of the 2018 USENIX Security Symposium (USENIX Security). USENIX.
- [2] JP Aumasson and Luis Merino. 2016. SGX Secure Enclaves in Practice: Security and Crypto Review. In Proceedings of the 2016 Black Hat (Black Hat).
- [3] Shai Avidan and Moshe Butman. 2006. Blind Vision. In Proceedings of the 2006 European Conference on Computer Vision (ECCV). Springer, 1–13.
- [4] Michael Backes, Mathias Humbert, Jun Pang, and Yang Zhang. 2017. walk2friends: Inferring Social Links from Mobility Profiles. In Proceedings of the 2017 ACM SIGSAC Conference on Computer and Communications Security (CCS). ACM, 1943– 1957.
- [5] Manuel Barbosa, Bernardo Portela, Guillaume Scerri, and Bogdan Warinschi. 2016. Foundations of Hardware-Based Attested Computation and Application to SGX. In Proceedings of the 2016 IEEE European Symposium on Security and Privacy (Euro S&P). IEEE, 245–260.
- [6] Erick Bauman, Huibo Wang, Mingwei Zhang, and Zhiqiang Lin. 2018. SGXElide: Enabling Enclave Code Secrecy via Self-modification. In Proceedings of the 2018 International Symposium on Code Generation and Optimization (CGO). ACM, 75–86.
- [7] Pascal Berrang, Mathias Humbert, Yang Zhang, Irina Lehmann, Roland Eils, and Michael Backes. 2018. Dissecting Privacy Risks in Biomedical Data. In Proceedings of the 2018 IEEE European Symposium on Security and Privacy (Euro S&P). IEEE.
- [8] Raphael Bost, Raluca Ada Popa, Stephen Tu, and Shafi Goldwasser. 2015. Machine Learning Classification over Encrypted Data. In Proceedings of the 2015 Network and Distributed System Security Symposium (NDSS). Internet Society.
- [9] Ferdinand Brasser, Urs Muller, Alexandra Dmitrienko, Kari Kostiainen, Srdjan Capkun, and Ahmad-Reza Sadeghi. 2017. Software Grand Exposure: SGX Cache Attacks Are Practical. In Proceedings of the 2017 USENIX Workshop on Offensive Technologies (WOOT). USENIX.
- [10] Ernie Brickell and Jiangtao Li. 2010. Enhanced Privacy ID from Bilinear Pairing for Hardware Authentication and Attestation. In Proceedings of the 2010 IEEE International Conference on Social Computing (SocialCom). IEEE, 768–775.
- [11] Jo Van Bulck, Marina Minkin, Ofir Weisse, Daniel Genkin, Baris Kasikci, Frank Piessens, Mark Silberstein, Thomas F. Wenisch, Yuval Yarom, and Raoul Strackx. 2018. Foreshadow: Extracting the Keys to the Intel SGX Kingdom with Transient Out-of-Order Execution. In Proceedings of the 2018 USENIX Security Symposium (USENIX Security). USENIX, 991–1008.
- [12] Nicholas Carlini and David Wagner. 2017. Towards Evaluating the Robustness of Neural Networks. In Proceedings of the 2017 IEEE Symposium on Security and Privacy (S&P). IEEE, 39–57.
- [13] Victor Costan, Ilia Lebedev, and Srinivas Devadas. 2016. Sanctum: Minimal Hardware Extensions for Strong Software Isolation. In Proceedings of the 2016 USENIX Security Symposium (USENIX Security). USENIX, 857–874.
- [14] Nathan Dowlin, Ran Gilad-Bachrach, Kim Laine, Kristin Lauter, Michael Naehrig, and John Wernsing. 2016. CryptoNets: Applying Neural Networks to Encrypted Data with High Throughput and Accuracy. In Proceedings of the 2016 International Conference on Machine Learning (ICML). JMLR, 201–210.
- [15] Ben Fisch, Dhinakaran Vinayagamurthy, Dan Boneh, and Sergey Gorbunov. 2017. Iron: Functional Encryption using Intel SGX. In Proceedings of the 2017

- ACM SIGSAC Conference on Computer and Communications Security (CCS). ACM, 765–782.
- [16] Matt Fredrikson, Somesh Jha, and Thomas Ristenpart. 2015. Model Inversion Attacks that Exploit Confidence Information and Basic Countermeasures. In Proceedings of the 2015 ACM SIGSAC Conference on Computer and Communications Security (CCS). ACM, 1322–1333.
- [17] Matt Fredrikson, Eric Lantz, Somesh Jha, Simon Lin, David Page, and Thomas Ristenpart. 2014. Privacy in Pharmacogenetics: An End-to-End Case Study of Personalized Warfarin Dosing. In Proceedings of the 2014 USENIX Security Symposium (USENIX Security). USENIX, 17–32.
- [18] Zhongshu Gu, Heqing Huang, Jialong Zhang, Dong Su, Ankita Lamba, Dimitrios Pendarakis, and Ian Molloy. 2018. Securing Input Data of Deep Learning Inference Systems via Partitioned Enclave Execution. CoRR abs/1807.00969 (2018).
- [19] Jamie Hayes, Luca Melis, George Danezis, and Emiliano De Cristofaro. 2017. LOGAN: Evaluating Privacy Leakage of Generative Models Using Generative Adversarial Networks. CoRR abs/1705.07663 (2017).
- [20] Andrew G. Howard, Menglong Zhu, Bo Chen, Dmitry Kalenichenko, Weijun Wang, Tobias Weyand, Marco Andreetto, and Hartwig Adam. 2017. MobileNets: Efficient Convolutional Neural Networks for Mobile Vision Applications. CoRR abs/1704.04681 (2017).
- [21] Xiaowei Huang, Marta Kwiatkowska, Sen Wang, and Min Wu. 2017. Safety Verification of Deep Neural Networks. In Proceedings of the 2017 International Conference on Computer Aided Verification (CAV). Springer, 3–29.
- [22] Tyler Hunt, Congzheng Song, Reza Shokri, Vitaly Shmatikov, and Emmett Witchel. 2018. Chiron: Privacy-preserving Machine Learning as a Service. CoRR abs/1803.05961 (2018).
- [23] Nick Hynes, Raymond Cheng, and Dawn Song. 2018. Efficient Deep Learning on Multi-Source Private Data. CoRR abs/1807.06689 (2018).
- [24] Mika Juuti, Sebastian Szyller, Alexey Dmitrenko, Samuel Marchal, and N. Asokan. 2018. PRADA: Protecting against DNN Model Stealing Attacks. CoRR abs/1805.02628 (2018).
- [25] Sangho Lee, Ming-Wei Shih, Prasun Gera, Taesoo Kim, Hyesoon Kim, and Marcus Peinado. 2017. Inferring Fine-grained Control Flow Inside SGX Enclaves with Branch Shadowing. In Proceedings of the 2017 USENIX Security Symposium (USENIX Security). USENIX, 557–574.
- [26] Jian Liu, Mika Juuti, Yao Lu, and N. Asokan. 2017. Oblivious Neural Network Predictions via MiniONN Transformations. In Proceedings of the 2017 ACM SIGSAC Conference on Computer and Communications Security (CCS). ACM, 619–631.
- [27] Aleksander Madry, Aleksandar Makelov, Ludwig Schmidt, Dimitris Tsipras, and Adrian Vladu. 2017. Towards Deep Learning Models Resistant to Adversarial Attacks. CoRR abs/1706.06083 (2017).
- [28] Sinisa Matetic, Mansoor Ahmed, Kari Kostiainen, Aritra Dhar, David Sommer, Arthur Gervais, Ari Juels, and Srdjan Capkun. 2017. ROTE: Rollback Protection for Trusted Execution. In Proceedings of the 2017 USENIX Security Symposium (USENIX Security). USENIX, 1289–1306.
- [29] Luca Melis, Congzheng Song, Emiliano De Cristofaro, and Vitaly Shmatikov. 2018. Inference Attacks Against Collaborative Learning. CoRR abs/1805.04049 (2018).
- [30] Prateek Mittal, Charalampos Papamanthou, and Dawn Song. 2013. Preserving Link Privacy in Social Network Based Systems. In Proceedings of the 2013 Network and Distributed System Security Symposium (NDSS). Internet Society.
- [31] Payman Mohassel and Yupeng Zhang. 2017. SecureML: A System for Scalable Privacy-Preserving Machine Learning. In Proceedings of the 2017 IEEE Symposium on Security and Privacy (S&P). IEEE, 19–38.
- [32] Seong Joon Oh, Max Augustin, Bernt Schiele, and Mario Fritz. 2018. Towards Reverse-Engineering Black-Box Neural Networks. In Proceedings of the 2018 International Conference on Learning Representations (ICLR).
- [33] Olga Ohrimenko, Felix Schuster, Cedric Fournet, Aastha Mehta, Sebastian Nowozin, Kapil Vaswani, and Manuel Costa. 2016. Oblivious Multi-Party Machine Learning on Trusted Processors. In Proceedings of the 2016 USENIX Security Symposium (USENIX Security). USENIX, 619–636.
- [34] Tribhuvanesh Orekondy, Seong Joon Oh, Bernt Schiele, and Mario Fritz. 2018. Understanding and Controlling User Linkability in Decentralized Learning. CoRR abs/1805.05838 (2018).
- [35] Nicolas Papernot, Patrick McDaniel, and Ian Goodfellow. 2016. Transferability in Machine Learning: from Phenomena to Black-Box Attacks using Adversarial Samples. CoRR abs/1605.07277 (2016).
- [36] Nicolas Papernot, Patrick McDaniel, Arunesh Sinha, and Michael Wellman. 2018. SoK: Towards the Science of Security and Privacy in Machine Learning. In Proceedings of the 2018 IEEE European Symposium on Security and Privacy (Euro S&P). IEEE.
- [37] Rafael Pass, Elaine Shi, and Florian Tramér. 2017. Formal Abstractions for Attested Execution Secure Processors. In Proceedings of the 2017 Annual International Conference on the Theory and Applications of Cryptographic Techniques (EUROCRYPT). Springer, 260–289.
- [38] Aditi Raghunathan, Jacob Steinhardt, and Percy Liang. 2018. Certified Defenses against Adversarial Examples. In Proceedings of the 2018 International Conference

- on Learning Representations (ICLR).
- [39] Ahmed Salem, Yang Zhang, Mathias Humbert, Pascal Berrang, Mario Fritz, and Michael Backes. 2019. ML-Leaks: Model and Data Independent Membership Inference Attacks and Defenses on Machine Learning Models. In Proceedings of the 2019 Network and Distributed System Security Symposium (NDSS). Internet Society.
- [40] Reza Shokri, Marco Stronati, Congzheng Song, and Vitaly Shmatikov. 2017. Membership Inference Attacks Against Machine Learning Models. In Proceedings of the 2017 IEEE Symposium on Security and Privacy (S&P). IEEE, 3–18.
- [41] Reza Shokri, Georgios Theodorakopoulos, Jean-Yves Le Boudec, and Jean-Pierre Hubaux. 2011. Quantifying Location Privacy. In Proceedings of the 2011 IEEE Symposium on Security and Privacy (S&P). IEEE, 247–262.
- [42] Karen Simonyan and Andrew Zisserman. 2014. Very Deep Convolutional Networks for Large-Scale Image Recognition. CoRR abs/1409.1556 (2014).
- [43] Ion Stoica, Dawn Song, Raluca Ada Popa, David PaÂŁtterson, Michael W. Mahoney, Randy Katz, Anthony D. Joseph, Michael Jordan, Joseph M. Hellerstein, Joseph Gonzalez, Ken Goldberg, Ali Ghodsi, David Culler, and Pieter Abbeel. 2017. A Berkeley View of Systems Challenges for AI. CoRR abs/1712.05855 (2017).
- [44] Raoul Strackx and Frank Piessens. 2016. Ariadne: A Minimal Approach to State Continuity. In Proceedings of the 2016 USENIX Security Symposium (USENIX Security). USENIX, 875–892.
- [45] Florian Tramer and Dan Boneh. 2018. Slalom: Fast, Verifiable and Private Execution of Neural Networks in Trusted Hardware. CoRR abs/1806.03287 (2018).

- [46] Florian Tramér, Fan Zhang, Ari Juels, Michael K. Reiter, and Thomas Ristenpart. 2016. Stealing Machine Learning Models via Prediction APIs. In Proceedings of the 2016 USENIX Security Symposium (USENIX Security). USENIX, 601–618.
- [47] Binghui Wang and Neil Zhenqiang Gong. 2018. Stealing Hyperparameters in Machine Learning. In Proceedings of the 2018 IEEE Symposium on Security and Privacy (S&P). IEEE.
- [48] Wenhao Wang, Guoxing Chen, Xiaorui Pan, Yinqian Zhang, XiaoFeng Wang, Vincent Bindschaedler, Haixu Tang, and Carl A. Gunter. 2017. Leaky Cauldron on the Dark Land: Understanding Memory Side-Channel Hazards in SGX. In Proceedings of the 2017 ACM SIGSAC Conference on Computer and Communications Security (CCS). ACM, 2421–2434.
- [49] Samuel Yeom, Irene Giacomelli, Matt Fredrikson, and Somesh Jha. 2018. Privacy Risk in Machine Learning: Analyzing the Connection to Overfitting. In Proceedings of the 2018 IEEE Computer Security Foundations Symposium (CSF). IEEE
- [50] Jialong Zhang, Zhongshu Gu, Jiyong Jang, Hui Wu, Marc Ph. Stoecklin, Heqing Huang, and Ian Molloy. 2018. Protecting Intellectual Property of Deep Neural Networks with Watermarking. In Proceedings of the 2018 ACM Asia Conference on Computer and Communications Security (ASIACCS). ACM, 159–172.
- [51] Yang Zhang, Mathias Humbert, Tahleen Rahman, Cheng-Te Li, Jun Pang, and Michael Backes. 2018. Tagvisor: A Privacy Advisor for Sharing Hashtags. In Proceedings of the 2018 Web Conference (WWW). ACM, 287–296.