

Topological Graphic Passwords And Their Matchings Towards Cryptography

Bing Yao^{1,5}, Hui Sun¹, Xiaohui Zhang¹, Yarong Mu¹, Yirong Sun¹

Hongyu Wang^{2,‡}, Jing Su², Mingjun Zhang³, Sihua Yang³, Chao Yang⁴

¹ College of Mathematics and Statistics, Northwest Normal University, Lanzhou, 730070, CHINA

² School of Electronics Engineering and Computer Science, Peking University, Beijing, 100871, CHINA

³ School of Information Engineering, Lanzhou University of Finance and Economics, Lanzhou, 730030, CHINA

⁴ School of Mathematics, Physics & Statistics, Shanghai University of Engineering Science, Shanghai, 201620, CHINA

⁵ School of Electronics and Information Engineering, Lanzhou Jiaotong University, Lanzhou, 730070, CHINA

[‡] Hongyu Wang is the corresponding author with email: why1988jy@163.com

Abstract—Graphical passwords (GPWs) are convenient for mobile equipments with touch screen. Topological graphic passwords (Topsnut-gpws) can be saved in computer by classical matrices and run quickly than the existing GPWs. We research Topsnut-gpws by the matching of view, since they have many advantages. We discuss: configuration matching partition, coloring/labelling matching partition, set matching partition, matching chain, etc. And, we introduce new graph labellings for enriching Topsnut-matchings and show that these labellings can be realized for trees or spanning trees of networks. In theoretical works we explore Graph Labelling Analysis, and show that every graph admits our extremal labellings and set-type labellings in graph theory. Many of the graph labellings mentioned are related with problems of set matching partitions to number theory, and yield new objects and new problems to graph theory.

Keywords—Cryptography; graphical password; matching; partition; labelling.

I. INTRODUCTION

As known, public key and private key play important roles in cryptography nowadays. How to realize the authentication of public keys and private keys by ciphers with easy to use and high level security? Graphical passwords (GPWs) emerged for alternative to text-based passwords. GPWs have been researched and applied in the real life for a long time, for example, QR code is popular in electronic commerce, open screen graphic cipher for smart mobiles, and so on ([8], [2], [5]). The existing GPWs are lack of pictures frequently changed and occupy huge spaces of computer, and need users to learn more and have good memory, and do not support more individual ideas and personal making GPWs.

For overcoming weak limits of the existing GPWs, Wang *et al.* ([16], [17]) have designed Topological graphic passwords (Topsnut-gpws) by an idea of “topological structure pulsing number theory”. Clearly, Topsnut-gpw is a mathematical expression of nature, and can be storage into computer by canonical matrices, and be operated quickly in computer. Topsnut-gpws have such advantages: (i) no general polynomial algorithms for finding topological structures and colorings/labellings in graph theory, which are two basic

components for producing Topsnut-gpws; (ii) easily yield text-based passwords, and such procedure is irreversible; (iii) easily operating like gesture passwords used in mobiles with touch screen; (iv) allow personal knowledge into making Topsnut-gpws for long time remembering in mind; (v) huge spaces [30], for instant, there are $t_{23} \approx 2^{179}$ and $t_{24} \approx 2^{197}$, where t_p is the number of graphs of p vertices, and over 200 existing labellings [6], and so on. Thereby, Topsnut-gpws have provable security, computational security and unbreakable in nowadays’ computer. We will study Topsnut-gpws by the matching of view in this article.

A. Examples

Matching phenomena are popular and exist almost every where of the world, such as black and white, more and less, men and women, rich and poor, public and private, and even mathematics, also, is the matching of space structure and quantity. Matching is not a connection between two different things, but also connections of one-more things and more-more things. Matching is not a simple combination of two or more things, but a combination with restrictive conditions. Here, our matchings belong to mathematics and cryptograph.

In cryptography we can consider that a public key and a private key form an *authentication matching*. Sometimes, people want one public key vs two or more private keys. In [16] and [17], the authors have listed many advantages of Topsnut-gpws. One advantage of Topsnut-gpws is that Topsnut-gpws can produce easily text-based passwords with longer bytes as longer as desired. However, we cannot reconstruct the origin Topsnut-gpws from the text-based passwords made by them. This irreversibility also appears in Hash algorithm that is a one-way encryption system, that is, only encryption procedure, no decryption procedure.

We start our discussion with the following examples for showing Topsnut-gpws worked best in generating text-based passwords. In Fig.1, we can see a Topsnut-gpw K_4 having: Any two small circles (called vertices hereafter) are connected by an edge. Furthermore, we identify the vertices of the Topsnut-gpws T_1, T_2, T_3 pictured in Fig.1 that have the same

label into one vertex, the resulting graph is just K_4 , so we write this fact as $K_4 = \odot \langle T_i \rangle_1^3$ for briefness. A phenomenon is that any two caterpillars T_i and T_j have no the edge with the same label, we denote this phenomenon by $E(T_i) \cap E(T_j) = \emptyset$. However, the Topsnut-gpws H_1, H_2, H_3 shown in Fig.1 have common edges with the same labels, we denote this fact as $E(H_i) \cap E(H_j) \neq \emptyset$; and identifying the vertices of these Topsnut-gpws H_1, H_2, H_3 results in K_4 by deleting multiple edges, we write this case as $K_4 = \ominus (H_i)_1^3$. We denote the number of vertices of T_i as $|V(T_i)|$ for $i = 1, 2, 3$, where $V(G)$ is the set of vertices of a graph G . It is not hard to observe that $|V(T_i)| \neq |V(T_j)|$ as $i \neq j$. But, $|V(H_i)| = |V(H_j)|$ for $i \neq j$ in Fig.1, these H_1, H_2, H_3 are the spanning trees of K_4 . Spanning trees, such as spanning algorithms, Spanning Tree Protocol (STP), minimum spanning trees and spanning tree searches, are useful in today's scientific areas, especially, network security.

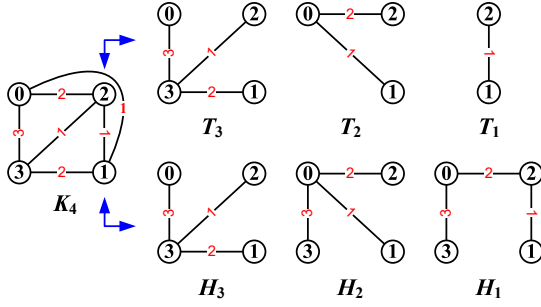


Fig. 1. Two decompositions of K_4 . The vertices and edges of each T_i and H_i are labelled with 0, 1, 2, 3.

We use three Topsnut-gpws T_1, T_2, T_3 shown in Fig.1 to generate three text-based passwords $D(T_1) = 112$, $D(T_2) = 110022$, $D(T_3) = 033312321$ for the purpose of encrypting electronic files. Moreover, we produce a little bit of complex text-based passwords below:

$$\begin{aligned} D_{123} &= D(T_1) + D(T_2) + D(T_3) = 112110022033312321 \\ D_{321} &= D(T_3) + D(T_2) + D(T_1) = 033312321110022112 \\ D_{132} &= D(T_1) + D(T_3) + D(T_2) = 112033312321110022. \end{aligned}$$

Clearly, D_{123} , D_{321} and D_{132} differ from to each other (notice that we have other three text-based passwords D_{213} , D_{231} and D_{312}). In fact, we can construct more complex text-based passwords by

$$D_T = \sum_{i=1}^m D(T_{j_i}) \quad (1)$$

with $1 \leq j_i \leq 3$ and $m \geq 2$, such that D_T has longer bytes as we desired. Also, we can get text-based passwords $D(H_i)$ from three Topsnut-gpws H_1, H_2, H_3 shown in Fig.1, and moreover

$$D_H = \sum_{i=1}^m D(H_{j_i}) \quad (2)$$

with $1 \leq j_i \leq 3$ and $m \geq 2$.

The second example for showing an important property of Topsnut-gpws. In Fig.2, we can walk along a path $1 \rightarrow 10 \rightarrow$

$21 \rightarrow 6 \rightarrow 13 \rightarrow 2 \rightarrow 9 \rightarrow 14$ to make two text-based passwords

$$\begin{aligned} T'_{vv} &= 1'1012141'10'1152110'21'681021'6'13 \\ &17216'13'2613'2'913192'9'14'135914' \end{aligned} \quad (3)$$

and

$$\begin{aligned} T'_{vev} &= 1'1110131215141'10'11131592110'21'567 \\ &891021'6'19131175216'13'15219613'2'119 \\ &151321192'9'2414189'14'1511731951914' \end{aligned} \quad (4)$$

or eliminating “'” from T'_{vv} and T'_{vev} for complex reason yields

$$\begin{aligned} T_{vv} &= 1101214110115211021681021613 \\ &172161326132913192914135914 \end{aligned} \quad (5)$$

and

$$\begin{aligned} T_{vev} &= 11110131215141101113159211021567 \\ &89102161913117521613152196132119 \\ &15132119292414189141511731951914 \end{aligned} \quad (6)$$

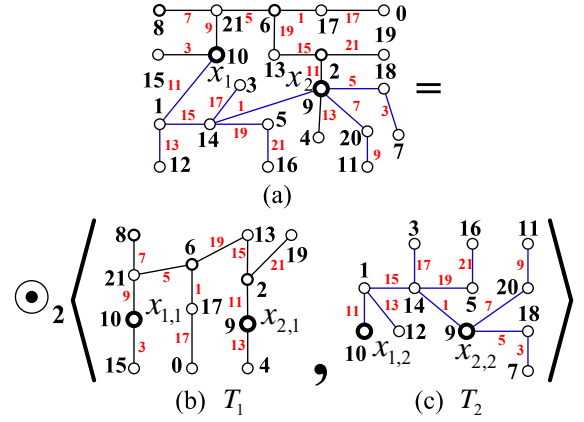


Fig. 2. (a) is a twin odd-elegant graph $\odot_2 \langle T_1, T_2 \rangle$ cited from [18].

It is not easy to reconstruct $\odot_2 \langle T_1, T_2 \rangle$ shown in Fig.2 by T_{vv} in (5) or T_{vev} in (6), thus large scale Topsnut-gpws are *provable security*, since reconstructing graph problems are related with some mathematical conjectures, such as Kelly-Ulam's Reconstruction Conjecture proposed in 1942. So we can claim that the procedure of getting text-based passwords from Topsnut-gpws is *irreversible*. On the other hand, large scale Topsnut-gpws made by various graph labellings are *computational security*, or *computationally unbreakable*, since *no polynomial algorithm* for finding all possible graph labellings for a given graph, also *no polynomial algorithm* for constructing all non-isomorphic graphs. We have *no polynomial algorithm* for listing all possible text-based passwords in a Topsnut-gpw, although it may be interesting and important.

We have to face the following problems:

Prob-1. In general, for $n \geq 4$, how many ways are there to form a Topsnut-gpw $K_n = \odot \langle T_i \rangle_1^m$ with $E(T_i) \cap E(T_j) = \emptyset$ as $i \neq j$, or $K_n = \ominus (H_i)_1^m$ with $V(K_n) = V(H_i)$ for $i \in [1, m]$ and $|E(H_i)| = |E(H_j)|$?

Prob-2. Are the text-based passwords D_T in (1) and D_H in (2), T_{vv} in (5) and T_{vev} in (6) computationally unbreakable?

Fig.3 tells us: Each Topsnut-gpw T_i (H_i) consists of one configuration $T_{i,1}$ ($H_{i,1}$) and one labelling $T_{i,2}$ ($H_{i,2}$). We need to know:

- How many configurations T_i or H_i are there for producing K_n with $n \geq 4$?
- How many type of label-functions (also, called labellings hereafter) do T_i and H_i admit?
- How to label the vertices or edges of T_i and H_i with the labellings admitted by T_i and H_i , such that identifying the vertices of T_i or H_i that have the same labels into one just results $K_n = \odot \langle T_i \rangle_1^m$ or $K_n = \ominus \langle H_i \rangle_1^m$?

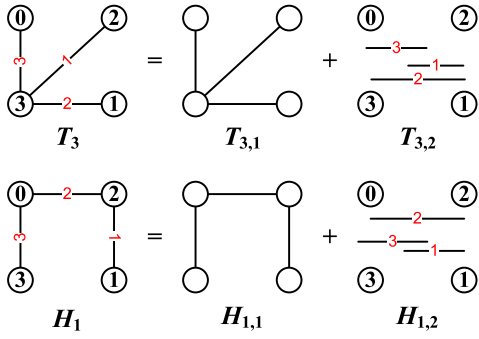


Fig. 3. Each Topsnut-gpw T_i (H_i) consists of a topological structure $T_{i,1}$ ($H_{i,1}$) and label-function $T_{i,2}$ ($H_{i,2}$).

A public key and a private key make an authentication true in network communication. Sometimes, an authentication needs one public key and two or more private keys, and vice versa. In other words, we can consider that “public key vs private key” forms some *matching partition* (authentication can be seen as a *matching entirety* that can be partitioned into several parts). Here, we will design matching type of Topsnut-gpws (*Topsnut-matchings*) for the requirement of protecting people’s information and property in networks.

The topic of matching partition contains: configuration matching partition, coloring/labelling matching partition, set matching partition, matching chain, etc. In the number of matching partitions, we have one-vs-one, one-vs-more and more-vs-more styles of matching partitions. Each matching mentioned here will be obtained by one of configuration-vs-configuration, configuration-vs-labelling, labelling-vs-labelling, and (configuration, labelling)-vs-(configuration, labelling).

A Topsnut-gpw was made by a *topological structure* (also, configuration, called *graph* in graph theory, which is a branch of mathematics) with a *label-function* (also, called graph labelling, or labelling for short) on vertices, or edges, or vertices and edges (see Fig.3). So, we are reasonable to consider any labeled graph of graph theory as a Topsnut-gpw here. Notice that Topsnut-gpws can be defined by many labellings shown in [6].

B. Preliminary

Before exploring solutions of Prob-1 and Prob-2, we need terminology, notations and particular graphs (=configurations) in our discussion, standard notations and definitions of graph theory can be found in [1]. A (p, q) -graph G has p vertices and q edges. We will use a notation $[a, b] = \{a, a + 1, \dots, b\}$, where m, n are integers with $0 \leq m < n$, and employ another notation $[\alpha, \beta]^o = \{\alpha, \alpha + 2, \dots, \beta\}$ with odd integers α, β holding $1 \leq \alpha < \beta$ true.

A *tree* is a graph in which any pair of two vertices x, y is connected by a unique path $P(x, y) = xu_1u_2 \dots u_my$; a *leaf* is a vertex of degree one; a *caterpillar* is a tree such that the deletion of all leaves of the tree results in a path; a *lobster* is a tree such that the deletion of all leaves of the tree produces just a caterpillar.

A *labelling* h of a graph G is a mapping $h : S \subseteq V(G) \cup E(G) \rightarrow [a, b]$ such that $h(x) \neq h(y)$ for any pair of elements x, y of S , and write the label set $h(S) = \{h(x) : x \in S\}$. A *dual labelling* h' of a labelling h is defined as: $h'(z) = \max h(S) + \min h(S) - h(z)$ for $z \in S$. Moreover, $h(S)$ is called *vertex label set* if $S = V(G)$, *edge label set* if $S = E(G)$, and $h(S)$ a *universal label set* if $S = V(G) \cup E(G)$.

We, in the following discussion, need four pairs of graph operations on four basic elements of vertex, edge, path and cycle as follows: In Fig.4, a *vertex-split operation* from (a) to (b); a *vertex-identifying operation* from (b) to (a); an *edge-split operation* from (c) to (d); and an *edge-identifying operation* from (d) to (c). Let $N(x)$ be the set of all neighbors of a vertex x , very often, $N(x)$ is called a *neighbor set*. In Fig.4 (b) and (d), after a series of vertex/edge-split operations, we have to emphasize that the neighbor sets hold $N(y') \cap N(y'') = \emptyset$, $N(u') \cap N(u'') = \emptyset$, $N(u') \cap N(v'') = \emptyset$, $N(v') \cap N(u'') = \emptyset$ and $N(v') \cap N(v'') = \emptyset$ true. The *path/cycle-split operation* and the *path/cycle-identifying operation* are shown in Fig.5, also, it stresses that the neighbor sets $N(u'_i) \cap N(u'_j) = \emptyset$ with $i, j \in [1, n]$.

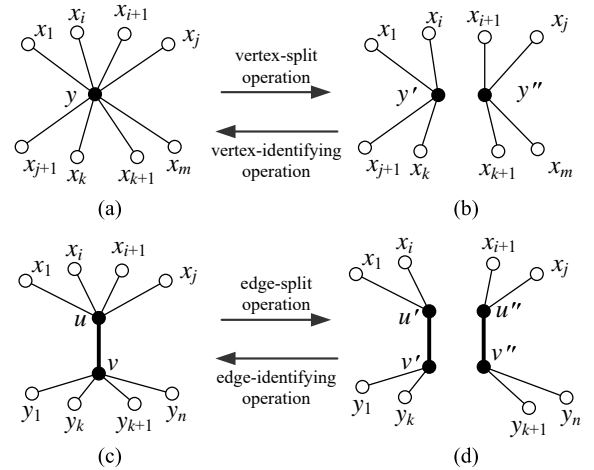


Fig. 4. A scheme for illustrating four graph operations: vertex-split operation; vertex-identifying operation; edge-split operation; edge-identifying operation.

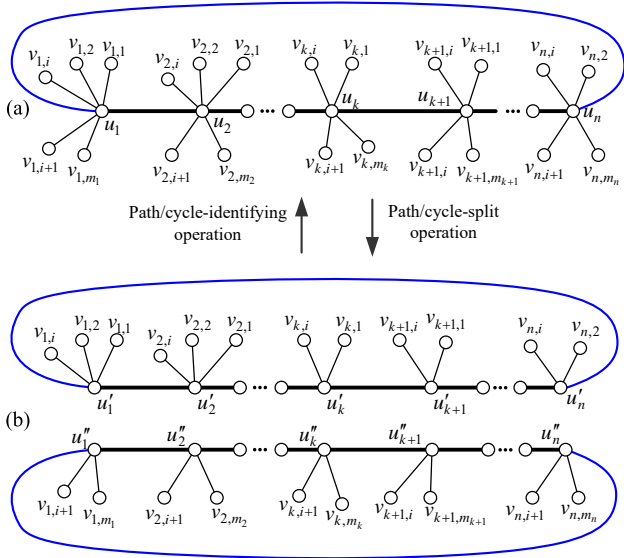


Fig. 5. A path-split operation from (a) to (b), and a path-identifying operation from (b) to (a). Also, a cycle-split operation from (a) to (b), and a cycle-identifying operation from (b) to (a).

II. MATCHING DIVERSITY

A. Configuration matching partition

Let W be a universal graph admitting a labelling f . If W contains edge disjoint subgraph G_i admitting a labelling f_i induced by f with $i \in [1, m]$ such that $V(W) = \bigcup_{i=1}^m V(G_i)$ and $E(W) = \bigcup_{i=1}^m E(G_i)$ after identifying the vertices of G_1, G_2, \dots, G_m having the same labels respectively (see an example $K_4 = \odot\langle T_i \rangle_1^3$ shown in Fig.1), we write this case as $W = \odot\langle G_i \rangle_1^m$, called an *edge-disjoint matching partition*. On the other hand, each G_i matches with the set $Z_i = \{G_1, G_2, \dots, G_m\} \setminus \{G_i\}$ on the edge-disjoint matching partition W , then we denote simply W as $\odot\langle G_i, Z_i \rangle$. Also, we allow the case $V(G_i) = V(W)$ with $i \in [1, m]$ in an edge-disjoint matching partition $W = \odot\langle G_i \rangle_1^m$.

In encryption of networks, each G_i with $i \in [1, m]$ can be considered as a *key*, so $W = \odot\langle G_i \rangle_1^m$ is just an *edge-disjoint authentication*. Furthermore, if G_i is a *public key*, and the set Z_i is a group of *private keys*, and $W = \odot\langle G_i, Z_i \rangle$ is just a *one-vs-more authentication*.

Similarly, we have a *multiple-edge matching partition* $W = \odot\langle H_i \rangle_1^m$ as each subgraph H_i admitting a labelling f_i induced by f with $i \in [1, m]$ holds $V(H_i) = V(W)$ and $E(H_i) \cap E(G_j) \neq \emptyset$ true for some $i \neq j$ by identifying the vertices of $\bigcup_{i=1}^m V(H_i)$ having the same labels together and eliminating multiple edges. A *mixed matching partition* $W = \bigcup_{i=1}^m G_i$ has some G_j holding $V(G_j) \neq V(W)$ and $E(G_s) \cap E(G_t) \neq \emptyset$ true for some $s \neq t$.

Experiment 1. Naturally, a labelling h and its dual labelling h' of a graph G are matching with each other, call (h, h') a *labelling matching* of G . Let G_1, G_2 be two copies of G , and let G_1 admit the labelling h , G_2 admit the dual labelling h' of h , so we have a graph $\odot\langle G_1, G_2 \rangle$ obtained by identifying those vertices of $V(G_1) \cup V(G_2)$ having the same labels together.

Experiment 2. As $W = K_n$, $V(K_n) = V(G_i)$ with $i = 1, 2$ and $E(G_1) \cap E(G_2) = \emptyset$ holding $E(K_n) = E(G_1) \cup E(G_2)$ true, we say G_1 and G_2 matching to each other and G_1 and G_2 are *complementary* to each other, moreover $K_n = \odot\langle G_1, G_2 \rangle$. Conversely, by doing a vertex-split operation to each vertex of K_n , so we split K_n into two subgraphs G_1 and G_2 .

Experiment 3. As W is an Euler graph, the edge-disjoint matching partition $W = \odot\langle G_i \rangle_1^m$ has its vertex degree $\deg_W(u) = \sum_{i=1}^m \deg_{G_i}(u)$ to be even for each vertex $u \in V(W)$. Here, W admits some v -set e -proper labelling (F, g) defined in Definition 6. For $m = 2$, G_1, G_2 are not Euler graphs, but $\odot\langle G_1, G_2 \rangle$ is an Euler graph, then we say both G_1, G_2 are *Euler matching* to each other.

Experiment 4. As W is a complete graph K_n , we have the following longstanding conjectures in graph theory, which show that the edge-disjoint matching partition $K_n = \odot\langle G_i \rangle_1^m$ may be *computationally unbreakable*:

(i) Anton Kotzig (1964) proposed the *Perfect 1-Factorization Conjecture*: For any $n \geq 2$, K_{2n} can be decomposed into $2n - 1$ perfect matchings such that the union of any two matchings forms a hamiltonian cycle of K_{2n} .

(ii) If each tree admits a graceful labelling, then this will settle down a well-known *Ringel-Kotzig Decomposition Conjecture* (Gerhard Ringel and Anton Kotzig, 1963; Alexander Rosa, 1967): A complete graph K_{2n+1} can be decomposed into $2n + 1$ edge-disjoint subgraphs that are all isomorphic to any given tree having n edges.

(iii) *K-T conjecture* (Gyaras and Lehel, 1978; Bela Bollobas, 1995): For integer $n \geq 3$, given n disjoint trees T_k having k vertices with respect to $k \in [1, n]$. Then the complete graph K_n can be decomposed into the union of n edge-disjoint trees H_k , such that $T_k \cong H_k$ with $k \in [1, n]$. Very often, we write this case as $\langle T_1, T_2, \dots, T_m | K_n \rangle$.

Thereby, the above three conjectures can help us to design more complex Topsnut-gpws to be computationally unbreakable.

B. Coloring/labelling matchings

Graph coloring/labellings are powerful and essential for designing Topsnut-gpws, let us see an example as follows:

Experiment 5. As W is a *maximal planar graph*, each G_i with $i \in [1, m]$ is a *semi-maximal planar graph* ([21], [22], [23], [24]) having a common even-cycle C , such that $E(G_i) \cap E(G_j) = E(C)$ for $i \neq j$. If each G_i is 4-colorable such that the even-cycle C is colored with 1, 2 only, then we do a series of cycle-identifying operations on m common even-cycles in G_1, G_2, \dots, G_m in to one. The resulting Topsnut-gpw, like a “book”, is denoted as $W = \odot_C\langle G_i \rangle_1^m$, and $G_i \cup G_j$ for $i \neq j$ is a maximal planar graph, we say $W = \odot_C\langle G_i \rangle_1^m$ to be a *maximal planar C-matching partition*. Each Topsnut-gpw G_i is as a “page” of the “book” W , and the common even-cycle C is as the “bone” of the “book” W . This “book” can be considered as an authentication too. It is not hard to see that there are two or more (infinite) “books” $W = \odot_C\langle G_i \rangle_1^m$.

Conversely, select a cycle L of a maximal planar graph G , and do an edge-split operation to each edge of the cycle L , so we split G into two semi-maximal planar graphs G^L and \overline{G}^L , and call G^L and \overline{G}^L to be matching to each other (see Fig.6). So, $G = \ominus_L(G^L, \overline{G}^L)$. Determining particular *semi-maximal planar matchings* (G^L, \overline{G}^L) can provide more complex models for authentication of public keys and private keys, such as both graphs $G^L - V(L)$ and $\overline{G}^L - V(L)$ are trees.

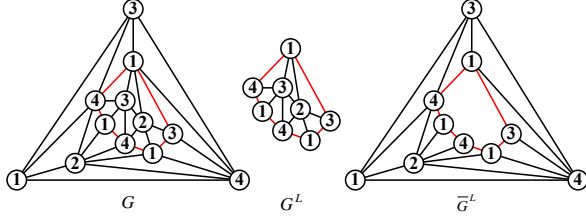


Fig. 6. A maximal planar graph $G = \ominus_L(G^L, \overline{G}^L)$ with its two semi-maximal planar graphs G^L and \overline{G}^L . As known, every planar graph is 4-colorable, no mathematical proof for this fact up to now.

Definition 1. ([6], [26], [33]) Suppose that a bipartite (p, q) -graph G with partition (X, Y) admits a vertex labelling $f : V(G) \rightarrow [0, 2q - 1]$, such that every edge uv is labeled as $f(uv) = |f(u) - f(v)|$ holding $f(E(G)) = [1, 2q - 1]^o$ true, we call f an *odd-graceful labelling* of G (called an *odd-graceful graph*). Furthermore, if G holds $\max\{f(x) : x \in X\} < \min\{f(y) : y \in Y\}$ ($f_{\max}(X) < f_{\min}(Y)$ for short) true, then f is called a *set-ordered odd-graceful labelling*. \square

In [27], we have expanded the odd-graceful labelling as: Let G be a (p, q) -graph, we have:

(i) If G admits a vertex labelling $f : V(G) \rightarrow [0, 2q]$ (it is allowed $f(E(G)) \subset [1, 2q]$), such that every edge uv is labeled as $f(uv) = |f(u) - f(v)|$ or $f(uv) = 2q - 1 - |f(u) - f(v)|$ and $f(E(G)) = [1, 2q - 1]^o$, then we call f a *pan-odd-graceful labelling*.

(ii) A k -matching *odd-graceful labelling* g of an odd-graceful labelling f of a (p, q) -Topsnut-gpw G is a vertex labelling defined on another graph H admitting $g : V(H) \rightarrow [0, 2q - 1]$, every edge $uv \in E(H)$ has its label $g(uv) = |g(u) - g(v)|$ holding $g(E(H)) = [1, 2q - 1]^o$ true, such that $f(V(G)) \cup g(V(H)) = [0, 2q]$, or $[0, 2q - 1]$ and $|f(V(G)) \cap g(V(H))| = k$. We call H with a k -matching odd-graceful labelling as an *odd-graceful Topsnut-matching* of G , denoted as $\odot(G, H)$. (see Fig. 7 and Fig.8)

(iii) A k -sequential *odd-graceful labelling* $h : V(G) \rightarrow [k, 2q - 1 + k]$ such that the induced edge labelling $h(uv) = |h(u) - h(v)|$ for $uv \in E(G)$ holding $g(E(G)) = [1, 2q - 1]^o$ true.

Definition 2. [34] A (p, q) -graph G admits a labelling $f : V(G) \rightarrow [0, 2q - 1]$ such that each edge $uv \in E(G)$ is labeled as $f(uv) = f(u) + f(v) \pmod{2q}$. If the set $f(E(G))$ of all edge labels is equal to $[1, 2q - 1]^o$, we call f an *odd-elegant labelling* of G (called an *odd-elegant graph*). \square

Finding all odd-graceful (odd-elegant) labellings of a Topsnut-gpw G admitting an odd-graceful (odd-elegant) labelling seems to be very difficult, and no way is for determining conditions for graphs admitting set-ordered odd-graceful (odd-elegant) labellings up to now. In Fig.7, we have six odd-graceful Topsnut-matchings $G_i = \odot_0(G, H_i)$ with $i \in [1, 6]$, since G admits an odd-graceful labelling. Here, $V(G_i) = V(G) \cup V(H_i)$ and $E(G_i) = E(G) \cup E(H_i)$ with $i \in [1, 6]$. Here, we present an algorithm for finding odd-graceful Topsnut-matchings.

ODD-GRACEFUL-GRAPH Algorithm:

Input: A connected (p, q) -graph G admitting an odd-graceful labelling f .

Output: A connected odd-graceful Topsnut-matching H admitting an odd-graceful labelling.

Step 1. Build up an integer set $R(f, G) = [0, 2q - 1] \setminus f(V(G))$ (or $R'(f, G) = [0, 2q] \setminus f(V(G))$), and make a candidate edge set $C_0 = \{x^o x^e : x^o, x^e \in R(f, G), x^o \text{ is odd, } x^e \text{ is even}\}$, and a graph H_0 is constructed by identifying the ends of edges of C_0 into one vertex, these ends have the same labels.

Step 2. If the graph H_k contains no two edges $x_i^o x_i^e$ and $x_j^o x_j^e$ holding $|x_i^o - x_i^e| = |x_j^o - x_j^e|$ true, go to Step 4; otherwise, go to Step 3.

Step 3. Do $H_{k+1} := x_i^o x_i^e + H_k - E(k + 1)$ with $E(k + 1) = \{x_j^o x_j^e : |x_j^o - x_j^e| = k + 1\} \subset C_0$ and $x_i^o x_i^e$ with $|x_i^o - x_i^e| = k + 1$, such that H_{k+1} is connected, go to Step 2.

Step 4. Return a connected Topsnut-matching H admitting an odd-graceful labelling.

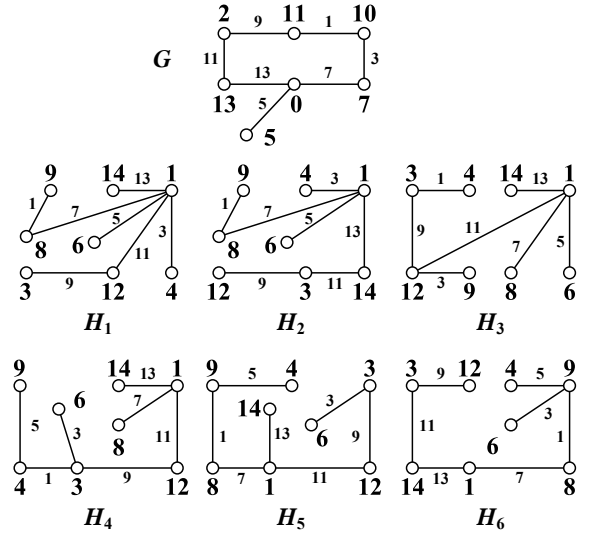


Fig. 7. A $(7, 7)$ -graph G admitting an odd-graceful labelling has six odd-graceful matchings H_i with a matching odd-graceful labelling g_i for $i \in [1, 6]$, such that each odd-graceful Topsnut-matching $\odot(G, H_i)$ holds $f(V(G)) \cup g_i(V(H_i)) = [0, 14]$ and $f(V(G)) \cap g_i(V(H_i)) = \emptyset$ true with $i \in [1, 6]$.

Let H be an (a pan)-odd-graceful graph with vertices v_1, v_2, \dots, v_p . If each vertex v_i matches with an (a pan)-

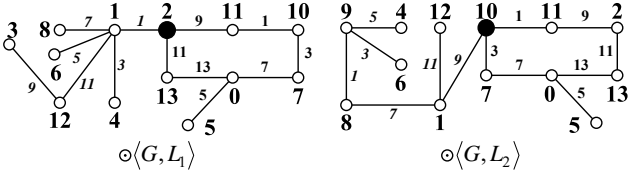


Fig. 8. Two odd-graceful Topsnut-matchings $\odot_1\langle G, L_1 \rangle$ and $\odot_1\langle G, L_2 \rangle$ of a $(7, 7)$ -graph G shown in Fig.7 hold $f(V(G)) \cap g_1(V(L_1)) = \{2\}$, $f(V(G)) \cap g_2(V(L_2)) = \{10\}$ and $f(V(G)) \cup g(V(L_i)) \neq [0, 14]$ true with $i = 1, 2$.

odd-graceful graph T_i with $i \in [1, p]$ such that there exists an odd-graceful Topsnut-matching $\odot_1\langle H, T_i \rangle_1^p$ obtained by identifying the vertex v_i with some vertex of T_i into one, these two vertices have been labeled with the same labels. We say $\odot_1\langle H, T_i \rangle_1^p$ a *(pan)-odd-graceful Topsnut-matching team* (see an example shown in Fig.9). Moreover, $\odot_1\langle H, T_i \rangle_1^p$ is called a *uniformly (pan)-odd-gracefully Topsnut-matching team* if $T_i \cong T_j$ for $i \neq j$.

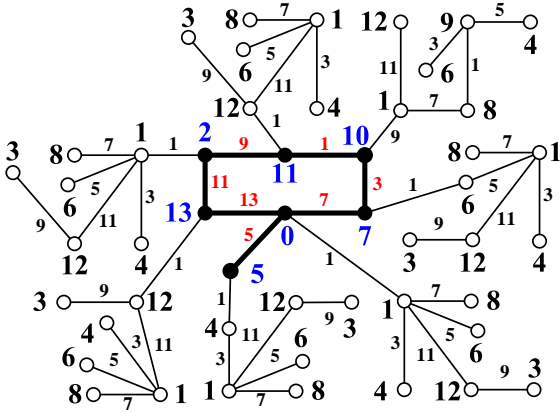


Fig. 9. An odd-graceful Topsnut-matching team.

Theorem 1. Each caterpillar H of p vertices has an *(a pan)-odd-graceful Topsnut-matching team* $\odot_1\langle H, T_i \rangle_1^p$.

Proof. There is a path $P = u_1 u_2 \cdots u_n$ in a caterpillar H , such that each u_i has its own leaf set $L(u_i) = \{v_{i,j} : j \in [1, m_i]\}$ with $m_i \geq 0$ and $i \in [1, n]$. And

$$V(H) = V(P) \cup L(u_1) \cup L(u_2) \cup \cdots \cup L(u_n),$$

see a caterpillar shown in Fig.10.

We define an odd-graceful labelling h of H by setting

$$h(u_1) = 0, h(v_{2,j}) = h(u_1) + 2j \text{ with } j \in [1, m_2];$$

$$h(u_3) = h(v_{2,m_2}) + 2 = 2(m_2 + 1),$$

$$h(v_{4,j}) = h(u_3) + 2j = 2(m_2 + 1 + j) \text{ with } j \in [1, m_4];$$

$$h(u_5) = h(v_{4,m_4}) + 2 = 2(m_2 + m_4 + 1) + 2 = 2(m_2 + m_4 + 2),$$

$$h(v_{6,j}) = h(u_5) + 2j = 2(m_2 + m_4 + 2 + j) \text{ with } j \in [1, m_6].$$

For $i \geq 2$, we let

$$h(u_{2i-1}) = h(v_{2i-2, m_{2i-2}}) + 2 = 2 \left(i - 1 + \sum_{k=1}^{i-1} m_{2k} \right)$$

and for $j \in [1, m_{2i}]$,

$$h(v_{2i,j}) = h(u_{2i-1}) + 2j = 2 \left(i - 1 + j + \sum_{k=1}^{i-1} m_{2k} \right).$$

Clearly, $h(v_{2i-2, m_{2i-2}}) < h(u_{2i-1})$ and $h(v_{2i,j}) < h(v_{2i,j+1})$ with $j \in [1, m_{2i} - 1]$ and $i \geq 2$.

Case 1. n is even.

We set $h(u_n) = h(v_{n, m_n}) + 1$, an odd integer, and $h(v_{n-1,j}) = h(u_n) + 2j$ with $j \in [1, m_{n-1}]$. Notice that $h(u_n) - h(v_{n, m_n}) = 1$. Furthermore, we have $h(u_{n-2}) = h(v_{n-1, m_{n-1}}) + 2$, and $h(v_{n-3,j}) = h(u_{n-2}) + 2j$ with $j \in [1, m_{n-3}]$.

For $i \geq 1$, $h(u_{n-2i}) = h(v_{n-2i+1, m_{n-2i+1}}) + 2$, and $h(v_{n-2i-1,j}) = h(u_{n-2i}) + 2j$ with $j \in [1, m_{n-2i-1}]$. As $2i = n - 2$, $h(u_2) = h(v_{3, m_3}) + 2$, and $h(v_{1,j}) = h(u_2) + 2j$ with $j \in [1, m_1]$.

Case 2. n is odd.

We set $h(u_n) = h(v_{n-1, m_{n-1}}) + 2$ to be an even integer, so we label $h(v_{n,j}) = h(u_n) + j$ with $j \in [1, m_n]$, such that each $h(v_{n,j})$ is an odd integer. Then, $h(v_{n,1}) - h(u_n) = 1$. Next, let $h(u_{n-1}) = h(v_{n, m_n}) + 2$, and $h(v_{n-2,j}) = h(u_{n-1}) + 2j$ with $j \in [1, m_{n-2}]$. In general, we have $h(u_{n-2i+1}) = h(v_{n-2i+2, m_{n-2i+2}}) + 2$, and $h(v_{n-2i,j}) = h(u_{n-2i+1}) + 2j$ with $j \in [1, m_{n-2i}]$ for $i \geq 1$. As $2i = n - 1$, $h(u_2) = h(v_{1, m_{n-2i-2}}) + 2$, and $h(v_{1,j}) = h(u_2) + 2j$ with $j \in [1, m_1]$.

Notice that $h(v_{1, m_1}) = 2p - 3$ and $h(v_{1, m_1-1}) = 2p - 5$. So, we can use the induction to show h is a set-ordered odd-graceful labelling of the caterpillar T .

Now, we write a copy of the caterpillar T with an odd-graceful labelling h by H and define a set-ordered pan-odd-graceful labelling h^* of H as: $h^*(x) = h(x) + 1$ for each $x \in V(T) = V(H)$. Clearly,

$$h^*(V(H)) \cup h(V(T)) = [0, 2(p-1)]$$

and $h^*(V(H)) \cup h(V(T)) = \emptyset$. Now, we make another caterpillar $T - v_{n,1}$ with a labelling f defined by $f(y) = h(y)$ for $y \in V(T) \setminus \{v_{n,1}\}$. So, $f(E(T - v_{n,1})) = [3, 2p - 3]^o$. We add a new vertex w_i to $T - v_{n,1}$, and join w_i with some vertex w'_i of $T - v_{n,1}$ by an edge $w_i w'_i$, the resulting tree is denoted as $T_i = T - v_{n,1} + w_i w'_i$, and define a labelling f_i of T_i as $f_i(x) = f(x)$ for $x \in V(T_i) \setminus \{w_i\}$, and $f_i(w_i) \in h^*(V(H))$ such that $|f_i(w_i) - f_i(w'_i)| = 1$, which means $f_i(V(T_i)) = [1, 2p - 3]^o$. Thereby,

$$|f_i(V(T_i)) \cap h^*(V(H))| = 1$$

and the graph $\odot_1\langle H, T_i \rangle$ is a pan-odd-graceful Topsnut-matching, and so we can claim that $\odot_1\langle H, T_i \rangle_1^p$ is an *(a pan)-odd-graceful Topsnut-matching team*. The proof of this theorem is complete. \square

In the proof of Theorem 1, we can see

$$H - v_{n,1} \cong T - v_{n,1} \cong T_i - w_i$$

with $i \in [1, p]$, so $\odot_1\langle H, T_i \rangle_1^p$ is approximately a uniformly *(pan)-odd-gracefully Topsnut-matching team*. Thereby, we can

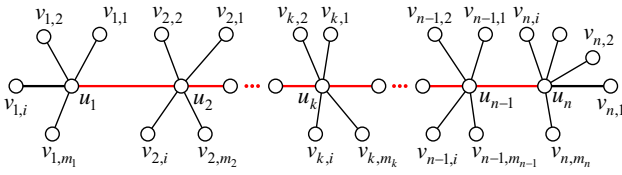


Fig. 10. A caterpillar.

get a result: “If a tree T of p vertices admits an odd-graceful labelling f such that $f(uv) = 1$ for an edge $uv \in E(T)$, where v is a leaf of T , that is, $\deg_T(v) = 1$. Then we have an (a pan-)odd-graceful Topsnut-matching team $\odot_1\langle H, T_i \rangle_1^p$, where T_i is obtained by deleting the leaf v of T and add a new vertex w to the remainder $T - v$, and join w with some vertex of $T - v$; H is a copy of T and admits a pan-odd-graceful labelling g defined by $g(x) = f(x) + 1$ for $x \in V(T) = V(H)$.”

For designing complex Topsnut-gpws, Wang *et al.* ([20], [18]) have defined firstly the twin-type of labellings by means of the matching of view (also, *key-vs-lock*).

Definition 3. [20] For two connected (p_i, q) -graphs G_i with $i = 1, 2$, and $p = p_1 + p_2 - 2$, if a (p, q) -graph $G = \odot\langle G_1, G_2 \rangle$ admits a vertex labelling $f: V(G) \rightarrow [0, q]$ such that

- (i) f is just an odd-graceful labelling of G_1 ;
- (ii) $f(E(G_2)) = \{f(uv) = |f(u) - f(v)| : uv \in E(G_2)\} = [1, q - 1]^o$;
- (iii) $|f(V(G_1)) \cap f(V(G_2))| = k$ and $f(V(G_1)) \cup f(V(G_2)) \subseteq [0, q - 1]$.

Then f is called a *twin odd-graceful labelling* (Tog-labelling) of G , and G a *Tog-matching partition*. \square

Definition 4. [18] For two connected (p_i, q) -graphs G_i with $i = 1, 2$, and $p = p_1 + p_2 - 2$, if a (p, q) -graph $G = \odot\langle G_1, G_2 \rangle$ admits a vertex labelling $f: V(G) \rightarrow [0, q - 1]$ such that

- (i) f is just an odd-elegant labelling of G_i with $i = 1, 2$;
- (ii) $|f(V(G_1)) \cap f(V(G_2))| = k$ and $f(V(G_1)) \cup f(V(G_2)) \subseteq [0, q - 1]$.

Then f is called a *twin odd-elegant labelling* (Toe-labelling) of G (called a *Toe-graph*), and $\odot\langle G_1, G_2 \rangle$ is called a *Toe-matching partition*, where G_1 is the *Toe-source* and G_2 is a *Toe-association*. \square

Fig.2 shows an example for understanding Definition 4. If each G_i with $i = 1, 2$ is a connected graph in Definition 4, and G_1 is a bipartite connected graph with bipartition (X_1, Y_1) holding $f_{\max}(X_1) < f_{\min}(Y_1)$ true, then f is called a *set-ordered twin odd-elegant labelling* (Sotoe-labelling) of G (called a *Sotoe-graph*). Wang *et al.* have shown the algorithms for producing Toe-graphs $G = \odot\langle G_1, G_2 \rangle$, such as

Theorem 2. [18] *Every non-star tree T admitting a set-ordered odd-elegant labelling matches with at least two trees T_1, T_2 such that each $\odot_2\langle T, T_i \rangle$ with $i = 1, 2$ admits a set-ordered twin odd-elegant labelling.*

Wang *et al.* have constructed large scale of Toe-graphs $\odot_2\langle H_1, H_2 \rangle$ by smaller Toe-graphs $\odot_2\langle T_i, T'_i \rangle$ with $i \in [1, m]$ for exploring Topsnut-chains. Moreover, they have mixed odd-graceful labelling with odd-elegant labelling together in Definition 5 below.

Definition 5. [18] For two connected (p_i, q) -graphs G_i with $i = 1, 2$, and $p = p_1 + p_2 - 2$, if a (p, q) -graph $G = \odot\langle G_1, G_2 \rangle$ admits a vertex labelling $f: V(G) \rightarrow [0, q]$ such that

- (i) f is an odd-graceful labelling of G_1 ;
- (ii) $f: V(G_2) \rightarrow [0, 2|E(G_2)|]$ holding

$$\begin{aligned} f(E(G_2)) &= \{f(uv) = f(u) + f(v) \pmod{2|E(G_2)|} : \\ &\quad uv \in E(G_2)\} \\ &= [1, 2|E(G_2)| - 1]^o \end{aligned}$$

true.

Then f is called a *2-odd graceful-elegant labelling* (a 2odd2-labelling) of G (called a *2odd2-graph*), and $\odot\langle G_1, G_2 \rangle$ is called a *2odd2-matching partition*. \square

In Definition 5, if f is a set-ordered odd-graceful labelling of G_1 , and G_2 has its bipartition (X, Y) holding $f_{\max}(X) < f_{\min}(Y)$ true, then we call f a *set-ordered 2odd2-labelling* of G . The results on the 2odd2-matching partition can be found in [18]. The authors of two articles [20] and [18] propose several conjectures on the twin type of odd-graceful/odd-elegant labellings which mean that Topsnut-gpws made by such labellings are computational security ([16], [17], [18], [20]).

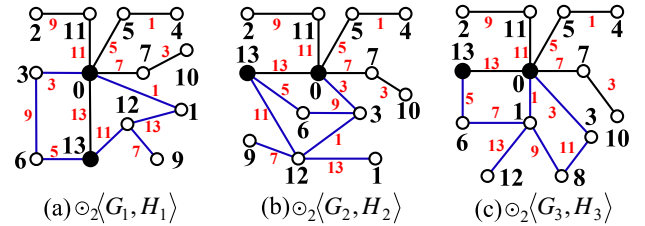


Fig. 11. Three 2odd2-graphs $\odot_2\langle G_i, H_i \rangle$ for $i \in [1, 3]$ cited from [18], where G_i has black edges, and H_i has blue edges.

C. Matching partitions based on set-type of labellings

We use a notation S^2 to denote the set of all subsets of a set S . For instance, $S = \{a, b, c\}$, so S^2 has its own elements: $\{a\}$, $\{b\}$, $\{c\}$, $\{a, b\}$, $\{a, c\}$, $\{b, c\}$ and $\{a, b, c\}$. It is clear that $\emptyset \notin S^2$ in the paper.

Definition 6. * Let G be a (p, q) -graph G , and $[0, M]^2$ be a set of all subsets of $[0, M]$ with $M \geq p + q$, and $[a, b]$ be an integer set. We have:

(i) A set mapping $F: V(G) \cup E(G) \rightarrow [0, M]^2$ is called a *total set-labelling* of G if $F(x) \neq F(y)$ for distinct elements $x, y \in V(G) \cup E(G)$.

(ii) A vertex set mapping $F: V(G) \rightarrow [0, M]^2$ is called a *vertex set-labelling* of G if $F(x) \neq F(y)$ for distinct vertices $x, y \in V(G)$.

(iii) An edge set mapping $F : E(G) \rightarrow [0, M]^2$ is called an *edge set-labelling* of G if $F(uv) \neq F(xy)$ for distinct edges $uv, xy \in E(G)$.

(iv) A vertex set mapping $F : V(G) \rightarrow [0, M]^2$ and a proper edge mapping $g : E(G) \rightarrow [a, b]$ are called a *v-set e-proper labelling* (F, g) of G if $F(x) \neq F(y)$ for distinct vertices $x, y \in V(G)$ and two edge labels $g(uv) \neq g(wz)$ for distinct edges $uv, wz \in E(G)$.

(v) An edge set mapping $F : E(G) \rightarrow [0, M]^2$ and a proper vertex mapping $f : V(G) \rightarrow [a, b]$ are called an *e-set v-proper labelling* (F, f) of G if $F(uv) \neq F(wz)$ for distinct edges $uv, wz \in E(G)$ and two vertex labels $f(x) \neq f(y)$ for distinct vertices $x, y \in V(G)$. \square

Experiment 6. Fig.12(a) shows a $(6, 8)$ -graph G admitting a v-set e-proper graceful labelling (F, g) defined by $F : V(G) \rightarrow [0, 8]^2$ and $g(E(G)) = [1, 8]$. And Fig.12(b) shows a $(6, 8)$ -graph H admitting a v-set e-proper odd-graceful labelling (F, f) defined by $F : V(H) \rightarrow [0, 15]^2$ and $f(E(H)) = [1, 15]^o$.

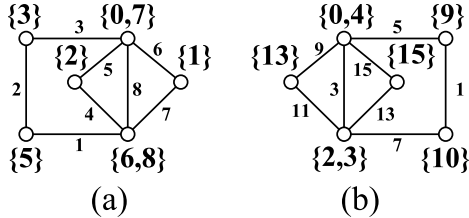


Fig. 12. (a) A v-set e-proper graceful labelling; (b) a v-set e-proper odd-graceful labelling.

Experiment 7. A tree T shown in Fig.13 admits an e-set v-proper labelling (F, f) defined by $f : V(T) \rightarrow [0, 11]$, and let “ \bullet ”=“null”, each edge of T has its own label set as follows:
 $F(ay) = \{\bullet, 1, 5, 11, 21, 22\}$, $F(cy) = \{\bullet, 2, 6, 10, 19, 21\}$,
 $F(dy) = \{\bullet, 3, 7, 9, 17, 20\}$, $F(de) = \{\bullet, 6, 10, 11, 17\}$,
 $F(dr) = \{\bullet, 4, 8, 15, 19\}$, $F(ds) = \{\bullet, 5, 7, 9, 13, 18\}$,
 $F(dt) = \{\bullet, 2, 3, 5, 9, 14\}$, $F(ew) = \{\bullet, 0, 5, 7, 9, 16\}$,
 $F(xw) = \{\bullet, 1, 4, 7, 8, 15\}$, $F(ut) = \{\bullet, 1, 4, 11, 12\}$,
 $F(uv) = \{\bullet, 2, 3, 10, 13\}$.

Thereby, this Topsnut-gpw T can produce more complex text-based passwords.

Theorem 3. If a connected graph T admits mutually distinct graceful labellings f_1, f_2, \dots, f_m and odd-graceful labellings g_1, g_2, \dots, g_n with $m, n \geq 1$, then T admits a total set-labelling.

There are many trees support Theorem 3, such as caterpillars, and so do trees admitting set-ordered graceful labellings.

Theorem 4. If a tree T admits a set-ordered graceful labelling, then T admits an e-set v-proper labelling (F, f) such that $\max\{|F(uv)| : uv \in E(T)\} \geq 5$.

Proof. Let a tree T of p vertices has its own vertex bipartition (X, Y) with $X = \{x_i : i \in [1, s]\}$ and $Y = \{y_j : j \in [1, t]\}$

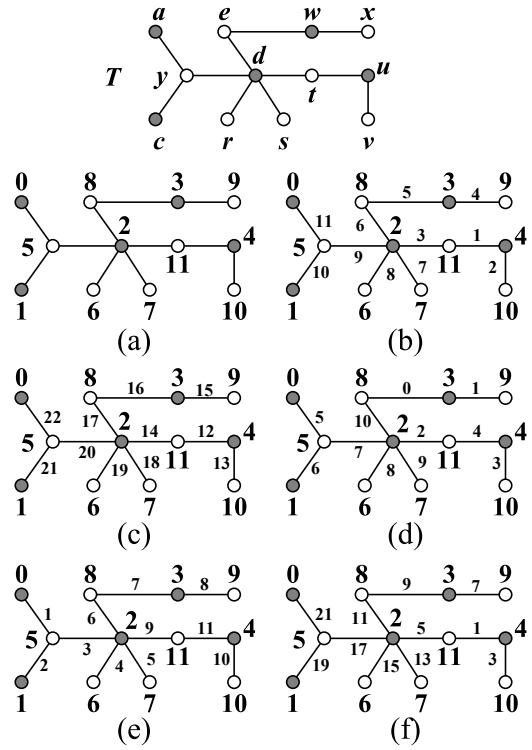


Fig. 13. A lobster T admits: (a) a labelling with null edge-labels; (b) a pan-edge-magic total labelling; (c) a pan-edge-magic total labelling; (d) a felicitous labelling; (e) an edge-magic graceful labelling; (f) an edge-odd-graceful labelling.

holding $s + t = |V(T)| = p$ true. By the hypothesis of this theorem, T admits a set-ordered graceful labelling f defined by $f(x_i) = i - 1$ for $i \in [1, s]$, $f(y_j) = s + j - 1$ for $j \in [1, t]$ and $f(x_i y_j) = f(y_j) - f(x_i) = s + j - i$ for each edge $x_i y_j \in E(T)$. We define another labelling f^* as: $f^*(x_i) = f(x_i)$ for $i \in [1, s]$, $f^*(y_j) = f(y_{t-j+1})$ for $j \in [1, t]$ and $f^*(x_i y_j) = f(x_i y_j)$ for each edge $x_i y_j \in E(T)$.

We define the following labellings:

(L-1) $h_1(w) = f^*(w)$ for $w \in V(T)$, $h_1(x_i y_j) = null$ for each edge $x_i y_j \in E(T)$.

(L-2) We construct a labelling h_2 by setting $h_2(w) = f^*(w)$ for $w \in V(T)$, and $h_2(x_i y_j) = f^*(x_i y_j)$ for each edge $x_i y_j \in E(T)$. We verify

$$\begin{aligned} & h_2(x_i) + h_2(x_i y_j) + h_2(y_j) \\ &= f^*(x_i) + f^*(x_i y_j) + f^*(y_j) \\ &= f(x_i) + f(x_i y_j) + f(y_{t-j+1}) \\ &= i - 1 + (s + j - i + 1) + s + (t - j + 1) - 1 \\ &= 2s + t \\ &= p + s. \end{aligned}$$

Thereby, h_2 is really a pan-edge-magic total labelling of T .

(L-3) Suppose that $h_3(w) = f^*(w)$ for $w \in V(T)$, $h_3(x_i y_j) = p - 1 + f^*(x_i y_j)$ for each edge $x_i y_j \in E(T)$. Hence, h_3 is another pan-edge-magic total labelling of T .

(L-4) Define a labelling h_4 by setting $h_4(w) = f^*(w)$ for $w \in V(T)$ and $h_4(x_i y_j) = h_4(x_i) + h_4(y_j) \pmod{p-1}$ for each edge $x_i y_j \in E(T)$. We compute

$$\begin{aligned} h_4(x_i y_j) &= h_4(x_i) + h_4(y_j) \\ &= f^*(x_i) + f^*(y_j) \\ &= f(x_i) + f(y_{t-j+1}) \\ &= f(y_{t-j+1}) + f(y_j) - [f(y_j) - f(x_i)] \\ &= s + (t-j+1) + s + j - f(x_i y_j) \\ &= p + s - f(x_i y_j), \end{aligned}$$

which distributes a set $\{p+s-1, p+s-2, \dots, p, p-1, p-2, \dots, s+1\} \pmod{p-1} = \{s, s-1, \dots, 1, 0, p-2, \dots, s+1\} = [0, p-2]$. So we claim that h_4 is a *felicitous labelling* of T .

(L-5) We define a labelling h_5 as: $h_5(w) = f^*(w)$ for $w \in V(T)$ and $h_5(x_i y_j) = p - f^*(x_i y_j) = p - f(x_i y_j)$ for each edge $x_i y_j \in E(T)$. Because

$$\begin{aligned} &|h_5(x_i) + h_5(y_j) - h_5(x_i y_j)| \\ &= |f^*(x_i) + f^*(y_j) + f^*(x_i y_j) - p| \\ &= |f(x_i) + f(y_{t-j+1}) + f(x_i y_j) - p| \\ &= |i-1 + s + (t-j+1) - 1 + s + j - i + 1 - p| \\ &= s-1, \end{aligned}$$

then we claim that h_5 is an *edge-magic graceful labelling* of T according to Definition 14.

(L-6) Let h_6 be defined by $h_6(w) = f^*(w)$ for $w \in V(T)$ and $h_6(x_i y_j) = 2f^*(x_i y_j) - 1 = 2f(x_i y_j) - 1$ for each edge $x_i y_j \in E(T)$. We get

$$\begin{aligned} &h_6(x_i) + h_6(x_i y_j) + h_6(y_j) \\ &= f(x_i) + f(y_{t-j+1}) + 2f(x_i y_j) - 1 \\ &= f(x_i) + f(y_{t-j+1}) + 2[f(y_j) - f(x_i)] - 1 \\ &= i-1 + s + (t-j+1) - 1 + s + j - i + f(x_i y_j) - 1 \\ &= p + s - 2 + f(x_i y_j), \end{aligned}$$

which induces a set $\{p+s-1, p+s+1, \dots, 2p+s-3\} = [p+s, 2p+s-3]$.

We can see relationships between the above labellings: $h_2(x_i y_j) + p - 1 = h_3(x_i y_j)$,

$$\begin{aligned} h_2(x_i y_j) + h_4(x_i y_j) &= f(x_i y_j) + p + s - f(x_i y_j) \\ &\equiv s-1 \pmod{p-1} \end{aligned}$$

and

$$h_2(x_i y_j) + h_5(x_i y_j) = f(x_i y_j) + p - f(x_i y_j) = p.$$

Now, we define the desired e-set v -proper labelling F in the way: $F(x_i y_j) = \{h_k(x_i y_j) : k \in [1, 6]\}$ for each edge $x_i y_j \in E(T)$, so T admits an e-set v -proper labelling (F, f^*) with $\max\{|F(uv)| : uv \in E(T)\} \geq 6$. This theorem is covered. \square

Definition 7. * If a (p, q) -graph G admits an e-set v -proper labelling (F, f) by $f : V(G) \rightarrow [0, a(p, q)]$ and $F : E(G) \rightarrow$

$[0, b(p, q)]^2$, where $a(p, q)$ and $b(p, q)$ are linear functions of p and q , such that G can be decomposed into spanning trees T_1, T_2, \dots, T_m with $m \geq 2$ and $E(G) = \bigcup_{i=1}^m E(T_i)$ (allow $E(T_i) \cap E(T_j) \neq \emptyset$ for some $i \neq j$), and each spanning tree T_i admits a proper labelling f_i induced by (F, f) . We call G a *multiple-tree matching partition*, denoted as $G = \oplus_F \langle T_i \rangle_1^m$. \square

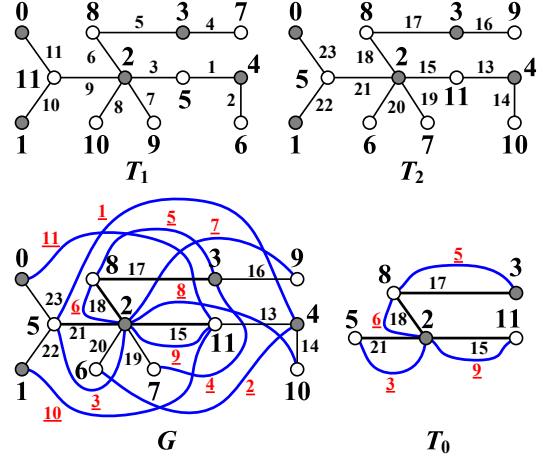


Fig. 14. A multiple-tree matching partition G for illustrating Definition 7.

Experiment 8. A multiple-tree matching partition G shown in Fig.14 has two spanning trees T_1, T_2 and an e-set v -proper labelling F , such that T_1 admits a set-ordered graceful labelling f_1 induced by F , and T_2 admits a super pan-edge-magic total labelling f_2 induced by F . In detail, $f_1(u) \in f(V(G))$ for $x \in V(T_1) = V(G)$, each edge $uv \in E(T_1)$ is labeled as $f_1(uv) = |f_1(u) - f_1(v)| \in F(uv)$; and $f_2(u) \in f(V(G))$ for $y \in V(T_2) = V(G)$, $f_2(uv) \in F(uv)$ for each edge $uv \in E(T_2)$, such that $f_2(u) + f_2(uv) + f_2(v) = 28$ for $uv \in E(T_2)$. We can see $T_0 = T_1 \cap T_2$, called the *common body* of G , each edge of T_0 is labeled with a set.

Similarly with Definition 7, we propose:

Definition 8. * If a (p, q) -graph G admits a vertex labelling $f : V(G) \rightarrow [0, p-1]$, such that G can be decomposed into (spanning) graphs G_1, G_2, \dots, G_m with $m \geq 2$ and $E(G) = \bigcup_{i=1}^m E(G_i)$ and $E(G_i) \cap E(G_j) = \emptyset$ for $i \neq j$, and each graph G_i admits a proper labelling f_i induced by f . We call G a *multiple-graph matching partition*, denoted as $G = \odot_f \langle G_i \rangle_1^m$. \square

In Fig.15, we can see that $E(G_i) \cap E(G_j) = \emptyset$ for $i \neq j$, and G_1 admits a graceful labelling f_1 induced by f , each G_j admits a felicitous labelling f_j induced by f with $j \in [2, 4]$. $H_j = \odot_{k_j} \langle G_1, G_j \rangle$, with $j \in [2, 4]$, admits the labelling f such that $f(E(G_1)) = \{|f(u) - f(v)| : uv \in E(G_1)\} = [1, 11]$, $f(E(G_j)) = \{f(x) + f(y) \pmod{11} : xy \in E(G_j)\} = [1, 11]$ (where we set $0 \equiv 11 \pmod{11}$), so each $H_j = \odot_{k_j} \langle G_1, G_j \rangle$ with $j \in [2, 4]$ is called a *graceful-felicitous matching partition*.

Theorem 5. *If a tree T admits a set-ordered graceful labelling, then T matches with a multiple-tree matching partition $\oplus_F \langle T_i \rangle_1^m$ with $m \geq 10$.*

Proof. Let (X, Y) be the bipartition of vertex set of the tree T admitting a set-ordered graceful labelling f , where $X = \{x_i : i \in [1, s]\}$ and $Y = \{y_j : j \in [1, t]\}$ with $s+t = |V(T)| = p$. By the definition of a set-ordered graceful labelling, we have $f(x_i) = i - 1$ for $i \in [1, s]$, $f(y_j) = s + j - 1$ for $j \in [1, t]$ and $f(x_i y_j) = f(y_j) - f(x_i) = s + j - i$ for each edge $x_i y_j \in E(T)$. Now, let $T = T_1$ and $f = f_1$ for the purpose of statement. Clearly, $\max f_1(X) < \min f_1(Y)$.

We construct the following trees.

(Equ-1) The tree T_2 is isomorphic to T , and admits an edge-magic total labelling f_2 defined as: $f_2(x_i) = f(x_i) + 1$ for $i \in [1, s]$, $f_2(y_j) = f(y_{t-j+1}) + 1$ for $j \in [1, t]$, and $f_2(x_i y_j) = f(x_i y_j) + p$ for each edge $x_i y_j \in E(T)$. Notice that $f_2(V(T_2)) = [1, p]$. Furthermore,

$$\begin{aligned} & f_2(x_i) + f_2(x_i y_j) + f_2(y_j) \\ &= f(x_i) + f(x_i y_j) + p + f(y_{t-j+1}) \\ &= s + 2p + 1. \end{aligned} \quad (7)$$

So, f_2 is a super edge-magic total labelling with the magic constant $s + 2p + 1$ and $\max f_2(X) < \min f_2(Y)$.

(Equ-2) We take a copy of T , denoted as T_3 , and define an edge-magic total labelling f_3 of T_3 in the way: $f_3(x_i) = f(x_{s-i+1}) + 1$ for $i \in [1, s]$, $f_3(y_j) = f(y_j) + 1$ for $j \in [1, t]$, and $f_3(x_i y_j) = f(x_i y_j) + p$ for each edge $x_i y_j \in E(T)$. So $f_3(V(T_3)) = [1, p]$. By the same way used in Equ-1, f_3 is a super edge-magic total labelling with the magic constant $t + 2p + 1$ and $\max f_3(X) < \min f_3(Y)$.

(Equ-3) Let T_4 be a tree being isomorphic to T . And T_4 admits a super felicitous labelling f_4 made by: $f_4(x_i) = f(x_i)$ for $i \in [1, s]$, $f_4(y_j) = f(y_{t-j+1})$ for $j \in [1, t]$. Moreover, we have

$$\begin{aligned} f_4(x_i) + f_4(y_j) &= f(x_i) + f(y_{t-j+1}) \\ &= f(x_i) + s + p - 1 - f(y_j) \\ &= s + p - 1 - [f(y_j) - f(x_i)] \\ &= s + p - 1 - f(x_i y_j), \end{aligned} \quad (8)$$

The above form (8) induces two sets

$$S_1 = \{s + p - 1 - 1, s + p - 1 - 2, \dots, s + p - 1 - (s - 1), s + p - 1 - s\}$$

and $S_2 = \{p - 2, p - 3, \dots, s\}$. Under modulo $(p - 1)$, $S_1 \equiv [0, s - 1]$. Thereby, $f_4(E(T_4)) = [0, p - 2]$. We claim that f_4 is a super felicitous labelling of T_4 with $\max f_4(X) < \min f_4(Y)$.

(Equ-4) T_5 is isomorphic to T , and admits a super felicitous labelling f_5 with $\max f_5(X) < \min f_5(Y)$. made by: $f_5(x_i) = f(x_{s-i+1})$ for $i \in [1, s]$, $f_5(y_j) = f(y_j)$ for $j \in [1, t]$. The remainder proof is as the same as that in Equ-3.

(Equ-5) Let $T_6 \cong T$. We define a labelling f_6 of T_6 in the way: $f_6(x_i) = f(x_i) + 1$ for $i \in [1, s]$, $f_6(y_j) = f(y_{t-j+1}) + 1 = s + p - f(y_j)$ for $j \in [1, t]$, and $f_6(x_i y_j) = 2p - f(x_i y_j)$

for each edge $x_i y_j \in E(T_6)$. It is not hard to see $f_6(V(T_6)) = [1, p]$. We have

$$f_6(x_i) + f_6(x_i y_j) + f_6(y_j) = s + 3p + 1 - 2f(x_i y_j)$$

which produces a set $\{p + s + 3, p + s + 3 + 2, p + s + 3 + 4, \dots, p + s + 3 + 2(p - 2)\}$. We can confirm that f_6 is a super edge antimagic total labelling with $\max f_6(X) < \min f_6(Y)$.

(Equ-6) Take a tree $T_7 \cong T$, and define a super edge antimagic total labelling f_7 of T_7 with $\max f_7(X) < \min f_7(Y)$ as follows: $f_7(x_i) = f(x_{s-i+1}) + 1$ for $i \in [1, s]$, $f_7(y_j) = f(y_j) + 1 = s + p - f(y_j)$ for $j \in [1, t]$, and $f_7(x_i y_j) = 2p - f(x_i y_j)$ for each edge $x_i y_j \in E(T_7)$. The remainder proof is very similar to that in Equ-5.

(Equ-7) Suppose that T_8 is a copy of T , we define a labelling f_8 of T_8 in the way that $f_8(x_i) = f(x_i)$ for $i \in [1, s]$, $f_8(y_j) = f(y_{t-j+1})$ for $j \in [1, t - 1]$, and $f_8(y_t) = 0$. For each edge $x_k y_t \in E(T_8)$, we have

$$\begin{aligned} & f_8(x_k) + f_8(y_t) = f_8(x_k) + 0 \\ &= f_8(x_k) + (p - 1) \pmod{p - 1} \\ &= f(x_k) + f(y_t) \pmod{p - 1} \\ &= f(x_k) + s + p - 1 - f(y_1) \pmod{p - 1} \\ &= s + p - 1 - [f(y_1) - f(x_k)] \pmod{p - 1} \\ &= s - f(x_k y_1). \end{aligned} \quad (9)$$

Under modulo $(p - 1)$,

$$\begin{aligned} & f_8(E(T_8)) = \{f_8(x_i y_j)\} \\ &= f_8(x_i) + f_8(y_j) \pmod{p - 1} : x_i y_j \in E(T_8) \\ &= [0, p - 2]. \end{aligned}$$

Therefore, f_8 is a harmonious labelling of T_8 with $\max f_8(X) < \min f_8(Y)$.

(Equ-8) Let $T_9 \cong T$. We define a harmonious labelling f_9 of T_9 with $\max f_9(X) < \min f_9(Y)$ as follows: $f_9(x_i) = f(x_{s-i+1})$ for $i \in [1, s]$, $f_9(y_j) = f(y_j)$ for $j \in [1, t - 1]$, and $f_9(y_t) = 0$. By the same way used in Equ-7, we can show f_9 is a harmonious labelling of T_9 and $\max f_9(X) < \min f_9(Y)$.

(Equ-9) By Definition 13 we define a Dgemm-labelling f_{10} of T_{10} that holds $T_{10} \cong T$ true as following: $f_{10}(x_i) = f(x_i)$ for $i \in [1, s]$, $f_{10}(y_j) = f(y_j)$ for $j \in [1, t]$, and $f_{10}(x_i y_j) = p - f(x_i y_j)$ for each edge $x_i y_j \in E(T_{10})$. We verify:

(i) Each edge $x_i y_j$ corresponds an edge $x'_i y'_j$ such that

$$\begin{aligned} f_{10}(x_i y_j) &= p - f(x_i y_j) = p - |f(x_i) - f(y_j)| \\ &= |f(x'_i) - f(y'_j)|. \end{aligned}$$

(ii) For each edge $x_i y_j \in E(T_{10})$, T_{10} has $p - 1$ edges, and

$$\begin{aligned} s(x_i y_j) &= |f_{10}(x_i) - f_{10}(y_j)| - f_{10}(x_i y_j) \\ &= |f(x_i) - f(y_j)| - p + f(x_i y_j) \\ &= 2f(x_i y_j) - p \end{aligned}$$

distributes a set $\{2 - p, 4 - p, \dots, 0, 2, 4, \dots, p - 2\}$ when p is even. Clearly, each edge $x_i y_j$ matches with another edge $x'_i y'_j \in E(T_{10})$ holding $s(x_i y_j) + s(x'_i y'_j) = 0$ true. If p is odd,

$s(x_i y_j)$ induces another set $\{2-p, 4-p, \dots, -1, 1, 3, \dots, p-2\}$, so $s(x_i y_j) + s(x'_i y'_j) = 0$ is true.

(iii) For each edge $x_i y_j \in E(T_{10})$, we have

$$\begin{aligned} & |f_{10}(x_i y_j) + |f_{10}(x_i) - f_{10}(y_j)| \\ &= p - f(x_i y_j) + |f_{10}(x_i) - f_{10}(y_j)| \\ &= p. \end{aligned}$$

(iv) Since $f(V(T)) = [0, p-1]$ and $f(E(T)) = [1, p-1]$, thus, $f(E(T)) = [1, p-1] = f(V(T)) \setminus \{0\}$, we have $f(x_i y_j) = f(w)$ for each edge $x_i y_j$ matching with a vertex w , which implies

$$f_{10}(x_i y_j) + f_{10}(w) = p - f(x_i y_j) + f(w) = p;$$

conversely, each vertex w corresponds an edge $x_i y_j$ holding

$$f_{10}(w) + f_{10}(x_i y_j) = p - f(x_i y_j) + f(w) = p$$

true, except the singularity $f(x_0) = \lfloor p \rfloor$.

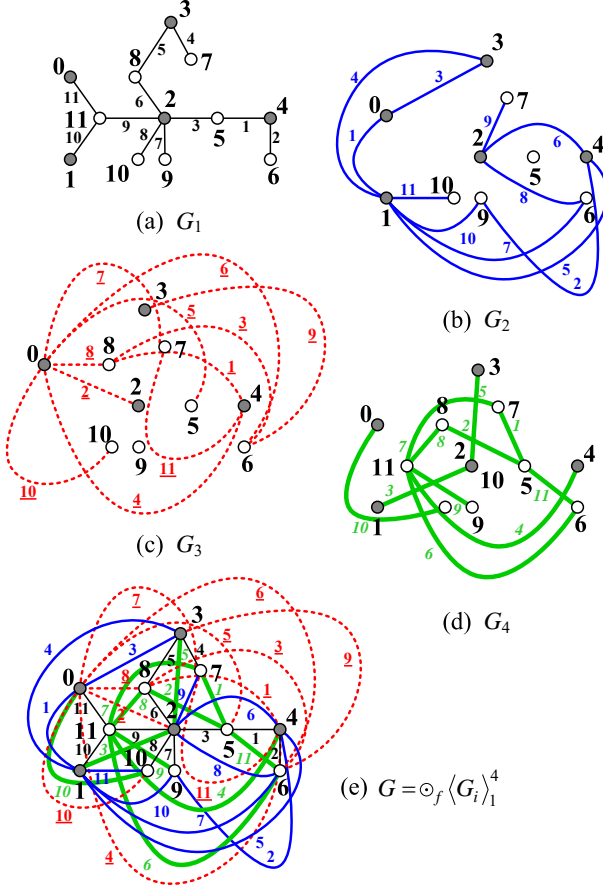


Fig. 15. An example for illustrating Definition 8.

We identify the vertices of T_1, T_2, \dots, T_{10} with the same labels into one, and delete the multiple edges, the resulting graph is just the desired multiple-tree matching partition $G = \oplus_F \langle T_i \rangle_1^{10}$ with the v-proper labelling f holding $f(V(G)) = [0, p-1]$ true and the e-set labelling F satisfying $F(x_i y_j) = \{f_k(x_i y_j) : k \in [1, 10]\}$ for each edge $x_i y_j \in E(G)$.

The labellings f_2, f_3, \dots, f_{10} shown in the above proof can deduce the set-ordered graceful labelling f , we omit the proof since the proof methods are similar to that in [25]. \square

Theorem 6. *If a bipartite (p, q) -graph G admits a set-ordered graceful labelling, then G admits a set-ordered graceful/odd-graceful total set-labelling.*

Proof. Suppose that G has its own vertex bipartition (X, Y) with $X = \{x_i : i \in [1, s]\}$ and $Y = \{y_j : j \in [1, t]\}$ holding $s+t = |V(G)| = p$ true. By the hypothesis of this theorem, G admits a set-ordered graceful labelling f defined by $f(x_i) = i-1$ for $i \in [1, s]$, $f(y_j) = s+j-1$ for $j \in [1, t]$ and

$$f(x_i y_j) = f(y_j) - f(x_i) = s+j-i$$

for each edge $x_i y_j \in E(G)$, such that $f(E(G)) = [1, q]$.

We define a total set-labelling $F : V(G) \cup E(G) \rightarrow [0, p+q]^2$ as follows: $F(x_i) = [0, i-1]$ with $i \in [1, s]$, $F(y_j) = [0, s+j-1]$ with $j \in [1, t]$ and $F(x_i y_j) = F(y_j) \setminus F(x_i) = [i, s+j-1]$ for each edge $x_i y_j \in E(G)$. Clearly, $F(u) \neq F(w)$ for distinct elements $u, w \in V(G) \cup E(G)$. Moreover, we have

$$\begin{aligned} & \{|F(x_i y_j)| : i \in [1, s], j \in [1, t]\} \\ &= \{s+j-i : i \in [1, s], j \in [1, t]\} \\ &= \{f(x_i y_j) : x_i y_j \in E(G)\} \\ &= f(E(G)) = [1, q], \end{aligned} \quad (10)$$

and $F(x_i) \subset F(y_j)$ with $i = |F(x_i)| < |F(y_j)| = s+j$. Thereby, F is really a set-ordered graceful total set-labelling of G .

For proving that G admits a set-ordered odd-graceful total set-labelling, we set a total set-labelling $F' : V(G) \cup E(G) \rightarrow [0, p+q]^2$ in the following way: $F'(x_i) = [0, 2(i-1)]$ with $i \in [1, s]$, $F'(y_j) = [0, 2(s+j)-3]$ with $j \in [1, t]$ and

$$F'(x_i y_j) = F'(y_j) \setminus F'(x_i) = [2(i-1)+1, 2(s+j)-3]$$

for each edge $x_i y_j \in E(G)$. Furthermore, $F'(x_i) \subset F'(y_j)$ with

$$2i-1 = |F'(x_i)| < |F'(y_j)| = 2(s+j)-2$$

and

$$\begin{aligned} & \{|F'(x_i y_j)| : i \in [1, s], j \in [1, t]\} = f(E(G)) \\ &= [1, 2q-1]^o. \end{aligned}$$

We are done for the proof of the theorem. \square

By the results appeared in [25], we can show other type of total set-labelling on bipartite graphs admitting set-ordered graceful labellings.

The graceful graph G shown in Fig.16(b) is a *graceful matching* of K_5 admitting a v-set e-proper graceful labelling, and an odd-graceful graph H shown in Fig.16(d) is an *odd-graceful matching* of K_5 having a v-set e-proper odd-graceful labelling. The graceful graph G and the odd-graceful graph H can be obtained from K_5 by the vertex-split operation introduced in Section I. Two graphs shown in Fig.16(b) and (d) can be shrunk back to K_5 . Identifying two non-adjacent vertices

u, v of a graph H into one $w = u \circ v$ if $N(u) \cap N(v) = \emptyset$ until, any pair of vertices x, y of the last graph H^* hold $|N(u) \cap N(v)| \geq 1$ true. Clearly, $|E(H)| = |E(H^*)|$. We call H^* a non-contracted graph, H has a non-contracted H^* -kernel. Two graphs shown in Fig.16(b) and (d) both have a non-contracted K_5 -kernel.

Lemma 7. *Each complete graph K_n admits a v -set e-proper (odd-)graceful labelling.*

Proof. We have known that K_5 admits a v -set e-proper graceful labelling. Assume that K_n admits a v -set e-proper graceful labelling (F, f) such that $F : V(K_n) \rightarrow [0, M_n]$ with $F(x_i) \cap F(x_j) = \emptyset$ for distinct $x_i, x_j \in V(K_n)$ and $f(E(K_n)) = [1, M_n]$, where $M_n = \frac{1}{2}n(n-1)$. We add a new vertex x_{n+1} to K_n by joining x_{n+1} with each vertex of K_n , and label it with the number $M_n + n$. If $x_i \in V(K_n)$ such that $M_n + n - a_{i,k_i} = M_n + k_i$ for $a_{i,k_i} \in F(x_i) = \{a_{i,1}, a_{i,2}, \dots, a_{i,m_i}\}$ with $1 \leq m_i \leq M_n$, we put x_i into a set S such that each $F(x_j)$ with $x_j \in \bar{S} = V(K_n) \setminus S$ has no element of $F(x_j) = \{a_{j,1}, a_{j,2}, \dots, a_{j,m_j}\}$ with $1 \leq m_j \leq M_n$ holds $M_n + n - a_{j,l} = M_n + l$ true. We add an number $b_j \in [M_n + 1, M_n + n] \setminus \{n - k_i : x_i \in S\}$ to $F(x_j)$ for $x_j \in \bar{S}$, one-vs-one, thus, we get a v -set e-proper graceful labelling (F', f') of K_{n+1} holding $F' : V(K_{n+1}) \rightarrow [0, \frac{1}{2}n(n+1)]$ true with $F'(x) \cap F'(y) = \emptyset$ for distinct $x, y \in V(K_{n+1})$ and $f'(E(K_{n+1})) = [1, \frac{1}{2}n(n+1)]$.

By the induction of hypothesis, we claim that each complete graph admits a v -set e-proper graceful labelling, and furthermore this proof way can be used to show each complete graph admits a v -set e-proper odd-graceful labelling. \square

Lemma 7 enables us to obtain the following result:

Theorem 8. *A (p, q) -graph G with a non-contracted H -kernel admits a proper ε -labelling if and only if H admits a v -set e-proper ε -labelling.*

Lemma 9. *Any connected (p, q) -graph can be split into a tree of $q + 1$ vertices.*

Proof. Our proof is based on induction of vertex number. As $p = 2$ and $q = 1$, the lemma is obvious. Assume that a connected (p, q) -graph can be split into a tree of $q + 1$ vertices. We consider any connected $(p + 1, q')$ -graph G . There exists a spanning tree T in G , since G is connected. We take a leaf x of T , so the graph $G - x$ is a connected $(p, q' - m)$ -graph, where $m = |N(x)|$, and the neighbor set $N(x)$ collects all neighbors x_1, x_2, \dots, x_m of the vertex x . By the hypothesis of induction, the connected $(p, q' - m)$ -graph $G - x$ can be split into a tree H of $q' - m$ vertices. Suppose that each vertex $x_i \in N(x)$ was split into $x_{i,1}, x_{i,2}, \dots, x_{i,m_i}$ in H . We add new vertices x'_i to $x_{i,1}$ by an edge $x'_i x_{i,1}$ with $i \in [1, m]$, the result graph is just a tree H' of $q' - m + m$ vertices. Thereby, H' is the desired tree split from G , and the leaves x'_1, x'_2, \dots, x'_m of H' are the result of splitting the vertex x of G . \square

By Lemma 9 we can see: "If every tree is (odd-)graceful, then any connected (p, q) -graph admits a v -set e-proper (odd-)

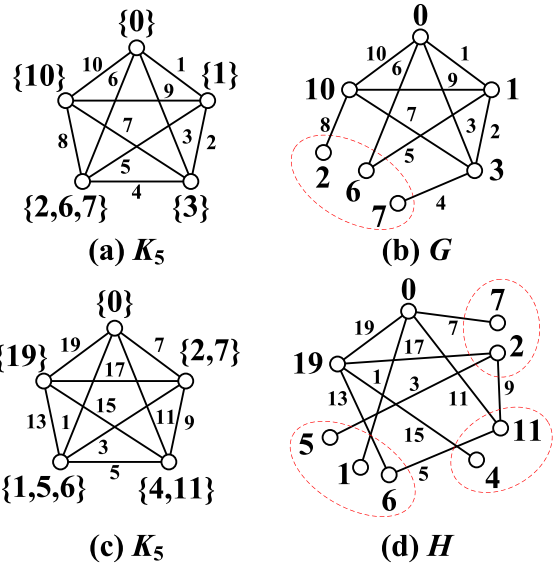


Fig. 16. (a) K_5 admits a v -set e-proper graceful labelling; (b) G admits a proper graceful labelling; (c) K_5 admits a v -set e-proper odd-graceful labelling; (d) H admits a proper odd-graceful labelling.

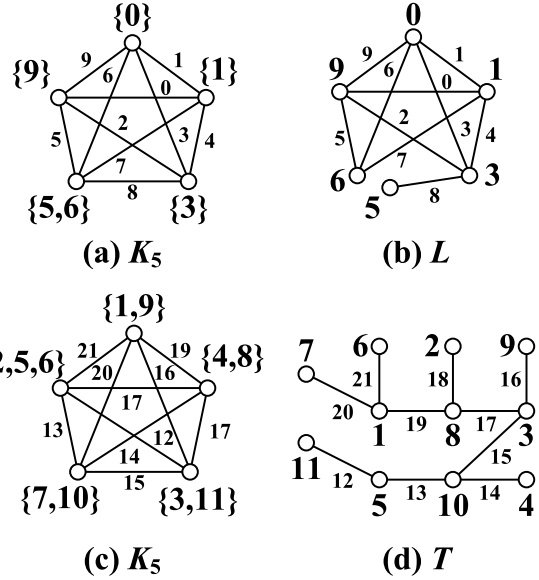


Fig. 17. (a) K_5 admits a v -set e-proper felicitous labelling; (b) L admits a felicitous labelling f holding $f(uv) = f(u) + f(v)$ (mod 10) true; (c) K_5 admits a v -set e-proper edge-magic total labelling; (d) T admits an edge-magic total labelling.

)graceful labelling. Conversely, if a connected (p, q) -graph G admits a v -set e-proper (odd-)graceful labelling (F, f) holds $f(E(G)) = [1, q]$ (resp. $f(E(G)) = [1, 2q - 1]$) true and $\bigcup_{u \in V(G)} F(u) = [0, q]$ (resp. $\bigcup_{u \in V(G)} F(u) \subset [0, 2q - 1]$), then it can be split into a (an odd-)graceful tree". For a connected (p, q) -graph G holding $q \equiv 0, 3 \pmod{4}$ true, we can say G admits a v -set e-proper (odd-)graceful labelling. Thereby, we conjecture:

Conjecture 10. Each connected graph with no multiple edges and self-loops admits a v -set e -proper (odd-)graceful labelling.

In [10], the authors show some Euler graphs admit v -set e -proper X -labellings with $X \in \{\text{graceful, odd-graceful, harmonious, } k\text{-graceful, odd sequential, elegant, odd-elegant, felicitous, odd-harmonious, edge-magic total}\}$. Thereby, we can generalize Conjecture 10 to other labellings. Zhou *et al.* in[33] have proven: Lobsters admit odd-graceful labellings, then we have

Theorem 11. If a connected graph can be split into a tree admitting a v -set e -proper X -labelling, where X is a graph labelling, then it admits a v -set e -proper X -labelling.

Notice that a connected (p, q) -graph G admitting a graceful labelling f can be split into a tree T of q edges, then T admits a *splitting graceful labelling* g induced by f , here, there are at least two vertices u, v holding $g(u) = g(v)$ true under $g(V(T)) \subseteq [0, q]$, but $g(E(T)) = [1, q]$.

Conjecture 12. Each tree with diameter less than three admits a *splitting graceful labelling*.

D. Magic type of matching labellings

Definition 9. * Let $f : V(G) \cup E(G) \rightarrow [1, p + q]$ be a total labelling of a (p, q) -graph G . If there is a constant k such that

$$f(u) + f(uv) + f(v) = k,$$

and each edge uv corresponds another edge xy holding $f(uv) = |f(x) - f(y)|$ true, then we call f a *relaxed edge-magic total labelling* (relaxed Emt-labelling) of G (called a *relaxed Emt-graph*) (see Fig.22(a)). \square

Definition 10. * Suppose that a (p, q) -graph G admits a vertex labelling $f : V(G) \rightarrow [0, 2q - 1]$ and an edge labelling $g : E(G) \rightarrow [1, 2p - 1]^o$. If there is a constant k such that

$$f(u) + g(uv) + f(v) = k$$

for each edge $uv \in E(G)$, and $g(E(G)) = [1, 2p - 1]^o$, then we call (f, g) an *odd-edge-magic matching labelling* (Oemm-labelling) of G (called an *Oemm-graph*). See Fig.18(c), Fig.21(a) and Fig.21 (b). \square

Definition 11. * Suppose that a (p, q) -graph G admits a vertex labelling $f : V(G) \rightarrow [0, 2q - 1]$ and an edge labelling $g : E(G) \rightarrow [1, 2q - 1]^o$, and let $s(uv) = |f(u) - f(v)| - g(uv)$ for $uv \in E(G)$. If

(i) each edge uv corresponds an edge $u'v'$ such that $g(uv) = |f(u') - f(v')|$;

(ii) and there exists a constant k' such that each edge xy has a matching edge $x'y'$ holding $s(xy) + s(x'y') = k'$ true;

(iii) there exists a constant k such that $f(uv) + |f(u) - f(v)| = k$ for each edge $uv \in E(G)$.

Then we call (f, g) an *ee-difference odd-edge-magic matching labelling* (Eedoeemm-labelling) of G (called a *Eedoeemm-graph*). (see Fig.21(a) and (b)) \square

We, again, define a new labelling with more restrictive conditions as follows:

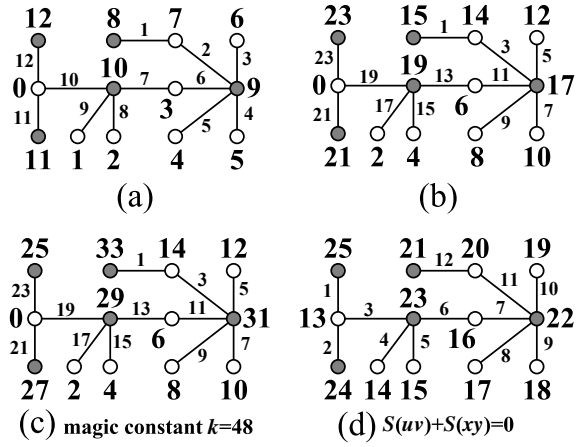


Fig. 18. A caterpillar admits: (a) a set-ordered graceful labellings; (b) a set-ordered odd-graceful labellings; (c) an odd-edge-magic matching labelling (f, g) ; (d) an ee-difference odd-magic matching labelling (f, g) .

Definition 12. * A total labelling $f : V(G) \cup E(G) \rightarrow [1, p + q]$ for a bipartite (p, q) -graph G is a bijection and holds:

(i) (e-magic) $f(uv) + |f(u) - f(v)| = k$ for a constant k and each edge $uv \in E(G)$;

(ii) (ee-difference) each edge $uv \in E(G)$ matches with another edge $xy \in E(G)$ holding $f(uv) = |f(x) - f(y)|$ (or $f(uv) = 2(p + q) - |f(x) - f(y)|$);

(iii) (ee-balanced) let $s(uv) = |f(u) - f(v)| - f(uv)$ for $uv \in E(G)$, then there exists a constant k' such that each edge uv matches with another edge $u'v'$ holding $s(uv) + s(u'v') = k'$ (or $2(p + q) + s(uv) + s(u'v') = k'$) true;

(iv) (EV-ordered) $f_{\min}(V(G)) > f_{\max}(E(G))$ (or $f_{\max}(V(G)) < f_{\min}(E(G))$), or $f(V(G)) \subseteq f(E(G))$, or $f(E(G)) \subseteq f(V(G))$, or $f(V(G))$ is an odd-set and $f(E(G))$ is an even-set;

(v) (ve-matching) there exists a constant k'' such that each edge uv matches with one vertex w such that $f(uv) + f(w) = k''$, and each vertex z matches with one edge xy such that $f(z) + f(xy) = k''$, except the *singularity* $f(x_0) = \lfloor \frac{p+q+1}{2} \rfloor$;

(vi) (set-ordered) $f_{\max}(X) < f_{\min}(Y)$ (or $f_{\min}(X) > f_{\max}(Y)$) for the bipartition (X, Y) of $V(G)$.

We then call f a *6C-labelling*. \square

For a given (p, q) -tree G admitting a 6C-labelling f , if another (p, q) -tree H admits a 6C-labelling g such that

$$f(V(G)) \setminus X^* = g(E(H)), \quad f(E(G)) = g(V(H)) \setminus X^*$$

and $f(V(G)) \cap g(V(H)) = X^*$, where $X^* = \{\lfloor \frac{p+q+1}{2} \rfloor\}$, we identify the vertex x_0 of G having $f(x_0) = \lfloor \frac{p+q+1}{2} \rfloor$ with the vertex w_0 of H having $g(w_0) = \lfloor \frac{p+q+1}{2} \rfloor$ into one to form a graph $\odot_1(G, H)$, called a *6C-complementary matching*. See examples shown in Fig.19 and Fig.20.

Theorem 13. If a tree T admits a 6C-labelling, then there exists another tree H admitting a 6C-labelling such that $\odot_1(T, H)$ is a 6C-complementary matching.

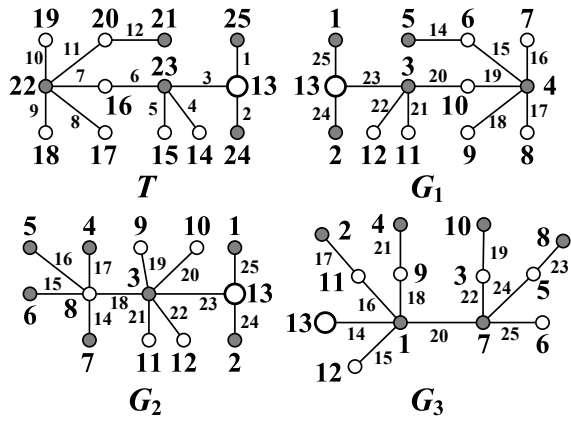


Fig. 19. A caterpillar T admitting a 6C-labelling has three 6C-complementary matchings $\odot_1\langle T, G_i \rangle$ with $i = 1, 2, 3$.

Proof. Suppose that a (p, q) -tree T admits a 6C-labelling f , we define another labelling h of T by $h(x) = 2(p + q + 1) - f(x)$ for $x \in V(T)$, so $h(uv) = (p + q + 1) - f(uv)$ for $uv \in E(T)$. Next, we set $E(T) = \{u_i v_i : i \in [1, q]\}$ holding $h(u_j v_j) < u_{j+1} v_{j+1}$ true with $j \in [1, q - 1]$. Now, we can defined a labelling g of a copy T' of T in the way: $g(x) = h(x)$ for $x \in V(T') = V(T)$, and $g(u_i v_i) = 2p + q + 1 - h(u_i v_i)$ for $u_i v_i \in E(T') = E(T)$. Notice that

$$\begin{aligned} g(u_i v_i) &= 2p + q + 1 - h(u_i v_i) \\ &= 2p + q + 1 - [(p + q + 1) - f(u_i v_i)] \\ &= f(u_i v_i) + p \end{aligned}$$

for $u_i v_i \in E(T') = E(T)$. We claim that g is a 6C-labelling of T' too, which means that $\odot_1\langle T, T' \rangle$ is a 6C-complementary matching. \square

Theorem 14. *A tree admits a set-ordered graceful labelling if and only if it admits a 6C-labelling.*

Proof. Suppose that (X, Y) is the bipartition of vertex set of a tree T , where $X = \{x_i : i \in [1, s]\}$ and $Y = \{y_j : j \in [1, t]\}$ with vertex number $|V(T)| = p = s + t$ and edge number $|E(T)| = p - 1$.

The proof of "if". Notice that T admitting a set-ordered graceful labelling g , so each vertex is labeled as $g(x_i) = i - 1$ for $i \in [1, s]$ and $g(y_j) = s + j - 1$ for $j \in [1, t]$, and furthermore each edge $x_i y_j \in E(T)$ has its label $g(x_i y_j) = g(y_j) - g(x_i) = s + j - i$.

We define another labelling f for the tree T in the way: $f(w) = p + g(w)$ for $w \in V(T)$, and

$$f(x_i y_j) = p - g(x_i y_j) = p - |g(x_i) - g(y_j)|$$

for $x_i y_j \in E(T)$. Clearly,

$$f(V(T)) = [p, 2p - 1], \quad f(E(T)) = [1, p - 1]. \quad (11)$$

(i) (e-magic) Each edge $x_i y_j \in E(T)$ holds $f(x_i y_j) + |f(x_i) - f(y_j)| = p - g(x_i y_j) + g(x_i y_j) = p$ true.

(ii) (ee-difference) Each edge $x_i y_j \in E(T)$ matches with another edge $x'_i y'_j \in E(T)$ holding $p - g(x_i y_j) = g(x'_i y'_j)$ such that

$$\begin{aligned} f(x_i y_j) &= p - g(x_i y_j) = g(x'_i y'_j) \\ &= |g(x'_i) - g(y'_j)| \\ &= |p + g(x'_i) - [p + g(y'_j)]| \\ &= |f(x'_i) - f(y'_j)|. \end{aligned}$$

(iii) (ee-balanced) Let $s(x_i y_j) = |f(x_i) - f(y_j)| - f(x_i y_j)$ for $x_i y_j \in E(T)$, so

$$\begin{aligned} s(x_i y_j) &= |f(x_i) - f(y_j)| - f(x_i y_j) \\ &= |g(x'_i) - g(y'_j)| - p + g(x_i y_j) \\ &= 2g(x_i y_j) - p, \end{aligned}$$

which distributes $\{2 - p, 4 - p, \dots, -2, 0, 2, 4, \dots, p - 2\}$ if p is even, or $\{2 - p, 4 - p, \dots, -3, -1, 1, 3, \dots, p - 2\}$ if p is odd. Thereby, each edge $x_i y_j \in E(T)$ matches with another edge $x''_i y''_j \in E(T)$ such that $s(x_i y_j) + s(x''_i y''_j) = 0$, except that edge e holding $s(e) = 0$ as p is even.

(iv) (EV-ordered) $f_{\max}(E(T)) < f_{\min}(V(T))$ from (11).

(v) (ve-matching) The form (11) tells us: Each edge uv matches with one vertex w such that $f(uv) + f(w) = 2p$, and each vertex z matches with one edge xy such that $f(z) + f(xy) = 2p$, except the singularity $f(w') = p$.

(vi) (set-ordered) $f_{\max}(X) < f_{\min}(Y)$ for the bipartition (X, Y) of $V(G)$ according to (11).

Hence, we claim that the labelling f admits really a 6C-labelling defined in Definition 12.

The proof of "only if". Suppose that T admits a 6C-labelling h . By the property (iv) and $h(V(T) \cup E(T)) = [1, 2p - 1]$, we get $h(E(T)) = [1, p - 1]$ and $h(V(T)) = [p, 2p - 1]$. We define a labelling h^* as: $h^*(w) = h(w) - p$ for $w \in V(T)$, which gives $h^*(V(T)) = [0, p - 1]$; and $h^*(x_i y_j) = p - h(x_i y_j)$ for each edge $x_i y_j \in E(T)$, so $h^*(E(T)) = [1, p - 1]$. The property (i) enables us to compute

$$\begin{aligned} h^*(x_i y_j) &= p - h(x_i y_j) \\ &= p - [p - |h(x_i) - h(y_j)|] \\ &= |[h(x_i) - p] - [h(y_j) - p]| \\ &= |h^*(x_i) - h^*(y_j)|, \end{aligned} \quad (12)$$

that is, h^* is graceful. The property (vi) means that h^* is set-ordered. \square

In Fig.20(a), $G = \odot_1\langle T, G_3 \rangle$ is obtained by identifying two singularities 13 of T and G_3 shown in Fig.19 into one, where the 6C-labelling f_{G_3} of G_3 is the reciprocal-inverse labelling of the 6C-labelling f_T of T , so we say f_{G_3} and f_T are matching to each other, and (f_{G_3}, f_T) is a 6C-complementary matching. Observe the 6C-labelling θ of $G = \odot_1\langle T, G_3 \rangle$, we can see such properties: $\theta(E(G)) \subset \theta(V(G))$; 13 ($= p$) is the common singularity of two trees T and G_3 ; and $\theta(uv) + |\theta(u) - \theta(v)| = 13 (= p)$ for each edge $uv \in E(T)$, $\theta(xy) - |\theta(x) - \theta(y)| = 13 (= p)$ for each edge $xy \in E(G_3)$. The particular properties of the 6C-labelling

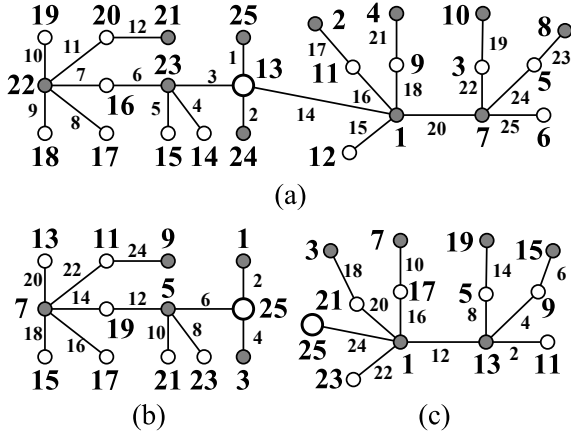


Fig. 20. (a) $G = \odot_1\langle T, G_3 \rangle$ admits a 6C-labelling defined in Definition 12, where T and G_3 are shown in Fig.19; (b) an odd-even separable 6C-labelling; (c) an odd-even separable 6C-labelling.

θ of $G = \odot_1\langle T, G_3 \rangle$ enables us to define a new labelling. Fig.20(b) and Fig.20(c) show two *odd-even separable 6C-labellings*. Thereby, we can have the following results (the proofs of these two results are similar to that in the proof of Theorem 14):

Corollary 15. *A tree admits a set-ordered graceful labelling if and only if it admits an odd-even separable 6C-labelling defined in Definition 12.*

Corollary 16. *Suppose that two trees T and H of p vertices admit set-ordered graceful labellings. Then $G = \odot_1\langle T, H \rangle$ admits a 6C-labelling θ with*

$$\theta(uv) + |\theta(u) - \theta(v)| = p$$

for each edge $uv \in E(T)$,

$$\theta(xy) - |\theta(x) - \theta(y)| = p$$

for each edge $xy \in E(H)$.

Similarly with Definitions 10 and 11, we can define a graceful-magic matching labelling (e.g. the edge-magic total labelling) and an ee-difference graceful-magic matching labelling (f, g) (see Fig.21(c) and (d)).

Definition 13. * Suppose that a (p, q) -graph G admits a vertex labelling $f : V(G) \rightarrow [0, p-1]$ and an edge labelling $g : E(G) \rightarrow [1, q]$, and let $s(uv) = |f(u) - f(v)| - g(uv)$ for $uv \in E(G)$. If

- (i) each edge uv corresponds an edge $u'v'$ such that $g(uv) = |f(u') - f(v')|$ (or $g(uv) = p - |f(u') - f(v')|$);
- (ii) and there exists a constant k'' such that each edge xy has a matching edge $x'y'$ holding $s(xy) + s(x'y') = k''$ true;
- (iii) there exists a constant k such that $|f(u) - f(v)| + f(uv) = k$ for each edge $uv \in E(G)$;
- (iv) there exists a constant k' such that each edge uv matches with one vertex w such that $f(uv) + f(w) = k'$, and each vertex z matches with one edge xy such that $f(z) + f(xy) = k'$, except the *singularity* $f(x_0) = 0$.

Then we call (f, g) an *ee-difference graceful-magic matching labelling* (Dgemm-labelling) of G (called a *Dgemm-graph*). (see examples shown in Fig.21(c) and (d)) \square

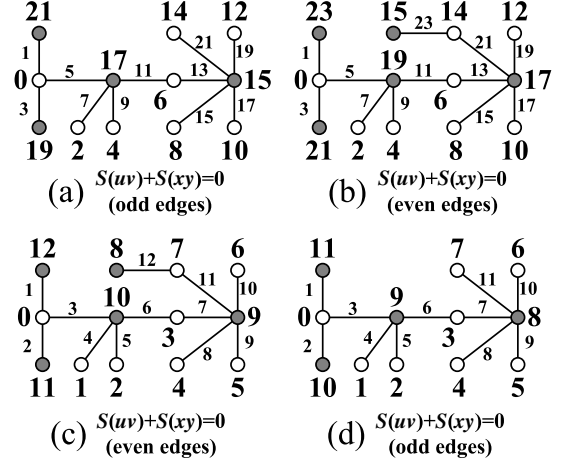


Fig. 21. (a) An ee-difference odd-magic matching labelling; (b) an ee-difference odd-magic matching labelling; (c) an ee-difference graceful-magic matching labelling; (d) an ee-difference graceful-magic matching labelling.

E. Inverse matchings

Definition 14. [9] If there exists a constant $k \geq 0$, such that a (p, q) -graph G admits a total labelling $f : V(G) \cup E(G) \rightarrow [1, p+q]$, each edge $uv \in E(G)$ holds

$$|f(u) + f(v) - f(uv)| = k$$

and $f(V(G) \cup E(G)) = [1, p+q]$ true, we call f an *edge-magic graceful labelling* of G , and k a *magic constant*. Moreover, f is called a *super edge-magic graceful labelling* if $f(V(G)) = [1, p]$. \square

Definition 15. [27] A *ve-exchanged matching labelling* h of an edge-magic graceful labelling f of a (p, q) -graph G is defined as: $h : V(G) \cup E(G) \rightarrow [1, p+q]$, each edge $uv \in E(G)$ holds $h(uv) = |h(u) - h(v)|$ true (or $h(uv) + |h(u) - h(v)| = k$, or $h(uv) = h(u) + h(v) \pmod{q}$, or $|h(u) + h(v) - h(uv)| = k$, or $h(u) + h(uv) + h(v) = k$), such that $h(V(G) \cup E(G)) = [1, p+q]$, $h(V(G)) \setminus \{a_0\} = f(E(G))$ and $h(E(G)) = f(V(G)) \setminus \{a_0\}$, where $a_0 = \lfloor \frac{p+q+1}{2} \rfloor$ is the singularity of two labellings f and h . (see Fig.22(b) and (c)). \square

By Definition 15, we propose the concept of “*reciprocal-inverse matching labelling*”: Suppose that a (p, q) -graph G admits an edge-magic graceful labelling f , and a (q, p) -graph H admits an edge-magic graceful labelling g . If

$$f(E(G)) = g(V(H)) \setminus X^*, f(V(G)) \setminus X^* = g(E(H))$$

for $X^* = f(V(G)) \cap g(V(H))$, we say that f and g are *reciprocal-inverse* (or *reciprocal complementary*), moreover H (or G) is an *inverse matching* of G (or H).

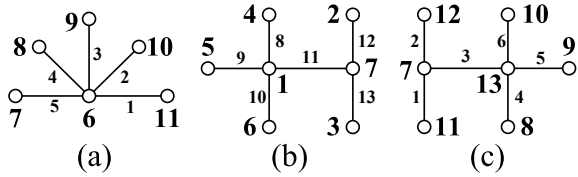


Fig. 22. (a) A relaxed Emt-graph; (b) an edge-magic graceful labelling f ; (c) a ve-exchanged matching labelling of f with the singularity 7.

Observe Fig.22(b) and (c), we have the *total-magic matching labelling* (f, f') of a (p, q) -graph G defined as: Two total labellings $f : V(G) \cup E(G) \rightarrow [1, p + q]$ and $f' : V(G) \cup E(G) \rightarrow [1, p + q]$ such that

$$f(x) + f'(x) = f(uv) + f'(uv)$$

for any vertex $x \in V(G)$ and edge $uv \in E(G)$. We can ask for f (or f') being an edge-magic total labelling, or an edge-magic graceful labelling, or other labellings defined on $V(G) \cup E(G)$ and $[1, p + q]$.

F. Self-matchings

For a partition $K_n = G \cup \overline{G}$ with the same vertex set $V(K_n) = V(G) = V(\overline{G})$ and edge-disjoint sets $E(G) \cap E(\overline{G}) = \emptyset$, we say that G and \overline{G} are *complementary* to each other, and we say G is *self-complementary* if G is isomorphic to \overline{G} . So, we can consider this case as a *self-matching*. Motivated from complete graph $K_n = G \cup \overline{G}$, we propose

Definition 16. * Let W be a universal graph, and two graphs G, H of W hold $E(G) \cap E(H) = \emptyset$ and $V(W) = V(G) \cup V(H)$ true. If $E(W) = E(G) \cup E(H)$, we say G and H to be *W-complementary* to each other, and moreover we call G to be *self-matching* (also, self-complementary) if G is isomorphic to H , that is, $G \cong H$. \square

For example, if T is isomorphic to T' in a universal graph $\odot_1\langle T, T' \rangle$, then we say T a *self-matching*.

If a connected (p, q) -graph G admits an edge-magic total labelling f , then there exists a connected graph H admitting a ve-matching labelling g such that $f(E(G)) = g(V(H))$ and $f(V(G)) = g(E(H))$ for G and H being not trees. We prove this proposition as: We take H as a copy of G , and define the *dual labelling* of f for H as: $g(x) = \max f(V(G) \cup E(G)) + \min f(V(G) \cup E(G)) - f(x)$ for $x \in V(G) \cup E(G)$. So, G is self-matching with H under the ve-matching labelling.

If a connected (p, q) -graph G admits an odd-graceful labelling $f : V(G) \rightarrow [0, 2q - 1]$, then there exists another connected graph H admitting a pan-odd-graceful labelling $g : V(H) \rightarrow [1, 2q]$ such that $\odot_1\langle G, H \rangle$ admits a *twin odd-graceful labelling*. For showing this claim, we let $H \cong G$, and define $g(x) = f(x) + 1$ for $x \in V(H) = V(G)$, and then identify the vertices of G and H with the same labels into one for obtaining $\odot_1\langle G, H \rangle$. Here, G is a self-matching.

If a connected (p, q) -graph G admits a 6C-labelling f , G has its own reciprocal complementary H admitting a 6C-labelling g , and f and g are pairwise reciprocal-inverse labellings, so $\odot_1\langle G, H \rangle$ is a *self-matching* when $G \cong H$ (see for examples T and G_1 shown in Fig.19).

Corollary 17. *If a tree T admits a set-ordered graceful labelling, then we have a self-matching $\odot_1\langle T, T \rangle$ admitting a 6C-labelling.*

Corollary 18. *If a tree T admits a set-ordered odd-graceful/odd-elegant labelling, then there exists a self-matching $\odot_1\langle T, T \rangle$ admitting a twin odd-graceful/odd-elegant labelling.*

Proof. By the hypothesis of the corollary, a tree T has its own vertex bipartition (X, Y) with $X = \{x_i : i \in [1, s]\}$ and $Y = \{y_j : j \in [1, t]\}$ with vertex number $|V(T)| = p = s + t$ and edge number $|E(T)| = p - 1$. Since T admits a set-ordered graceful labelling f , so we get $f(x_i) = i - 1$ for $i \in [1, s]$ and $f(y_j) = s + j - 1$ for $j \in [1, t]$, and $f(x_i y_j) = f(y_j) - f(x_i) = s + j - i$ for each edge $x_i y_j \in E(T)$. Clearly, $f(X) < f(Y)$.

(1) We define a labelling g of a copy T' of T with $(X', Y') = (X, Y)$ as: $g(x'_i) = 2f(x_i) = 2(i - 1)$ for $i \in [1, s]$ and $g(y'_j) = 2f(y_j) - 1 = 2(s + j) - 3$ for $j \in [1, t]$, immediately,

$$\begin{aligned} g(x'_i y'_j) &= |g(y'_j) - g(x'_i)| \\ &= |2(s + j) - 3 - 2(i - 1)| \\ &= 2s + 2(j - i) - 1 \\ &= 2(s + j - i) - 1 \\ &= 2f(x_i y_j) - 1. \end{aligned}$$

So, g is an odd-graceful labelling of T' , since $g(X') = \{0, 2, \dots, 2(s - 1)\}$ is an even-set, $g(Y') = \{2s - 1, 2s + 1, \dots, 2p - 3\}$ is an odd-set, and $g(E(T)) = [1, 2p - 3]^o$ is an odd-set too. Now, we take another copy T'' of T with $(X'', Y'') = (X, Y)$, and make a *complementary labelling* g'' of the odd-graceful labelling g' by setting $g''(w) = g'(w) + 1$ for $w \in V(T)$, clearly, $g''(E(T)) = g'(E(T))$. Moreover, $g''(X) = [1, 2s - 1]^o$, $g''(Y) = \{2s, 2s + 2, \dots, 2p - 2\}$, we can see

$$g''(V(T)) \cap g'(V(T)) = \{2s - 1\}$$

and

$$g''(V(T)) \cup g'(V(T)) = [0, 2p - 2].$$

T'' is the *complementary matching* of T' . Thereby, $\odot_1\langle T', T'' \rangle$ admits a twin odd-graceful labelling and it is a self-matching.

(2) The proof of $\odot_1\langle T', T'' \rangle$ admitting a twin odd-elegant labelling is very similar to that of the above (1), here, it takes “mod $2p - 2$ ”.

The proof of this corollary is finished. \square

G. Set-ordered matchings

Suppose that a (p, q) -graph G admits an ε -labelling $f : V(G) \rightarrow [0, p - 1]$ (or $[1, p + q]$, or $[0, 2q - 1]$, or $[1, 2q]$),

G is bipartite with its own bipartition (X, Y) . The symbol $f_{\max}(X) < f_{\min}(Y)$ is defined by

$$\max\{f(x) : x \in X\} < \min\{f(y) : y \in Y\}$$

and we call f a *set-ordered ε -labelling* of G . As known, many set-ordered ε -labellings have good properties, and have been connected with other labellings equivalently ([11], [12], [14], [15], [25]). However, determining a graph whether admits a set-ordered ε -labelling seems to be not easy.

Theorem 19. *Suppose that a bipartite (p, q) -graph G admits an ε -labelling, then there exists another bipartite (p, q) -graph H such that a bipartite graph $G \ominus H$ obtained by using an edge to join a vertex of G with a vertex of H admits a set-ordered ε -labelling.*

Proof. Let (X, Y) be the bipartition of vertices of G such that each edge $uv \in E(G)$ satisfies $u \in X$ and $v \in Y$. We take a copy of G , denoted as H with its bipartition $(X', Y') = (X, Y)$. Suppose that G admits an ε -labelling f , so H admits an ε -labelling f' which is a copy of f . Now, we use an edge to join any vertex u of G with its isomorphic vertex u' of H for producing the desired graph $G \ominus H$. Clearly, $G \ominus H$ is a bipartite $(2p, 2q + 1)$ -graph with bipartition $(X \cup Y', X' \cup Y)$. We define a labelling g as: $g(x) = f(x)$ for $x \in X$, $g(y') = f(y')$ for $y' \in Y'$, $g(w) = f(w) + p$ for $w \in X'$, and $g(z) = f(z) + p$ for $z \in Y$. Obviously,

$$g_{\max}(X \cup Y') < g_{\min}(X' \cup Y),$$

so g is a set-ordered ε -labelling of $G \ominus H$. \square

If the graph $G \ominus H$ based on two disjoint graphs G and H admits a set-ordered ε -labelling, we say G to be a *set-ordered matching* of H , and vice versa. It may be interesting to look for $G \not\cong H$ in the set-ordered matching $G \ominus H$.

H. Labellings with extremal conditions

Definition 17. * Let $f : V(G) \rightarrow [0, q]$ be a vertex labelling of a (p, q) -graph G , and let

$$S_{um}(G, f) = \sum_{uv \in E(G)} |f(u) - f(v)|,$$

we call f a *difference-sum labelling*. Find two extremum $\max_f S_{um}(G, f)$ (profit) and $\min_f S_{um}(G, f)$ (cost) over all difference-sum labellings of G . \square

A tree T shown in Fig.23 has $\max_f S_{um}(T, f) = S_{um}(T, h_1) = 84$ and $\min_f S_{um}(T, f) = S_{um}(T, h_4) = 20$. We will show some properties of difference-sum labellings of graphs with necessary proofs.

(Extr-1) Each complete graph K_n holds

$$\begin{aligned} \min_g S_{um}(K_n, g) &= \max_f S_{um}(K_n, f) \\ &= \sum_{i=1}^{n-1} \sum_{k=1}^{n-i} k = \frac{1}{2} \sum_{i=1}^{n-1} (n-i+1)(n-i). \end{aligned}$$

(Extr-2) Let G be a caterpillar, then

(a) Adding a leaf to G produces another caterpillar $G + e$, we have

$$\begin{aligned} \min_f S_{um}(G, f) &\leq \min_g S_{um}(G + e, g) \\ &\leq \min_f S_{um}(G, f) + 3. \end{aligned}$$

(b) Suppose H is another caterpillar with $|V(G)| = |V(H)|$. If two diameters $D(H) > D(G)$, then

$$\min_g S_{um}(H, g) \leq \min_f S_{um}(G, f).$$

(Extr-3) If a disconnected graph G has its components G_1, \dots, G_m , then

$$\max_f S_{um}(G, f) = \sum_{i=1}^m \max_g S_{um}(G_i, g),$$

$$\min_f S_{um}(G, f) = \sum_{i=1}^m \min_g S_{um}(G_i, g).$$

(Extr-4) Adding an edge uv to join two non-adjacent vertices u, v of G produces a new graph $G + uv$, then $\max_f S_{um}(G, f) \leq \max_h S_{um}(G + uv, h)$.

(Extr-5) If f and f^* are dual difference-sum labellings to each other, then $S_{um}(G, f) = S_{um}(G, f^*)$.

(Extr-6) For a tree T of p vertices, a *path* P_p of p vertices and a *star* $K_{1, p-1}$, we have

$$\begin{aligned} p - 1 &= \min_f S_{um}(P_p, f) \leq \min_f S_{um}(T, f) \\ &\leq \min_f S_{um}(K_{1, p-1}, f) = \frac{p^2}{4}, \frac{p^2 - 1}{4}. \end{aligned} \quad (13)$$

(Extr-7) A difference-sum labelling h of a tree T holds $\max_f S_{um}(T, f) = S_{um}(T, h)$ true if and only if $h_{\max}(X) < h_{\min}(Y)$ with the partition (X, Y) of T .

Proof. Let $V(T) = X \cup Y$ with $X \cap Y = \emptyset$, where $X = \{x_1, x_2, \dots, x_a\}$, $Y = \{y_1, y_2, \dots, y_b\}$. Suppose G admits a vertex labelling $f : V(T) \rightarrow [0, p - 1]$ such that

$$\begin{aligned} 0 = f(x_1) &< f(x_2) < \dots < f(x_i) < f(x_{i+1}) < \dots \\ &< f(x_a) < f(y_1) < f(y_2) < \dots < f(y_j) < \\ &f(y_{j+1}) < \dots < f(y_b) = p - 1 \end{aligned} \quad (14)$$

We exchange two labels $f(x_i)$ and $f(y_j)$ for some $i \neq j$. In other word, we define another vertex labelling $g : V(T) \rightarrow [0, p - 1]$ such that $g(x_i) = f(y_j)$, $g(y_j) = f(x_i)$ and $g(w) = f(w)$ for $w \in V(T) \setminus \{x_i, y_j\}$. Clearly, there is no $g_{\max}(X) < g_{\min}(Y)$. We claim

$$S_{um}(T, f) > S_{um}(T, g). \quad (15)$$

Let the set of neighbors of the vertex x_i is denoted as $N(x_i) = \{y_{i_1}, y_{i_2}, \dots, y_{i_m}\}$, the set of neighbors of the vertex y_j is written as $N(y_j) = \{x_{j_1}, x_{j_2}, \dots, x_{j_n}\}$. We compute

$$\begin{aligned} |g(x_i) - g(y_{i_s})| &= |f(y_j) - f(y_{i_s})| \leq f(y_{i_s}) - \\ f(y_1) &< f(y_{i_s}) - f(x_a) \leq f(y_{i_s}) - f(x_i), \end{aligned} \quad (16)$$

and

$$\begin{aligned} |g(y_j) - g(x_{j_t})| &= |f(x_i) - f(x_{j_t})| \leq f(x_a) - \\ f(x_{j_t}) &< f(y_1) - f(x_{j_t}) \leq f(y_1) - f(x_{j_t}). \end{aligned} \quad (17)$$

Thereby, our assertion (15) holds true. \square

(Extr-8) Max-min-sum Algorithm for computing $\max_f S_{um}(T, f)$.

Initiation. Take a labelling $f_0 : V(T) \rightarrow [0, p-1]$.

Iteration. For an optimal labelling $f_k : V(T) \rightarrow [0, p-1]$, find a pair of vertices x, y , and check whether

$$\sum_{x_i \in N(x)} |f_k(y) - f(x_i)| \geq (\leq) \sum_{x_i \in N(x)} |f_k(x) - f(x_i)| \quad (18)$$

and

$$\sum_{y_j \in N(y)} |f_k(x) - f(y_j)| \geq (\leq) \sum_{y_j \in N(y)} |f_k(y) - f(y_j)|. \quad (19)$$

If it is so, we define a new labelling f_{k+1} as: $f_{k+1}(x) := f_k(y)$, $f_{k+1}(y) := f_k(x)$, and $f_{k+1}(w) := f_k(w)$ for $w \in V(T) \setminus \{x, y\}$.

Termination. If no two vertices x, y hold the forms (18) and (19) true, output the labelling f_k with $S_{um}(T, f_k) = \max_f S_{um}(T, f)$.

Similarly, we can use (\leq) in (18) and (19) to deal with the case $\min_f S_{um}(T, f)$.

(Extr-9) If T is a caterpillar, then we can compute the exact value of $\min_f S_{um}(T, f)$.

Proof. We show an algorithmic proof here. A caterpillar T shown in Fig.10 contains a path $P = u_1 u_2 \cdots u_n$, and each set of leaves $v_{i,j}$ adjacent to a vertex u_i is denoted as $L(u_i) = \{v_{i,j} : j \in [1, m_i]\}$ with $m_i \geq 0$ and $i \in [1, n]$. So, each vertex u_i has its own degree $\deg(u_1) = |L(u_1)| + 1 = m_1 + 1$, $\deg(u_j) = |L(u_j)| + 2 = m_j + 2$ with $j \in [2, n-1]$, $\deg(u_n) = |L(u_n)| + 1 = m_n + 1$. We define a labelling f of T as follows. Let $N(x)$ be the set of neighbors of a vertex x .

Step 1. For the vertices of $N(u_1) = L(u_1) \cup \{u_2\}$, we set $f(v_{1,j}) = j - 1$ with $j \in [1, m_1]$, $f(u_1) = m_1$, $f(u_2) = m_1 + 1$. Compute the sum

$$\begin{aligned} \sum_{j=1}^{m_1} |f(v_{1,j}) - f(u_1)| &= \sum_{j=1}^{m_1} [m_1 - f(v_{1,j})] \\ &= 1 + 2 + \cdots + m_1 = \frac{1}{2}(m_1 + 1)m_1, \end{aligned} \quad (20)$$

and $|f(u_1) - f(u_2)| = m_1 + 1 - m_1 = 1$.

Step 2. Notices that $u_i \in N(u_{i-1})$ with $i \in [2, n]$, so $f(u_i)$ has been defined well. For the vertices of $N(u_i) = L(u_i) \cup \{u_{i-1}, u_{i+1}\}$ with $i \in [2, n-1]$, we set $f(v_{i,j}) = f(u_i) + j$ with $j \in [1, m_i]$, $f(u_{i+1}) = f(u_i) + m_i + 1$. Thereby, we have

$$\begin{aligned} \sum_{j=1}^{m_i} |f(v_{i,j}) - f(u_i)| &= \sum_{j=1}^{m_i} [f(u_i) + j - f(u_i)] \\ &= 1 + 2 + \cdots + m_i = \frac{1}{2}(m_i + 1)m_i, \end{aligned} \quad (21)$$

and

$$|f(u_i) - f(u_{i+1})| = f(u_i) + m_i + 1 - f(u_i) = m_i + 1.$$

Step 3. For the vertices of $N(u_n) = L(u_n) \cup \{u_{n-1}\}$, we set $f(v_{n,j}) = f(u_n) + j$ with $j \in [1, m_n]$. We get

$$\begin{aligned} \sum_{j=1}^{m_n} |f(v_{n,j}) - f(u_n)| &= \sum_{j=1}^{m_n} [f(u_n) + j - f(u_n)] \\ &= 1 + 2 + \cdots + m_n = \frac{1}{2}(m_n + 1)m_n. \end{aligned} \quad (22)$$

Therefore, we summarize the above sub-sums as

$$\begin{aligned} S_{um}(T, f) &= \frac{1}{2}(m_1 + 1)m_1 + 1 + \frac{1}{2}(m_n + 1)m_n \\ &\quad + \sum_{k=2}^{n-1} \frac{1}{2}(m_k + 1)m_k + \sum_{k=2}^n (m_k + 1) \\ &= n - m_1 + \frac{1}{2} \sum_{k=1}^n m_k(m_k + 3) \end{aligned} \quad (23)$$

We, now, optimize the sum $S_{um}(T, f)$. According to the definition of the labelling f , $|f(u_i) - f(u_{i+1})| = f(u_{i+1}) - f(u_i) = m_i + 1$, so $|f(u_i) - f(u_{i-1})| = f(u_i) - f(u_{i-1}) = m_{i-1} + 1$. We select a vertex $v_{i,j}$ for some $j \in [1, m_i]$, and define a new labelling g as: $g(u_i) = f(v_{i,j}) = f(u_i) + j$, $g(v_{i,j}) = f(u_i)$, and $g(w) = f(w)$ for $w \in V(T) \setminus \{v_{i,j}, u_i\}$. Now, we inspect the sum $S_{um}(T, g)$. From

$$\begin{aligned} |g(u_i) - g(u_{i-1})| &= f(v_{i,j}) - f(u_{i-1}) \\ &= f(u_i) + j - f(u_{i-1}) \\ &= m_{i-1} + 1 + j \end{aligned}$$

and

$$\begin{aligned} |g(u_i) - g(u_{i+1})| &= f(u_{i+1}) - f(u_i) \\ &= f(u_{i+1}) - f(v_{i,j}) \\ &= f(u_i) + 1 + m_i - [f(u_i) + j] \\ &= m_i + 1 - j. \end{aligned}$$

we have

$$\begin{aligned} |f(u_i) - f(u_{i-1})| + |f(u_i) - f(u_{i+1})| \\ = |g(u_i) - g(u_{i-1})| + |g(u_i) - g(u_{i+1})|. \end{aligned}$$

and

$$\begin{aligned} \sum_{k=1}^{m_i} |g(u_i) - g(v_{i,k})| \\ = |f(v_{i,j}) - f(u_i)| + \sum_{k=1, k \neq j}^{m_i} |f(v_{i,j}) - f(v_{i,k})| \\ < \sum_{k=1}^{m_i} |f(u_i) - f(v_{i,k})| \end{aligned} \quad (24)$$

We select $a_{i,0} = \lfloor \frac{m_i+1}{2} \rfloor$ with $i \in [1, n]$, thus, each sum

$$\begin{aligned} \sum_{k=1}^{m_i} |g(u_i) - g(v_{i,k})| &= \sum_{k=1, k \neq a_{i,0}}^{m_i} |f(v_{i,a_{i,0}}) - f(v_{i,k})| \\ &= 2(1 + 2 + \cdots + a_{i,0}) \\ &= a_{i,0}(1 + a_{i,0}) \end{aligned}$$

Clearly,

$$a_{i,0}(1 + a_{i,0}) < \sum_{j=1}^{m_i} |f(v_{i,j}) - f(u_i)|$$

from in (21). Furthermore, using (18) and (19) check the sum $S_{um}(T, g)$, we can see $S_{um}(T, g) = \min_f S_{um}(T, f)$ holds true. This algorithm is correct and has the complex of polynomial time. \square

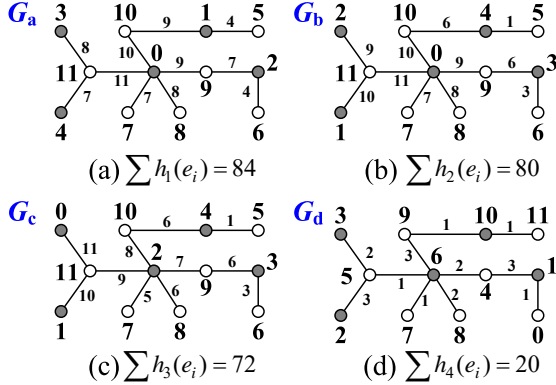


Fig. 23. A lobster admits four difference-sum labellings with the maximum sum 84, sum 80, sum 72 and the minimum sum 20.

When considering network passwords, we have theoretical guarantee for using Topsnut-gpws made by caterpillars. A spider with three legs of length 2, also, is called an aster, denoted as $A_{2,2,2}$. Or, the deletion of all leaves of $A_{2,2,2}$ results in $K_{1,3}$. If each spanning tree of a graph G is a caterpillar, we call G to be *caterpillar-pure*. Jamison *et al.* [7] have shown: A connected graph is caterpillar-pure if and only if it does not contain any aster $A_{2,2,2}$ as a (not necessarily induced) subgraph.

We present a new extremal labelling, called felicitous-sum labelling (see an example in Fig.24), as follow:

Definition 18. * Let $f : V(G) \rightarrow [0, q]$ be a labelling of a (p, q) -graph G , and let

$$F_{um}(G, f) = \sum_{uv \in E(G)} [f(u) + f(v)] \pmod{q+1},$$

we call f a *felicitous-sum labelling*. Find two extremum $\max_f F_{um}(G, f)$ and $\min_f F_{um}(G, f)$ over all felicitous-sum labellings of G . (See examples shown in Fig.24) \square

Observe Fig.23 and Fig.24, we can get two particular matching graphs $A = \odot_{12}\langle G_a, G_d \rangle$ with G_a, G_d shown in Fig.23 and $B = \odot_9\langle F_b, F_c \rangle$ with F_b, F_c shown in Fig.24. These two particular matching graphs enable us to define two new concepts in the following Definition 19 and Definition 20, respectively.

Definition 19. * Suppose that G_M and G_m are two copies of a (p, q) -graph G , and G_M admits a difference-sum labelling f_M holding $S_{um}(G_M, f_M) = \max_f S_{um}(G, f)$

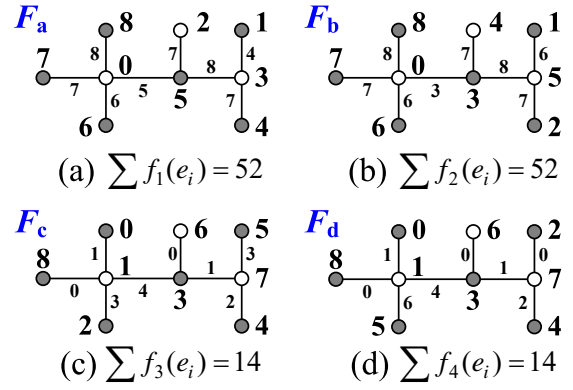


Fig. 24. As understanding Definition 18, a tree admits four felicitous-sum labellings with the maximum sum 52, sum 52, the minimum sum 14 and the minimum sum 14.

true, G_m admits another difference-sum labelling f_m holding $S_{um}(G_m, f_m) = \min_f S_{um}(G, f)$ true. The identifying graph $H = \odot\langle G_M, G_m \rangle$ is called a *Max-min difference-sum matching partition*, moreover if $H = \odot_p\langle G_M, G_m \rangle$ holds $E(G_M) \cap E(G_m) = \emptyset$ true, we call H a *perfect Max-min difference-sum matching partition*. (See a perfect Max-min difference-sum matching partition shown in 25(a)) \square

Definition 20. * Suppose that H_M and H_m are two copies of a (p, q) -graph H , and H_M admits a felicitous-sum labelling h_M holding $F_{um}(H_M, h_M) = \max_f F_{um}(G, f)$ true, H_m admits another felicitous-sum labelling h_m holding $F_{um}(H_m, h_m) = \min_f F_{um}(G, f)$ true. The identifying graph $G = \odot\langle H_M, H_m \rangle$ is called a *Max-min felicitous-sum matching partition*, and furthermore we call G a *perfect Max-min felicitous-sum matching partition* if $G = \odot_p\langle H_M, H_m \rangle$ holds $E(H_M) \cap E(H_m) = \emptyset$ true. (see a perfect Max-min felicitous-sum matching partition shown in 25(b)) \square

We guess: *Each tree induces a perfect Max-min difference-sum matching partition and a perfect Max-min felicitous-sum matching partition.*

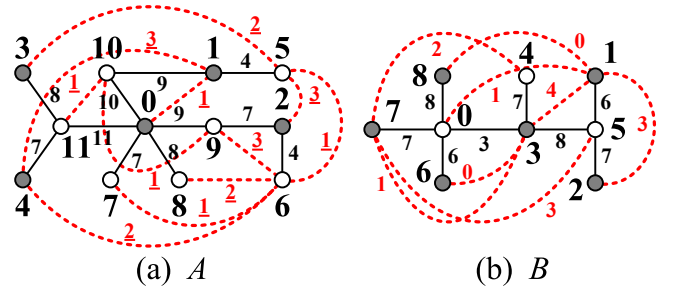


Fig. 25. (a) A perfect Max-min difference-sum matching partition $A = \odot_{12}\langle G_a, G_d \rangle$, where G_a, G_d are shown in Fig.23; (b) a perfect Max-min felicitous-sum matching partition $B = \odot_9\langle F_b, F_c \rangle$, where F_b, F_c are shown in Fig.24.

III. MATCHINGS FROM PROPER TOTAL COLORINGS

Graph coloring is an important branch of graph theory, since there are many unsolved problems and conjectures in various graph colorings. For example, the famous *four color conjecture* on planar graphs was proved in 1976 by Kenneth Appel and Wolfgang Haken, but only after many false proofs and counterexamples. It was the first major theorem to be proved using a computer. A simpler proof using the same ideas and still relying on computers was published in 1997 by Robertson, Sanders, Seymour, and Thomas. Additionally, in 2005, the theorem was proved by Georges Gonthier with general-purpose theorem-proving software (Ref. Wikipedia). Unfortunately, there is no mathematical proof of the four color theorem up to now. Another example is the *total coloring conjecture* proposed by Behzad in 1965 and Vizing in 1964.

A. Edge-magic and equitable proper total colorings

Coloring each of vertices and edges of a graph G with a number in $[1, k]$ makes no two adjacent vertices/edges or incident edge/vertex having the same label, we call this coloring a *proper total coloring*, the minimum number of k for which G admits a proper total k -colorings is denoted as $\chi''(G)$. Let $f : V(G) \cup E(G) \rightarrow [1, \chi''(G)]$ be a proper total coloring of G with $\chi''(G) = |\{f(x) : x \in V(G) \cup E(G)\}|$, and we call such coloring f to be *total chromatic number pure* (tcn-pure). Let $d_f(uv) = f(u) + f(uv) + f(v)$ for each edge $uv \in E(G)$, and set

$$B_{tol}(G, f) = \max_{uv \in E(G)} \{d_f(uv)\} - \min_{uv \in E(G)} \{d_f(uv)\}.$$

Determine a new parameter $\min_f B_{tol}(G, f)$ over all tcn-pure colorings of G , and call $\min_f B_{tol}(G, f)$ by the *pan-bandwidth total chromatic number*. Especially, a coloring h is called an *edge-magic proper total coloring* if $B_{tol}(G, h) = 0$, or an *equitably proper total coloring* if $B_{tol}(G, h) = 1$.

In Fig.26, three complete bipartite graphs $K_{2,3}$, $K_{2,4}$ and $K_{3,3}$ admit six tcn-pure colorings: each h_i is the *dually total coloring* (also, *matching total coloring*) of f_i with $i \in [1, 3]$. Moreover, $B_{tol}(K_{2,3}, f_1) = 2$, $B_{tol}(K_{2,4}, f_2) = 3$ and $B_{tol}(K_{3,3}, f_3) = 4$; $B_{tol}(K_{2,3}, h_1) = 2$, $B_{tol}(K_{2,4}, h_2) = 3$, $B_{tol}(K_{3,3}, h_3) = 3$.

There are some obvious facts:

Tot-1. Any path P_n of n vertices admits an edge-magic proper total coloring, that is, $\min_f B_{tol}(P_n, f) = 0$.

Tot-2. A cycle C_n of n vertices admits an edge-magic proper total coloring if $n \equiv 0 \pmod{3}$, and admits an equitably total coloring, otherwise.

Tot-3. If h is the *matching proper total coloring* of a tcn-pure coloring f defined as: $h(w) = [\max f(V(G) \cup E(G)) + \min f(V(G) \cup E(G))] - f(w)$ for $w \in V(G) \cup E(G)$, then,

$$\begin{aligned} d_h(uv) &= h(u) + h(uv) + h(v) \\ &= 3(\max f + \min f) - [f(u) + f(uv) + f(v)] \\ &= 3(\max f + \min f) - d_f(uv), \end{aligned}$$

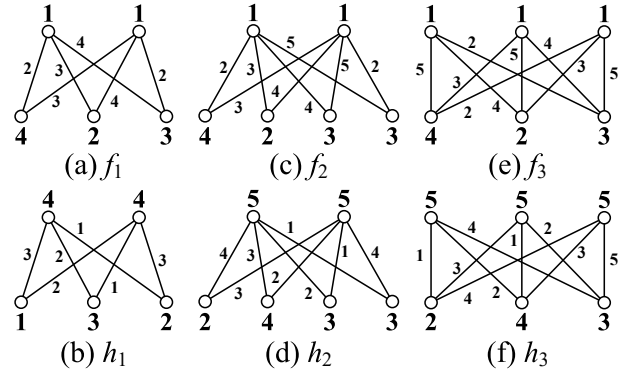


Fig. 26. Six tcn-pure colorings of three complete bipartite graphs, in which h_i is the matching coloring of the tcn-pure coloring f_i with $i = 1, 2, 3$.

thus,

$$\begin{aligned} B_{tol}(G, h) &= \max_{uv \in E(G)} \{d_h(uv)\} - \min_{uv \in E(G)} \{d_h(uv)\} \\ &= \max_{uv \in E(G)} \{d_f(uv)\} - \min_{uv \in E(G)} \{d_f(uv)\} \\ &= B_{tol}(G, f). \end{aligned}$$

It seems to be not easy to determine the exact value of the pan-bandwidth total chromatic number $\min_f B_{tol}(G, f)$ for a given simple graph G , since $\min_f B_{tol}(G, f)$ is related with the total chromatic number $\chi''(G)$, which lets us recall the long standing total coloring conjecture: “For any simple graph G , the elements of $V(G) \cup E(G)$ can be colored with at most $\Delta(G) + 2$ colors so that no two adjacent or incident elements receive the same color, also $\chi''(G) \leq \Delta(G) + 2$.” Unfortunately, there are less significant results on the total labelling conjecture so far. The exact values of some special families of graphs have been obtained, such as K_n , complete bipartite graph $K_{m,n}$, complete k -partite graph K_{m_1, m_2, \dots, m_k} , and join graph $G + H$ and so on. We, as exercise, verify a simple result.

Lemma 20. Let T be a tree, then the total chromatic number $\chi''(T) = \Delta(T) + 1$.

Proof. The assertion is true if T is a star $K_{1, n-1}$ or a double star $S_{s,t}$, so assume $T \neq K_{1, n-1}$ and $T \neq S_{s,t}$. The following part of the proof is by induction on orders of trees and constrained by diameter $D(T) \geq 4$.

Case 1. If there is a vertex u of T such that $\deg_T(u) = 2$, which is adjacent to a leaf v with $\deg_T(v) = 1$ in T . Let $T_1 = T - v$, then $\Delta(T_1) = \Delta(T)$. We take a proper $\chi''(T_1)$ -total coloring f of T_1 , hence, set $f'(v) = f(uv)$, $f'(uv) = f(w)$ and $f'(x) = f(x)$ for $x \in [E(T) \cup V(T)] \setminus N(u)$. It is clear that the coloring f' is a proper $\chi''(T_1)$ -total coloring of T such that

$$\chi''(T) = \chi''(T_1) = \Delta(T_1) + 1 = \Delta(T) + 1.$$

Case 2. For the case $\deg_T(u) \geq 3$, we take a vertex u of T with its neighbor set $N(u) = \{u_1, u_2, \dots, u_k, u_0\}$, where $k =$

$\deg_T(u) - 1$, u_i is a leaf of T with $i \in [1, k]$ and $\deg(u_0) \geq 2$, and let $T_2 = T - u_1$.

Now, we take a proper $\chi''(T_2)$ -total coloring g of T_2 having $\chi''(T_2) = \Delta(T_2) + 1$, and then build a proper $\chi''(T)$ -total coloring g' of T as: Let $C = [1, \chi''(T_2)]$ be the color set of T_2 under g and $C(g, w) = \{g(xw) : xw \in E(T_2)\} \cup \{g(w)\}$ for $w \in (T_2)$.

Case 2.1. If $\Delta(T_2) = \Delta(T)$, then $|C(g, u)| \leq \Delta(T_2)$, so there is a color $\alpha \in C$ but $\alpha \notin C(g, u)$. We have that $g'(v) = g(u_0)$, $g'(uv) = \alpha$ and $g'(x) = g(x)$ for $x \in [E(T) \cup V(T)] \setminus \{v, uv\}$. Hence,

$$\chi''(T) = \chi''(T_2) = \Delta(T_2) + 1 = \Delta(T) + 1.$$

Case 2.2. If $\Delta(T_2) = \Delta(T) - 1$, so $\chi''(T_2) = \Delta(T_2) + 1 = \Delta(T)$, and then we set $g'(v) = g(u_0)$, $g'(uv) = \chi''(T_2) + 1$ and $g'(x) = g(x)$ for $x \in (E(T) \cup V(T)) \setminus \{v, uv\}$. Therefore,

$$\chi''(T) = \chi''(T_2) + 1 = \Delta(T) + 1. \quad (25)$$

The proof of this lemma is finished. \square

Lemma 21. *A star also is a complete bipartite graph $K_{1,n}$. Then this star $K_{1,n}$ admits an edge-magic proper total coloring for even n , that is, $\min_f B_{tol}(K_{1,n}, f) = 0$, or an equitably proper total coloring for odd n .*

Proof. Clearly, $\Delta(K_{1,n}) = n$. Let this star $K_{1,n}$ have its vertex set $V(K_{1,n}) = \{x_0, x_1, x_2, \dots, x_n\}$ and edge set $E(K_{1,n}) = \{x_i x_0 : i \in [1, n]\}$. We define a proper total coloring f of $K_{1,n}$ as: If n is even, we set $f(x_0) = 1$, $f(x_0 x_i) = 1 + i$ and $f(x_i) = n + 2 - i$ with $i \in [1, n]$. We can compute $\chi''(K_{1,n}) = \Delta(K_{1,n}) + 1 = n + 1$, and

$$\begin{aligned} d_f(u_0 u_i) &= f(x_0) + f(x_0 x_i) + f(x_i) \\ &= 1 + 1 + i + n + 2 - i \\ &= n + 3, \end{aligned}$$

which shows $B_{tol}(K_{1,n}, f) = 0$.

If n is odd, we label $f(x_0) = 1$, $f(x_0 x_i) = 1 + i$ with $i \in [1, n]$, $f(x_i) = n + 2 - i$ with $i \in [1, n]$ and $i \neq (n+1)/2$, and $f(x_{(n+1)/2}) = n + 1 - (n+1)/2$. Clearly, $\chi''(K_{1,n}) = \Delta(K_{1,n}) + 1 = n + 1$, $d_f(u_0 u_i) = f(x_0) + f(x_0 x_i) + f(x_i) = 1 + 1 + i + n - i = n + 2$ with $i \in [1, n-1]$ and $i \neq (n+1)/2$, and

$$\begin{aligned} d_f(u_0 u_{(n+1)/2}) &= f(x_0) + f(x_0 x_{(n+1)/2}) + f(x_{(n+1)/2}) \\ &= 1 + [n + 2 - (n+1)/2] + [n + 1 - (n+1)/2] \\ &= n + 3. \end{aligned}$$

Thereby, we claim $B_{tol}(K_{1,n}, f) = 1$, in other words, $K_{1,n}$ admits an equitably proper total coloring. \square

Lemma 22. *Each bi-star $S_{m,n}$ admits an equitably proper total coloring.*

Proof. By the definition of a bi-star $S_{m,n}$, it has its own vertex set $V(S_{m,n}) = \{x_0, x_1, x_2, \dots, x_m\} \cup \{y_0, y_1, y_2, \dots, y_n\}$ and edge set $E(S_{m,n}) = \{x_i x_0 : i \in [1, m]\} \cup \{y_j y_0 : j \in [1, n]\} \cup \{x_0 y_0\}$. Without loss of generality, assume that $m \geq n$. We consider the case $m = 2a$ and $n = 2b$ and set a proper total

coloring g of $S_{m,n}$ as follows: $g(x_0) = 1$, $g(x_0 x_i) = 1 + i$ with $i \in [1, 2a]$, $g(x_0 y_0) = 2a + 2$, $g(y_0) = 2$, $g(x_i) = 2a + 3 - i$ with $i \in [1, 2a]$ and $i \neq a + 1$, $g(x_{a+1}) = g(x_{a+2})$; if $a \neq b$, $g(y_0 y_j) = 2 + j$ with $j \in [1, 2b]$, $g(y_j) = 2a + 1 - j$ with $i \in [1, 2b]$; if $a = b$, $g(y_0 y_j) = 2 + i$ with $j \in [1, 2b - 1]$, $g(y_0 y_{2b}) = 1$, $g(y_{2b}) = 2a + 2$, $g(y_j) = 2a + 1 - j$ with $j \in [1, 2b - 2]$, $g(y_{2b-1}) = 3$. It is not hard to verify $B_{tol}(S_{2a,2b}, g) = 1$. Notice that

$$g : V(S_{2a,2b}) \rightarrow [1, 2a + 2] = [1, \Delta(S_{2a,2b}) + 1].$$

For other three cases $m = 2a$ and $n = 2b - 1$, $m = 2a - 1$ and $n = 2b - 1$, $m = 2a - 1$ and $n = 2b$, the proof ways are similar to that of the case $m = 2a$ and $n = 2b$. We claim that $S_{m,n}$ admits an equitably proper total coloring. \square

Theorem 23. *There exist infinite trees admitting edge-magic proper total colorings.*

Proof. A spider S_{m_1, m_2, \dots, m_n} has n paths (called legs) $P_i = u_{i,1} u_{i,2} \dots u_{i,m_i}$ with $m_i \geq 1$ for $i \in [1, n]$, and a body u_0 is joined with $u_{i,1}$ by an edge $u_0 u_{i,1}$ with $i \in [1, n]$. As n is even, the star $K_{1,n}$ having its vertex set $\{u_0, u_{1,1}, u_{2,1}, \dots, u_{n,1}\}$ and edge set $\{u_0 u_{i,1} : i \in [1, n]\}$ admits an edge-magic proper total coloring f by Lemma 21. So, $f(u_0) = 1$, $f(u_0 u_{i,1}) = 1 + i$ and $f(u_{i,1}) = n + 2 - i$ with $i \in [1, n]$. Notice that

$$\begin{aligned} d_f(u_0 u_{i,1}) &= f(u_0) + f(u_0 u_{i,1}) + f(u_{i,1}) \\ &= 1 + n + 2 - i + 1 + i \\ &= n + 3 \end{aligned} \quad (26)$$

with $i \in [1, n]$. Clearly, $\chi''(K_{1,n}) = n + 1 = \Delta(K_{1,n}) + 1$.

We extend the coloring f to the spider S_{m_1, m_2, \dots, m_n} by coloring a leg $P_i = u_{i,1} u_{i,2} \dots u_{i,m_i}$ as: $f(u_{i,1} u_{i,2}) = 1$ and $f(u_{i,2}) = f(u_0 u_{i,1}) = 1 + i$, which shows $d_f(u_{i,1} u_{i,2})$ obeys (26); next, $f(u_{i,2} u_{i,3}) = f(u_{i,1}) = n + 2 - i$ and $f(u_{i,3}) = f(u_0) = 1$, so $d_f(u_{i,2} u_{i,3})$ obeys (26) too. Go on in this way, we have shown that the spider S_{m_1, m_2, \dots, m_n} admits f as its a proper total coloring such that

$$\chi''(S_{m_1, m_2, \dots, m_n}) = n + 1 = \Delta(S_{m_1, m_2, \dots, m_n}) + 1$$

and

$$B_{tol}(S_{m_1, m_2, \dots, m_n}, f) = 0.$$

The proof of the theorem is complete. \square

An example is shown in Fig.27 for understanding the proof of Theorem 23. Motivated from the technique in the proof of Theorem 23, we have:

Lemma 24. *For any tree T , we can add a leaf u to T with $u \notin V(T)$ such that the tree $T + uv$ with $v \in V(T)$ holds $\min_f B_{tol}(T, f) = \min_g B_{tol}(T + uv, g)$ true.*

See a generalized spider admitting an edge-magic proper total coloring shown in Fig.28 for understanding Lemma 24, which can help us to design random Topsnut-gpws or rooted Topsnut-gpw.

Theorem 25. *Each tree admits an equitable proper total coloring.*

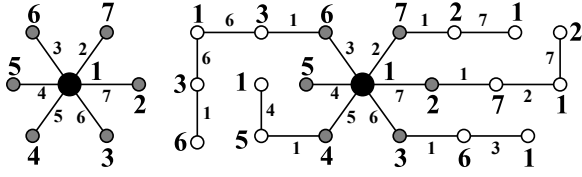


Fig. 27. Left is $K_{1,6}$, Right is a spider $S_{1,3,3,4,3,5}$.

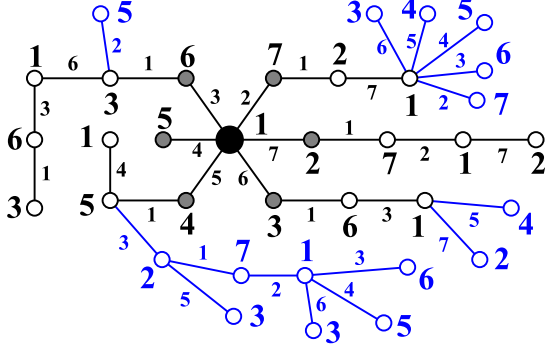


Fig. 28. A generalized spider H admits an edge-magic proper total coloring, where $K_{1,6}$ is the root, so H is called a rooted Topsnut-gpw.

Proof. We consider a tree T having diameter $D_{ia}(T) \geq 4$ since T with $D_{ia}(T) \leq 3$ follows Lemma 21 and Lemma 22. Select a vertex u of T such that the neighbor set $N(u) = \{u_1, u_2, \dots, u_k, u_0\}$, where $k = \deg_T(u) - 1$, $\deg_T(u_i) = 1$ with $i \in [1, k]$ and $\deg(u_0) \geq 2$. Without loss of generality, assume that $k + 2 \leq \Delta(T)$, since we use the induction proof on numbers of vertices of trees.

Then, T admits a proper total coloring f holding $B_{tol}(T, f) = \min_g B_{tol}(T, g) = 1$ true. Notice that $\chi''(T) = \Delta(T) + 1$, there exists a vertex w of T such that $\deg_T(w) = \Delta(T)$. By the principle of induction, we add a new vertex x to T and join it with u by an edge ux . There are the following cases.

Case 1. If $f(u_0) \neq f(u_i u)$ with $i \in [1, k]$, then we set $f(ux) = f(u_0)$, $f(x) = f(u_0 u)$. Obviously, $|d_f(u_0 u) - d_f(ux)| = 0$.

Case 2. If $f(u_j) \neq f(u_i u)$ for some $i \neq j$, then we set $f(ux) = f(u_j)$, $f(x) = f(u_j u)$, thus, $|d_f(u_j u) - d_f(ux)| = 0$.

Case 3. Without loss of generality, we assume $f(u_0) = f(u_j u)$ for some j , and $f(u_i) = f(u_{i'} u)$ for each $i \in [1, k]$. We have a color set

$$S = \{f(u_0 u), f(u_1 u), f(u_2 u), \dots, f(u_k u), f(u)\}$$

such that $|S| = \Delta(T)$. We can arrange

$$f(u_0 u) < f(u_1 u) < f(u_2 u) < \dots < f(u_k u).$$

By $\chi''(T) = \Delta(T) + 1$, the cardinality of the color set holds $|f(V(T) \cup E(T))| = \Delta(T) + 1$ true, so there exists one color $c \in f(V(T) \cup E(T)) \setminus S$. So, $f(u_j u) < c < f(u_{j+1} u)$.

Case 3.1. If $f(u) < f(u_j u)$ or $f(u_{j+1} u) < f(u)$, immediately, we have $c - f(u_j u) = 1$ and $f(u_{j+1} u) - c = 1$,

$f(u_{j+1} u) - f(u_j u) = 2$. We set $f(ux) = c$, $f(x) = f(u_j u)$, and furthermore

$$\begin{aligned} & |d_f(u_{j+1} u) - d_f(ux)| \\ &= |[f(u_{j+1} u) + f(u_{j+1} u) + f(u)] \\ &\quad - [f(x) + f(ux) + f(u)]| \\ &= |f(u_{j+1} u) - f(u_j u) + f(u_{j+1} u) - c| \\ &= |c + 1 - 2 - c| = 1. \end{aligned} \quad (27)$$

Case 3.2. If $f(u_j u) < f(u) < c < f(u_{j+1} u)$, according to $\chi''(T) = \Delta(T) + 1$, we get $f(u) - f(u_j u) = 1$, $c - f(u) = 1$ and $f(u_{j+1} u) - c = 1$. We let $f(ux) = c$, $f(x) = f(u_{j+1} u)$, and moreover we can compute

$$\begin{aligned} & |d_f(u_{j+1} u) - d_f(ux)| \\ &= |[f(u_{j+1} u) + f(u_{j+1} u) + f(u)] \\ &\quad - [f(x) + f(ux) + f(u)]| \\ &= |f(u_{j+1} u) + f(u_{j+1} u) - f(u_{j+1} u) - c| \\ &= |c + 1 - c| = 1. \end{aligned} \quad (28)$$

Summarizing the above cases, we have shown

$$B_{tol}(T + ux, f) = B_{tol}(T, f) = 1,$$

that is, f is an equitable proper total coloring of the tree $T + ux$. The proof of this theorem is complete. \square

According to Lemma 21 and Lemma 22, we claim that a tree T admits an edge-magic proper total coloring if its maximum degree $\Delta(T)$ is even, and T admits an equitable proper total coloring otherwise. Furthermore, we can make random rooted Topsnut-gpws by adding vertices and edges based on edge-magic/equitable proper total colorings. About rooted Topsnut-gpws G with edge-magic proper total colorings, we have the following problems: (1) The distance between two maximum degree vertices of G is at least 3. (2) For a fixed $|V(G)|$, how large is $|E(G)|$? and what is the number of maximum degree vertices of G ? (3) The girth (length of the smallest cycle) of G is at least 6, and so on.

In Fig.29, we can get a text-based password

$$D_{vev} = 5231631721721635272635235145163 \\ 5217217235235217213613.$$

Clearly, no way by D_{vev} to reconstruct the original non-planar rooted Topsnut-gpw G shown in Fig.29.

B. Consecutive integer sets of complete graphs with proper total colorings

A complete graph K_m admits a proper total coloring f with $\chi''(K_m) = m + 1$ for even m , and $\chi''(K_m) = m$ for odd m . Let

$$f^*(E(K_m)) = \{f(u) + f(uv) + f(v) : uv \in E(K_m)\}.$$

Hence, we guess: $f^*(E(K_m))$ is a consecutive integer set $[a, b]$ (see Fig.30). Four proper total colorings h shown in Fig.31 match with four proper total colorings f shown in Fig.30, we can see $f^*(E(K_3)) = h^*(E(K_3))$ and $f^*(E(K_5)) =$

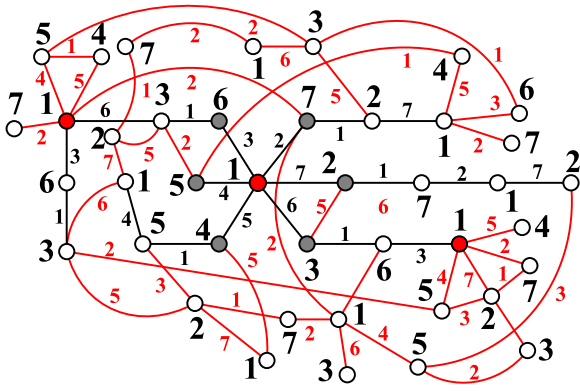


Fig. 29. A non-planar rooted Topsnut-gpw G with maximum degree 6 and an edge-magic proper total coloring.

$h^*(E(K_5))$, so we say the proper total colorings f of K_3 and K_5 are *self-matching about consecutive integer sets*. Does any complete graph K_{2n+1} admit a proper total coloring f being self-matching about consecutive integer set?

Since any tree T admits an edge-magic proper total labelling f or an equitable proper total labelling f , so

$$f^*(E(T)) = \{f(u) + f(uv) + f(v) : uv \in E(T)\}$$

is a consecutive integer set.

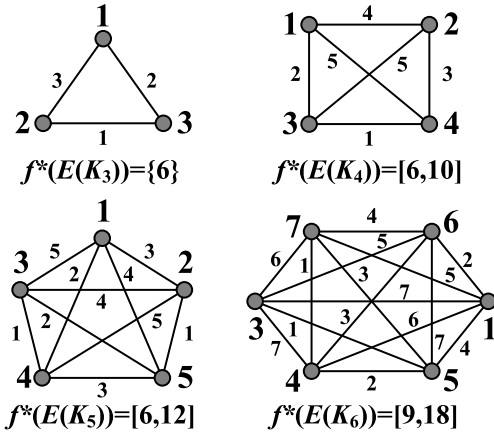


Fig. 30. Four examples for illustrating the consecutive integer sets of proper total colorings.

In Fig.26, we have $f_1^*(E(K_{2,3})) = \{f_1(u) + f_1(uv) + f_1(v) : uv \in E(K_{2,3})\} = [6, 8]$, $f_2^*(E(K_{2,4})) = \{f_2(u) + f_2(uv) + f_2(v) : uv \in E(K_{2,4})\} = [6, 9]$ and $f_3^*(E(K_{3,3})) = \{f_3(u) + f_3(uv) + f_3(v) : uv \in E(K_{3,3})\} = [6, 10]$, and furthermore the matching colorings h_1, h_2, h_3 distribute us

$$\begin{aligned}
 h_1^*(E(K_{2,3})) &= \{h_1(u) + h_1(uv) + h_1(v) : uv \in E(K_{2,3})\} \\
 &= [7, 9], \\
 h_2^*(E(K_{2,4})) &= \{h_2(u) + h_2(uv) + h_2(v) : uv \in E(K_{2,4})\} \\
 &= [9, 12] \text{ and} \\
 h_3^*(E(K_{3,3})) &= \{h_3(u) + h_3(uv) + h_3(v) : uv \in E(K_{3,3})\} \\
 &= [8, 12].
 \end{aligned}$$

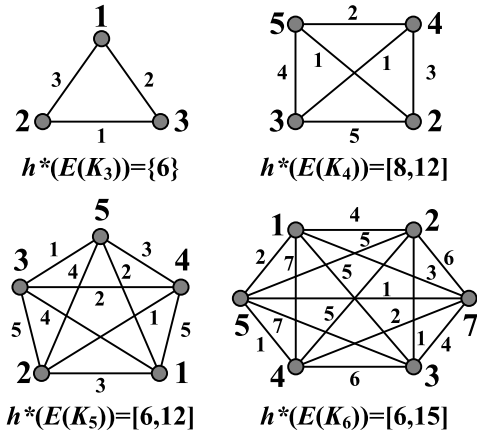


Fig. 31. Four proper total colorings of four complete graphs match with four total colorings of four complete graphs shown in Fig.30.

It shows that each complete bipartite graph $K_{m,n}$ admits a proper total coloring

$$g : V(K_{m,n}) \cup E(K_{m,n}) \rightarrow [1, \chi''(K_{m,n})]$$

such that

$$g^*(E(K_{m,n})) = \{g(u) + g(uv) + g(v) : uv \in E(K_{m,n})\}$$

is a consecutive integer set $[a, b]$.

C. New parameters on proper vertex colorings

We define two parameters on proper vertex colorings of graph theory in this subsection. Let $f : V(G) \rightarrow [1, k]$ be a proper vertex coloring of a graph G with $k = \chi(G)$. We define a parameter

$$B_{sub}(G, f) = \sum_{xy \in E(G)} |f(x) - f(y)|, \quad (29)$$

and try to determine $\min_f B_{sub}(G, f)$ and $\max_f B_{sub}(G, f)$. Clearly, if G is a bipartite graph, then

$$\min_f B_{sub}(G, f) = \max_f B_{sub}(G, f) = |E(G)|.$$

If a connected graph G holds

$$\min_f B_{sub}(G, f) < M < \max_f B_{sub}(G, f) \quad (30)$$

true for each M , there exists a proper vertex coloring f_M of G such that $B_{sub}(G, f_M) = M$, we say that G has a *group of consecutive difference proper vertex colorings* (see an example shown in Fig.32).

Let $g : V(G) \rightarrow [1, k]$ be a proper vertex coloring of a graph G with $k = \chi(G)$. We define another parameter

$$B_{sum}(G, g) = \sum_{xy \in E(G)} [f(x) + f(y)] \quad (31)$$

and try to compute two extremal values $\min_g B_{sum}(G, g)$ and $\max_h B_{sum}(G, h)$. If G has a proper vertex coloring g_Q for each Q satisfying

$$\min_g B_{sum}(G, g) < Q < \max_h B_{sum}(G, h) \quad (32)$$

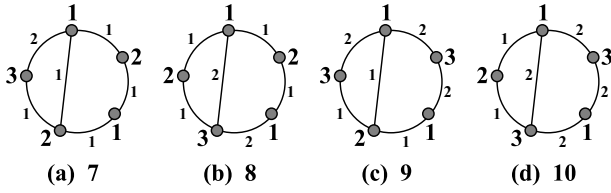


Fig. 32. The graph $C + uv$ admits a group of consecutive difference proper vertex colorings, which forms a *Topsnut-matching chain*.

such that $B_{sum}(G, g_Q) = Q$, we say that G has a *group of consecutive sum proper vertex colorings*. We give an example shown in Fig.33.

Observed that the labeled graph (a) in Fig.32 is equal to the labeled graph (a) in Fig.33, so we ask for a problem: If a proper vertex coloring h^* holds

$$B_{sub}(G, h^*) = \min_f B_{sub}(G, f)$$

true, then h^* holds

$$B_{sum}(G, h^*) = \min_f B_{sum}(G, f)$$

true too?

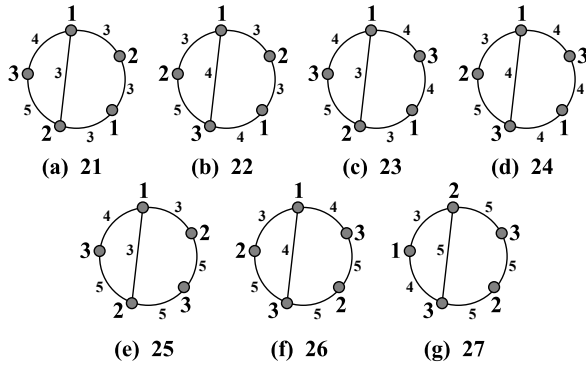


Fig. 33. The graph $C + uv$ admits a group of consecutive sum proper vertex colorings, which forms a *Topsnut-matching chain*.

For making *Topsnut-gpws* and *Topsnut-matchings* more complex, we can use distinguishing edge-colorings and distinguishing total colorings, since they match with the following open problems:

(i) Zhang *et al.* [32] show a famous conjecture: For every graph G with no K_2 or C_5 component, then the adjacent strong edge chromatic number

$$\chi'_{as}(G) \leq \Delta(G) + 2.$$

(ii) Zhang *et al.* [31] introduced a concept of adjacent vertex distinguishing total coloring (AVDTC), and show a conjecture: Let G be a simple graph with order $n \geq 2$; then G has its AVDTC chromatic number

$$\chi''_{as}(G) \leq \Delta(G) + 2.$$

(iii) Yang *et al.* propose the following conjectures ([3], [4]): Every simple graph G having at least a 4-avdvc holds

$$\chi''_{4as}(G) \leq \Delta(G) + 4.$$

D. New proper total colorings

We use the successful experience of graph labelling definitions to propose new proper total colorings. Let $f : V(G) \cup E(G) \rightarrow [1, k]$ be a proper total coloring of a graph G . If each edge uv holds $f(uv) = |f(u) - f(v)|$ true, we call f a *ve-matching difference total k -coloring* of G , we denote the smallest number of k over all *ve-matching difference total k -colorings* by $\chi''_{ved}(G)$, called the *ve-matching difference total chromatic number* of G . See two *ve-matching difference total colorings* shown in Fig.34(a) and (b). We can see $\chi''(G) \leq \chi''_{ved}(G)$, in general.

For a proper total coloring $h : V(G) \cup E(G) \rightarrow [1, m]$, if each edge uv holds $h(uv) = h(u) + h(v)$ true, we call h a *ve-matching sum total m -coloring*. The minimal number of m over all *ve-matching sum total m -colorings* is denoted as $\chi''_{ves}(G)$, called the *ve-matching sum total chromatic number* of G . Two *ve-matching sum total colorings* are shown in Fig.34(c) and (d). Clearly, $\chi''(G) \leq \chi''_{ves}(G)$.

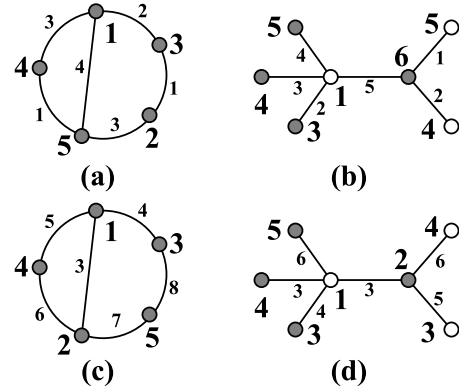


Fig. 34. Four *ve-matching difference/sum total colorings*.

Lemma 26. Suppose that H is a connected subgraph of a connected graph G , then

$$\chi''_{ved}(H) \leq \chi''_{ved}(G), \chi''_{ves}(H) \leq \chi''_{ves}(G). \quad (33)$$

IV. GRAPH LABELLING ANALYSIS

Analyzing a graph labelling in detail and depth is necessary and important, since graph labellings are applied to design graphical ciphers serving to information security. We hope that analysis of graph labellings will be helpful for applying graph labellings towards information networks, and become a new subbranch of graph theory.

A. Pan-labellings

A *pan-labelling* is constituted of a topological structure and some operations based on numbers, letters, *Topsnut-gpws*, sets, groups etc. In general, a *pan-labelling* may be a traditional graph labelling/coloring of graph theory, or others introduced here. A coloring can be admitted by each simple graph, but a traditional labelling is admitted only by part of simple graphs.

For a (p, q) -graph G , a *pan-labelling* f is defined on a domain $S \subseteq V(G) \cup E(G)$, and yields the *main-range*

$f(S) = \{f(x) : x \in S\}$. Furthermore, f gives a mapping f' based on the edge-domain $E(G)$ and produces the *derivative range*

$$f'(E(G)) = \{f'(uv) = F(f(u), f(v)) : uv \in E(G)\}$$

where $F(f(u), f(v))$ is a *function* of two variables. The main range or the derivative range is one of number sets, graph sets, group sets, Topsnut-sets, and so on.

Definition 21 is one of generalized labelling definitions for connecting more well-defined graph labellings.

Definition 21. [28] Let G be a (p, q) -graph, and let $A_M = \{a_i\}_1^M$ and $B_q = \{b_j\}_1^q$ be two monotonic increasing sequences of numbers with $M \geq p$. There are the following restrict conditions:

Seq-1. A vertex mapping $f : V(G) \rightarrow A_M$ such that $f(u) \neq f(v)$ for distinct vertices $u, v \in V(G)$.

Seq-2. A total mapping $g : V(G) \cup E(G) \rightarrow A_M \cup B_q$ such that $g(x) \neq g(y)$ for distinct elements $x, y \in V(G) \cup E(G)$.

Seq-3. An induced edge label $f(uv) = O(f(u), f(v))$.

Seq-4. An F -equation $F(g(u), g(uv), g(v)) = 0$ holds true.

Seq-5. An E -equation $E(f(u), f(uv), f(v)) = 0$ holds true.

Seq-6. $f(E(G)) \subseteq B_q$.

Seq-7. $g(V(G) \cup E(G)) \subseteq A_M \cup B_q$.

Seq-8. $f(V(G)) \subseteq A_M$ and $f(E(G)) = B_q$.

Seq-9. $f(V(G)) = A_M$ and $f(E(G)) = B_q$.

We call f :

(1) a *sequence- (A_M, B_q) labelling* if Seq-1 and Seq-3 hold true;

(2) a *sequence- (A_M, B_q) total labelling* if Seq-2, Seq-3 and Seq-7 hold true;

(3) a *full sequence- (A_M, B_q) labelling* if Seq-2, Seq-4 and Seq-8 hold true;

(4) a *graceful sequence- (A_M, B_q) labelling* if Seq-1, Seq-3 and Seq-9 hold true;

(5) a *total sequence- (A_M, B_q) labelling* if Seq-2 and Seq-4 hold true;

(6) a *sequence- (A_M, B_q) F -total graceful labelling* if Seq-2, Seq-4 and Seq-9 hold true;

(7) a *sequence- (A_M, B_q) mixed labelling* if Seq-3, Seq-5 and Seq-8 hold true. \square

If two sets $A_M = \{a_i\}_1^M$ and $B_q = \{b_j\}_1^q$ defined in Definition 21 correspond a graph labelling admitted by graphs, we say (A_M, B_q) a *graph-realized sequence matching*.

B. Topsnut-matchings labeled by graphs

Let $\{G_i\}_1^m$ be a set of disjoint graphs G_1, G_2, \dots, G_m , where G_k admits a labelling g_k with $k \in [1, m]$, and let a (p, q) -graph H be a *base*.

* **Addition and subtraction.** Define a mapping $f : V(H) \rightarrow \{G_i\}_1^m$, and an induced edge label $f'(uv) = F(G_i, G_j)$ for each edge $uv \in E(H)$, where $f(u) = G_i$ and $f(v) = G_j$. Hereafter, "joining G_i with G_j " is defined as an

operation of "joining a vertex of a graph G_i with some vertex of another graph G_j by an edge".

Gr-1. If $f'(E(H)) = \{|i-j| : uv \in E(H)\} = [1, q]$, we call $H(f, f')$ a *graceful graph-set labelling* (graceful gs-labelling). And, we have a *graceful gs-compound* $G = \langle \{G_i\}_1^m; H(f, f') \rangle$ obtained by joining $G_i = f(u)$ with $G_j = f(v)$ for each edge $uv \in E(H)$. In general, the number of such graphs $G = \langle \{G_i\}_1^m; H(f, f') \rangle$ is not one.

Gr-2. If $f'(E(H)) = \{|i-j| : uv \in E(H)\} = [1, 2q-1]^o$, then $H(f, f')$ is called an *odd-graceful graph-set labelling* (odd-graceful gs-labelling), and we have an *odd-graceful gs-compound* $G = \langle \{G_i\}_1^m; H(f, f') \rangle$.

Gr-3. If $f'(E(H)) = \{i+j \pmod{q} : uv \in E(H)\} = [0, q-1]$, we have a *felicitous graph-set labelling* (felicitous gs-labelling) $H(f, f')$, and a *felicitous gs-compound* $G = \langle \{G_i\}_1^m; H(f, f') \rangle$.

Gr-4. If $f'(E(H)) = \{i+j \pmod{2q-1} : uv \in E(H)\} = [0, 2q-3]^o$, we have an *odd-elegant graph-set labelling* (felicitous gs-labelling) $H(f, f')$, and an *odd-elegant gs-compound* $G = \langle \{G_i\}_1^m; H(f, f') \rangle$.

* **Magic type.** Define a mapping $f : V(H) \cup E(H) \rightarrow \{G_i\}_1^m$, such that $f(u) = G_i$, $f(v) = G_j$ and $f(uv) = G_k$ for each edge $uv \in E(H)$.

Mg-1. If there exists a constant k^* , such that

$$i + k + j = k^*$$

for each edge $uv \in E(H)$, we call f an *edge-magic total graph-set labelling* (edge-magic total gs-labelling), the graph $G = \langle \{G_i\}_1^m; H(f) \rangle$ is obtained by joining G_i with G_k and joining G_k with G_j for each edge $uv \in E(H)$ is called an *edge-magic total gs-compound*.

Mg-2. If there exists a constant k^* such that $|i-k+j| = k^*$ for each edge $uv \in E(H)$, we call f an *edge-magic total graceful graph-set labelling* (edge-magic total graceful gs-labelling), the graph $G = \langle \{G_i\}_1^m; H(f) \rangle$ is obtained by joining G_i with G_k and joining G_k with G_j for each edge $uv \in E(H)$ is called an *edge-magic total graceful gs-compound*.

Mg-3. If there exists a constant k^* such that $k + |i-j| = k^*$ for each edge $uv \in E(H)$, we call f an *edge-magic graceful total graph-set labelling* (edge-magic graceful total gs-labelling), the graph $G = \langle \{G_i\}_1^m; H(f) \rangle$ is obtained by joining G_i with G_k and joining G_k with G_j for each edge $uv \in E(H)$ is called an *edge-magic graceful total gs-compound*.

* (k, d) **type.** It is not difficult to imitate those well-defined graph labellings having parameters, so it is interesting to mention them as exercise.

C. Topsnut-matchings produced by graph operations

Op-1. **Odd-graceful/odd-elegant graph matching.** Let $S_{og}(p)$ be a set of odd-graceful/odd-elegant graphs of m vertices. A (p, q) -graph G admits a graph labelling $f : V(G) \rightarrow S_{og}(p)$ such that each edge $uv \in E(G)$ labeled as $f(uv) = \odot \langle f(u), f(v) \rangle$ is just a twin odd-graceful/odd-elegant graph of k_{uv} vertices, where $(f(u), f(v))$ is just an

odd-graceful/odd-elegant Topsnut-matching. If $\{k_{uv} : uv \in E(G)\} = [a, b]$, we say the graph $\langle G \odot S_{og}(p) \rangle$ obtained by joining $f(u)$ with $f(uv)$ and joining $f(uv)$ with $f(v)$ for each edge $uv \in E(G)$ an $[a, b]$ -*twin odd-graceful/odd-elegant graph*.

Op-2. Euler graph matching. Let E_g be a set of non-eulerian graphs. A (p, q) -graph G admits a graph labelling $f : V(G) \rightarrow E_g$, and induced edge label $f(uv) = \odot \langle f(u), f(v) \rangle$ is just an Euler graph of k_{uv} vertices, we call $(f(u), f(v))$ an *Euler Topsnut-matching*. The graph $\langle G \odot E_g \rangle$ obtained by joining $f(u)$ with $f(uv)$ and joining $f(uv)$ with $f(v)$ for each edge $uv \in E(G)$ an $[a, b]$ -*Euler graph*, where $\{k_{uv} : uv \in E(G)\} = [a, b]$.

Op-3. Hamilton graph matching. Let H_{ag} be a set of graphs. A (p, q) -graph G admits a graph labelling $f : V(G) \rightarrow H_{ag}$, and induced edge label $f(uv) = \odot \langle f(u), f(v) \rangle$ is just a Hamilton graph of k_{uv} vertices, we call $(f(u), f(v))$ a *Hamilton Topsnut-matching*. The graph $\langle G \odot E_{ag} \rangle$ obtained by joining $f(u)$ with $f(uv)$ and joining $f(uv)$ with $f(v)$ for each edge $uv \in E(G)$ is an $[a, b]$ -*Hamilton graph*, where $\{k_{uv} : uv \in E(G)\} = [a, b]$.

Op-4. Pan-matching with operation (\bullet) . Let P_{ag} be a set of graphs. A (p, q) -graph G admits a graph labelling $F : V(G) \rightarrow P_{ag}$, and induced edge label $F(uv) = F(u)(\bullet)F(v)$ is just a graph having a P-matching, where (\bullet) is an operation. Here, a P-matching may be: a perfect matching of k_{uv} vertices, k_{uv} -cycle, k_{uv} -connected, k_{uv} -edge-connected, k_{uv} -colorable, edge k_{uv} -colorable, total k_{uv} -colorable, k_{uv} -regular, k_{uv} -girth, k_{uv} -maximum degree, k_{uv} -clique, $\{a, b\}_{uv}$ -factor, a maximal planar graph of k_{uv} vertices, and so on. We call the graph $\langle G(\bullet)P_{ag} \rangle$ obtained by joining $F(u)$ with $F(uv)$ and joining $F(uv)$ with $F(v)$ for each edge $uv \in E(G)$ a *P-matching $\{k_{uv}\}$ -graph*.

An $\{a; b\}$ -factor is a spanning subgraph H of a graph G such that each vertex x of H has one of degree a and degree b . Let $F : V(G) \rightarrow H_{ag}$, where P_{ag} is a set of graphs, and let $F(uv) = \odot \langle F(u), F(v) \rangle$ be a graph having an $\{a; b\}$ -factor for each edge $uv \in E(G)$ (see Fig.36).

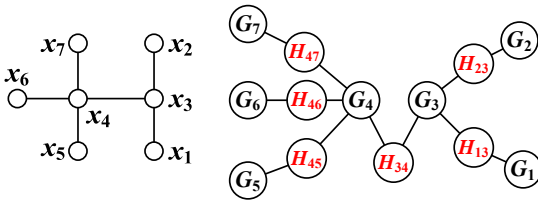


Fig. 35. Left is a tree T , Right is a collection T^* of graph-labelling graphs based on T and the intersect operation.

In Fig.35 and Fig.36, a tree T admits a graph labelling $F : V(T) \rightarrow F(G)$, where $F(x_i) = G_i$ with $i \in [1, 7]$, and $F(x_i x_j) = F(x_i) \cap F(x_j) = G_i \cap G_j = H_{ij}$. The graph H shown in Fig.36 is one of the collection T^* of graph-labelling graphs, since there are many ways to join two graphs by an edge. Here, $H_{13} = K_1 + \overline{K}_2$ is a $\{2; 1\}$ -factor, $H_{23} = K_2 + \overline{K}_2$ is a $\{2; 2\}$ -factor, $H_{34} = K_2 + \overline{K}_2$ is a $\{2; 3\}$ -factor, $H_{45} =$

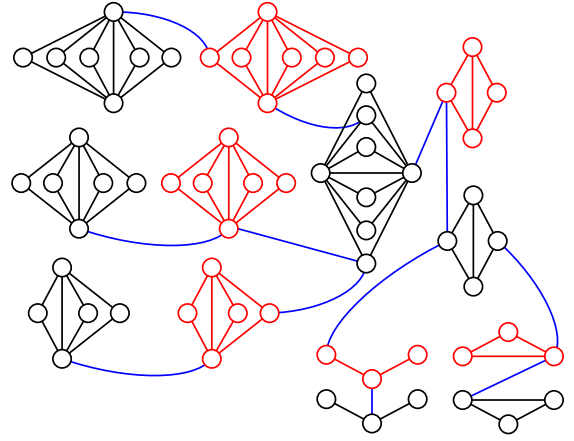


Fig. 36. A graph H is one of the collection T^* shown in Fig.35.

$K_2 + \overline{K}_3$ is a $\{2; 4\}$ -factor, $H_{46} = K_2 + \overline{K}_4$ is a $\{2; 5\}$ -factor, and $H_{47} = K_2 + \overline{K}_5$ is a $\{2; 6\}$ -factor. So, The edges of the graph H form a graceful sequence of $\{2; k\}$ -factors with $k \in [1, 6]$.

Theorem 27. Each caterpillar with q edges admits an $\{a; b\}$ -factor graph labelling, where $\{a; b\}$ is a non-decreasing sequence-pair $\{a_i^*; b_i^*\}_1^q$.

Proof. A caterpillar T shown in Fig.10 contains a path $P = u_1 u_2 \dots u_n$, and each set of leaves $v_{i,j}$ adjacent to a vertex u_i is denoted as $L(u_i) = \{v_{i,j} : j \in [1, m_i]\}$ with $m_i \geq 0$ and $i \in [1, n]$. We take a non-decreasing sequence-pair $\{a_{i,j}\}$ and $\{b_{i,j}\}$ for $j \in [1, m_i]$ and $i \in [1, n]$. Each complete bipartite graph $K_{a_{i,j}, b_{i,j}}$ is written as $K(a_{i,j}, b_{i,j})$ for convenient statement. We define a graph labelling F on T as follows:

For $i := 1$, we set

$$F(u_1) = K(c_{1,2} + A(m_1), d_{1,2} + B(m_1))$$

with $A(m_1) = \sum_{j=1}^{m_1} a_{1,j}$ and $B(m_1) = \sum_{j=1}^{m_1} b_{1,j}$, and set $F(v_{1,j}) = K(a_{1,j}, b_{1,j})$ and $F(u_1 v_{1,j}) = F(u_1) \cap F(v_{1,j})$ with $j \in [1, m_1]$.

For $i := i + 1$, we set

$$F(u_{i+1}) = K \left(\sum_{k=1}^{i+1} A(m_k) + \sum_{k=1}^i c_{k,k+1}, \sum_{k=1}^{i+1} B(m_k) + \sum_{k=1}^i d_{k,k+1} \right)$$

with $A(m_k) = \sum_{j=1}^{m_k} a_{k,j}$ and $B(m_k) = \sum_{j=1}^{m_k} b_{k,j}$, and set $F(v_{i+1,j}) = K(a_{i+1,j}, b_{i+1,j})$ and $F(u_1 v_{i+1,j}) = F(u_{i+1}) \cap F(v_{i+1,j})$ with $j \in [1, m_{i+1}]$.

At the last, we let

$$F(u_n) = K \left(1 + \sum_{k=1}^n A(m_k) + \sum_{k=1}^{n-1} c_{k,k+1}, \sum_{k=1}^n B(m_k) + \sum_{k=1}^{n-1} d_{k,k+1} \right)$$

and set $F(v_{n,j}) = K(a_{n,j}, b_{n,j})$ and $F(u_n v_{n,j}) = F(u_n) \cap F(v_{n,j})$ with $j \in [1, m_n]$.

Let $\alpha(r) = \sum_{k=1}^r m_k$. We write $a_j^* = a_{1,j}$ and $b_{1,j}^* = b_{1,j}$ with $j \in [1, m_1]$; $c_{12} = a_{1+\alpha(1)}^*$ and $d_{12} = b_{1+\alpha(1)}^*$; $a_{1+\alpha(1)+j}^* = a_{2,j}$ and $b_{1+\alpha(1)+j}^* = b_{2,j}$ with $j \in [1, m_2]$; $c_{2,3} = a_{2+\alpha(2)}^*$ and $d_{2,3} = b_{2+\alpha(2)}^*$; \dots ; $c_{n-1,n} = a_{n-1+\alpha(n-1)}^*$ and $d_{n-1,n} = b_{n-1+\alpha(n-1)}^*$; $a_{n-1+\alpha(n-1)+j}^* = a_{n,j}$ and $b_{n-1+\alpha(n-1)+j}^* = b_{n,j}$ with $j \in [1, m_n]$. Furthermore, we let $a_k^* \leq a_{k+1}^*$ and $b_k^* \leq b_{k+1}^*$ with $k \in [1, n-1+\alpha(n)]$.

Thereby, we have shown the result of the theorem. \square

We give the values of $\{a_i^*\}_1^q$ and $\{b_i^*\}_1^q$ in Theorem 27 in the following:

- (i) $\{a_i^*\}_1^q = \{a\}$ and $\{b_i^*\}_1^q = [1, q]$, so each caterpillar with q edges admits a *graceful* $\{a; b\}$ -factor graph labelling;
- (ii) $\{a_i^*\}_1^q = \{a\}$ and $\{b_i^*\}_1^q = [1, 2q-1]^o$, then every caterpillar with q edges admits an *odd-graceful* $\{a; b\}$ -factor graph labelling;
- (iii) $\{a_i^*\}_1^q = [1, q]$ and $\{b_i^*\}_1^q = [1, q]$, then each caterpillar with q edges admits a *bi-graceful* $\{a; b\}$ -factor graph labelling;
- (iv) $\{a_i^*\}_1^q = [1, 2q-1]^o$ and $\{b_i^*\}_1^q = [1, 2q-1]^o$, then each caterpillar with q edges admits an *bi-odd-graceful* $\{a; b\}$ -factor graph labelling.

Notice that there are many graphs containing $\{a; b\}$ -factors, in general. We can take well-known sequences (such as Fibonacci sequence, arithmetic progression, geometric progression, etc.) to replace $\{a_i^*\}_1^q$ and $\{b_i^*\}_1^q$ for getting more interesting Topsnut-gpws. Moreover, it is not difficult to prove: *Each lobster with q edges admits an $\{a; b\}$ -factor graph labelling, where $\{a, b\}$ is some non-decreasing sequence-pair $\{a_i^*; b_i^*\}_1^q$.*

D. Properties of Labellings

The previous subsections show the labellings with the following properties. Other properties of labellings can be found in [6]. Let k be a constant, and let G be a (p, q) -graph admitting a labelling f . We have:

C-1. (e-magic-graceful) Each edge uv matches with another edge xy such that $f(uv) + |f(x) - f(y)| = k$.

C-2. (e-magic) Each edge uv matches with another edge xy such that $f(x) + f(uv) + f(y) = k$.

C-3. (ee-graceful) Each edge uv matches with another edge xy holding $|f(x) + f(y) - f(uv)| = k$ true.

C-4. (ee-difference) Each edge uv matches with another edge xy holding $f(uv) = |f(x) - f(y)|$ true, or $f(uv) = M - |f(x) - f(y)|$.

C-5. (ee-sum) Each edge uv matches with another edge xy holding $f(uv) = f(x) + f(y) \pmod{B}$ true, such that the resulting edge labels are distinct and nonzero.

C-6. (ep-matching) Each matching edge $uv \in M$ holds $f(u) + f(v) = k$ true, where M is a perfect matching of G , and k is some constant.

C-7. (ee-bandwidth) Each edge uv matches with another edge $u'v'$ holding $s(uv) + s(u'v') = 0$ true, where $s(xy) = |f(x) - f(y)| - f(xy)$.

C-8. (ve-matching) Each edge uv matches with one vertex w such that $f(uv) + f(w) = k'$, and vice versa, except the *singularity*.

C-9. (EV-ordered) There two orders:

(i) $f_{\max}(V(G)) < f_{\min}(E(G))$, or $f_{\min}(V(G)) > f_{\max}(E(G))$;

(ii) $f(V(G)) \subseteq f(E(G))$, $f(E(G)) \subseteq f(V(G))$.

C-10. (set-ordered) $f_{\max}(X) < f_{\min}(Y)$, or $f_{\min}(X) > f_{\max}(Y)$ if G is bipartite with its partition (X, Y) of $V(G)$.

C-11. (reciprocal-inverse) $h(V(G) \cup E(G)) = [1, p+q]$,

$h(V(G)) \setminus \{a_0\} = f(E(G))$, $h(E(G)) = f(V(G)) \setminus \{a_0\}$

where $a_0 = \lfloor (p+q+1)/2 \rfloor$ is the singularity of two labellings f and h .

C-12. (odd-even separable) $f(V(G) \cup E(G)) = [1, p+q]$, and $f(V(G))$ is an odd-set containing only odd numbers, as well as $f(E(G))$ is an even-set containing only even numbers.

E. Some indices for analyzing graph labellings

We design parameters for theoretically metricizing Topsnut-gpws, such as:

Deg-1. *Difficulty*. A labelling f holds m conditions, we say f to be m -rank difficulty.

Deg-2. *Complexity*. A labelling f holds m conditions, each condition has a complex rank, summarizing them together forms the whole complex rank.

Deg-3. *Constructibility and non-constructibility*. It includes configuration construction (with no polynomial algorithm in general) and structural construction (with polynomial algorithm), constructive labelling. Conversely, it includes non-structural construction, non-constructive labelling.

Deg-4. *Computationally unbreakable*. Consider giant spaces, no-constructive algorithms, non-mathematical interventions (physics, chemistry, biology, music, national language).

Deg-5. *Matching*. Twin odd-graceful labelling, reciprocal-inverse labellings, other matchings mentioned here, and so on.

Deg-6. *Combinatorics*. Twin type of labellings, such as twin odd-graceful and twin odd-elegant labellings. Various combinatorics induce many labellings, such as 6C-labellings.

Deg-7. *Closure to property and configuration*. Labellings are closed to particular graphs, or graph properties, or labelling properties, and so on.

Deg-8. *Connections with others*. There are: (i) canonical mathematical operations, such as addition, subtraction, multiplication and division; (ii) graph operations, such as union, intersection, split, subdivision, and so on; (iii) advanced algebraic operations, such as group, ring and field; (iv) text-based passwords; (v) between labellings, such as equivalence, transformation etc.

Deg-9. *Compound*. Graphs are labeled by Topsnut-gpws and graphic groups etc.

Deg-10. *Transformation*. For example, f is set-ordered on (X, Y) , so we have an affine transformation g defined by $g(x) = af(x) + b$ for $x \in X$, $g(y) = cf(y) + d$ for $y \in Y$.

Deg-11. *Generalization and diversity.* What is a hyperlabelling? What is a network labelling? What is a random labelling? What is a functional (chemistry, physical, biological) labelling?

V. ALGEBRAIC GROUP/SET MATCHING PARTITIONS

Many problems of Topsnut-gpws can be transformed into algebraic problems, such as set problems and algebraic group problems, etc. However, the research of algebraic group/set problems differs greatly from that of Topsnut-gpws. On the other hands, investigating the problems proposed in this subsection does not need knowledge of graph theory, only basic mathematical knowledge.

A. Set matching partitions

Set matching partition is a natural phenomenon in mathematics, such as an integer set $[1, 10]$ contains two subsets $[1, 10]^o = \{1, 3, 5, 7, 9\}$ and $[1, 10]^e = \{2, 4, 6, 8, 10\}$. Clearly, $[1, 10]^o \cup [1, 10]^e = [1, 10]$, we say $[1, 10]^o$ and $[1, 10]^e$ are matching to each other, they are a *set matching partition* of $[1, 10]$. Many graph labellings are related with set problems. For two integers $p \geq 2$ and $q \geq 1$, the previous labelling definitions enable us to obtain the following set problems:

Set-1. From Definition 9: Partition $[1, p+q]$ into two disjoint subsets V and E with $V \cup E = [1, p+q]$ such that: (i) each $c \in E$ corresponds to distinct $a, b \in V$ holding $c = |a-b|$ true; (ii) there exists a constant k , each $c' \in E$ matches with distinct $a', b' \in V$ holding $a' + c' + b' = k$ true. We call (V, E) a *relaxed edge-magic total matching partition* of $[1, p+q]$.

* Find all possible relaxed edge-magic total matching partitions (V, E) of $[1, p+q]$.

Set-2. From Definition 10: Select two subsets $V, E \subset [1, 2q-1]$ with $E = [1, 2p-1]^o$ such that there is a constant k , each $c \in E$ corresponds two distinct $a, b \in V$ holding $a+b+c = k$ true. We call (V, E) an *odd-edge-magic matching partition* of $[1, 2q-1]$.

* Find all possible odd-edge-magic matching partitions of $[1, 2q-1]$.

Set-3. From Definition 11: Selecting two subsets $V, E \subset [1, 2q-1]$ with $E = [1, 2p-1]^o$ holds true: (i) each $c \in E$ corresponds $a, b \in V$ to form an *ev-matching* (acb) ; (ii) each $c \in E$ corresponds to $z \in E$ with the *ev-matching* (xzy) such that $c = |x-y|$; (iii) each $c \in E$ with the *ev-matching* (acb) corresponds to $c' \in E$ with the *ev-matching* $(a'c'b')$ such that

$$(|a-b|-c) + (|a'-b'|-c') = 0.$$

We call (V, E) an *ee-difference odd-edge-magic matching partition* of $[1, 2q-1]$.

* Find all possible ee-difference odd-edge-magic matching partitions (V, E) of $[1, 2q-1]$. Here, each *ev-matching* (acb) corresponds an edge c of a graph, where the edge c has two ends a, b .

Set-4. From Definition 12: Partition $[1, p+q]$ into two subsets V, E satisfies: (i) each $c \in E$ corresponds $a, b \in V$ to form an *ev-matching* (acb) ; (ii) (e-magic) each $c \in E$ with the *ev-matching* (acb) hold $c+|a-b| = k$ true; (iii) (ee-difference)

each $c \in E$ corresponds to $z \in E$ with the *ev-matching* (xzy) such that $c = |x-y|$; (iv) (ee-bandwidth) each $c \in E$ with the *ev-matching* (acb) corresponds to $c' \in E$ with the *ev-matching* $(a'c'b')$ such that $(|a-b|-c) + (|a'-b'|-c') = 0$; (iv) (EV-ordered) $\max V < \min E$ (or $\max V > \min E$); (v) (ve-matching) each *ev-matching* (acb) matches with another *ev-matching* (uvw) such that $a+w = k'$ or $b+w = k'$, k' is a constant, except the *singularity* $\lfloor \frac{p+q+1}{2} \rfloor$. We call (V, E) a *6C-partition* of $[1, p+q]$.

For a given 6C-partition (V, E) of $[1, p+q]$, if there exists another 6C-partition (V', E') of $[1, p+q]$ such that

$$V \setminus (V \cap V') = E', \quad E = V' \setminus (V \cap V')$$

for $V \cap V' = \{\lfloor \frac{p+q+1}{2} \rfloor\}$, we get a partition $(V \cup E', E \cup V)$, and call it a *6C-complementary matching partition* of $[1, p+q]$.

* Find all possible 6C-partitions (V, E) of $[1, p+q]$, and all possible 6C-complementary matching partitions $(V \cup E', E \cup V)$.

Set-5. From Definition 13: Partition $[0, p+q-1]$ into two subsets V, E with $E = [1, q]$ and $V \subseteq [0, q-1]$ satisfies: (i) each $c \in E$ corresponds $a, b \in V$ to form an *ev-matching* (acb) ; (ii) (ee-difference) each $c \in E$ corresponds to $z \in E$ with the *ev-matching* (xzy) such that $c = |x-y|$; (iii) (ee-bandwidth) each $c \in E$ with the *ev-matching* (acb) corresponds to $c' \in E$ with the *ev-matching* $(a'c'b')$ such that $(|a-b|-c) + (|a'-b'|-c') = |a-b| + |a'-b'| - (c+c') = 0$; (iv) there exists a constant k such that each $c \in E$ with its *ev-matching* (acb) holds $c + |a-b| = k$ true; (v) each $c \in E$ corresponds another $c' \in E$ with its *ev-matching* $(a'c'b')$ such that $c+a' = p$ or $c+b' = p$. We call (V, E) an *ee-difference graceful-magic matching partition* of $[0, p+q-1]$.

* Find all possible ee-difference graceful-magic matching partitions of $[0, p+q-1]$.

Set-6. From Definition 15: Partition $[1, p+q]$ into two disjoint subsets V and E with $V \cup E = [1, p+q]$ such that each $c \in E$ corresponds to distinct $a, b \in V$ holding $c = |a-b|$ true, and there exists a constant k satisfying $a+c+b = k$ for each $c \in E$ which corresponds to distinct $a, b \in V$. We call (V, E) an *edge-magic graceful matching partition* of $[1, p+q]$. If (E, V) is another edge-magic graceful matching partition of $[1, p+q]$, we say (V, E) (resp. (E, V)) to be a *ve-exchanged matching partition* of $[1, p+q]$.

* Find all possible edge-magic graceful matching partitions of $[1, p+q]$, and all possible ve-exchanged matching partitions.

Set-7. If there are two sets $V \subseteq [0, q]^2$ (or $[0, 2q-1]^2$) and $E \subseteq [1, q]$ (or $[1, 2q-1]$) such that each $c \in E$ with its *ev-matching* (acb) holds $c = |a-b|$ true, where $a \in A \in V$ and $b \in B \in V$ with $A \cap B = \emptyset$, then we call (V, E) a *v-set e-proper graceful (or odd-graceful) matching partition*.

Set-8. From the twin odd-graceful/odd-elegant labellings: Partition $[0, 2q]$ into two subsets S_1, S_2 such that $S_1 \subset [0, 2q-1]$, $S_2 \subset [1, 2q]$, $|S_1 \cap S_2| = 1$ and $S_1 \cup S_2 = [0, 2q]$. For $E_1 = E_2 = [1, 2q-1]^o$, each $c_i \in E_i$ corresponds two numbers $a_i, b_i \in S_i$ holding $c_i = |a_i - b_i|$ true (or $c_i = a_i + b_i \pmod{2}$)

$2q$) with $i = 1, 2$. We call (S_1, S_2) a *twin odd-graceful (or odd-elegant) matching partition* of $[0, 2q]$.

* Characterize twin odd-graceful (or odd-elegant) matching partitions, and find them.

Set-9. From Definitions 17 and 18: Select a subset $E \subset [0, p-1]$ such that each $c \in E$ corresponds two distinct $a, b \in V = [0, p-1]$ to hold $c = |a - b|$ true (or $c = a + b \pmod{|E|}$), we call $f_E = (V, E)$ a *graph matching partition*, and call $S_{um}(G, f_E) = \sum_{c \in E} |a - b|$ a *difference-sum number* (or $F_{um}(G, f_E) = \sum_{c \in E} (a + b) \pmod{|E|}$ is a *felicitous-sum number*).

* Determine $\max_{f_E} S_{um}(G, f_E)$ (profit) and $\min_{f_E} S_{um}(G, f_E)$ (cost) over all difference-sum matching partitions $f_E = (V, E)$ of $[0, p-1]$. Find $\max_{f_E} F_{um}(G, f_E)$ and $\min_{f_E} F_{um}(G, f_E)$ over all felicitous-sum matching partitions $f_E = (V, E)$ of $[0, p-1]$.

It may be interesting to consider such algebraic groups on the above set partition problems.

B. Matching partitions of algebraic matrices

We introduce an algebraic expression of a Topsnut-gpw G being a (p, q) -graph as follows:

Definition 22. A *Topsnut-matrix* $A_{vev}(G)$ of a Topsnut-gpw G being a (p, q) -graph is defined as

$$A_{vev}(G) = \begin{pmatrix} x_1 & x_2 & \cdots & x_q \\ e_1 & e_2 & \cdots & e_q \\ y_1 & y_2 & \cdots & y_q \end{pmatrix} = (X \ W \ Y)^T \quad (34)$$

where

$$\begin{aligned} X &= (x_1 \ x_2 \ \cdots \ x_q), W = (e_1 \ e_2 \ \cdots \ e_q) \\ Y &= (y_1 \ y_2 \ \cdots \ y_q), \end{aligned} \quad (35)$$

and G has another *Topsnut-matrix* $A_{vv}(G)$ defined as $A_{vv}(G) = (X, Y)^T$, where X, Y are called *vertex-vectors*, W is called *edge-vector*, such that $e_i = x_i y_i$ is an edge of G for $i \in [1, q]$. \square

So, $A_{vev}(G)$ is a Topsnut-matrix, and $A_{vv}(G)$ is a Topsnut-matrix. Clearly, such Topsnut-matrices are easily saved in computer, and produce quickly text-based passwords. For example, we have the following four Topsnut-matrices A_1, A_2, B_1 and B_2 from Fig.37 to Fig.40:

$$A_1 = \begin{pmatrix} 3 & 11 & 11 & 7 & 0 & 9 & 0 & 1 & 1 & 2 & 2 \\ 8 & 7 & 11 & 7 & 8 & 9 & 10 & 9 & 4 & 7 & 4 \\ 11 & 4 & 0 & 0 & 8 & 0 & 10 & 10 & 5 & 9 & 6 \end{pmatrix}$$

Fig. 37. A Topsnut-matrix A_1 for G_a in the perfect Max-min difference-sum matching partition A shown in Fig.25.

We point out: (i) A Topsnut-matrix $A_{vev}(G)$ is not unique for expressing a Topsnut-gpw G , in other words, a Topsnut-gpw G many have two or more Topsnut-matrices; (ii) Topsnut-matrices differ from popular algebraic matrices, since Topsnut-matrices are only the expression of labelled vertices joined

$$A_2 = \begin{pmatrix} 3 & 4 & 4 & 10 & 10 & 6 & 0 & 6 & 9 & 2 & 5 \\ 2 & 3 & 2 & 1 & 1 & 1 & 1 & 2 & 3 & 3 & 1 \\ 5 & 1 & 6 & 11 & 9 & 7 & 1 & 8 & 6 & 5 & 6 \end{pmatrix}$$

Fig. 38. A Topsnut-matrix A_2 for G_d in the perfect Max-min difference-sum matching partition A shown in Fig.25.

$$B_1 = \begin{pmatrix} 0 & 8 & 0 & 3 & 4 & 5 & 5 & 2 \\ 7 & 8 & 6 & 3 & 7 & 8 & 6 & 7 \\ 7 & 0 & 6 & 0 & 3 & 3 & 1 & 5 \end{pmatrix}$$

Fig. 39. A Topsnut-matrix B_1 for F_b in the perfect Max-min felicitous-sum matching partition B shown in Fig.25.

by labelled edges. Clearly, we need some new algebraic operations on Topsnut-matrices.

Let $D(A)$ be the matrix of a perfect Max-min difference-sum matching partition $A = \odot_{12}\langle G_a, G_d \rangle$ shown in Fig.25. So, $D(A)$ is a Topsnut-matrix, denoted directly as $D(A) = \odot_{12}\langle A_1, A_2 \rangle$ (see Fig.37 and Fig.38), called a *matrix matching partition*. Similarly, the matrix $D(B)$ of the perfect Max-min felicitous-sum matching partition $B = \odot_9\langle F_b, F_c \rangle$ shown in Fig.25 is a Topsnut-matrix, and we have another *matrix matching partition* $D(B) = \odot_8\langle B_1, B_2 \rangle$ (see Fig.39 and Fig.40).

Along the orange line in the matrix B_1 , we can get a text-based password

$$T_{ext}(B_1) = 077088066033473385561572$$

and another text-based password

$$T_{ext}(B_2) = 731734825701611001143323$$

obtained along the orange line in the matrix B_2 . Obviously, it is not easy to reconstruct the perfect Max-min felicitous-sum matching partition B shown in Fig.25 from $T_{ext}(B_1)$ and $T_{ext}(B_2)$, even it is impossible if Topsnut-gpws with large numbers of vertices and edges.

By the vertex-split and vertex-identifying operations, as well as the edge-split and edge-identifying operations, we can define algebraic operations on Topsnut-matrices of (p, q) -graphs that are topological structures of Topsnut-gpws, such as $D(A) = \odot_{12}\langle A_1, A_2 \rangle$ and $D(B) = \odot_8\langle B_1, B_2 \rangle$ obtained by the *vertex-identifying operation* of $(3 \times q)$ -matrices.

C. Topsnut-matchings made by graphic groups

Let T_{group}^{odd} be a set of odd-graceful Topsnut-groups. We define a labelling $f : V(G) \rightarrow T_{group}^{odd}$ for a (p, q) -graph G , and set $f(uv) = \odot\langle f(u), f(v) \rangle$ to be a matching of two odd-graceful Topsnut-groups G_i^{odd} and G_j^{odd} , here, each $T_i \in G_i^{odd}$ matches with $T_j \in G_j^{odd}$ such that $\odot\langle T_i, T_j \rangle$ is just an odd-graceful Topsnut-matching, and vice versa.

$$B_2 = \begin{pmatrix} 7 & 5 & 7 & 1 & 0 & 3 & 3 & 2 \\ 1 & 3 & 2 & 0 & 1 & 0 & 4 & 3 \\ 3 & 7 & 4 & 8 & 1 & 6 & 1 & 1 \end{pmatrix}$$

Fig. 40. A Topsnut-matrix B_1 for F_c in the perfect Max-min felicitous-sum matching partition B shown in Fig.25.

For encrypting a network by graphic groups we show a simple example in Fig.41, Fig.42 and Fig.43. We have an operation defined by

$$[f_i(x) + f_j(x) - f_k(x)] \pmod{13} = f_\lambda(x) \quad (36)$$

for each element $x \in V(G) \cup E(G)$ shown in Fig.41, where $\lambda = i + j - k \pmod{13}$, and call (36) “additive operation”. We can see that there are many ways to realize a network encrypted by a graphic group, since there are two or more ways to join G_i with G_j by an edge (allow by two or more edges). Thereby, we have obtained many encrypted networks.

D. Algebraic groups from Topsnut-gpws, Topsnut-matrices and text-based passwords

We have known that a Topsnut-gpw G has its Topsnut-matrix $A(G)$ which induces a text-based password $D(G)$. So this Topsnut-gpw G and its Topsnut-matrix $A(G)$, as well as the text-based password $D(G)$ can produce three Abelian additive groups by the additive operation shown in (36), we call them *Topsnut-group*, *Topsnut-matrix group* and *Text-pw group*, respectively. If a Topsnut-gpw G matches with another Topsnut-gpw H , so two Topsnut-groups induced by G and H match with each other. More results on such groups can be found in [13] and [27].

VI. RESEARCHING PROBLEMS

For further researching Topsnut-matchings we propose the following problems:

Pro-1. (A complete graph obtained from labeled trees) Given disjoint trees T_1, T_2, \dots, T_m with

$$\sum_{i=1}^m |E(T_i)| \geq \frac{1}{2}n(n-1).$$

Can we find a labelling f_i for each tree T_i such that $f_i : V(T_i) \rightarrow [0, n-1]$ and

$$\{|f_i(u) - f_i(v)| : uv \in E(T_i)\} = [1, |E(T_i)|],$$

and identify the vertices of $\bigcup_{i=1}^m V(T_i)$ having the same labels into one, the resulting graph is just $K_n = \odot_1 \langle T_i \rangle_1^m$, or $K_n = \ominus \langle T_i \rangle_1^m$, or $K_n = \bigcup_{i=1}^m T_i$?

Pro-2. For any odd-graceful graph H of p vertices, does there exists a pan-odd-graceful Topsnut-matching team $\odot_1 \langle H, T_i \rangle_1^p$? Or consider this H as a lobster first. Find conditions for the perfect odd-gracefully Topsnut-matching team $\odot_1 \langle H, T_i \rangle_1^p$ with $T_i \cong T_j$ for $i \neq j$. Find nontree graphs which induce pan-odd-graceful Topsnut-matching teams.

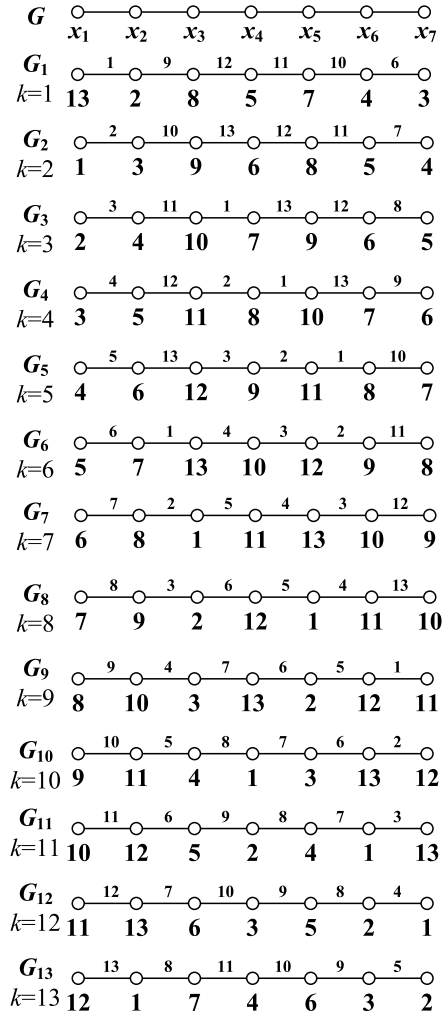


Fig. 41. A graphic group based on a path G and the edge-magic graceful labelling, each G_i admits a pan-edge-magic graceful labelling f_i under modulo 13.

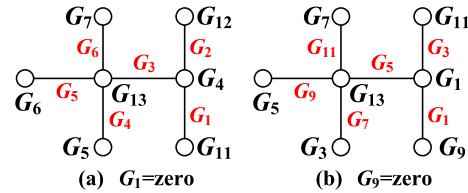


Fig. 42. A tree admits: (a) a graceful group labelling based on the zero G_1 shown in Fig.41; (b) an odd-graceful group labelling based on the zero G_9 shown in Fig.41.

Pro-3. Plant the concept of pan-odd-graceful Topsnut-matching team $\odot_1 \langle H, T_i \rangle_1^p$ on other graph labellings.

Pro-4. For a given lobster T , find another lobster T' such that $\odot \langle T, T' \rangle$ admits a twin odd-graceful labelling (or a twin odd-elegant labelling) ([20], [18]).

Pro-5. For a given (p, q) -tree G admitting a 6C-labelling f , find all possible (p, q) -tree H admits a 6C-labelling g such

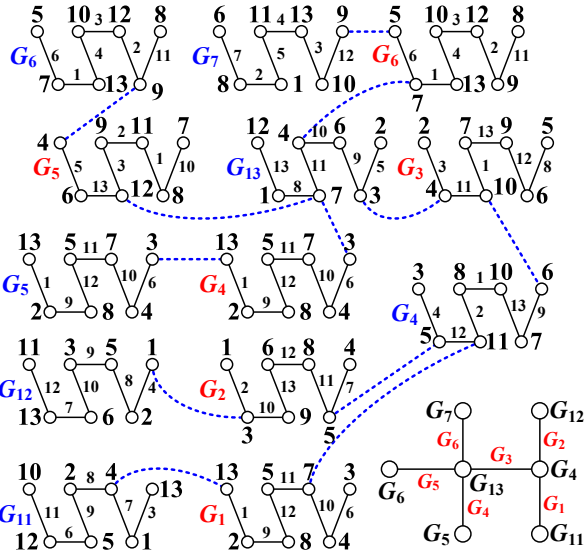


Fig. 43. A network encrypted by a graphic group shown in Fig.41.

that $\odot\langle G, H \rangle$ are 6C-complementary matchings.

Pro-6. Find conditions for a connected graph G to be a multiple-tree matching partition $G = \oplus_F \langle T_i \rangle_1^m$ with $m \geq 2$.

Pro-7. Find all possible odd-graceful Topnut-matchings $\odot\langle G, H \rangle$ for a given (p, q) -graph G admitting odd-graceful labellings.

Pro-8. Determine v -set e -proper graceful/odd-graceful labellings of Euler graphs.

Pro-9. Determine the conditions for A_M and B_q and any $a \in A_M$ corresponds two numbers $a^* \in A_M$ $b^* \in B_q$ such that $b^* = |a - a^*|$. Then determine such sequence pair (A_M, B_q) defined in Definition 21 such that the sequence type of labellings defined in Definition 21 hold true on graphs. Clearly, if any $b \in B_q$ corresponds two numbers $a', a'' \in A_M$ such that $b = |a' - a''|$, then there exists at least a forest T admitting a graceful sequence- (A_M, B_q) labelling defined in Definition 21.

Pro-10. Find connected graphs G such that for any integer M holding

$$\min_f S_{um}(G, f) < M < \max_f S_{um}(G, f) \quad (37)$$

true, then there exists a difference-sum labelling h of G with $M = S_{um}(G, h)$.

Pro-11. Find connected graphs G such that for any integer M holding

$$\min_f F_{um}(G, f) < M < \max_f F_{um}(G, f) \quad (38)$$

true, then there exists a felicitous-sum labelling h of G with $M = F_{um}(G, h)$.

Pro-12. For particular graphs G , compute the exact values of $\min_f S_{um}(G, f)$ and $\max_f S_{um}(G, f)$.

Pro-13. For a given graph G , find all graphs H for forming set-ordered matching graphs $G \ominus H$ with $H \not\cong G$.

Pro-14. For an odd-graceful graph G , find all matching graphs H such that $\odot\langle G, H \rangle$ admitting twin odd-graceful labellings.

Pro-15. Consider other v -set e -proper ε -labellings of a complete graph K_n , where $\varepsilon \in \{\text{edge-magic total labelling, odd-elegant labelling, harmonious labelling, the labellings defined in this paper}\}$. For example:

(i) A v -set e -proper felicitous labelling (F, f) of a (p, q) -graph G is defined as: $F : V(G) \rightarrow [0, q-1]^2$ with $F(x) \cap F(y) = \emptyset$ for distinct $x, y \in V(G)$, and $f : E(G) \rightarrow [0, q-1]$ holding $f(E(G)) = [0, q-1]$ and $f(uv) = a_u + a_v \pmod{q}$ true with $a_u \in F(u)$ and $a_v \in F(v)$.

Does K_n admits a v -set e -proper felicitous labelling?

(ii) A v -set e -proper edge-magic total labelling (F, f) of a (p, q) -graph G is defined by $F : V(G) \rightarrow [1, M]^2$ with $p + q \leq M$ and $F(x) \cap F(y) = \emptyset$ for distinct $x, y \in V(G)$, and $f : E(G) \rightarrow [1, M]$ with $f(uv) \neq f(xy)$ for any two edges $uv, xy \in E(G)$, and there exists a constant k such that

$$a_u + f(uv) + a_v = k$$

for any edge $uv \in E(G)$ with $a_u \in F(u)$ and $a_v \in F(v)$.

Does K_n admits a v -set e -proper edge-magic total labelling? Find the parameter $E_{mt}(G) = \min_{(F,f)} \{M\}$ over all v -set e -proper edge-magic total labellings of G .

Pro-16. If we can split a connected graph admitting a v -set e -proper graceful labelling into a tree, then characterize this graph and its possible v -set e -proper graceful labellings.

Pro-17. Find conditions for a connected graph G that can be split into caterpillars, or lobsters, such that G admits a v -set e -proper X -labelling, where X is a graph labelling admitted by caterpillars, or lobsters (see Theorem 11).

Pro-18. For each $p \geq 2$, find a (p, q) -graph $G = \odot_f \langle G_i \rangle_1^m$ defined in definition 8, such that q is the largest edge number on such (p, q) -graphs when p is fixed. We can add other restrictions: (i) each G_i is a spanning subgraph of G ; (ii) $E(G_i) \cap E(G_j) = E^* \subset E(G)$ for $i \neq j$ and $E^* \neq \emptyset$; (iii) each G_i is a tree, or an Euler graph, or a bipartite graph, and so on.

Pro-19. A (p, q) -graph G and a (q, p) -graph H admit two edge-magic graceful labellings f and g , respectively, and f and g are reciprocal inverse because $f(E(G)) = g(V(H)) \setminus X^*$ and $f(V(G)) \setminus X^* = g(E(H))$ for $X^* = f(V(G)) \cap g(V(H))$. Find such pairs of graphs G and H , and characterize them.

Pro-20. Find reciprocal complementary (reciprocal-inverse matching) $G = \odot\langle T, G \rangle$ for a fixed graph T , where T and G admit reciprocal-inverse labellings f and g , respectively, such that

$$f(E(T)) = g(V(G)) \setminus X^* \text{ and } f(V(T)) \setminus X^* = g(E(G))$$

for $X^* = f(V(T)) \cap g(V(G))$.

Pro-21. If a total coloring g of a graph G arrives at $B_{tol}(G, g) = \min_f B_{tol}(G, f)$, is there $\chi''(G) = \{g(x) : x \in V(G) \cup E(G)\}$?

Pro-22. For any connected subgraph H of a connected graph G , does there exists $\max_g S_{um}(H, g) \leq \max_f S_{um}(G, f)$?

Pro-23. Determine connected graphs having a group of consecutive difference proper vertex colorings, or a group of consecutive sum proper vertex colorings.

Pro-24. Find connected graphs admitting one of the edge-magic proper total coloring and the equitably proper total coloring.

Pro-25. It is not difficult to verify $\chi''_{ved}(K_n) \leq 2n$ and $\chi''_{ves}(K_n) \leq 2n - 1$. Does any tree T hold

$$\chi''_{ved}(T) \leq \Delta(T) + 4$$

and

$$\chi''_{ves}(T) \leq 2\Delta(T) + 1$$

true?

Pro-26. Let $f : V(G) \cup E(G) \rightarrow [1, \chi''(G)]$ be a proper total coloring of a graph G , and let

$$f^*(E(G)) = \{f(u) + f(uv) + f(v) : uv \in E(G)\}.$$

Characterize G if $f^*(E(G))$ is a consecutive integer set $[a, b]$.

Pro-27. In [29], the authors defined: “Let η -labeling be a given graph labelling, and let a connected graph G admit an η -labeling. If every connected proper subgraph of G also admits a labelling like η -labeling, then we call G a *perfect η -labeling graph*.” Caterpillars are perfect η -labeling graphs if these η -labelings are listed in this article, and each lobster is a perfect (odd-)graceful labeling graph. They ask for: *If every connected proper subgraph of a connected graph G admits an η -labelling, then does G admits this η -labelling too?* Clearly, a perfect η -labeling graph (like an elder generation) can be used to produce a crowd of Topsnut-GPWs (like son generations).

VII. CONCLUSION

We have known that Topsnut-matching is a larger topic in researching Topsnut-gpws, *nature-inspired passwords*. Results and techniques of graph theory are proven to be powerful in designing and researching Topsnut-gpws, since there are no polynomial algorithms for many of these results and techniques. Many of the graph labellings introduced here match with mathematical conjectures, so they may provide computationally unbreakable for our Topsnut-gpws. It is hopeful to let more people use Topsnut-gpws and *pan-Topsnut-gpws* (allow label vertices and edges with non-mathematical elements) for protecting their information and profits in networks ([28], [19]). There are over 200 graph labellings introduced in [6], and more new graph labellings emerge everyday. It is time to consider *Graph Labelling Analysis* as a subbranch of graph theory. So, we try doing some exploring work here, although we have two hands empty on this topic.

Matching can help us to design Topsnut-gpws for one public key vs one private key, one public key vs two or more private keys, and more public keys vs more private keys. Matching opens a window for us to understand something new in cryptography. It is very important that matching is just one of mathematical principles. Almost mathematical operations have their own matching operations. The graph labellings first defined or introduced here match with other existing graph

labellings, and can be shown to be related with mathematical conjectures, or open problems.

Researching Topsnut-matching can derive two interesting topics: one is *set matching partition* to number theory, and another is about labeled graphs for constructing large scale of graphs with labellings, which differs from finding labellings to unlabeled graphs. We have listed possible researching problems for further studying works on Topsnut-gpws, and hope to find more something new and to do more theoretical works on Topsnut-gpws. We try to use Topsnut-groups to build up so-called network passwords for encrypting a network with thousand and thousand nodes (vertices). So we have investigated one of Topsnut-groups, called *Abelian additive graphic group* (*graphic group* for short). This type of graphic groups based on addition operation processes a particular property: “Every element in a graphic group can be regarded as “zero” of the graphic group, so we can call it an *every-zero graphic group*”. Unfortunately, we do not discover graphic group based on multiplication operation. It may be a way to find more graph labellings of a graph from connection between two or more graphic groups.

Several new colorings and new parameters on proper total colorings have been introduced and investigated. We have found that the difference-sum labelling (*extremal labelling*) can be admitted by every graph, so then it breaks down the case of no labelling admitted by each graph. Thereby, we are motivated from the difference-sum labelling and know that there are many *extremal labellings* like the difference-sum labelling, which mean that we may touch a new subbranch of graph labellings.

The above research works on two different areas motivate us to think of the biological combination of human being and AI machine in current development of the world, rather than AI machines only that will take a long time to success. An application project supported by mathematics like passwords depends on mathematics going deep into and continuous improvement, how long will it support last, how far can the project go.

ACKNOWLEDGMENT

The author, *Bing Yao*, is delight for supported by the National Natural Science Foundation of China under grants 61163054, 61363060 and 61662066. Bing Yao, cordially, thanks every member of *Topological Graphic Passwords Symposium* in the second semester of 2017-2018 academic year for their effective discussion and constructive suggestions, and part of members of the Symposium were supported by Scientific research project of Gansu University under grants 2016A-067, 2017A-047 and 2017A-254.

REFERENCES

- [1] J. A. Bondy, U. S. R. Murty. Graph Theory. Springer London, 2008.
- [2] R. Biddle, S. Chiasson, and P.C. van Oorschot. Graphical passwords: Learning from the First Twelve Years. ACM Computing Surveys, 44(4), Article 19:1-41. Technical Report TR-09-09, School of Computer Science, Carleton University, Ottawa, Canada. 2009.

- [3] Chao Yang, Han Ren, Bing Yao. Adjacent Vertex Distinguishing Total Colorings Of Graphs With Four Distinguishing Constraints. *Ars combinatoria* 127(2016), pp. 197-208
- [4] Chao Yang, Bing Yao, Han Ren. A Note on Graph Proper Total Colorings with Many Distinguishing Constraints. *Information processing letters* V 16, 6 396-400. (2016) DOI: 10.1016/j.ipl.2015.11.04, ISSN:0020-0190
- [5] Haichang Gao, Wei Jia, Fei Ye and Licheng Ma. A Survey on the Use of Graphical Passwords in Security. *Journal Of Software*, Vol. 8, No. 7, July 2013, 1678-1698.
- [6] Joseph A. Gallian. A Dynamic Survey of Graph Labeling. *The electronic journal of combinatorics*, 17 (2016), # DS6. (440 pages, 2265 reference papers, over 200 graph labellings)
- [7] Robert E. Jamison, F.R. McMorris, Henry Martyn Mulder. Graphs with only caterpillars as spanning trees. *Discrete Mathematics* 272 (2003) 81-95.
- [8] Xiaoyuan Suo, Ying Zhu, G. Scott. Owen. Graphical Password: A Survey. In: *Proceedings of Annual Computer Security Applications Conference (ACSAC)*, Tucson, Arizona. IEEE (2005) 463-472.
- [9] Marumuthu. G. Super Edge Magic Graceful Labeling of Generalized Petersen Graphs, *Discrete Mathematics* (2015) 235-241.
- [10] Hui Sun, Bing Yao. New Graph Labellings Of Euler Graphs For Designing Topological Graphic Passwords. submitted (2018).
- [11] Hui Sun, Xiaohui Zhang, Bing Yao. New Graphical Passwords On Trees Having Perfect Matchings. submitted to *Information Processing letters* (2017).
- [12] Hui Sun, Xiaohui Zhang, and Bing Yao. Strongly (k, d) -Graphical Labellings For Designing Graphical Passwords In Communication. *ICMITE 2017, MATEC Web of Conferences* 139, 00204 (2017) DOI: 10.1051/mateconf/201713900204
- [13] Hui Sun, Xiaohui Zhang, Meimei Zhao and Bing Yao. New Algebraic Groups Produced By Graphical Passwords Based On Colorings And Labellings. *ICMITE 2017, MATEC Web of Conferences* 139, 00152 (2017), DOI: 10. 1051/mateconf/201713900152
- [14] Hui Sun, Xiaohui Zhang, Bing Yao. Construction Of New Graphical Passwords With Graceful-type Labellings On Trees. 2018 2nd IEEE Advanced Information Management, Communicates, Electronic and Automation Control Conference (IMCEC 2018), 1491-1494.
- [15] Hui Sun, Jing Su, Xiaohui Zhang, Bing Yao. New Graphic Cryptography Made By Strongly Graceful-Type Labellings Towards Communication Security. submitted (2018).
- [16] Hongyu Wang, Jin Xu, Bing Yao. Exploring New Cryptographical Construction Of Complex Network Data. *IEEE First International Conference on Data Science in Cyberspace*. IEEE Computer Society, (2016):155-160.
- [17] Hongyu Wang, Jin Xu, Bing Yao. The Key-models And Their Lock-models For Designing New Labellings Of Networks. *Proceedings of 2016 IEEE Advanced Information Management, Communicates, Electronic and Automation Control Conference (IMCEC 2016)* 565-5568.
- [18] Hongyu Wang, Jin Xu, Bing Yao. Odd-elegant Matching Trees In Planning New-type Graphical Passwords. submitted (2017).
- [19] Hongyu Wang. The Structure And Theoretical Analysis On Topological Graphic Passwords. Doctor's thesis. School of Electronics Engineering and Computer Science, Peking University, 2018.
- [20] Hongyu Wang, Jin Xu, Bing Yao. Twin Odd-Graceful Trees Towards Information Security. *Procedia Computer Science* 107 (2017)15-20, DOI: 10.1016/j.procs.2017.03.050
- [21] Jin Xu. Theory on Structure and Coloring of Maximal Planar Graphs: (1) Recursion Formulae of Chromatic Polynomial and Four-Color Conjecture. *Journal of Electronics and Information Technology*. Vol.38 No.4, Jul. 2016, 763-770.
- [22] Jin Xu. Theory on Structure and Coloring of Maximal Planar Graphs: (2) Domino Configurations and Extending-Contracting Operations. *Journal of Electronics and Information Technology*. Vol.38 No.6, Jul. 2016, 1271-1327.
- [23] Jin Xu. Theory on Structure and Coloring of Maximal Planar Graphs: (3) Purely Tree-colorable and Uniquely 4-colorable Maximal Planar Graph Conjectures. *Journal of Electronics and Information Technology*. Vol.38 No.6, Jul. 2016, 1329-1353.
- [24] Jin Xu. Theory on Structure and Coloring of Maximal Planar Graphs: (4) σ -Operations and Kempe Equivalent Classes. *Journal of Electronics and Information Technology*. Vol.38 No.7, Jul. 2016, 1558-1585.
- [25] Bing Yao, Xia Liu and Ming Yao. Connections between labellings of trees. *Bulletin of the Iranian Mathematical Society*, ISSN: 1017-060X (Print) ISSN: 1735-8515 (Online), Vol. 43 (2017), 2, pp. 275-283.
- [26] Bing Yao, Hui Cheng, Ming Yao and Meimei Zhao. A Note on Strongly Graceful Trees. *Ars Combinatoria* 92 (2009), 155-169.
- [27] Bing Yao, Yarong Mu, Hui Sun, Xiaohui Zhang, Hongyu Wang, Jing Su, Fei Ma. Algebraic Groups For Construction Of Topological Graphic Passwords In Cryptography. 2018 IEEE 3rd Advanced Information Technology, Electronic and Automation Control Conference (IAEAC 2018), 2211-2216.
- [28] Bing Yao, Yarong Mu, Hui Sun, Xiaohui Zhang, Hongyu Wang, Jing Su. Connection Between Text-based Passwords and Topological Graphic Passwords. 2018 IEEE 4th Information Technology and Mechatronics Engineering Conference (2018), submitted.
- [29] Bing Yao, Hui Sun, Hongyu Wang, Jing Su, Jin Xu. Graph Theory Towards New Graphical Passwords In Information Networks. arXiv:1806.02929v1 [cs.CR] 8 Jun 2018
- [30] Bing Yao, Xiaohui Zhang, Hui Sun, Yarong Mu, Hongyu Wang, Mingjun Zhang, Sihua Yang. On Space and Design of Topological Graphic Passwords For Information Networks. The 2018 IEEE 3rd Advanced Information Technology, Electronic and Automation Control Conference (IAEAC2018), submitted.
- [31] Z. Zhang, X. Chen, J. Li, B. Yao, X. Lv and J. Wang, On the adjacent vertex-distinguishing total coloring of graphs, *Sci. China Ser. A* 48 (2005):289-299.
- [32] Zhongfu Zhang, Linzhong Liu, Jianfang Wang, Adjacent strong edge coloring of graphs. *Applied Math. Letters* 15 (2002) 623-626.
- [33] Xiangqian Zhou, Bing Yao, Xiang'en Chen and Haixia Tao. A proof to the odd-gracefulness of all lobsters. *Ars Combinatoria* 103 (2012), 13-18.
- [34] Xiangqian Zhou, Bing Yao, Xiang'en Chen. Every lobster is odd-elegant. *Information Processing Letters*, 113,1-2(2013):30-33.