

---

# Context Mover’s Distance & Barycenters: Optimal Transport of Contexts for Building Representations

---

Sidak Pal Singh  
EPFL

Andreas Hug  
EPFL

Aymeric Dieuleveut  
EPFL and École Polytechnique

Martin Jaggi  
EPFL

## Abstract

We present a framework for building unsupervised representations of entities and their compositions, where each entity is viewed as a probability distribution rather than a vector embedding. In particular, this distribution is supported over the contexts which co-occur with the entity and are embedded in a suitable low-dimensional space. This enables us to consider representation learning from the perspective of Optimal Transport and take advantage of its tools such as Wasserstein distance and barycenters. We elaborate how the method can be applied for obtaining unsupervised representations of text and illustrate the performance (quantitatively as well as qualitatively) on tasks such as measuring sentence similarity, word entailment and similarity, where we empirically observe significant gains (e.g., 4.1% relative improvement over Sent2vec, GenSen).

The key benefits of the proposed approach include: (a) capturing uncertainty and polysemy via modeling the entities as distributions, (b) utilizing the underlying geometry of the particular task (with the ground cost), (c) simultaneously providing interpretability with the notion of optimal transport between contexts and (d) easy applicability on top of existing point embedding methods. The code, as well as pre-built histograms, are available under <https://github.com/context-mover/>.

## 1 Introduction

One of the driving factors behind recent successes in machine learning has been the development of better

---

Correspondence to: <[contact@sidakpal.com](mailto:contact@sidakpal.com)>. Proceedings of the 23<sup>rd</sup> International Conference on Artificial Intelligence and Statistics (AISTATS) 2020, Palermo, Italy. PMLR: Volume 108. Copyright 2020 by the author(s).




Figure 1: Distributional estimate for the entity ‘radio’.

methods for data representation. Examples include continuous vector representations for language (Mikolov et al., 2013; Pennington et al., 2014), CNN based feature representations for images and text (LeCun et al., 1998; Collobert and Weston, 2008; Kalchbrenner et al., 2014), or via the hidden state representations of LSTMs (Hochreiter and Schmidhuber, 1997; Sutskever et al., 2014). Pre-trained unsupervised representations, in particular, have been immensely useful as general purpose features for model initialization (Kim, 2014), downstream tasks (Severyn and Moschitti, 2015; Deriu et al., 2017), and in domains with limited supervised information (Qi et al., 2018). A shared theme across these methods is to map input entities to dense vector embeddings lying in a low-dimensional latent space where the semantics of inputs are preserved. Thus, each entity of interest (e.g., a word) is represented directly as a single point (i.e., its embedding vector) in space, which is typically Euclidean.

In contrast, we approach the problem of building unsupervised representations in a fundamentally different manner. We focus on the co-occurrence information between the entities and their contexts, and represent each entity as a *probability distribution (histogram)* over its contexts. Here the contexts themselves are embedded as points in a suitable low-dimensional space. This allows us to cast finding distance between entities as an instance of the *Optimal Transport problem* (Monge, 1781; Kantorovich, 1942; Villani, 2008). So, our resulting framework intuitively compares the cost of moving the contexts of a given entity to the contexts of another, which motivates the naming: *Context Mover’s Distance (CMD)*.

We call this distribution over contexts embeddings as

the *distributional estimate* of our entity of interest (see Figure 1), while we refer to the individual embeddings of contexts as *point estimates*. More precisely, the contexts refer to any generic entities or objects (such as words, phrases, sentences, images, etc.) co-occurring with the entities to be represented.

The main motivation for our proposed approach originates from the domain of natural language, where the entities (words, phrases, or sentences) generally have different semantics depending on the context in which they occur. Hence, it is important to consider representations that effectively capture such inherent uncertainty and polysemy, and we will argue that distributional estimates capture more of this information compared to point-wise embedding vectors alone.

The co-occurrence information that is the crucial building block of our approach in building the distributions is actually inherent to a wide variety of problems, for instance, recommending products such as movies or web-advertisements (Grbovic et al., 2015), nodes in a graph (Grover and Leskovec, 2016), sequence data, or other entities (Wu et al., 2017). Particularly when training point-wise embeddings for textual data, the co-occurrence information is already computed as the first step, like in GloVe (Pennington et al., 2014), but does not get utilized beyond this.

Lastly, the connection to optimal transport at the level of entities and contexts paves the way to make better use of its vast toolkit (e.g., Wasserstein distances, barycenters, barycentric coordinates, etc.) for applications, which in the case of NLP has primarily been restricted to document distances (Kusner et al., 2015; Huang et al., 2016).

**Contributions:** 1) Employing the notion of optimal transport of contexts as a distance measure, we illustrate how our framework can be beneficial for important tasks involving word and sentence representations, such as sentence similarity, hypernymy (entailment) detection and word similarity. The method can be readily used on top of existing embedding methods and does not require any additional learning.

2) The resulting representations, as portrayed in Figures 1, 3, 4, capture the various senses under which the entity occurs. Further, the transport map obtained through CMD (see Figure 2) gives a clear interpretation of the resulting distance obtained between two entities.

3) CMD can be used to measure any task-specific distance (even asymmetric costs) between words, by defining a suitable underlying cost on the movement of contexts, which we show can lead to a state-of-the-art metric for unsupervised word entailment.

4) Defining the transport over contexts has the ad-

ditional benefit that the representations are compositional - they directly extend from entities to groups of entities (of any size), such as from word to sentence representations. To this end, we utilize the notion of Wasserstein barycenters, which to the best of our knowledge has never been considered in the past. This results in a significant performance boost on multiple datasets, and even outperforming popular supervised methods like InferSent (Conneau et al., 2017) and GenSen (Subramanian et al., 2018) by a decent margin.

## 2 Related Work

**Vector representations.** The idea of using vector space models for natural language dates back to Bengio et al. (2003), but in particular, has been popularized by Word2vec (Mikolov et al., 2013) and GloVe (Pennington et al., 2014). One of the problems that still persists is the inability to capture, within just a point embedding, the multiple senses or semantics associated with the occurrence of a word. This has resulted in works that either maintain multiple embeddings Huang et al. (2012), or utilize bilingual parallel corpora Guo et al. (2014), or learn embeddings that capture some specific information Levy and Goldberg (2014a), but a general solution still remains to be found.

**Representing with distributions.** This line of work is fairly recent, mainly originating from Vilnis and McCallum (2014), who proposed to represent words with Gaussian distributions, and later extended to mixtures of Gaussians in (Athiwaratkun and Wilson, 2017). Concurrent to this work, Muzellec and Cuturi (2018) and Sun et al. (2018) have suggested using elliptical and Gaussian distributions endowed with a Wasserstein metric respectively. While these methods<sup>1</sup> already provide richer information than typical vector embeddings, their form restricts what could be gained by allowing for arbitrary distributions (in terms of being free from assumptions on their shape or modality) as possible here. Our proposal of distributional estimate (i.e., distribution over context embeddings), inherently relies upon the empirically obtained co-occurrence information of a word and its contexts. Hence, this naturally allows for the use of optimal transport (or Wasserstein metric) in the space containing the contexts, and leads to an interpretation<sup>2</sup> (Figure 2) which is not available in the above approaches.

After the release of our initial technical report<sup>3</sup>, Frogner

<sup>1</sup>Elliptical embeddings (Muzellec and Cuturi, 2018) also depend on WordNet supervision in the case of hypernymy.

<sup>2</sup>We explicitly connect the ground space to the space of contexts, which enables a better interpretation of the transport map.

<sup>3</sup>The first version of this article appeared on 5th June, 2018 at <https://openreview.net/forum?id=Bkx2jd4Nx7> titled as ‘Wasserstein is all you need’.

et al. (2019) also independently propose to embed entities as discrete distributions in the Wasserstein space. A key distinction is that the training procedure required to learn such representations in their and the above-mentioned methods is not necessary for our approach, since we can just utilize the existing pre-trained point-embeddings together with the co-occurrence information. Further, these methods (except for Frogner et al. (2019)) don't provide a way to represent composition of entities (e.g. sentences) which is available via our framework (see Section 5).

**Optimal Transport in NLP.** The primary focus of the explorations of optimal transport in NLP has been on transporting words or sets of words directly, and for downstream applications rather than representation learning in general. Existing examples include document distances (Kusner et al., 2015; Huang et al., 2016), topic modelling (Rolet et al., 2016; Xu et al., 2018), document clustering (Ye et al., 2017), and others (Zhang et al., 2017; Grave et al., 2018). For example, the Word Mover's Distance (WMD; Kusner et al., 2015) considers computing the distance between documents as an optimal transport between their bag-of-words, and in itself doesn't lead to a representation. When the transport is defined at the level of words, like in these approaches, it can not be used to represent words themselves. In our approach, the transport is considered over contexts instead, which enables us to develop representations for words and extend them to represent composition of words (i.e., sentences, documents) in a principled manner, as illustrated in Sections 5 and 6.

### 3 Background on Optimal Transport

Optimal Transport (OT) provides a way to compare two probability distributions defined over a space  $\mathcal{G}$  (commonly known as the ground space), given an underlying distance or more generally the cost of moving one point to another in the ground space. In other terms, it lifts a distance between points to a distance between distributions. In contrast, Kullback-Leibler (KL), or  $f$ -divergences in general, only focus on the probability mass values, thus ignoring the geometry of the ground space: something which we exploit via OT. Also,  $\text{KL}(\mu||\nu)$  is defined only when the distribution  $\mu$  is absolutely continuous with respect to  $\nu$ . Below is a brief background on OT in the discrete case.

**Linear Program (LP) formulation.** Consider an empirical probability measure of the form  $\mu = \sum_{i=1}^n a_i \delta(\mathbf{x}^{(i)})$  where  $X = (\mathbf{x}^{(1)}, \dots, \mathbf{x}^{(n)}) \in \mathcal{G}^n$ ,  $\delta(\mathbf{x})$  denotes the Dirac (unit mass) distribution at point  $\mathbf{x} \in \mathcal{G}$ , and  $(a_1, \dots, a_n)$  lives in the probability simplex  $\Sigma_n := \{\mathbf{p} \in \mathbb{R}_+^n \mid \sum_{i=1}^n p_i = 1\}$ . Now given a second empirical measure,  $\nu = \sum_{j=1}^m b_j \delta(\mathbf{y}^{(j)})$ , with  $Y = (\mathbf{y}^{(1)}, \dots, \mathbf{y}^{(m)}) \in \mathcal{G}^m$ , and  $(b_1, \dots, b_m) \in \Sigma_m$ ,

and if the ground cost of moving from point  $\mathbf{x}^{(i)}$  to  $\mathbf{y}^{(j)}$  is denoted by  $M_{ij}$ , then the OT distance between  $\mu$  and  $\nu$  is the solution to the following LP.

$$\text{OT}(\mu, \nu; M) := \min_{T \in \mathbb{R}_+^{n \times m}} \sum_{ij} T_{ij} M_{ij} \quad (1)$$

s.t.  $\forall i, \sum_j T_{ij} = a_i, \forall j, \sum_i T_{ij} = b_j$

The optimal  $T \in \mathbb{R}_+^{n \times m}$  is referred to as the *transportation matrix*, where  $T_{ij}$  denotes the optimal amount of mass to move from point  $\mathbf{x}^{(i)}$  to point  $\mathbf{y}^{(j)}$ . Intuitively, OT is concerned with the problem of moving a given supply of goods from certain factories to meet the demands at some shops, such that the overall transportation cost is minimal.

**Distance.** When  $\mathcal{G} = \mathbb{R}^d$  and the cost is defined with respect to a metric  $D_{\mathcal{G}}$  over  $\mathcal{G}$  (i.e.,  $M_{ij} = D_{\mathcal{G}}(\mathbf{x}^{(i)}, \mathbf{y}^{(j)})^p$  for any  $i, j$ ), OT defines a distance between empirical probability distributions. This is the  $p$ -Wasserstein distance, defined as  $\mathcal{W}_p(\mu, \nu) := \text{OT}(\mu, \nu; D_{\mathcal{G}}^p)^{1/p}$ . In most cases, we are only concerned with the case where  $p = 1$  or 2.

**Barycenters.** In Section 5, we will make use of the notion of averaging in the Wasserstein space. More precisely, the Wasserstein barycenter (Agueh and Carlier, 2011) is a probability measure that minimizes the sum of ( $p$ -th power) Wasserstein distances to the given measures. Formally, given  $N$  measures  $\{\nu_1, \dots, \nu_N\}$  with corresponding weights  $\boldsymbol{\eta} = \{\eta_1, \dots, \eta_N\} \in \Sigma_N$ , the Wasserstein barycenter can be written as

$$\mathcal{B}_p(\nu_1, \dots, \nu_N) = \arg \min_{\mu} \sum_{i=1}^N \eta_i \mathcal{W}_p(\mu, \nu_i)^p. \quad (2)$$

**Regularization and Sinkhorn iterations.** The cost of exactly solving OT scales at least in  $\mathcal{O}(n^3 \log(n))$  ( $n$  being the cardinality of the support of the empirical measure) when using network simplex or interior point methods. Following Cuturi (2013), we consider the entropy regularized Wasserstein distance,  $\mathcal{W}_{p,\lambda}(\mu, \nu) := \text{OT}_{\lambda}(\mu, \nu; D_{\mathcal{G}}^p)^{1/p}$ , where the search space for the optimal  $T$  is instead restricted to a smooth solution close to the extreme points of the linear program identical to (2), but subtracting  $\lambda H(T)$  from the linear objective, where  $H(T) = -\sum_{ij} T_{ij} \log T_{ij}$ . The regularized problem ( $\lambda > 0$ ) can then be solved efficiently using Sinkhorn iterations (Sinkhorn, 1964). While the cost of each Sinkhorn iteration is quadratic in  $n$ , it has been shown in Altschuler et al. (2017) that convergence can be attained in a number of iterations that is independent of  $n$ , thus resulting in an overall complexity of  $\tilde{\mathcal{O}}(n^2)$ . Similarly, we consider the regularized barycenter ( $\mathcal{B}_{p,\lambda}$ ) (Cuturi and Doucet, 2014) which uses regularized Wasserstein distances  $\mathcal{W}_{p,\lambda}$  in Eq. (2) and can be cheaply computed by iterative Bregman projections (Benamou et al., 2015) to yield an

approximate solution. Overall, thanks to this entropic regularization, OT computations can be carried out efficiently in a parallel and batched manner on GPUs (in our use case,  $n \approx 300$ ).

## 4 Methodology

In this section, we define the distributional estimate that we use to represent each entity and the corresponding OT based distance measure. Since we take the guiding example of building text representations, we consider each entity to be a word for clarity.

**Distributional Estimate** ( $\mathbb{P}_V^w$ ). For a word  $w$ , its distributional estimate is built from a histogram  $H^w$  over the set of contexts  $\mathcal{C}$ , and an embedding of these contexts into a space  $\mathcal{G}$ . The histogram measures how likely it is that a word  $w$  occurred in a particular context  $c$ , i.e., probability  $p(c|w)$ . In absence of an exact closed-form expression, we can use its empirical estimate given by the frequency of the word  $w$  in context  $c$ , relative to the total frequency of word  $w$  in the corpus.

Thus one natural way to build this histogram is to maintain a co-occurrence matrix between words in our vocabulary and all possible contexts, where each entry indicates how often a word and context occur in a (symmetric) window of fixed size  $L$ . Then, the bin values  $(H^w)_{c \in \mathcal{C}}$  of the histogram can be viewed as the row corresponding to  $w$  in this co-occurrence matrix.

Next, the simplest embedding of contexts is into the space of one-hot vectors of all the possible contexts. However, this induces a lot of sparsity in the representation and the distance between such embeddings of contexts does not reflect their semantics. A classical solution would be to instead find a dense low-dimensional embedding of contexts that captures the semantics, possibly using techniques such as SVD or deep neural networks. We denote by  $V = (\mathbf{v}_c)_{c \in \mathcal{C}}$  an embedding of the contexts into this low-dimensional space  $\mathcal{G} \subset \mathbb{R}^d$ , which we refer to as the *ground space*.

Combining the histogram  $H^w$  and the context embeddings  $V$ , we represent the word  $w$  by the following empirical distribution, referred to as the *distributional estimate* of the word:

$$\mathbb{P}_V^w := \sum_{c \in \mathcal{C}} (H^w)_c \delta(\mathbf{v}_c). \quad (3)$$

**Distance.** If we equip the ground space  $\mathcal{G}$  with a meaningful metric  $D_{\mathcal{G}}$  and use distributional estimates ( $\mathbb{P}_V^w$ ) to represent the words, then we can define a distance between two words  $w_i$  and  $w_j$  as the solution to the following optimal transport problem:

$$\text{CMD}(w_i, w_j; D_{\mathcal{G}}^p) \stackrel{\text{def}}{=} \text{OT}(\mathbb{P}_V^{w_i}, \mathbb{P}_V^{w_j}; D_{\mathcal{G}}^p) \simeq \mathcal{W}_{p,\lambda}(\mathbb{P}_V^{w_i}, \mathbb{P}_V^{w_j})^p. \quad (4)$$




Figure 2: *Illustration of Context Mover’s Distance (CMD) (Eq. (4)) between elephant  $\mathcal{E}$  and mammal (when represented with their distributional estimates and using entailment ground metric discussed in Section 6). Here, we pick four contexts at random from their top 20 contexts in terms of PPMI. The square cells denote the entries of the transportation matrix  $T$  obtained while computing CMD. The darker a cell, larger the amount of mass moved.*

**Intuition.** Two words are similar in meaning if the contexts of one word can be easily transported to the contexts of the other, with this cost of transportation being measured by  $D_{\mathcal{G}}$ . This idea still remains in line with the distributional hypothesis (Harris, 1954; Rubenstein and Goodenough, 1965) that words in similar contexts have similar meanings, but provides a precise way to quantify it. We thus call the distance in Eq.(4) the *Context Mover’s Distance (CMD)*.

**Interpretation.** The particular definition of CMD in Eq.(4), lends a pleasing interpretation (c.f. Figure 2) in terms of the transportation map  $T$ . This can be useful in understanding why and how are the two words being considered as similar in meaning, by looking at this movement of contexts.

Additionally, CMD between two words can be thought of as computing the WMD between some hypothetical documents associated to each word, which contain all possible contexts of the respective words.

**Mixed Distributional Estimate.** Based on a given task, it might be useful to reduce the cost incurred from extraneous contexts, or in other words, to adjust the amounts of “distribution” and “point” nature needed for the representation. This can be done by adding the point estimate of the target entity as an additional context in the distributional estimate, with a particular mixing weight  $m$ . The other contexts in the distributional estimate are reweighted to sum to  $1 - m$ .

**Concrete Framework.** For simplicity, we limit the contexts to consist of single words and discuss how the framework can be concretely applied as follows:

(i) *Making associations better.* It is commonly understood that co-occurrence counts alone may not necessarily suggest a strong association between a word and a context. The well-known Positive Pointwise Mutual

Information (PPMI) matrix (Church and Hanks, 1990; Levy et al., 2015) addresses this shortcoming, and in particular, we use its smoothed and shifted variant called SPPMI (Levy and Goldberg, 2014b). Overall, this enables us to extract better semantic associations from the co-occurrence matrix. Hence, the bin values (at context  $c$ ) for the histogram of word  $w$  in Eq. (3) can be written as:  $(H^w)_c := \frac{\text{SPPMI}(w,c)}{\sum_{c \in \mathcal{C}} \text{SPPMI}(w,c)}$ . Building this histogram information comes almost for free while learning point embeddings, as in GloVe (Pennington et al., 2014).

(ii) *Computational considerations:* A natural question could arise that CMD might be computationally intractable in its current formulation, as the possible number of contexts can be enormous. Since the contexts are mapped to dense embeddings, it is possible to only consider  $K$  representative contexts<sup>4</sup>, each covering some part  $\mathcal{C}_k$  of the set of contexts  $\mathcal{C}$ . The histogram for word  $w$  with respect to these contexts can then be written as  $\tilde{\mathbb{P}}_V^w = \sum_{k=1}^K (\tilde{H}^w)_k \delta(\tilde{\mathbf{v}}_k)$ , where  $\tilde{\mathbf{v}}_k \in \tilde{V}$  is the point estimate of the  $k^{\text{th}}$  representative context, and  $(\tilde{H}^w)_k$  denotes the new histogram bin values (formed by combining the SPPMI contributions). More details on this, including precise definitions of SPPMI and the effect of number of clusters, are given in the supplementary sections S1.2 and S2.


Another way would have been to consider the top-K contexts by SPPMI but we don’t go this route, since the computations can’t be batched when the supports are different. Also this would require reducing the support of the obtained barycenter, back to K, everytime.

**Overall efficiency.** Thus, with the batched implementations on a Nvidia TitanX GPU, it is possible to compute  $\approx 13,700$  Wasserstein-distances/second (for histogram size 100), and **4,600** Wasserstein-barycenters/second (for sentence length 25 and histogram size 100).

## 5 Sentence Representations

The goal of this task is to develop a representation for sentences, that captures the semantics conveyed by it. Most unsupervised representations proposed in the past rely on the composition of word embeddings, through additive, multiplicative, or other ways (Mitchell and Lapata, 2008; Arora et al., 2017; Pagliardini et al., 2017). As before, our aim is to represent sentences by distributional estimates to better capture the inherent uncertainty and polysemy. We hypothesize that a sentence,  $S = (w_1, w_2, \dots, w_N)$ , can be effectively represented via the Wasserstein barycenter of the distributional estimates of its words,  $\tilde{\mathbb{P}}_V^S := \mathcal{B}_{p,\lambda}(\tilde{\mathbb{P}}_V^{w_1}, \tilde{\mathbb{P}}_V^{w_2}, \dots, \tilde{\mathbb{P}}_V^{w_N})$ .

<sup>4</sup>In practice, these are the cluster centroids obtained by applying K-means to context embeddings under  $D_G$ .



(a) Dist. estimate (b) Euclidean avg (c) W-barycenter.

Figure 3: Distributional estimate of ‘my’ (green), ‘love’ (red) and ‘life’ (blue). Illustrates how Wasserstein barycenter (and thus CoMB) utilizes the geometry of ground space, while the Euclidean averaging just focuses on the probability mass. <sup>6</sup>

The motivation is that since the barycenter minimizes the sum of optimal transports, cf. Eq. (2), it should result in a representation which best captures the simultaneous occurrence of the words in a sentence. Henceforth, we refer to this representation as *Context Mover’s Barycenters* (CoMB).

To give a better idea of the nature of Wasserstein barycenter underlying CoMB, consider two Diracs measures,  $\delta(\mathbf{x})$  and  $\delta(\mathbf{y})$ , with equal weights and under Euclidean ground metric. Then, the Wasserstein barycenter is  $\delta(\frac{\mathbf{x}+\mathbf{y}}{2})$  while simple averaging gives  $\frac{1}{2}(\delta(\mathbf{x}) + \delta(\mathbf{y}))$ . Figure 3 highlights this interpolating nature of Wasserstein barycenter in the ground space, and illustrates how it is better suited for using the innate geometry of tasks (here context embeddings) as compared to the simple Euclidean averaging.

Averaging of point-estimates, in many variants (Iyyer et al., 2015; Arora et al., 2017; Pagliardini et al., 2017), has been shown to be surprisingly effective for multiple NLP tasks including sentence similarity. Interestingly, this can be seen as a special case of CoMB, when the distribution associated to a word is just a Dirac at its point estimate. It becomes apparent that having a rich distributional estimate for a word could be beneficial.

Since with CoMB, each sentence is also a distribution over the ground space  $\mathcal{G}$  containing the contexts, we utilize the Context Mover’s Distance (CMD) defined in Eq.(4) to define the distance between two sentences  $S_1$  and  $S_2$  as follows,  $\text{CMD}(S_1, S_2; D_G^p) := \text{OT}(\tilde{\mathbb{P}}_V^{S_1}, \tilde{\mathbb{P}}_V^{S_2}; D_G^p) \simeq \mathcal{W}_{p,\lambda}(\tilde{\mathbb{P}}_V^{S_1}, \tilde{\mathbb{P}}_V^{S_2})^p$ . Here, the ground metric  $D_G$  is typically Euclidean or angular distance between the point embeddings.

**Experimental Setup.** To evaluate the effectiveness of an unsupervised sentence representation, we consider the semantic textual similarity (STS) tasks across 24 datasets from SemEval (Agirre et al., 2012, 2013, 2014, 2015, 2016), containing sentences from domains such as news headlines, forums, Twitter, etc. The objective

<sup>6</sup>For visualization purposes in Figures 1, 3, 4, we compute a 2D representation of the actual context embeddings using t-SNE (Maaten and Hinton, 2008) and use a kernel density estimate to smooth the distributions.

Model	Corpus (# tokens)	Val. Set	Test Set					Avg.
		STS16	STS12	STS13	STS14	STS15		
<i>(a) Unsupervised methods based on GloVe embeddings</i>								
NBoW	TBC (0.9 B)	19.2	21.1	13.5	25.0	30.7	22.6	
SIF		26.6	32.4	23.0	34.1	35.3	31.2	
SIF (PC removed)		57.6	41.0	50.1	51.9	52.8	49.0	
Euclidean avg.		50.7	45.7	39.0	49.9	53.5	47.0	
CoMB		52.4	48.2	42.2	54.9	53.8	49.8	
CoMB Mix		60.2	50.5	51.0	58.3	60.5	55.1	
CoMB Mix + PC removed		63.0	49.3	56.5	60.8	64.0	57.7	
<i>(b) Unsupervised methods based on Sent2vec embeddings</i>								
Sent2vec	TBC (0.9 B)	69.1	55.6	57.1	68.4	74.1	63.8	
Sent2vec (PC removed)		69.0	57.0	62.8	70.1	72.8	65.7	
CoMB Mix		70.1	56.1	59.7	68.8	73.7	64.6	
CoMB Mix + PC removed		70.6	57.9	64.2	<b>70.3</b>	73.1	<b>66.4</b>	
<i>(c) Unsupervised methods across different corpora</i>								
Skip-thought (Arora et al., 2017)	TBC (0.9 B)	NA	30.8	24.8	31.4	31.0	29.5	
WME (Word2vec)	Google News (100 B)	NA	<b>60.6</b>	54.5	65.5	61.8	60.6	
SIF PC removed (GloVe)	Common Crawl (840 B)	NA	56.2	56.6	68.5	71.7	63.3	
CoMB Mix + PC removed (GloVe)	TBC + News Crawl (5 B)	<b>72.0</b>	54.9	<b>67.2</b>	67.5	72.0	65.4	
<i>(d) Supervised methods</i>								
GenSen (Kiros and Chan, 2018)	AllNLI, TBC, WMT, etc.	66.4	<b>60.6</b>	54.7	65.8	<b>74.2</b>	63.8	
InferSent	AllNLI (26 M)	71.5	59.2	58.9	69.6	71.3	64.8	

Table 1: Average *Pearson correlation* ( $\times 100$ ) on STS tasks for CoMB and other baselines. ‘Mix’ denotes the mixed distributional estimate. ‘PC removed’ refers to removing contribution along the principal component of point estimates (as in SIF). See S3 for detailed results and hyperparameters.

here is to give a similarity score to each sentence pair and rank them, which is evaluated against the ground truth ranking via Pearson correlation.

We benchmark the performance of CoMB using SentEval (Conneau and Kiela, 2018) against a variety of unsupervised methods such as (a) Neural Bag-of-Words (NBoW) averaging of point estimates, (b) SIF from Arora et al. (2017) who regard it as a “simple but tough-to-beat baseline” and utilize weighted NBoW averaging with principal component removal, (c) Sent2vec (Pagliardini et al., 2017) which learns word embeddings so that their average works well as a sentence representation, (d) Skip-thought (Kiros et al., 2015) which trains an LSTM-based encoder to predict surrounding sentences, and (e) Word Mover’s Embedding (WME; Wu et al., 2018) which is a recent variant of WMD. For comparison, we also show the performance of recent supervised methods such as InferSent (Conneau et al., 2017) and GenSen (Subramanian et al., 2018), although these methods are clearly at an advantage due to training on labeled corpora.

**Empirical Results.** *(i) Ground Metric: GloVe.* Table 1 (a) compares the performance of CoMB against other methods using the same GloVe embeddings trained on the common Toronto Book Corpus (TBC) (Zhu et al., 2015). We observe that the vanilla CoMB significantly outperforms SIF and NBoW, showing the benefit of having the distributional estimate instead of just a Dirac. Also, it is better than SIF<sub>PC removed</sub>

on average across the test set, and using the mixed distributional estimate (CoMB<sub>Mix</sub>) further improves the average test performance by 10%. Next, when the PC removal is carried out for point estimates during mixing (i.e., CoMB<sub>Mix + PC removed</sub>), the average performance increases to 57.7. Both of these are for mixing weight  $m = 0.4$  towards the point estimate. Also, we see empirical evidence that the Euclidean average of the distributional estimates (Figure 3b) performs worse than Wasserstein barycenter (CoMB), when measuring the sentence similarity using CMD for both.

*(ii) Ground Metric: Sent2Vec.* Our method is not specific to GloVe embeddings, and in Table 1 (b), we see the effect of using an improved ground metric, by employing word vectors from Sent2vec. Here, we notice that our best variant, CoMB<sub>Mix + PC removed</sub>, results in a relative improvement of 4% over Sent2vec, which is a decent gain considering that for unstructured text corpora it is a state-of-the-art unsupervised method.

*(iii) Overall comparisons:* To facilitate an accurate comparison with baselines which typically use huge corporas, in Table 1 (c) we report our results (with ground metric GloVe) by using the News Crawl corpus (Bojar et al., 2018) combined with TBC. First of all, this increase in data boosts the performance of CoMB from 57.7 to 65.4, which outperforms WME despite using a smaller corpus. Thus, pointing towards the advantage of defining transport over contexts than words. Further, CoMB also outperforms SIF<sub>PC removed</sub> trained on Common Crawl and popular supervised

sentence embedding methods<sup>7</sup> such as GenSen and InferSent which utilize labeled corpora.

**Qualitative analysis and ablation.** We discuss this extensively in our supplementary section, but the main observations include: (a) Section S4.3: we qualitatively analyze the averaging of distributional estimates versus point estimates and find that the nature of errors made by CoMB and SIF are complementary in nature. CoMB outperforms when the difference in sentences stems from predicate while SIF is better when the distinguishing factor is the subject of the sentences. (b) Section S2.3: we observe that by around  $K = 300$  to 500, the performance gained by increasing the number of clusters starts to plateau, implying that it is sufficient to only consider the representative contexts. (c) Section S5: CoMB shows promise for application in a downstream task like sentence completion, although a quantitative evaluation remains beyond the scope.

**Summary and further prospects.** Overall, this highlights the advantage of distributional estimates for words, that can be extended to give meaningful representation of sentences via CoMB in a principled manner. In terms of efficiency, it takes about 3 minutes on one GPU to get results on all the STS tasks comprising 25,000 sentences (see S1.4 for details). A future avenue would be to utilize the non-associativity of Wasserstein barycenters (i.e.,  $B_p(\mu, B_p(\nu, \xi)) \neq B_p(B_p(\mu, \nu), \xi)$ ), to take into account the word order with various aggregation strategies (like parse trees).

## 6 Hypernymy Detection

In linguistics, hypernymy is a relation between words where the semantics of one word (the *hyponym*) are contained within that of another word (the *hypernym*). A simple form of this relation is the *is-A* relation, e.g., *cat* is an *animal*. Hypernymy is a special case of the more general concept of lexical entailment, detecting which is relevant for tasks such as Question Answering.

Early unsupervised approaches for this task exploited various linguistic properties of hypernymy (Weeds and Weir, 2003; Kotlerman et al., 2010; Santus et al., 2014; Rimell, 2014). While most of these are count-based, point embedding methods (Chang et al., 2017; Henderson and Popa, 2016) have become popular in recent years. Other approaches represent words by Gaussian distributions with KL-divergence as an entailment measure (Vilnis and McCallum, 2014; Athiwaratkun and Wilson, 2017). These methods have proven powerful, as they capture not only the semantics, but also the un-

<sup>7</sup>USE (Cer et al., 2018), which relies on a labeled corpus, doesn't report results on STS12-15 but according to (BERT official repo, 2019), its performance is 67.5 which is close to CoMB's unsupervised performance of 66.4. See also BERT's performance in BERT official repo (2019).




Figure 4: Distributional estimates of *rock* and *music*. The two words have an overlapping mode (for rock in the sense of rock music) and separate modes for other senses (such as rock in the sense of a stone).

certainly about the contexts in which a word appears.

Therefore, hypernymy detection is a great testbed to verify the effectiveness of our approach to represent each entity by the distribution of its contexts. The intuitive idea for the applicability of our method to this task originates from the *Distributional Inclusion Hypothesis* (Geffet and Dagan, 2005), which states that a word  $v$  entails another word  $w$  if “the most characteristic contexts of  $v$  are expected to be included in all  $w$ 's contexts (but not necessarily amongst the most characteristic ones for  $w$ )”. The inclusion of the contexts for the words *rock* and *music* is illustrated in Figure 4. We view our method as a relaxation of this strict inclusion condition by modeling it more softly with the optimal transport between the set of contexts corresponding to the hyponym and hypernym. Hence, it is natural to make use of the Context Mover's Distance (CMD), Eq. (4), but with a ground cost that measures entailment relations.

For this, we utilize a recently proposed method by Henderson et al. (Henderson and Popa, 2016; Henderson, 2017), which explicitly models what information is known about a word, by interpreting each entry of the embedding as the degree to which a certain feature is present. Based on the logical definition of entailment they derive an operator measuring the entailment similarity between two so-called entailment vectors defined as follows:  $\mathbf{v}_i \otimes \mathbf{v}_j = \sigma(-\mathbf{v}_i) \cdot \log \sigma(-\mathbf{v}_j)$ , where the sigmoid  $\sigma$  and log are applied component-wise on the embeddings. Thus, we use as ground cost  $D_{ij}^{\text{Hend.}} := -\mathbf{v}_i \otimes \mathbf{v}_j$ . This asymmetric ground cost shows that our framework can be flexibly used with an arbitrary cost function defined on the ground space.

**Evaluation.** In total, we evaluate our method on 10 standard datasets using the HypEval<sup>10</sup> evaluation toolkit. The foremost thing that we would like to check is the benefit of having a distributional estimate in comparison to just the point embeddings. Here,

<sup>9</sup>Scores for GE+C, GE+KL, and DIVE are taken from (Chang et al., 2017) as we use the same evaluation setup.

<sup>10</sup><https://github.com/context-mover/HypEval>

Method	Validation Set				Test Set			
	HypeNet-Train (Shwartz et al., 2016)	HypeNet-Test (Shwartz et al., 2016)	EVALution (Santus et al., 2015)	LenciBenotto Benotto (2015)	Weeds (Weeds et al., 2014)	Turney (Turney and Mohammad, 2015)	Baroni (Baroni and Lenci, 2011)	BIBLESS (Kielia et al., 2015)
$D^{\text{Hend.}}$	29.0	28.8	31.6	44.8	60.8	<u>56.6</u>	78.3	67.7
$\text{CMD}_{K=200} + D^{\text{Hend.}}$	<u>53.4</u>	<u>53.4</u>	<b>38.1</b>	<u>50.1</u>	<u>63.9</u>	56.0	67.5	<b>75.4</b>
$\text{CMD}_{K=250} + D^{\text{Hend.}}$	<b>53.6</b>	<b>53.7</b>	<u>37.1</u>	49.9	63.8	56.3	67.3	<u>75.2</u>
GE + Cosine	NA	21.6	26.7	43.3	52.0	53.9	69.7	NA
GE + KL	NA	23.7	29.6	45.1	51.3	52.0	64.6	NA
DIVE	NA	32.0	33.0	<b>50.4</b>	<b>65.5</b>	<b>57.2</b>	<b>83.5</b>	NA
Poincaré GloVe	NA	NA	NA	NA	NA	NA	NA	65.2

Table 2: Comparison of the entailment vectors from Henderson (2017) used alone ( $D^{\text{Hend.}}$ ), and when used together with our Context Mover’s Distance ( $\text{CMD}_K$ ) as the underlying ground metric, with state-of-the-art unsupervised methods. The two listed CMD variants are the ones with best validation performance for  $K = 200$  and 250 clusters. The scores are **AP@all (%)**<sup>9</sup>, except for BIBLESS where it is accuracy. More details about the training setup and results on other datasets can be found in Section S1.1, and Table S12 in Section S6.2. Best results for each column are in **bold** and the 2<sup>nd</sup> best are underlined.

Method	Validation Set						Test Set						Wt. Average [7721]	
	MEN + SimVerb-D [2499]	MC [30]	MTurk-287 [285]	MTurk-771 [771]	RG [65]	RW [1493]	SimLex [998]	Verb [144]	WS-ALL [352]	WS-REL [251]	WS-SIM [203]	YP [130]		SimVerb-T [2999]
$D^{\text{GloVe}}$	<b>61.1</b>	67.8	66.8	61.7	<b>73.7</b>	33.7	<b>34.8</b>	<b>26.4</b>	53.5	40.9	68.2	<b>54.5</b>	<b>19.4</b>	35.0
$\text{CMD}_{K=400} + D^{\text{GloVe}}$	60.8	<b>69.6</b>	<b>67.8</b>	<b>62.1</b>	73.1	<b>38.9</b>	33.9	23.6	<b>55.3</b>	<b>44.1</b>	<b>69.2</b>	53.0	18.9	<b>35.9</b>

Table 3: Performance on standard word similarity tasks measured by Spearman’s rho x 100. Both methods are based on *Toronto Book Corpus (0.9 B)* to ensure fair comparison. The last column is the weighted average of test set performance, with weights as [# of word pairs] present in the vocabulary for each dataset.

we observe that employing CMD along with the entailment embeddings, leads to a significant boost on most of the datasets, except on Baroni and Turney, where the performance is still competitive with the other state of the art methods like Gaussian embeddings (GE). The more interesting observation is that on some datasets (EVALution, HypeNet, LenciBenotto) we even outperform or match state-of-the-art performance (cf. Table 2), by simply using CMD together with this ground cost  $D_{ij}^{\text{Hend.}}$  based on the entailment embeddings. Further, on BIBLESS (equivalent to WBLESS), CMD performs better than the state-of-the-art unsupervised method, Poincaré GloVe, as reported in Tifrea et al. (2018). Also, qualitative analysis can be found in Table S18/S19 of the supplementary. Lastly, these results can be efficiently computed in less than 3 minutes on a single GPU for all datasets (>100,000 pairs) and check Table S15 for details.

## 7 Word Similarity

The hypernymy detection results indicate the advantage gained by representing with a distribution over contexts than a point embedding for a word-level task. Nevertheless, we present results for another standard word-level task: namely word similarity and relatedness (Faruqui and Dyer, 2014) in Table 3. We utilize GloVe embeddings with cosine similarity as a baseline for point embedding methods and compare the performance by using our Context Mover’s Distance (CMD) on top. But some other point embedding method can also be plugged into CMD similarly.

In the above, we use the combined development sets of MEN and SimVerb for validation, as these are the only datasets with pre-defined development and test splits. The mixing weight  $m$  (see Section 4) is 0.8, the PPMI smoothing  $\alpha = 0.15$  and the number of clusters  $K = 400$  for the CMD experiment. We observe that on a majority of the test datasets, CMD results in a performance gain and also performs better on average. An extensive analysis with different embeddings and corpora is however outside the current scope.

## 8 Conclusion

We advocate for representing entities by a distributional estimate on top of any given co-occurrence structure. For each entity, we jointly consider the histogram information (with its contexts) as well as the point embeddings of the contexts. We show how this enables the use of optimal transport over distributions of contexts. Our framework results in an efficient, interpretable and compositional metric to represent and compare entities (e.g. words) and groups thereof (e.g. sentences), while leveraging existing point embeddings. We demonstrate its performance on several NLP tasks such as word and sentence similarity, as well as hypernymy detection. A practical take-home message is: *do not throw away the co-occurrence information* (e.g. when using GloVe), *but instead pass it on to our method*. Motivated by the promising results, learning the distributional estimates and applying the proposed framework on co-occurrence structures beyond NLP are exciting future directions.



## Acknowledgments

We would like to acknowledge Alexis Conneau, Tom Bosc, and anonymous reviewers, for their helpful comments. Also, we thank all the members of MLO for fruitful discussions. SPS is indebted to Marco Cuturi for teaching him about Optimal Transport and Honda Foundation for sponsoring that visit.

## References

- Eneko Agirre, Mona Diab, Daniel Cer, and Aitor Gonzalez-Agirre. Semeval-2012 task 6: A pilot on semantic textual similarity. In *Proceedings of the First Joint Conference on Lexical and Computational Semantics- Volume 1: Proceedings of the main conference and the shared task, and Volume 2: Proceedings of the Sixth International Workshop on Semantic Evaluation*, pages 385–393. Association for Computational Linguistics, 2012. [5](#)
- Eneko Agirre, Daniel Cer, Mona Diab, Aitor Gonzalez-Agirre, and Weiwei Guo. \* sem 2013 shared task: Semantic textual similarity. In *Second Joint Conference on Lexical and Computational Semantics (\*SEM), Volume 1: Proceedings of the Main Conference and the Shared Task: Semantic Textual Similarity*, volume 1, pages 32–43, 2013. [5](#)
- Eneko Agirre, Carmen Banea, Claire Cardie, Daniel Cer, Mona Diab, Aitor Gonzalez-Agirre, Weiwei Guo, Rada Mihalcea, German Rigau, and Janyce Wiebe. Semeval-2014 task 10: Multilingual semantic textual similarity. In *Proceedings of the 8th international workshop on semantic evaluation (SemEval 2014)*, pages 81–91, 2014. [5](#), [23](#), [28](#)
- Eneko Agirre, Carmen Banea, Claire Cardie, Daniel Cer, Mona Diab, Aitor Gonzalez-Agirre, Weiwei Guo, Inigo Lopez-Gazpio, Montse Maritxalar, Rada Mihalcea, et al. Semeval-2015 task 2: Semantic textual similarity, english, spanish and pilot on interpretability. In *Proceedings of the 9th international workshop on semantic evaluation (SemEval 2015)*, pages 252–263, 2015. [5](#), [23](#), [27](#)
- Eneko Agirre, Carmen Banea, Daniel Cer, Mona Diab, Aitor Gonzalez-Agirre, Rada Mihalcea, German Rigau, and Janyce Wiebe. Semeval-2016 task 1: Semantic textual similarity, monolingual and cross-lingual evaluation. In *Proceedings of the 10th International Workshop on Semantic Evaluation (SemEval-2016)*, pages 497–511, 2016. [5](#)
- Martial Agueh and Guillaume Carlier. Barycenters in the wasserstein space. *SIAM Journal on Mathematical Analysis*, 43(2):904–924, 2011. [3](#), [17](#)
- Jason Altschuler, Jonathan Weed, and Philippe Rigollet. Near-linear time approximation algorithms for optimal transport via sinkhorn iteration. In *Advances in Neural Information Processing Systems*, pages 1964–1974, 2017. [3](#)
- Sanjeev Arora, Yingyu Liang, and Tengyu Ma. A simple but tough-to-beat baseline for sentence embeddings. *ICLR*, 2017. [5](#), [6](#), [23](#)
- Ben Athiwaratkun and Andrew Gordon Wilson. Multimodal word distributions. *arXiv preprint arXiv:1704.08424*, 2017. [2](#), [7](#)
- Marco Baroni and Alessandro Lenci. How we blessed distributional semantic evaluation. In *Proceedings of the GEMS 2011 Workshop on GEometrical Models of Natural Language Semantics*, pages 1–10. Association for Computational Linguistics, 2011. [8](#)
- Marco Baroni, Silvia Bernardini, Adriano Ferraresi, and Eros Zanchetta. The wacky wide web: a collection of very large linguistically processed web-crawled corpora. *Language Resources and Evaluation*, 43(3): 209–226, Sep 2009. [30](#)
- Jean-David Benamou, Guillaume Carlier, Marco Cuturi, Luca Nenna, and Gabriel Peyré. Iterative bregman projections for regularized transportation problems. *SIAM Journal on Scientific Computing*, 37(2): A1111–A1138, 2015. [3](#)
- Yoshua Bengio, Réjean Ducharme, Pascal Vincent, and Christian Janvin. A neural probabilistic language model. *J. Mach. Learn. Res.*, 3:1137–1155, March 2003. ISSN 1532-4435. URL <http://dl.acm.org/citation.cfm?id=944919.944966>. [2](#)
- Giulia Benotto. Distributional models for semantic relations: A study on hyponymy and antonymy. *PhD thesis, University of Pisa*, 2015. [8](#)
- BERT official repo. Universal Sentence Encoder results on STS 12-16. <https://github.com/google-research/bert/issues/128#issuecomment-451896503>, 2019. Accessed: 23 May, 2019. [7](#)
- Ondřej Bojar, Christian Federmann, Mark Fishel, Yvette Graham, Barry Haddow, Matthias Huck, Philipp Koehn, and Christof Monz. Findings of the 2018 conference on machine translation (WMT18). In *Proc. of WMT*, 2018. URL <https://www.aclweb.org/anthology/W18-6401>. [6](#)
- Daniel Cer, Yinfei Yang, Sheng yi Kong, Nan Hua, Nicole Limtiaco, Rhomni St. John, Noah Constant, Mario Guajardo-Cespedes, Steve Yuan, Chris Tar, Yun-Hsuan Sung, Brian Strope, and Ray Kurzweil. Universal sentence encoder, 2018. [7](#)
- Haw-Shiuan Chang, ZiYun Wang, Luke Vilnis, and Andrew McCallum. Distributional inclusion vector embedding for unsupervised hypernymy detection. *arXiv preprint arXiv:1710.00880*, 2017. [7](#), [15](#), [30](#)

- Kenneth Ward Church and Patrick Hanks. Word association norms, mutual information, and lexicography. *Computational linguistics*, 16(1):22–29, 1990. 5, 15
- Ronan Collobert and Jason Weston. A unified architecture for natural language processing: Deep neural networks with multitask learning. In *Proceedings of the 25th international conference on Machine learning*, pages 160–167. ACM, 2008. 1
- Alexis Conneau and Douwe Kiela. SentEval: An Evaluation Toolkit for Universal Sentence Representations. *arXiv preprint arXiv:1803.05449*, 2018. 6
- Alexis Conneau, Douwe Kiela, Holger Schwenk, Loic Barrault, and Antoine Bordes. Supervised learning of universal sentence representations from natural language inference data. *arXiv preprint arXiv:1705.02364*, 2017. 2, 6
- Marco Cuturi. Sinkhorn distances: Lightspeed computation of optimal transport. In *Advances in neural information processing systems*, pages 2292–2300, 2013. 3, 17
- Marco Cuturi and Arnaud Doucet. Fast computation of wasserstein barycenters. In Eric P. Xing and Tony Jebara, editors, *Proceedings of the 31st International Conference on Machine Learning*, volume 32 of *Proceedings of Machine Learning Research*, pages 685–693, Beijing, China, 22–24 Jun 2014. PMLR. 3, 17
- Jan Deriu, Aurelien Lucchi, Valeria De Luca, Aliaksei Severyn, Simon Müller, Mark Cieliebak, Thomas Hofmann, and Martin Jaggi. Leveraging Large Amounts of Weakly Supervised Data for Multi-Language Sentiment Classification. In *WWW 2017 - International World Wide Web Conference*, pages 1045–1052, Perth, Australia, 2017. 1
- Manaal Faruqui and Chris Dyer. Community evaluation and exchange of word vectors at wordvectors.org. In *Proceedings of 52nd Annual Meeting of the Association for Computational Linguistics: System Demonstrations*, pages 19–24, Baltimore, Maryland, June 2014. Association for Computational Linguistics. doi: 10.3115/v1/P14-5004. URL <https://www.aclweb.org/anthology/P14-5004>. 8
- Charlie Frogner, Farzaneh Mirzazadeh, and Justin Solomon. Learning embeddings into entropic wasserstein spaces, 2019. 2, 3
- Maayan Geffet and Ido Dagan. The distributional inclusion hypotheses and lexical entailment. In *Proceedings of the 43rd Annual Meeting on Association for Computational Linguistics*, pages 107–114. Association for Computational Linguistics, 2005. 7
- Aude Genevay, Marco Cuturi, Gabriel Peyré, and Francis Bach. Stochastic optimization for large-scale optimal transport. In D. D. Lee, M. Sugiyama, U. V. Luxburg, I. Guyon, and R. Garnett, editors, *Advances in Neural Information Processing Systems 29*, pages 3440–3448. Curran Associates, Inc., 2016. 16
- Edouard Grave, Armand Joulin, and Quentin Berthet. Unsupervised Alignment of Embeddings with Wasserstein Procrustes. *arXiv preprint arXiv:1805.11222*, 2018. 3
- Mihajlo Grbovic, Vladan Radosavljevic, Nemanja Djuric, Narayan Bhamidipati, Jaikit Savla, Varun Bhagwan, and Doug Sharp. E-commerce in your inbox: Product recommendations at scale. In *Proceedings of the 21th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, pages 1809–1818. ACM, 2015. 2
- Aditya Grover and Jure Leskovec. node2vec: Scalable feature learning for networks. In *KDD 2016 - Proceedings of the 22nd ACM SIGKDD international conference on knowledge discovery and data mining*, pages 855–864. ACM, 2016. 2
- Jiang Guo, Wanxiang Che, Haifeng Wang, and Ting Liu. Learning sense-specific word embeddings by exploiting bilingual resources. In *Proceedings of COLING 2014, the 25th International Conference on Computational Linguistics: Technical Papers*, pages 497–507, 2014. 2
- Zellig S Harris. Distributional structure. *Word*, 10(2-3): 146–162, 1954. 4
- James Henderson. Learning word embeddings for hyponymy with entailment-based distributional semantics. *arXiv preprint arXiv:1710.02437*, 2017. 7, 8, 15, 34
- James Henderson and Diana Nicoleta Popa. A vector space for distributional semantics for entailment. *arXiv preprint arXiv:1607.03780*, 2016. 7
- Sepp Hochreiter and Jürgen Schmidhuber. Long short-term memory. *Neural computation*, 9(8):1735–1780, 1997. 1
- Eric H Huang, Richard Socher, Christopher D Manning, and Andrew Y Ng. Improving word representations via global context and multiple word prototypes. In *Proceedings of the 50th Annual Meeting of the Association for Computational Linguistics: Long Papers-Volume 1*, pages 873–882. Association for Computational Linguistics, 2012. 2
- Gao Huang, Chuan Guo, Matt J Kusner, Yu Sun, Fei Sha, and Kilian Q Weinberger. Supervised word mover’s distance. In *Advances in Neural Information Processing Systems*, pages 4862–4870, 2016. 2, 3
- Mohit Iyyer, Varun Manjunatha, Jordan Boyd-Graber, and Hal Daumé III. Deep unordered composition rivals syntactic methods for text classifica-

- tion. In *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 1681–1691, Beijing, China, July 2015. Association for Computational Linguistics. doi: 10.3115/v1/P15-1162. URL <https://www.aclweb.org/anthology/P15-1162>. 5
- Nal Kalchbrenner, Edward Grefenstette, and Phil Blunsom. A Convolutional Neural Network for Modelling Sentences. In *ACL - Proceedings of the 52nd Annual Meeting of the Association for Computational Linguistics*, pages 655–665, 2014. 1
- Leonid V Kantorovich. On the translocation of masses. In *Dokl. Akad. Nauk. USSR (NS)*, volume 37, pages 199–201, 1942. 1
- Douwe Kiela, Laura Rimell, Ivan Vulić, and Stephen Clark. Exploiting image generality for lexical entailment detection. In *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 2: Short Papers)*, pages 119–124. Association for Computational Linguistics, 2015. 8, 34
- Yoon Kim. Convolutional Neural Networks for Sentence Classification. In *EMNLP 2014 - Empirical Methods in Natural Language Processing*, pages 1746–1751, 2014. 1
- Jamie Kiros and William Chan. Inferlite: Simple universal sentence representations from natural language inference data. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 4868–4874. Association for Computational Linguistics, 2018. URL <http://aclweb.org/anthology/D18-1524>. 6
- Ryan Kiros, Yukun Zhu, Ruslan R Salakhutdinov, Richard Zemel, Raquel Urtasun, Antonio Torralba, and Sanja Fidler. Skip-thought vectors. In *Advances in neural information processing systems*, pages 3294–3302, 2015. 6
- Lili Kotlerman, Ido Dagan, Idan Szpektor, and Maayan Zhitomirsky-Geffet. Directional distributional similarity for lexical inference. *Natural Language Engineering*, 16(4):359–389, 2010. 7
- Matt Kusner, Yu Sun, Nicholas Kolkin, and Kilian Weinberger. From word embeddings to document distances. In *International Conference on Machine Learning*, pages 957–966, 2015. 2, 3
- Yann LeCun, Léon Bottou, Yoshua Bengio, and Patrick Haffner. Gradient-based learning applied to document recognition. *Proceedings of the IEEE*, 86(11):2278–2324, 1998. 1
- Omer Levy and Yoav Goldberg. Dependency-based word embeddings. In *Proceedings of the 52nd Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, volume 2, pages 302–308, 2014a. 2
- Omer Levy and Yoav Goldberg. Neural word embedding as implicit matrix factorization. In *Advances in neural information processing systems*, pages 2177–2185, 2014b. 5, 15
- Omer Levy, Yoav Goldberg, and Ido Dagan. Improving distributional similarity with lessons learned from word embeddings. *Transactions of the Association for Computational Linguistics*, 3:211–225, 2015. 5, 15
- Laurens van der Maaten and Geoffrey Hinton. Visualizing data using t-sne. *Journal of machine learning research*, 9(Nov):2579–2605, 2008. 5
- Christopher Manning, Mihai Surdeanu, John Bauer, Jenny Finkel, Steven Bethard, and David McClosky. The stanford corenlp natural language processing toolkit. In *Proceedings of 52nd annual meeting of the association for computational linguistics: system demonstrations*, pages 55–60, 2014. 15
- Tomas Mikolov, Ilya Sutskever, Kai Chen, Greg S Corrado, and Jeff Dean. Distributed representations of words and phrases and their compositionality. In *Advances in neural information processing systems*, pages 3111–3119, 2013. 1, 2
- Jeff Mitchell and Mirella Lapata. Vector-based models of semantic composition. *proceedings of ACL-08: HLT*, pages 236–244, 2008. 5
- Gaspard Monge. Mémoire sur la théorie des déblais et des remblais. *Histoire de l'Académie Royale des Sciences de Paris*, 1781. 1
- Boris Muzellec and Marco Cuturi. Generalizing Point Embeddings using the Wasserstein Space of Elliptical Distributions. *arXiv preprint arXiv:1805.07594*, 2018. 2
- Matteo Pagliardini, Prakhar Gupta, and Martin Jaggi. Unsupervised learning of sentence embeddings using compositional n-gram features. *arXiv preprint arXiv:1703.02507*, 2017. 5, 6
- Jeffrey Pennington, Richard Socher, and Christopher Manning. Glove: Global vectors for word representation. In *Proceedings of the 2014 conference on empirical methods in natural language processing (EMNLP)*, pages 1532–1543, 2014. 1, 2, 5
- Ye Qi, Devendra Sachan, Matthieu Felix, Sarguna Padmanabhan, and Graham Neubig. When and why are pre-trained word embeddings useful for neural machine translation? In *Proceedings of the 2018 Conference of the North American Chapter of the*

- Association for Computational Linguistics: Human Language Technologies, Volume 2 (Short Papers)*, pages 529–535. Association for Computational Linguistics, 2018. doi: 10.18653/v1/N18-2084. URL <http://aclweb.org/anthology/N18-2084>. 1
- Laura Rimell. Distributional lexical entailment by topic coherence. In *Proceedings of the 14th Conference of the European Chapter of the Association for Computational Linguistics*, pages 511–519, 2014. 7
- Antoine Rolet, Marco Cuturi, and Gabriel Peyré. Fast dictionary learning with a smoothed wasserstein loss. In Arthur Gretton and Christian C. Robert, editors, *Proceedings of the 19th International Conference on Artificial Intelligence and Statistics*, volume 51 of *Proceedings of Machine Learning Research*, pages 630–638, Cadiz, Spain, 09–11 May 2016. PMLR. 3
- Herbert Rubenstein and John B Goodenough. Contextual correlates of synonymy. *Communications of the ACM*, 8(10):627–633, 1965. 4
- Enrico Santus, Alessandro Lenci, Qin Lu, and S Schulte im Walde. Chasing hypernyms in vector spaces with entropy. In *14th Conference of the European Chapter of the Association for Computational Linguistics*, pages 38–42. EACL (European chapter of the Association for Computational Linguistics), 2014. 7
- Enrico Santus, Frances Yung, Alessandro Lenci, and Chu-Ren Huang. Evaluation 1.0: an evolving semantic dataset for training and evaluation of distributional semantic models. In *Proceedings of the 4th Workshop on Linked Data in Linguistics: Resources and Applications*, pages 64–69, 2015. 8
- Aliaksei Severyn and Alessandro Moschitti. Twitter Sentiment Analysis with Deep Convolutional Neural Networks. In *38th International ACM SIGIR Conference*, pages 959–962, 2015. 1
- Vered Shwartz, Yoav Goldberg, and Ido Dagan. Improving hypernymy detection with an integrated path-based and distributional method. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 2389–2398. Association for Computational Linguistics, 2016. 8, 15, 30
- Richard Sinkhorn. A relationship between arbitrary positive matrices and doubly stochastic matrices. *The Annals of Mathematical Statistics*, 35(2):876–879, 1964. ISSN 00034851. 3
- Sandeep Subramanian, Adam Trischler, Yoshua Bengio, and Christopher J Pal. Learning general purpose distributed sentence representations via large scale multi-task learning, 2018. 2, 6
- Chi Sun, Hang Yan, Xipeng Qiu, and Xuanjing Huang. Gaussian Word Embedding with a Wasserstein Distance Loss. *arXiv preprint arXiv:1808.07016v7*, 2018. 2
- Ilya Sutskever, Oriol Vinyals, and Quoc V. Le. Sequence to sequence learning with neural networks. In *NIPS*, 2014. 1
- Alexandru Tifrea, Gary Bécigneul, and Octavian-Eugen Ganea. Poincaré glove: Hyperbolic word embeddings. *arXiv preprint arXiv:1810.06546*, 2018. 8, 33
- Peter D Turney and Saif M Mohammad. Experiments with three approaches to recognizing lexical entailment. *Natural Language Engineering*, 21(3):437–476, 2015. 8
- Cédric Villani. *Optimal transport: old and new*, volume 338. Springer Science & Business Media, 2008. 1
- Luke Vilnis and Andrew McCallum. Word representations via gaussian embedding. *arXiv preprint arXiv:1412.6623*, 2014. 2, 7
- Ivan Vulić, Daniela Gerz, Douwe Kiela, Felix Hill, and Anna Korhonen. Hyperlex: A large-scale evaluation of graded lexical entailment. *Computational Linguistics*, 43(4):781–835, 2017. 33
- Julie Weeds and David Weir. A general framework for distributional similarity. In *Proceedings of the 2003 conference on Empirical methods in natural language processing*, pages 81–88. Association for Computational Linguistics, 2003. 7
- Julie Weeds, Daoud Clarke, Jeremy Reffin, David Weir, and Bill Keller. Learning to distinguish hypernyms and co-hyponyms. In *Proceedings of COLING 2014, the 25th International Conference on Computational Linguistics: Technical Papers*, pages 2249–2259. Dublin City University and Association for Computational Linguistics, 2014. 8
- Ledell Wu, Adam Fisch, Sumit Chopra, Keith Adams, Antoine Bordes, and Jason Weston. Starspace: Embed all the things! *arXiv preprint arXiv:1709.03856*, 2017. 2
- Lingfei Wu, Ian En-Hsu Yen, Kun Xu, Fangli Xu, Avinash Balakrishnan, Pin-Yu Chen, Pradeep Ravikumar, and Michael J. Witbrock. Word mover’s embedding: From word2vec to document embedding. In *EMNLP*, 2018. 6
- Hongteng Xu, Wenlin Wang, Wei Liu, and Lawrence Carin. Distilled wasserstein learning for word embedding and topic modeling. *arXiv preprint arXiv:1809.04705*, 2018. 3
- Jianbo Ye, Yanran Li, Zhaohui Wu, James Z Wang, Wenjie Li, and Jia Li. Determining gains acquired from word embedding quantitatively using discrete distribution clustering. In *Proceedings of the 55th*

*Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, volume 1, pages 1847–1856, 2017. [3](#)

Meng Zhang, Yang Liu, Huanbo Luan, and Maosong Sun. Earth mover’s distance minimization for unsupervised bilingual lexicon induction. In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 1934–1945. Association for Computational Linguistics, 2017. [3](#)

Yukun Zhu, Ryan Kiros, Richard Zemel, Ruslan Salakhutdinov, Raquel Urtasun, Antonio Torralba, and Sanja Fidler. Aligning books and movies: Towards story-like visual explanations by watching movies and reading books. *arXiv preprint arXiv:1506.06724*, 2015. [6](#)

# Appendices

---

In these appendices, we provide supplementary details on the experiments, mathematical framework, and detailed results in Section [S1](#). In Section [S2](#) we discuss computational aspects and the importance of clustering the contexts. Detailed results of the sentence representation and hypernymy detection experiments are listed on the following pages in Section [S3](#) and [S6](#) respectively. Then we describe a qualitative analysis of sentence similarity in Section [S4](#), and finally discuss a qualitative analysis of hypernymy detection in Section [S7](#).

## Contents

<b>S1 Technical specifications</b>	<b>15</b>
S1.1 Experimental Details . . . . .	15
S1.2 PPMI Details . . . . .	15
S1.3 Optimal Transport . . . . .	16
S1.4 Empirical runtime . . . . .	17
S1.5 Software Release . . . . .	17
<b>S2 Clustering the contexts</b>	<b>17</b>
S2.1 Computational considerations. . . . .	17
S2.2 Implementation. . . . .	18
S2.3 Effect of number of clusters . . . . .	18
<b>S3 Sentence Representation</b>	<b>19</b>
S3.1 Detailed results . . . . .	19
S3.2 Hyperparameters . . . . .	20
<b>S4 Qualitative Analysis of Sentence Similarity</b>	<b>23</b>
S4.1 Evaluation Procedure . . . . .	23
S4.2 Experiments and Observations . . . . .	23
S4.3 Conclusions from Qualitative Examples . . . . .	25
S4.4 Effect of Sentence Length . . . . .	26
S4.5 Additional Qualitative Analysis . . . . .	27
<b>S5 Sentence completion: nearest neighbor analysis</b>	<b>29</b>
<b>S6 Hypernymy Detection</b>	<b>30</b>
S6.1 Corpora . . . . .	30
S6.2 Detailed Results . . . . .	30
S6.3 Hyperparameters . . . . .	30
S6.4 Effect of PPMI parameters for Hypernymy Detection . . . . .	31
S6.5 Computational Considerations . . . . .	33
S6.6 Detection Accuracy on WBLESS . . . . .	33
<b>S7 Qualitative Analysis of Hypernymy detection</b>	<b>34</b>
S7.1 Evaluation Procedure . . . . .	34
S7.2 Results . . . . .	34

## S1 Technical specifications

In this Section, we give further details on the experimental framework in Section S1.1, on the PPMI formulation (Section S1.2), and on Optimal Transport (Section S1.3). In Section S1.5, we provide references for software release.

### S1.1 Experimental Details

**Sentence Representations.** While using the Toronto Book Corpus, we remove the errors caused by crawling and pre-process the corpus by filtering out sentences longer than 300 words, thereby removing a very small portion (500 sentences out of the 70 million sentences). We utilize the code<sup>S1</sup> from GloVe for building the vocabulary of size 205513 (obtained by setting `min_count=10`) and the co-occurrence matrix (considering a symmetric window of size 10). Note that as in GloVe, the contribution from a context word is inversely weighted by the distance to the target word, while computing the co-occurrence. The vectors obtained via GloVe have 300 dimensions and were trained for 75 iterations at a learning rate of 0.005, other parameters being the default ones. The performance of these vectors from GloVe was verified on standard word similarity tasks.

**Hypernymy Detection.** The training of the entailment vector is performed on a Wikipedia dump from 2015 with 1.7B tokens that have been tokenized using the Stanford NLP library (Manning et al., 2014). In our experiments, we use a vocabulary with a size of 80'000 and word embeddings with 200 dimensions. We followed the same training procedure as described in Henderson (2017) and were able to reproduce their scores on the hypernymy detection task. For tuning the hyperparameters, we utilize the HypeNet training set of Shwartz et al. (2016) (from the random split), following the procedure indicated in Chang et al. (2017) for tuning DIVE and Gaussian embeddings.

### S1.2 PPMI Details

**Definition.** The Positive Pointwise Mutual Information (PPMI) matrix (Church and Hanks, 1990; Levy et al., 2015) is defined as follows:

$$\text{PPMI}(w, c) := \max \left( \log \left( \frac{p(w, c)}{p(w) \times p(c)} \right), 0 \right). \quad (5)$$

This means that the PPMI entries are non-zero when the joint probability of target and context words co-occurring is higher than the probability when they are independent.

**Formulation and Variants.** Typically, the probabilities used in PPMI are estimated from the co-occurrence counts  $\#(w, c)$  in the corpus and lead to

$$\text{PPMI}(w, c) = \max \left( \log \left( \frac{\#(w, c) \times |Z|}{\#(w) \times \#(c)} \right), 0 \right), \quad (6)$$

where,  $\#(w) = \sum_c \#(w, c)$ ,  $\#(c) = \sum_w \#(w, c)$  and  $|Z| = \sum_w \sum_c \#(w, c)$ . Also, it is known that PPMI is biased towards infrequent words and assigns them a higher value. A common solution is to smoothen<sup>S2</sup> the context probabilities by raising them to an exponent of  $\alpha$  lying between 0 and 1. Levy and Goldberg (2014b) have also suggested the use of the shifted PPMI (SPPMI) matrix where the shift<sup>S3</sup> by  $\log(s)$  acts like a prior on the probability of co-occurrence of target and context pairs. These variants of PPMI enable us to extract better semantic associations from the co-occurrence matrix. Finally, we have

$$\text{SPPMI}_{\alpha, s}(w, c) := \max \left( \log \left( \frac{\#(w, c) \times \sum_{c'} \#(c')^\alpha}{\#(w) \times \#(c)^\alpha} \right) - \log(s), 0 \right),$$

<sup>S1</sup><https://github.com/stanfordnlp/GloVe>

<sup>S2</sup> $p_\alpha(c) := \frac{\#(c)^\alpha}{\sum_{c'} \#(c')^\alpha}$ .

<sup>S3</sup>Here, we denote the shift parameter by  $s$  instead of the  $k$  defined in (Levy et al., 2015) to avoid confusion with the other usage of  $k$ .

where  $\alpha$  and  $s$  denote the smoothing and k-shift parameters. Hence, the bin values (at context  $c$ ) for the histogram of word  $w$  in Eq. (3) can be written as:

$$(H^w)_c := \frac{\text{SPPMI}_{\alpha,s}(w,c)}{\sum_{c \in \mathcal{C}} \text{SPPMI}_{\alpha,s}(w,c)}. \quad (7)$$

**Computational aspect.** We utilize the sparse matrix support of Scipy<sup>S4</sup> for efficiently carrying out all the PPMI computations.

**PPMI Column Normalizations.** Now, instead of the individual contexts we consider the PPMI with respect to the representative contexts (i.e., cluster centers). In certain cases, when the PPMI contributions towards the partitions (or clusters) have a large variance, it can be helpful to consider the fraction of  $\mathcal{C}_k$ ’s SPPMI (Eq. (8), (9)) that has been used towards a word  $w$ , instead of aggregate values used in (12). Otherwise the process of making the histogram unit sum might misrepresent the actual underlying contribution. We call this PPMI column normalization ( $\beta$ ). In other words, the intuition is that the normalization will balance the effect of a possible non-uniform spread in total PPMI across the clusters. We observe that setting  $\beta$  to 0.5 or 1 help in boosting performance on the STS tasks. The basic form of column normalization is shown in (9).

$$(\tilde{H}^w)_k := \frac{(\bar{H}^w)_k}{\sum_{k=1}^K (\bar{H}^w)_k} \quad \text{with} \quad (8)$$

$$(\bar{H}^w)_k := \frac{\text{SPPMI}_{\alpha,s}(w, \mathcal{C}_k)}{\sum_w \text{SPPMI}_{\alpha,s}(w, \mathcal{C}_k)}. \quad (9)$$

Another possibility while considering the normalization to have an associated parameter  $\beta$  that can interpolate between the above normalization and normalization with respect to cluster size.

$$(\tilde{H}_\beta^w)_k := \frac{(\bar{H}_\beta^w)_k}{\sum_{k=1}^K (\bar{H}_\beta^w)_k}, \quad \text{where} \quad (10)$$

$$(\bar{H}_\beta^w)_k := \frac{\text{SPPMI}_{\alpha,s}(w, \mathcal{C}_k)}{\sum_w \text{SPPMI}_{\alpha,s}(w, \mathcal{C}_k)^\beta}$$

In particular, when  $\beta = 1$ , we recover the equation for histograms as in (9), and  $\beta = 0$  would imply normalization with respect to cluster sizes.

### S1.3 Optimal Transport

**Implementation aspects.** We make use of the Python Optimal Transport (POT)<sup>S5</sup> for performing the computation of Wasserstein distances and barycenters on CPU. For more efficient GPU implementation, we built custom implementation using PyTorch. We also implement a batched version for barycenter computation, which to the best of our knowledge has not been done in the past. The batched barycenter computation relies on a viewing computations in the form of block-diagonal matrices. As an example, this batched mode can compute around 200 barycenters in 0.09 seconds, where each barycenter is of 50 histograms (of size 100) and usually gives a speedup of about 10x.

**Scalability.** For further scalability, an alternative is to consider *stochastic optimal transport* techniques (Genevay et al., 2016). Here, the idea would be to randomly sample a subset of contexts from the distributional estimate while considering this transport.

**Stability of Sinkhorn Iterations.** For all our computations involving optimal transport, we typically use  $\lambda$  around 0.1 and make use of log or median normalization as common in POT to stabilize the Sinkhorn iterations. Also, we observe that clipping the ground metric matrix (if it exceeds a particular large threshold) also sometimes results in performance gains.

<sup>S4</sup><https://docs.scipy.org/doc/scipy/reference/sparse.html>

<sup>S5</sup><http://pot.readthedocs.io/en/stable/>



**Value of  $p$ .** It has been shown in [Agueh and Carlier \(2011\)](#) that when the underlying space is Euclidean and  $p = 2$ , there exists a unique minimizer to the Wasserstein barycenter problem. But, since we are anyways solving the regularized Wasserstein barycenter ([Cuturi and Doucet, 2014](#)) problem over here instead of the exact one, the particular value of  $p$  seems less of an issue. Empirically in the sentence similarity experiments, we have observed  $p = 1$  to perform better than  $p = 2$  (by about 2-3 points).

### S1.4 Empirical runtime

Starting from scratch, it takes less than 11 minutes to get the results on all STS tasks which contains 25,000 sentences. This includes about 3 minutes to cluster 200,000 words (1 GPU), 5 minutes to convert raw co-occurrences into histograms of size 300 (1 CPU core) and 3 minutes for STS (1 GPU).

### S1.5 Software Release

**Core code and histograms.** Our code to build the ppmi-matrix, clusters, histograms as well computing Wasserstein distances and barycenters is publicly available on Github under <https://github.com/context-mover>. Precomputed histograms, clusters and point embeddings used in our experiments can also be downloaded from <https://drive.google.com/open?id=13stRuUd--71hc0q92yWUF-0iY15DYKNf>.

**Standard evaluation suite for Hypernymy.** To ease the evaluation pipeline, we have collected the most common benchmark datasets and compiled the code for assessing a model’s performance on hypernymy detection or directionality into a Python package, called **HypEval**, which is publicly available at <https://github.com/context-mover/HypEval>. This also handles OOV (out-of-vocabulary) pairs in a standardized manner and allows for efficient, batched evaluation on GPU.

## S2 Clustering the contexts

In this Section, we discuss computational aspects and how using clustering makes the problem scalable. We give precise definition of the distributional estimate in Section [S2.1](#), and show how the number of clusters affects the performance in Section [S2.3](#).

### S2.1 Computational considerations.

The view of optimal transport between histograms of contexts introduced in Eq. (4) offers a pleasing interpretation (see Figure 2). However, it might be computationally intractable in its current formulation, since the number of possible contexts can be as large as the size of vocabulary (if the contexts are just single words) or even exponential (if contexts are considered to be phrases, sentences and otherwise). For instance, even with the use of SPPMI matrix, which also helps to sparsify the co-occurrences, the cardinality of the support of histograms still varies from  $10^3$  to  $5 \times 10^4$  context words, when considering a vocabulary of size around  $2 \times 10^5$ .

This is problematic because the Sinkhorn algorithm for regularized optimal transport ([Cuturi, 2013](#), see Section 3) scales roughly quadratically in the histogram size, and the ground cost matrix can also become prohibitive to store in memory. One possible fix is to instead consider a set of representative contexts in this ground space, for example via clustering. We believe that with dense low-dimensional embeddings and a meaningful metric between them, we may not require as many contexts as needed before. For instance, this can be achieved by clustering the contexts with respect to metric  $D_G$ . Apart from the computational gain, the clustering will lead to transport between more abstract contexts. This will although come at the loss of some interpretability.

Now, consider that we have obtained  $K$  representative contexts, each covering some part  $C_k$  of the set of contexts  $C$ . The histogram for word  $w$  with respect to these contexts can then be written as:

$$\tilde{\mathbb{P}}_{\tilde{V}}^w = \sum_{k=1}^K (\tilde{H}^w)_k \delta(\tilde{\mathbf{v}}_k). \tag{11}$$

Here  $\tilde{\mathbf{v}}_k \in \tilde{V}$  is the point estimate of the  $k^{th}$  representative context, and  $(\tilde{H}^w)_k$  denote the new histogram bin

values with respect to the part  $\mathcal{C}_k$ ,

$$(\tilde{\mathbf{H}}^w)_k := \frac{\text{SPPMI}_{\alpha,s}(w, \mathcal{C}_k)}{\sum_{k=1}^K \text{SPPMI}_{\alpha,s}(w, \mathcal{C}_k)}, \text{ with} \quad (12)$$

$$\text{SPPMI}_{\alpha,s}(w, \mathcal{C}_k) := \sum_{c \in \mathcal{C}_k} \text{SPPMI}_{\alpha,s}(w, c). \quad (13)$$

In the following subsection, we show the effect of the number of clusters on the performance.

## S2.2 Implementation.

For clustering, we make use of kmcuda’s<sup>S6</sup> efficient implementation of K-Means algorithm on GPUs.

## S2.3 Effect of number of clusters

Here, we analyze the impact of number of clusters on the performance of Context Mover’s Barycenters (CoMB) for the sentence similarity experiments (cf. Section 5). In particular, we look at the three best performing variants (A, B, C) on the validation set (STS 16) as well as averaged across them.

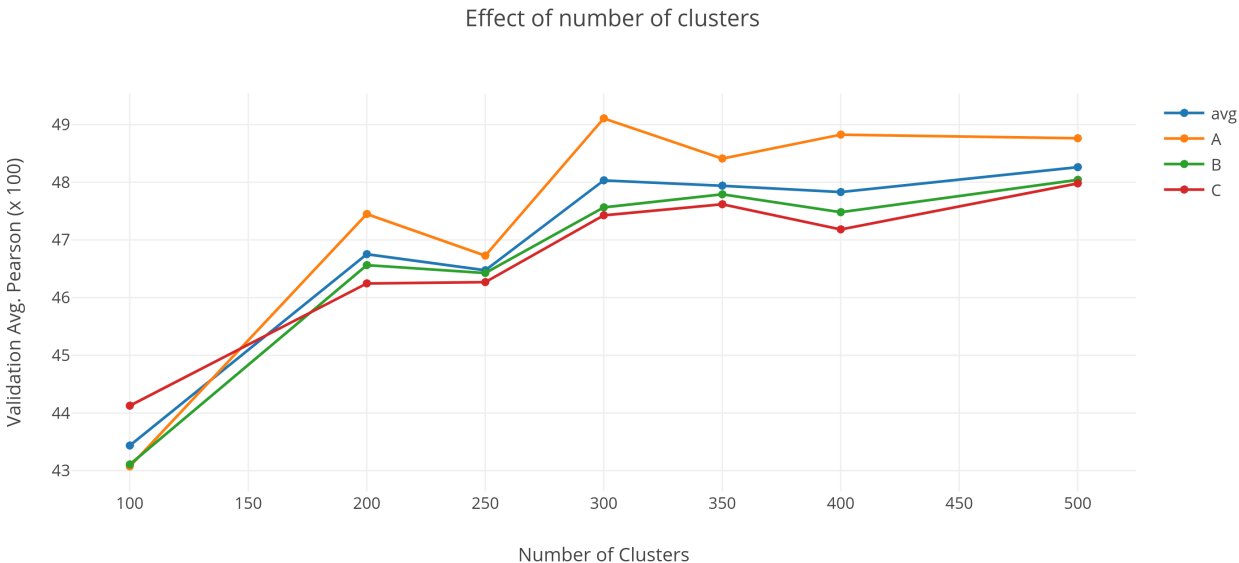


Figure S1: Effect of the number of clusters ( $K$ ) on validation performance. A, B, C correspond to the three best performing variants of CoMB obtained as per validation on STS16 and as presented in the Table 1. In particular, A denotes the hyperparameter setting of  $[(\alpha=0.55, \beta=1, s=5)]$ , B refers to  $[\alpha=0.55, \beta=0.5, s=5]$  and C denotes  $[\alpha=0.15, \beta=0.5, s=1]$ . The ‘avg’ plot shows the average trend across these three configurations.

We observe in Figure S1 that on average the performance significantly improves when the number of clusters are increased until around  $K = 300$ , and beyond that mostly plateaus ( $\pm 0.5$ ). But, as can be seen for variants B and C the performance typically continues to rise until  $K = 500$ . It seems that the amount of PPMI column normalization ( $\beta = 0.5$  vs  $\beta = 1$ ) might be at play here.

As going from  $K = 300$  to  $K = 500$  comes at the cost of increased computation time, and doesn’t lead to a substantial gain in performance. We use either  $K = 300$  or  $500$  clusters, depending on validation results, for our results on sentence similarity tasks.

Such a trend seems to be in line with the ideal case where we wouldn’t need to do any clustering and just take all possible contexts into account.

<sup>S6</sup><https://github.com/src-d/kmcuda>

### S3 Sentence Representation

#### S3.1 Detailed results

We provide detailed results of the **test set performance** of *Context Mover’s Barycenters* (CoMB) and related baselines on the STS-12, 13, 14 and STS-15 tasks in Tables S2 and S3 and **validation set performance** in Table S4. Hyperparameters for all the methods are tuned on STS16 (validation set), and the best configuration so obtained is used for the other STS tasks.

The first 3 baselines (NBoW, SIF, SIF + PC removed) as well as the first three CoMB (first part of the Tables) are using Glove embeddings, while methods in the second part of the table use Sent2vec embeddings. The Sent2Vec embeddings that we use are the pre-trained ones available at <https://github.com/epfml/sent2vec>. The GloVe embeddings used are the ones described in the Section S1.1. We used SIF’s publicly available implementation (<https://github.com/PrincetonML/SIF>) to obtain its scores. The numbers are average Pearson correlation x 100 (with respect to ground-truth scores).

Model	STS12					Average
	MSRpar	MSRvid	SMTeuparl	WordNet	SMThews	
NBoW	17.5	-6.4	25.4	37.2	31.9	21.1
SIF	12.1	51.6	23.5	55.1	19.9	32.4
SIF + PC removed	21.9	58.9	30.9	55.9	37.2	41.0
Euclidean avg	31.1	67.1	45.4	52.2	32.7	45.7
CoMB (GloVe)	31.3	61.5	<b>47.5</b>	54.5	<b>46.0</b>	48.2
CoMB (GloVe) + Mix	<b>35.8</b>	75.0	44.2	59.2	38.5	<b>50.5</b>
CoMB (GloVe) + Mix + PC removed	<u>35.5</u>	<b>78.2</b>	35.5	<b>60.9</b>	36.5	<u>49.3</u>
CoMB (GloVe) + Mix + PC rem. (TBC + News Crawl)	33.0	82.8	45.7	65.9	47.0	54.9
Sent2vec	37.7	78.7	49.3	70.2	42.3	55.6
CoMB (sent2vec) + Mix	<u>40.7</u>	<u>78.9</u>	<b>49.9</b>	<u>68.0</u>	<u>43.0</u>	<u>56.1</u>
CoMB (sent2vec) + Mix + PC removed	<b>44.3</b>	<b>82.3</b>	<u>47.1</u>	<b>68.8</b>	<b>47.0</b>	<b>57.9</b>

Model	STS13			
	FNWN	Headlines	WordNet	Average
NBoW	14.2	27.1	-0.8	13.5
SIF	8.5	54.1	6.3	23.0
SIF + PC removed	13.7	<u>61.0</u>	<u>75.5</u>	50.1
Euclidean avg.	1.9	50.9	64.3	39.0
CoMB (GloVe)	11.8	54.6	60.1	42.2
CoMB (GloVe) + Mix	<u>22.3</u>	58.5	72.3	<u>51.0</u>
CoMB (GloVe) + Mix + PC removed	<b>28.9</b>	<b>62.8</b>	<b>77.7</b>	<b>56.5</b>
CoMB (GloVe)+ Mix + PC rem. (TBC + News Crawl)	46.9	75.1	79.5	67.2
Sent2vec	42.4	66.2	62.7	57.1
CoMB (sent2vec) + Mix	42.5	67.6	69.1	59.7
CoMB (sent2vec) + Mix + PC removed	<b>43.3</b>	<b>69.4</b>	<b>80.0</b>	<b>64.2</b>

Table S1: Detailed **test set performance** of *Context Mover’s Barycenters* (CoMB) and related baselines on the STS12 and STS13 tasks using Toronto Book Corpus. The numbers are average Pearson correlation x100 (with respect to ground truth scores). ‘Mix’ denotes the mixed distributional estimate. ‘PC removed’ refers to removing contribution along the principal component of point estimates as done in SIF. The part in brackets after CoMB refers to the underlying ground metric.

We observe empirically that the PPMI smoothing parameter  $\alpha$ , which balances the bias of PPMI towards rare words, plays an important role. While its ideal value would vary on each task, we found the settings mentioned in the Table S5 to work well uniformly across the above spectrum of tasks. We also provide in Table S5 a comparison of the hyper-parameters used in each of the methods in Tables S1, S2, S3 and S4.

Model	STS14						Average
	Forum	News	Headlines	Images	WordNet	Twitter	
NBoW	18.2	37.6	24.0	14.9	17.1	38.0	25.0
SIF	21.1	29.4	50.7	34.3	22.4	46.5	34.1
SIF + PC removed	27.9	43.1	<u>57.0</u>	52.9	<u>76.8</u>	53.5	51.9
Euclidean avg.	39.2	52.3	40.6	54.5	64.8	48.1	49.9
CoMB (GloVe)	<u>40.4</u>	<b>64.9</b>	50.5	51.5	64.4	57.8	54.9
CoMB (GloVe) + Mix	<b>40.9</b>	<u>62.7</u>	53.9	<u>59.7</u>	73.7	<u>58.8</u>	<u>58.3</u>
CoMB (GloVe) + Mix + PC removed	40.0	60.8	<b>58.6</b>	<b>66.6</b>	<b>77.9</b>	<b>60.8</b>	<b>60.8</b>
CoMB (GloVe)+ Mix + PC rem. (TBC + News Crawl)	42.0	69.8	67.1	77.4	81.6	67.0	67.5
Sent2vec	49.1	67.2	<u>63.9</u>	<b>82.5</b>	72.4	<b>75.5</b>	68.4
CoMB (sent2vec) + Mix	<u>52.1</u>	<b>69.5</b>	63.2	78.3	<u>75.1</u>	74.5	<u>68.8</u>
CoMB (sent2vec) + Mix + PC removed	<b>52.5</b>	<u>69.5</u>	<b>64.4</b>	<u>78.4</u>	<b>81.6</b>	<u>75.3</u>	<b>70.3</b>

Table S2: (continued from Table S1) Detailed **test set performance** of *Context Mover’s Barycenters* (CoMB) and related baselines on the STS14 using Toronto Book Corpus. The numbers are average Pearson correlation x 100 (with respect to groundtruth scores). ‘Mix’ denotes the mixed distributional estimate. ‘PC removed’ refers to removing contribution along the principal component of point estimates as done in SIF. The part in brackets after CoMB refers to the underlying ground metric.

### S3.2 Hyperparameters

The hyperparameters for CoMB and related baselines are summarized in the Table S5. When tuning our results on the validation set (STS16), the main hyperparameters and their ranges that we consider are:  $\alpha=\{0.15, 0.55, 0.95\}$ ,  $\beta=\{0, 0.5, 1.0\}$ ,  $s=\{1, 5, 15\}$ ,  $\lambda=\{0.05, 0.1\}$ ,  $m=\{0.4, 0.5, 0.6\}$ , ground metric clipping =  $\{10, 12, 14\}$ , sinkhorn iterations =  $\{100\}$ , and  $K=\{300, 400, 500\}$ .

Model	STS15					
	Forum	Students	Belief	Headlines	Images	Average
NBoW	18.6	43.7	28.5	37.1	25.8	30.7
SIF	23.9	33.8	30.2	57.6	31.1	35.3
SIF + PC removed	35.3	63.8	51.0	62.3	51.6	52.8
Euclidean avg.	42.4	59.8	48.0	53.6	63.6	53.5
CoMB (GloVe)	36.2	<u>64.5</u>	45.2	61.1	61.8	53.8
CoMB (GloVe) + Mix	<u>51.0</u>	<b>66.2</b>	<u>54.4</u>	<u>62.5</u>	<u>68.2</u>	<u>60.5</u>
CoMB (GloVe) + Mix + PC removed	<b>55.3</b>	61.3	<b>63.3</b>	<b>66.1</b>	<b>74.1</b>	<b>64.0</b>
CoMB (GloVe) + Mix + PC rem. (TBC + News Crawl)	65.9	66.3	71.6	74.3	81.8	71.9
Sent2vec	67.5	<b>73.9</b>	<b>77.1</b>	69.4	<b>82.6</b>	<b>74.1</b>
CoMB (sent2vec) + Mix	<u>67.9</u>	<u>73.8</u>	<u>75.6</u>	69.8	81.5	<u>73.7</u>
CoMB (sent2vec) + Mix + PC removed	<b>68.4</b>	69.6	74.6	<b>71.3</b>	<u>81.9</u>	73.1

Table S3: (continued from Table S2) Detailed **test set performance** of *Context Mover’s Barycenters* (CoMB) and related baselines on the STS15 using Toronto Book Corpus. The numbers are average Pearson correlation x 100 (with respect to groundtruth scores). ‘Mix’ denotes the mixed distributional estimate. ‘PC removed’ refers to removing contribution along the principal component of point estimates as done in SIF. The part in brackets after CoMB refers to the underlying ground metric.

Model	STS16					
	Answer	Headlines	Plagiarism	Postediting	Question	Average
NBoW	19.9	32.6	16.5	35.7	-8.9	19.2
SIF	35.1	55.1	14.6	31.7	-3.5	26.6
SIF + PC removed	42.4	<u>60.0</u>	58.5	<u>71.7</u>	55.4	57.6
Euclidean avg.	45.4	43.8	47.5	66.0	50.7	50.7
CoMB (GloVe)	38.7	55.4	50.2	67.6	50.1	52.4
CoMB (GloVe) + Mix	<b>50.5</b>	57.1	<u>64.2</u>	69.6	<u>59.7</u>	<u>60.2</u>
CoMB (GloVe) + Mix + PC removed	<u>47.9</u>	<b>60.6</b>	<b>70.0</b>	<b>76.6</b>	<b>59.9</b>	<b>63.0</b>
CoMB (GloVe) + Mix + PC rem. (TBC + News Crawl)	59.0	72.4	78.6	82.1	68.0	72.0
Sent2vec	62.5	68.3	<b>78.6</b>	82.5	53.5	69.1
CoMB (sent2vec) + Mix	<u>62.6</u>	<u>69.0</u>	<u>76.4</u>	<u>83.0</u>	<u>59.5</u>	<u>70.1</u>
CoMB (sent2vec) + Mix + PC removed	<b>63.3</b>	<b>69.7</b>	74.8	<b>83.9</b>	<b>61.1</b>	<b>70.6</b>

Table S4: Detailed **validation set performance** of *Context Mover’s Barycenters* (CoMB) and related baselines on the STS16 using Toronto Book Corpus. The numbers are average Pearson correlation x100 (with respect to groundtruth scores). ‘Mix’ denotes the mixed distributional estimate. ‘PC removed’ refers to removing contribution along the principal component of point estimates as done in SIF. The part in brackets after CoMB refers to the underlying ground metric. Note that, STS16 was used as the validation set to obtain the best hyperparameters for all the methods in these experiments. As a result, high performance on STS16 may not be indicative of the overall performance.

	$a$			Clusters	PC removed	Mixing
SIF	$a = 10^{-4}$					
SIF + PC removed	$a = 10^{-4}$				✓	0.4
	$\alpha$	$\beta$	$s$			
Euclidean avg.	0.55	1	5	300		
CoMB (GloVe)	0.55	1	5	300		
CoMB (GloVe) + Mix	0.95	1	1	500		0.4
CoMB (GloVe) + Mix + PC removed	0.95	1	1	500	✓	0.4
CoMB (GloVe) + Mix + PC rem. (TBC + News Crawl )	0.55	1	1	400	✓	0.6
CoMB (sent2vec) + Mix	0.15	1	1	300		0.4
CoMB (sent2vec) + Mix + PC removed	0.15	1	1	300	✓	0.4

Table S5: Detailed parameters for the methods presented in Tables S2, S2 and S4. The parameters for CoMB  $\alpha, \beta, s$  denote the PPMI smoothing, column normalization exponent (Eq. (10)), and k-shift.

## S4 Qualitative Analysis of Sentence Similarity

In this section, we aim to qualitatively analyse the particular examples where our method, Context Mover’s Barycenters (CoMB), performs better or worse than the Smooth Inverse Frequency (SIF) approach from Arora et al. (2017).

### S4.1 Evaluation Procedure

**Comparing by rank.** It doesn’t make much sense to compare the raw distance values between two sentences as given by Context Mover’s Distance (CMD) for CoMB and cosine distance for SIF. This is because the spread of distance values across sentence pairs can be quite different. Note that the quantitative evaluation of these tasks is also carried out by Pearson/Spearman rank correlation of the predicted distances/similarities with the ground-truth scores.

Thus, in accordance with this reasoning, we compare the similarity score of a sentence pair relative to its rank based on ground-truth score (amongst the sentence pairs for that dataset). So, the better method should rank sentence pairs closer to the ranking obtained via ground-truth scores.

<i>Ground-Truth Score</i>	<i>Implied meaning</i>
5	The two sentences are completely equivalent, as they mean the same thing.
4	The two sentences are mostly equivalent, but some unimportant details differ.
3	The two sentences are roughly equivalent, but some important information differs/missing.
2	The two sentences are not equivalent, but share some details.
1	The two sentences are not equivalent, but are on the same topic.
0	The two sentences are completely dissimilar.

Table S6: STS ground scores and their implied meanings, as taken from Agirre et al. (2015)

**Ground-truth details.** The ground-truth scores (can be fractional) and range from 0 to 5, and the meaning implied by the integral score values can be seen in the Table S6. In the case where different examples have the same ground-truth score, the ground-truth rank is then based on lexicographical ordering of sentences for our qualitative evaluation procedure. (This for instance means that sentence pairs ranging from 62 to 74 would correspond to the same ground-truth score of 4.6). The ranking is done in the descending order of sentence similarity, i.e., most similar to least similar.

**Example selection criteria.** For all the examples, we compare the best variants of CoMB and SIF on those datasets. We particularly choose those examples where there is the maximum difference in ranks according to CoMB and SIF, as they would be more indicative of where a method succeeds or fails. Nevertheless, such a qualitative evaluation is subjective and is meant to give a better understanding of things happening under the hood.

### S4.2 Experiments and Observations

We look at examples from three datasets, namely: Images from STS15, News from STS14 and WordNet from STS14 to get a better idea of an overall behavior. In terms of aggregate quantitative performance, on Images and News datasets, CoMB is better than SIF, while the opposite is true for WordNet. These examples across the three datasets may not probably be exhaustive and are up to subjective interpretation, but hopefully will lend some indication as to where and why each method works.

#### S4.2.1 Task: STS14, Dataset: News

We look in detail at the examples in News dataset from STS 2014 (Agirre et al., 2014). The results of qualitative analysis on Images and WordNet datasets can be found in Section S4.5. For reference, CoMB results in a better performance overall with a Pearson correlation (x100) of 64.9 versus 43.0 for SIF, as presented in Table S2. The main observations are:

**Context Mover’s Distance & Barycenters: Optimal Transport of Contexts for Building Representations**

	Sentence 1	Sentence 2	Ground-Truth	Ground-Truth	CoMB	SIF
			Score	Ranking	Ranking	Ranking
1	the united states government and other nato members have refused to ratify the amended treaty until officials in moscow withdraw troops from the former soviet republics of moldova and georgia .	the united states and other nato members have refused ratify the amended treaty until russia completely withdraws from moldova and georgia .	4.6	30	<b>67</b>	152
2	jewish-american group the anti-defamation league ( adl ) published full-page advertisements in swiss and international papers in april 2008 accusing switzerland of funding terrorism through the deal .	the anti-defamation league took out full-page advertisements in swiss and international newspapers earlier in april 2008 accusing switzerland of funding terrorism through the deal .	4.4	36	<b>35</b>	128
3	the judicial order accused raghad of funding terrorism .	the court accused raghad saddam hussein of funding terrorism .	4.2	59	258	<b>124</b>
4	estonian officials stated that some of the cyber attacks that caused estonian government websites to shut down temporarily came from computers in the administration of russia including in the office of president vladimir putin .	officials in estonia including prime minister andrus ansip have claimed that some of the cyber attacks came from russian government computers including computers in the office of russian president vladimir putin .	3.8	86	<b>84</b>	206
5	the african union has proposed a peacekeeping mission to help somalia ’ s struggling transitional government stabilize somalia .	the african union has proposed a peacekeeping mission to aid the struggling transitional government in stabilizing somalia , particularly after the withdrawal of ethiopian forces	3.6	119	<b>104</b>	262
6	some asean officials stated such standardization would be difficult due to different countries ’ political systems .	some officials stated the task would be difficult for asean members because of varied legal and political systems .	3.6	117	244	<b>108</b>
7	nicaragua commemorated the 25th anniversary of the sandinista revolution .	nicaragua has not reconciled how to approach the anniversary of the sandinista revolution .	2.4	213	<b>250</b>	48
8	south korea launches new bullet train reaching 300 kph .	south korea has had a bullet train system since the 1980s .	2	232	<b>267</b>	130
9	south korea and israel oppose proliferation of weapons of mass destruction and an arms race .	china will resolutely oppose the proliferation of mass destructive weapons .	1.4	262	164	<b>235</b>
10	china is north korea ’ s closest ally .	north korea is a reclusive state .	1.2	265	<b>279</b>	196
11	the chinese government gave active cooperation and assistance to the organization for the prohibition of chemical weapons inspections .	the ecuadorian foreign ministry said in a statement that delegates from the organization for the prohibition of chemical weapons ( opaq ) will also take part in the meeting .	1	277	158	<b>231</b>
12	do quy doan is a spokesman for the vietnamese ministry of culture and information .	grenell is spokesman for the u.s. mission to the united nations .	0.8	282	213	<b>292</b>

Table S7: Examples of some indicative sentence pairs, from *News* dataset in *STS14*, with ground-truth scores and ranking as obtained via (best variants of) CoMB and SIF. The total number of sentences is **300** and the ranking is done in descending order of similarity. The method which ranks an example closer to the ground-truth rank is better and is highlighted in **blue**. CoMB ranking is the one produced when representing sentences via CoMB and then using CMD to compare them. SIF ranking is when sentences are represented via SIF and then employing cosine similarity.



**Observation 1.** Examples 1, 2, 4, 5 are sentence pairs which are equivalent in meaning (cf. Table S6), but typically have additional details in the predicates of the sentences. Here, CoMB is better than SIF at ranking the pairs closer to the ground-truth ranking. This probably suggests the averaging of word embeddings, which is the 1<sup>st</sup> step in SIF, is not as resilient to the presence of such details than the Wasserstein barycenter of distributional estimates in CoMB. We speculate that when having distributional estimates (where multiple senses or contexts are considered), adding details can help towards refining the particular meaning implied.

**Observation 2.** Let’s consider the examples 3 and 6 where SIF is better than CoMB. These are sentence pairs which are equivalent or roughly equivalent in meanings, but with a few words substituted (typically subjects) like “*judicial order*” instead of “*court*” in example 3. Here it seems that the substitution is adverse for CoMB while considering varied senses through the distributional estimate, in comparison to looking at the “point” meaning given by SIF.

**Observation 3.** In 7, 8, and 10, each sentence pair is about a common topic, but the meaning of individual sentences is quite different. For instance, example 8: “*south korea launches new bullet train reaching 300 kph*” & “*south korea has had a bullet train system since the 1980s*”. Or like in example 10: “*china is north korea ’s closest ally*” & “*north korea is a reclusive state*”. Note that typically in these examples, the subject is same in a sentence pair, and the difference is mainly in the predicate. Here, CoMB identifies the difference and ranks them closer to the ground-truth. Whereas, SIF fails to understand this and ranks them as more similar (and far away) than the ground-truth.

**Observation 4.** The examples 9, 11, and 12 are related sentences and differ mainly in details such as the name of the country, person, department, i.e. proper nouns. In particular, consider example 9: “*south korea and israel oppose proliferation of weapons of mass destruction and an arms race*” & “*china will resolutely oppose the proliferation of mass destructive weapons*”. The main difference in these examples stems from differences in the subject rather than the predicate. CoMB considers these sentence pairs to be more similar than suggested by ground-truth. Hence, in such scenarios where the subject (like the particular proper nouns) makes the most difference, SIF seems to be better.

### S4.3 Conclusions from Qualitative Examples

Summarizing the observations from the above qualitative analysis on News dataset<sup>S7</sup>, we conclude the following about the nature of success or failures of each method.

- When the subject of the sentence is similar and main difference stems from the predicate, CoMB is the winner. This can be seen for both the case when predicates are equivalent but described distinctly (*observation 1*) and when predicates are not equivalent (*observation 3*).
- When the predicates are similar and the distinguishing factor is in the subject (or object), SIF takes the lead. This seems to be true for both scenarios when the subject used increases or decreases the similarity as measured by CoMB, (*observations 2 and 4*).
- The above two points in a way also signify where having distributional estimates can be better or worse than point estimates.
- CoMB and SIF appear to be complementary in the kind of errors they make. Hence, combining the two is an exciting future avenue.

Lastly, it also seems worthwhile to explore having different ground metrics for CoMB and CMD (which are currently shared). The ground metric plays a crucial role in performance and the nature of these observations. Employing a ground metric(s) that better handles the above subtleties would be a useful research direction.

---

<sup>S7</sup>Similar findings can also be seen for the two other datasets in Section S4.5.

#### S4.4 Effect of Sentence Length

In this section, we look at the length of sentences across all the datasets in each of the STS tasks. Average sentence length is one measure of the complexity of a particular dataset. But looking at just sentence lengths may not give a complete picture, especially for the textual similarity tasks where there can be many words common between the sentence pairs. The Table S8 shows the various statistics of each dataset, with respect to the sentence lengths along with the better method on each of them (out of CoMB and SIF).

Task-Dataset	# sentence pairs	Avg. sentence length	Avg. word overlap (per sentence pair)	Avg. effective sentence length (excluding common words)	Better method
STS12-MSRpar	750	21.16	14.17	6.99	CoMB
STS12-MSRvid	750	7.65	4.70	2.95	CoMB
STS12-SMTeuroparl	459	12.33	8.11	4.22	CoMB
STS12-WordNet	750	8.82	5.03	3.79	SIF
STS12-SMInews	399	13.62	8.66	4.96	SIF
STS13-FNWN	189	22.94	2.53	20.41	CoMB
STS13-Headlines	750	7.80	3.76	4.05	SIF
STS13-WordNet	561	8.17	4.64	3.53	SIF
STS14-Forum	450	10.48	7.03	3.45	CoMB
STS14-News	300	17.42	11.59	5.83	CoMB
STS14-Headlines	750	7.91	3.89	4.01	SIF
STS14-Images	750	10.18	6.20	3.98	SIF
STS14-WordNet	750	8.87	4.83	4.05	SIF
STS14-Twitter	750	12.25	4.85	7.40	(equal)
STS15-Forum	375	17.77	4.29	13.49	CoMB
STS15-Students	750	10.70	5.33	5.37	CoMB
STS15-Belief	375	16.53	6.27	10.26	SIF
STS15-Headlines	750	8.00	3.71	4.29	SIF
STS15-Images	750	10.66	6.07	4.59	CoMB

Table S8: Analysis of sentence lengths in each of the datasets from STS12, STS13, STS14, and STS15. Along with the average sentence lengths, we also measure average word overlap in the sentence pair and thus the average *effective sentence length* (i.e., after excluding the overlapping/common words in the sentence pair). For reference, we also show which out of CoMB or SIF performs better. On STS14-Twitter, the difference in performance isn’t significant and we thus write ‘equal’ in the corresponding cell.

#### Observations.

- We notice that on datasets with longer effective sentence lengths, CoMB performs better than SIF on average. There might be other factors at play here, but if one had to pick on the axis of effective sentence length, CoMB leads over SIF<sup>S8</sup>.
- The above statement also aligns well with the *observation 1* from the qualitative analysis (cf. Section S4.2.1), that having more details can help in refining the particular meaning or sense implied by CoMB. (Effective sentence length can serve as a good proxy for indicating the amount of details.)
- It also seems to explain why both methods don’t perform well (see Table S2) on STS13-FNWN, which has on average the maximum effective sentence length (of 20.4).
- To an extent, it also points towards the effect of corpora. For instance, in a corpus such as WordNet, which has a low average sentence length and with examples typically concerned about word definitions (see

<sup>S8</sup>Effective sentence length averaged across datasets where CoMB is better is **7.48**. Contrast this to an average effective sentence length of **5.03** across datasets where SIF is better.

Table S10), SIF seems to be better of the methods. On the other hand, CoMB seems to be better for News (Table S7), Image captions (Table S9) or Forum.

### S4.5 Additional Qualitative Analysis

#### S4.5.1 Task: STS15, Dataset: Images

We consider the sentence pairs from Images dataset in STS15 task (Agirre et al., 2015), as presented in Table S9. As a reminder, CoMB outperforms SIF on this dataset with a Pearson correlation (x100) of 61.8 versus 51.7, as mentioned in Table S3. The main observations are:

	Sentence 1	Sentence 2	Ground-Truth	Ground-Truth	CoMB	SIF
			Score	Ranking	Ranking	Ranking
1	the man and two young boys jump on a trampoline .	a man and two boys are bouncing on a trampoline .	4.8	68	<b>74</b>	640
2	a boy waves around a sparkler .	a young boy is twisting a sparkler around in the air .	4.4	126	<b>195</b>	624
3	a dog jumps in midair to catch a frisbee .	the brown dog jumps for a pink frisbee .	4	184	<b>161</b>	481
4	a child is walking from one picnic table to another .	the boy hops from one picnic table to the other in the park .	3.2	287	<b>401</b>	737
5	three boys are running on the beach playing a game .	two young boys and one young man run on a beach with water behind them .	3.2	306	<b>260</b>	421
6	a boy swinging on a swing .	the girl is on a swing .	2.4	380	<b>410</b>	622
7	a man is swinging on a rope above the water .	a man in warm clothes swinging on monkey bars at night .	1.6	492	259	<b>606</b>
8	a skier wearing blue snow pants is flying through the air near a jump .	a skier stands on his hands in the snow in front of a movie camera .	1.4	514	264	<b>605</b>
9	two black and white dogs are playing together outside .	two children and a black dog are playing out in the snow .	1	570	185	<b>372</b>
10	three dogs running in the dirt .	the yellow dog is running on the dirt road .	1	524	303	<b>531</b>
11	a little girl and a little boy hold hands on a shiny slide .	a little girl in a paisley dress runs across a sandy playground .	0.4	629	<b>683</b>	354
12	a little girl walks on a boardwalk with blue domes in the background .	a man going over a jump on his bike with a river in the background .	0	696	310	<b>591</b>

Table S9: Examples of some indicative sentence pairs, from *Images* dataset in *STS15*, with ground-truth scores and ranking as obtained via (best variants of) CoMB and SIF. The total number of sentences is **750** and the ranking is done in descending order of similarity. The method which ranks an example closer to the ground-truth rank is better and is highlighted in **blue**. CoMB ranking is the one produced when representing sentences via CoMB and then using CMD to compare them. SIF ranking is when sentences are represented via SIF and then employing cosine similarity.

**Observation A.** Example 1 to 5 indicate pairs of sentences which are essentially equivalent in meaning, but with varying degrees of equivalence. Here, we can see that CoMB with CMD is able to rank the similarity between these pairs quite well in comparison to SIF, even when their way of describing is different. For instance, example 2 : “*a boy waves around a sparkler*” & “*a young boy is twisting a sparkler around in the air*”. This points towards the benefit of having multiple senses or contexts encoded through the distributional estimate in CoMB.

**Observation B.** Next, in the examples 7 to 10, which consist of sentence pairs that are not equivalent but have commonalities (about the topic). Here, SIF ranks the sentences closer to the ground-truth ranking while CoMB interprets these pairs as being more common in meaning than given by ground-truth. This could be the consequence of comparing the various senses or contexts implied by the sentence pairs via CMD. Take for instance, example 10, “*three dogs running in the dirt*” & “*the yellow dog is running on the dirt road*”. Since these sentences

are about the similar topic (and the major difference is in their subject), this can result in CMD considering them more similar than cosine distance.

**Observation C.** For sentences which are completely dissimilar as per ground-truth, let’s look at example 11 and 12. Consider 11, which is “*a little girl and a little boy hold hands on a shiny slide*” & “*a little girl in a paisley dress runs across a sandy playground*”, the sentences meaning totally different things and CoMB seems to be better at ranking than SIF. But, consider example 12: “*a little girl walks on a boardwalk with blue domes in the background*” & “*a man going over a jump on his bike with a river in the background*”. One common theme<sup>S9</sup> can be thought as “*a person moving with something blue in the background*”, which can result in CoMB ranking the sentence as more similar. SIF also ranks it higher (at 591) than ground-truth (696), but is more closer than CoMB which ranks it at 310.

#### S4.5.2 Task: STS14, Dataset: WordNet

	Sentence 1	Sentence 2	Ground-Truth	Ground-Truth	CoMB	SIF
			Score	Ranking	Ranking	Ranking
1	combine so as to form a more complex product .	combine so as to form a whole ; mix .	4.6	127	<b>142</b>	335
2	( cause to ) sully the good name and reputation of .	charge falsely or with malicious intent ; attack the good name and reputation of someone .	4.4	176	<b>235</b>	534
3	a person or thing in the role of being a replacement for something else	a person or thing that takes or can take the place of another .	4.2	248	<b>270</b>	535
4	create something in the mind .	form a mental image of something that is not present or that is not the case .	3.6	340	<b>443</b>	683
5	the act of surrendering an asset	the act of losing or surrendering something as a penalty for a mistake or fault or failure to perform etc .	3	405	<b>445</b>	639
6	( attempt to ) convince to enroll , join or participate	register formally as a participant or member .	2.8	406	<b>423</b>	507
7	return to a prior state .	return to an original state .	4.4	219	384	<b>231</b>
8	give away something that is not needed .	give up what is not strictly needed .	4.2	261	709	<b>383</b>
9	a person who is a member of the senate .	a person who is a member of a partnership .	0.4	553	260	<b>429</b>
10	the context or setting in which something takes place .	the act of starting something .	0	717	485	<b>707</b>
11	a spatial terminus or farthest boundary of something .	a relation that provides the foundation for something .	0	620	500	<b>623</b>
12	the act of beginning something new .	the act of rejecting something .	0	670	<b>677</b>	539

Table S10: Examples of some indicative sentence pairs, from *WordNet* dataset in *STS14*, with ground-truth scores and ranking as obtained via (best variants of) CoMB and SIF. The total number of sentences is **750** and the ranking is done in descending order of similarity. The method which ranks an example closer to the ground-truth rank is better and is highlighted in **blue**. CoMB ranking is the one produced when representing sentences via CoMB and then using CMD to compare them. SIF ranking is when sentences are represented via SIF and then employing cosine similarity.

Lastly, we discuss the examples and observations derived from the qualitative analysis on WordNet dataset from STS14 (Agirre et al., 2014). This dataset is comprised of sentences which are the definitions of words/phrases, and sentence length is typically smaller than the datasets discussed before. For reference, SIF (76.8) does better than CoMB (64.4) in terms of average Pearson correlation (x100), as mentioned in Table S2.

**Observation D.** Consider examples 1 to 6 as shown in Table S10, which fall in the category of equivalent sentences but in varying degrees. The sentence pairs essentially indicate different ways of characterizing equivalent

<sup>S9</sup>Of course, this is upto subjective interpretation.

things. Here, CoMB is able to rank the similarity between sentences in a better manner than SIF. Specifically, see example 2: “( *cause to* ) *sully the good name and reputation of*” & “*charge falsely or with malicious intent ; attack the good name and reputation of someone*”. It seems that SIF is not able to properly handle the additional definition present in sentence 2 and ranks this pair much lower in similarity at 534 versus 235 for CoMB. This is also in line with observation 1 about added details in the Section [S4.2.1](#).

**Observation E.** The examples 7 to 9, where CoMB doesn’t do well in comparison to SIF, mainly have a slight difference in the object of the sentence. For instance, in example 9: “*a person who is a member of the senate*” & “*a person who is a member of a partnership*”. So based on the kind of substituted word, looking at its various contexts via the distributional estimate can make it more or less similar than desired. In such cases, using the “point” meanings of the objects seems to fare better. This also aligns with the observations 2 and 4 in the Section [S4.2.1](#).

## S5 Sentence completion: nearest neighbor analysis

Here, we would like to qualitatively probe the kind of results obtained when computing Wasserstein barycenter of the distributional estimates, in particular, when using CoMB to represent sentences. To this end, we consider a few simple sentences and find the closest word in the vocabulary for CoMB (with respect to CMD) and contrast it to SIF with cosine distance.

Query	CoMB (with CMD)	SIF (with cosine, no PC removal)
['i', 'love', 'her']	love, hope, <i>always, actually, because, doubt, imagine, but, never, simply</i>	love, loved, breep-breep, <i>want, clash-clash-clang, thysel, know, think, nope, life</i>
['my', 'favorite', 'sport']	sport, <i>costume, circus, costumes, outfits, super, sports, tennis, brand, fabulous</i>	favorite, favourite, sport, wiccan-type, <i>pastime, pastimes, sports, best, hangout, spectator</i>
['best', 'day', 'of', 'my', 'life']	best, <i>for, also, only, or, anymore, all, is, having, especially</i>	life, day, best, c.5, writer/mummy, days, margin-bottom, time, margin-left,night
['he', 'lives', 'in', 'europe', 'for']	america, europe, <i>decades, asia, millenium, preserve, masters, majority, elsewhere, commerce</i>	lives, europe, life, america, lived, world, england, france, people, c.5
['he', 'may', 'not', 'live']	<i>unless, perhaps, must, may, anymore,</i> will, likely, youll, would, certainly	may, live, should, will, might, must, margin-left, henreeeee, 0618082132, think
['can', 'you', 'help', 'me', 'shopping']	<i>anytime, yesterday, skip, overnight, wed, afterward,</i> choosing, figuring, deciding, shopping	help, can, going, want, <i>go, do, think, need, able, take</i>
['he', 'likes', 'to', 'sleep', 'a', 'lot']	<i>whenever,</i> forgetting, <i>afterward, pretending,</i> rowan, eden, <i>casper,</i> nash, annabelle, savannah,	lot, sleep, much, <i>besides,</i> better, likes, <i>really,</i> think, <i>probably,</i> talk

Table S11: Top 10 closest neighbors for CoMB and SIF (no PC removed) found across the vocabulary, and sorted in ascending order of distance from the query sentence. Words in *italics* are those which in our opinion would fit well when added to one of the places in the query sentence. Note that, both CoMB (under current formulation) and SIF don’t take the word order into account.

**Observations.** We find that closest neighbors (see Table [S11](#)) for CoMB consist of a relatively more diverse set of words which fit well in the context of a given sentence. For example, take the sentence “i love her”, where CoMB captures a wide range of contexts, for example, “i *actually* love her”, “i love her *because*”, “i *doubt* her love” and more. Also for an ambiguous sentence “he lives in europe for”, the obtained closest neighbors for CoMB include: ‘decades’, ‘masters’, ‘majority’, ‘commerce’, etc., while with SIF the closest neighbors are mostly words similar to one of the query words. Further, if you look at the last three sentences in the Table [S11](#), the first closest neighbor for CoMB even acts as a good next word for the given query. This suggests that CoMB might perform well on the task of sentence completion, but this additional evaluation is beyond the scope of this paper.

## S6 Hypernymy Detection

In this Section, we provide detailed results for the hypernymy detection in Section S6.2 and mention the corresponding hyperparameters in Section S6.3. We also mention the effect of PPMI parameters on Hypernymy results in Section S6.4.

### S6.1 Corpora

All the methods use a Wikipedia dump as a training corpus. In particular, GE and DIVE employ Wikipedia (a 2009 Wikipedia dump) from Baroni et al. (2009), and  $D^{Hend.}$  and CMD are based on a 2015 Wikipedia dump.

### S6.2 Detailed Results

Method	Dataset					
	BLESS	EVALution	LenciBenotto	Weeds	BIBLESS	Baroni
Henderson et al. ( $D^{Hend.}$ )	<b>6.4</b>	31.6	44.8	60.8	70.5	<b>78.3</b>
CMD ( $K=200$ ) + $D^{Hend.}$	5.8	<b>38.1</b>	<b>50.1</b>	<b>63.9</b>	74.0	<b>67.5</b>
CMD ( $K=250$ ) + $D^{Hend.}$	5.8	37.1	49.9	63.8	<b>74.9</b>	67.3

Method	Dataset				Avg. Gain
	Kotlerman	Levy	HypeNet-Test	Turney	
Henderson et al. ( $D^{Hend.}$ )	34.0	11.7	28.8	<b>56.6</b>	-
CMD ( $K=200$ ) + $D^{Hend.}$	<b>34.7</b>	12.2	53.4	56.0	+3.2
CMD ( $K=250$ ) + $D^{Hend.}$	34.4	<b>12.9</b>	<b>53.7</b>	56.3	+ <b>3.3</b>

Table S12: Comparison of the entailment vectors alone (Hend.) and when used together with our Context Mover’s Distance, CMD( $K$ ) (where  $K$  is the number of clusters), in the form of ground cost  $D^{Hend.}$ . We also indicate the average gain in performance across these 10 datasets by using CMD along with the entailment vectors. All scores are AP at all (%).

### S6.3 Hyperparameters

The above listed variants of CMD are the ones with best validation performance on HypeNet-Train (Shwartz et al., 2016). The other hyperparameters (common) for both of them are as follows:

- PPMI smoothing,  $\alpha = 0.5$ .
- PPMI column normalization exponent,  $\beta=0.5$ .
- PPMI k-shift,  $s=1$ .
- Regularization constant for Wasserstein distance,  $\lambda=0.1$
- Number of Sinkhorn iterations = 500.
- Log normalization of Ground Metric.

**Out of Vocabulary Details.** Following Chang et al. (2017) we pushed any OOV (out-of-vocabulary) words in the test data to the bottom of the list, effectively assuming that the word pairs do not have a hypernym relation. Table S13 shows the out of vocabulary information for entailment experiments.

Dataset	Number of pairs (N)	Out of vocabulary pairs (OOV)
BLESS	26554	1504
EVALution	13675	92
LenciBenotto	5010	1172
Weeds	2928	354
BIBLESS	1668	33
Baroni	2770	37
Kotlerman	2940	172
Levy	12602	4926
HypeNet-Test	17670	11334
Turney	2188	173

Table S13: Dataset sizes. N is the number of word pairs in the dataset, and OOV denotes how many word pairs are not processed.

#### S6.4 Effect of PPMI parameters for Hypernymy Detection

This table was generated during an earlier version of the paper, when we were not considering the validation on HypeNet-Train. Hence, the above table doesn't contain numbers on HypeNet-Test, but an indication of performance on it can be seen in Section S12. In any case, this table suggests that our method works well for several PPMI hyper-parameter configurations.

Method	Dataset					
	BLESS	EVALution	LenciBenotto	Weeds	BIBLESS	Baroni
Henderson et al. ( $D^{\text{Hend.}}$ )	6.4	31.6	44.8	60.8	70.5	<b>78.3</b>
CMD ( $\alpha=0.15, s=1$ ) + $D^{\text{Hend.}}$	<b>7.3</b>	37.7	49.0	63.6	74.8	64.4
CMD ( $\alpha=0.15, s=5$ ) + $D^{\text{Hend.}}$	6.9	39.1	49.4	64.3	74.0	65.2
CMD ( $\alpha=0.15, s=15$ ) + $D^{\text{Hend.}}$	7.0	39.8	48.5	64.7	75.0	65.6
CMD ( $\alpha=0.5, s=1$ ) + $D^{\text{Hend.}}$	6.6	39.2	48.6	62.9	<b>76.1</b>	64.6
CMD ( $\alpha=0.5, s=5$ ) + $D^{\text{Hend.}}$	5.9	40.4	<b>49.9</b>	65.7	73.9	67.2
CMD ( $\alpha=0.5, s=15$ ) + $D^{\text{Hend.}}$	5.5	<b>40.5</b>	49.5	<b>66.2</b>	72.8	67.4

Method	Dataset			Avg. Gain	Avg. Gain (w/o Baroni)
	Kotlerman	Levy	Turney		
Henderson et al. ( $D^{\text{Hend.}}$ )	34.0	11.7	56.6	-	-
CMD ( $\alpha=0.15, s=1$ ) + $D^{\text{Hend.}}$	33.9	10.8	57.2	+0.5	+2.2
CMD ( $\alpha=0.15, s=5$ ) + $D^{\text{Hend.}}$	34.2	11.6	57.0	+0.8	+2.5
CMD ( $\alpha=0.15, s=15$ ) + $D^{\text{Hend.}}$	34.9	12.3	<b>57.3</b>	+1.2	<b>+2.9</b>
CMD ( $\alpha=0.5, s=1$ ) + $D^{\text{Hend.}}$	34.7	10.2	56.8	+0.6	+2.4
CMD ( $\alpha=0.5, s=5$ ) + $D^{\text{Hend.}}$	34.6	11.3	56.5	+1.2	+2.7
CMD ( $\alpha=0.5, s=15$ ) + $D^{\text{Hend.}}$	<b>35.6</b>	<b>12.6</b>	56.1	<b>+1.3</b>	+2.8

Table S14: Comparison of the entailment vectors alone (Hend.) and when used together with our Context Mover’s Distance,  $\text{CMD}(\alpha, s)$  (where  $\alpha$  and  $s$  are the PPMI smoothing and shift parameters), in the form of ground cost  $D^{\text{Hend.}}$ . All of the CMD variants use  $K = 100$  clusters. We observe that using our method with the entailment vectors performs better on 8 out of 9 datasets in comparison to just using these vectors alone. Avg. gain refers to the average gain in performance relative to the entailment vectors. Avg. gain w/o Baroni refers to the average performance gain excluding the Baroni dataset. The hyperparameter  $\alpha$  refers to the smoothing exponent and  $s$  to the shift in the PPMI computation. All scores are AP at all (%).



### S6.5 Computational Considerations

Table S15 presents the required time for the hypernymy evaluation task using HypEval.

Dataset	Dataset Size	Time (in seconds)
LenciBenotto	5'010	7
BIBLESS	1'668	5
EVALution	13'675	30
Weeds	2'928	5
Baroni	2'770	5
HypeNet-Train	49'475	49
HypeNet-Test	17'670	13
Turney	2'188	4
Levy	12'602	15
Kotlerman	2'940	5
<b>Total</b>	<b>110'926</b>	<b>138</b>

Table S15: Required evaluation time using the evaluation toolkit HypEval.

### S6.6 Detection Accuracy on WBLESS

In this task, the goal is to detect whether a word pair  $(w_1, w_2)$  is in a hyponym-hypernym relationship. The detection accuracy for Henderson embeddings alone and CMD are reported in Table ??.

Method	Accuracy (%)
Poincaré GloVe	65.2
$D_{Hend.}$	67.7
CMD ( $K = 200$ ) + $D_{Hend.}$	<b>75.4</b>
CMD ( $K = 250$ ) + $D_{Hend.}$	75.2

Table S16: Detection accuracy on WBLESS. CMD performs better than the state-of-the-art fully unsupervised method as reported in Tifrea et al. (2018).

Method	Spearman Correlation
Poincaré GloVe	0.341
$D_{Hend.}$	0.316
CMD ( $K = 200$ ) + $D_{Hend.}$	0.336
CMD ( $K = 250$ ) + $D_{Hend.}$	0.338

Table S17: Spearman correlation on HyperLex Vulić et al. (2017)

## S7 Qualitative Analysis of Hypernymy detection

Here, our objective is to qualitatively analyse the particular examples where our method of using Context Mover’s Distance (CMD) along with embeddings from Henderson (2017) performs better or worse than just using these entailment embeddings alone.

### S7.1 Evaluation Procedure

**Comparing by rank.** Again as in the qualitative analysis with sentence similarity, it doesn’t make much sense to compare the raw distance/similarity values between two words as their spread across word pairs can be quite different. We thus compare the ranks assigned to each word pair by both the methods.

**Ground-truth details.** In contrast to graded ground-truth scores in the previous analysis, here we just have a binary ground truth: ‘True’ if the hyponym-hypernym relation exists and ‘False’ when it doesn’t. We consider the BIBLESS dataset (Kiehl et al., 2015) for this analysis, which has a total of 1668 examples. Out of these, 33 word pairs are not in the vocabulary (see Table S13), so we ignore them for this analysis. Amongst the 1635 examples left, 814 are ‘True’ and 821 are ‘False’. A perfect method should rank the examples labeled as ‘True’ from 1 to 814 and the ‘False’ examples from 815 to 1635. Of course, achieving this is quite hard, but the better of the methods should rank as many examples in the desired ranges.

**Example selection criteria.** We look at the examples where the difference in ranks as per the two methods is the largest. Also, for a few words, we also look at how each method ranks when present as a hypernym and a hyponym. If the difference in ranks is defined as,  $CMD\ rank - Henderson\ Rank$ , we present the top pairs where this difference is most positive and most negative.

### S7.2 Results

For reference on the BIBLESS dataset, CMD performs better than Henderson embeddings quantitatively (cf. Table 2). Let’s take a look at some word pairs to get a better understanding.

#### S7.2.1 Maximum Positive Difference in Ranks

These are essentially examples where CMD considers the entailment relation as ‘False’ while the Henderson embeddings predict it as ‘True’, and both are most certain about their decisions. Table S18 shows these pairs, along with ranks assigned by the two methods and the ground-truth label for reference.

Some quick observations: many of the word pairs that the Henderson’s method gets wrong are co-hyponym pairs, such as: (‘banjo’, ‘flute’), (‘guitar’, ‘trumpet’), (‘turnip’, ‘radish’). Additionally, (‘bass’, ‘cello’), (‘creature’, ‘gorilla’), etc., are examples where the method has to assess not just if the relation exists, but also take into account the directionality between the pair, which the Henderson’s method seems unable to do.

#### S7.2.2 Maximum Negative Difference in Ranks

Now the other way around, these are examples where CMD considers the entailment relation as ‘True’ while the Henderson embeddings predict it as ‘False’, and both are most certain about their decisions. Table S19 shows these pairs. The examples where CMD performs poorly like, (‘box’, ‘mortality’), (‘pistol’, ‘initiative’) seem to be unrelated and we speculate that matching the various contexts or senses of the distributional estimate causes this behavior. One possibility to deal with this can be to take into account the similarity between word pairs in the ground metric. Overall, CMD does a good job of handling these pairs in comparison to the Henderson method.

Hypernym candidate	Hypernym candidate	Ground Truth	CMD rank	Henderson rank	Better Method
bass	cello	FALSE	1346	56	CMD
banjo	flute	FALSE	1312	108	CMD
guitar	trumpet	FALSE	1249	52	CMD
trumpet	violin	FALSE	1351	165	CMD
gill	goldfish	FALSE	1202	21	CMD
topside	battleship	FALSE	1508	345	CMD
trumpet	piano	FALSE	1289	126	CMD
washer	dishwasher	FALSE	1339	234	CMD
gun	pistol	FALSE	1270	166	CMD
cauliflower	rainbow	FALSE	1197	136	CMD
hawk	woodpecker	FALSE	1265	210	CMD
garlic	spice	TRUE	1248	204	Henderson
coyote	beast	TRUE	1096	57	Henderson
lizard	beast	TRUE	1231	201	Henderson
turnip	radish	FALSE	1060	39	CMD
creature	gorilla	FALSE	1558	543	CMD
rabbit	squirrel	FALSE	1260	249	CMD
ship	battleship	FALSE	1577	571	CMD
giraffe	beast	TRUE	1220	220	Henderson
coyote	elephant	FALSE	1017	28	CMD

Table S18: The top 20 word pairs with **maximum positive difference** in ranks (CMD rank - Henderson rank). The rank is given out of 1635.

Hyponym candidate	Hypernym candidate	Ground Truth	CMD rank	Henderson rank	Better Method
box	mortality	FALSE	116	1534	Henderson
radio	device	TRUE	110	1483	CMD
television	system	TRUE	5	1354	CMD
elephant	hospital	FALSE	52	1355	Henderson
pistol	initiative	FALSE	40	1316	Henderson
library	construction	TRUE	71	1335	CMD
radio	system	TRUE	6	1266	CMD
bowl	artifact	TRUE	223	1448	CMD
oven	device	TRUE	88	1279	CMD
bear	creature	TRUE	324	1513	CMD
stove	device	TRUE	167	1356	CMD
saw	tool	TRUE	461	1620	CMD
television	equipment	TRUE	104	1244	CMD
library	site	TRUE	87	1217	CMD
battleship	bus	FALSE	292	1418	Henderson
pistol	device	TRUE	70	1187	CMD
battleship	vehicle	TRUE	77	1175	CMD
bowl	container	TRUE	333	1431	CMD
pub	construction	TRUE	19	1116	CMD
bowl	object	TRUE	261	1334	CMD

Table S19: The top 20 word pairs with **maximum negative difference** in ranks (CMD rank - Henderson rank). The rank is given out of 1635.