

The FOLE Table

Robert E. Kent

Ontologos

Abstract. This paper discusses the representation of ontologies in the first-order logical environment **FOLE** (Kent [13]). An ontology defines the primitives with which to model the knowledge resources for a community of discourse (Gruber [7]). These primitives, consisting of classes, relationships and properties, are represented by the entity-relationship-attribute **ERA** data model (Chen [2]). An ontology uses formal axioms to constrain the interpretation of these primitives. In short, an ontology specifies a logical theory. A series of three papers provide a rigorous mathematical representation for the **ERA** data model in particular, and ontologies in general, within the first-order logical environment **FOLE**. The first two papers, which provide a *foundation* and *superstructure* for **FOLE**, represent the formalism and semantics of (many-sorted) first-order logic in a classification form corresponding to ideas discussed in the Information Flow Framework (IFF [26]). The third paper (Kent [16]) will define an *interpretation* of **FOLE** in terms of the transformational passage, first described in Kent [13], from the classification form of first-order logic to an equivalent interpretation form, thereby defining the formalism and semantics of first-order logical/relational database systems. Two papers will provide a precise mathematical basis for **FOLE** interpretation: the current paper develops the notion of a **FOLE** relational table following the relational model (Codd [3]), and a follow-up paper will develop the notion of a **FOLE** relational database. Both of these papers expand on material found in the paper (Kent [12]). Although the classification form (and **FOLE** itself) follow the entity-relationship-attribute data model of Chen, the interpretation form incorporates the relational data model of Codd. In general, the **FOLE** representation uses a conceptual structures approach, that is completely compatible with formal concept analysis (Ganter and Wille [4]) and information flow (Barwise and Seligman [1]).

Keywords: signature, type domain, signed domain, table.

Table of Contents

| | |
|---|----|
| The FOLE Table | 1 |
| <i>Robert E. Kent</i> | |
| 1 Introduction | 3 |
| 1.1 Philosophy | 3 |
| 1.2 Background | 3 |
| 1.3 Architecture | 4 |
| 1.4 Overview | 4 |
| 2 Table Basics | 6 |
| 2.1 Overview | 6 |
| 2.2 Signatures | 7 |
| 2.3 Type Domains | 8 |
| 2.4 Signed Domains | 10 |
| 2.5 Inclusion/Tuple Bridges | 11 |
| 2.5.1 Signatures | 11 |
| 2.5.2 Type Domains | 12 |
| 2.5.3 Tuple Function Factorization | 17 |
| 3 Table Hierarchy | 19 |
| 3.1 FOLE Tables | 19 |
| 3.2 Signed Domain Indexing | 22 |
| 3.3 Signature Indexing | 25 |
| 3.3.1 Lower Aspect | 25 |
| 3.3.2 Upper Aspect | 27 |
| 3.4 Type Domain Indexing | 29 |
| 3.4.1 Lower Aspect | 29 |
| 3.4.2 Upper Aspect | 30 |
| 3.5 Fibered Contexts of FOLE Tables | 34 |
| 4 Table Constructions | 36 |
| 4.1 Preliminaries | 36 |
| 4.2 Propositions | 37 |
| 4.2.1 Using Comma Contexts | 37 |
| 4.2.2 Using the Grothendieck Construction | 38 |
| 4.3 Constructive Proof | 39 |
| 4.4 Example | 40 |
| 5 Conclusion and Future Work | 42 |
| 5.1 This Paper in Review | 42 |
| 5.2 The Presentation of FOLE | 44 |
| A Appendix | 45 |
| A.1 \mathcal{A} -Relations | 45 |
| A.2 Comma Contexts | 47 |
| A.3 The Grothendieck Construction | 48 |

1 Introduction

1.1 Philosophy.

The relational model is an approach to information management using the semantics and formalism of first-order predicate logic.¹ The first-order logical environment FOLE is a framework for defining the semantics and formalism of logic and databases in an integrated and coherent fashion. Hence, the relational model for information management can be framed in terms of the first-order logical environment FOLE.

1.2 Background

The author's "Systems Consequence" paper (Kent [11]) is a very general theory and methodology for specification and inter-operation of systems of information resources. The generality comes from the fact that it is independent of the logical/semantic system (institution) being used. This is a wide-ranging theory, based upon ideas from information flow (Barwise and Seligman [1]), formal concept analysis (Wille and Ganter et al [4]), the theory of institutions (Goguen et al [6]), and the lattice of theories notion (Sowa [21]), for the integration of both formal and semantic systems independent of logical environment. In order to better understand the motivations of that paper and to be able more readily to apply its concepts, in the future it will be important to study system consequence in various particular logical/semantic systems. This paper aims to do just that for the logical/semantic system of relational databases. The paper, which was inspired by and which extends a recent set of papers on the theory of relational database systems (Spivak [22],[23]), is linked with work on the Information Flow Framework (IFF [26]) connected with the ontology standards effort (SUO), since relational databases naturally embed into first order logic. We offer both an intuitive and a technical discussion. Corresponding to the notions of primary and foreign keys, relational database semantics takes two forms: a distinguished form where entities are distinguished from relations, and a unified form where relations and entities coincide. The distinguished form corresponds to the theory presented in the paper (Spivak [22]). We extend Spivak's treatment of tables from the static case of a single entity classification (type specification) to the dynamic case of classifications varying along infomorphisms. Our treatment of relational databases as diagrams of tables differs from Spivak's sheaf theory of databases. The unified form, a special case of the distinguished form, corresponds to the theory presented in the paper (Spivak [23]). The unified form has a graphical presentation, which corresponds to the sketch theory of databases (Johnson and Rosebrugh [8]) and the resource description framework (RDF). This paper, which is the first step to connect relational databases with system consequence, is concerned with the semantics of relational databases. A later paper will discuss various formalisms of relational databases, such as relational algebra and first order logic.

¹ "The relational model for database management : version 2" by E.F. Codd [3].

1.3 Architecture.

The FOLE architecture, as briefly pictured in Fig.1 and more completely in Fig. 1 in the preface of [19], consists of four nodes divided into two branches. The classification form of FOLE (left hand side of Fig.1) consists of “The FOLE Foundation” at the bottom and “The FOLE Superstructure” at the top. The interpretation form of FOLE (right hand side of Fig.1) consists of “The FOLE Table” at the bottom and “The FOLE Database” at the top. The equivalence between the classification form and the interpretation form is define in the paper “FOLE Equivalence” [19]. The current paper is concerned with the FOLE table concept.





Fig. 1. FOLE

1.4 Overview

Section 2 provides material on the basic structures underpinning the FOLE table concept: signatures, type domains and signed domains. Section 3 describes our representation for the table concept by defining the multi-path fibered context of tables ² (illustrated in Tbl. 18 of § 3.5)

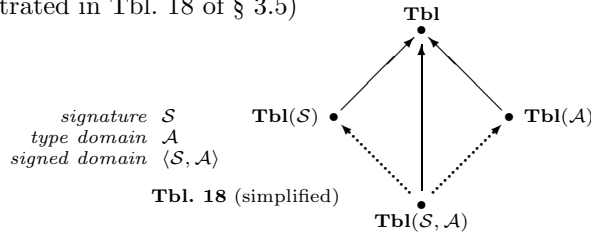

— one fibered path goes directly via signed domains (§ 3.2), while two other paths go indirectly via signatures (§ 3.3) and type domains (§ 3.4). Section 4 uses properties of comma contexts and the Grothendieck construction to prove that the various (sub)contexts of FOLE tables are complete (joins exist) and cocomplete (unions exist).

Table 1 lists the figures and tables in this paper.

² The original discussion of FOLE (Kent [13]) took place within the knowledge representation community, where the term *category* is defined to be a division within a system of classification or a mode of existence. Hence following (Kent [13]), we use “mathematical context” (Goguen [5]) for the mathematical term “category”, “passage” for the term “functor”, and “bridge” for the term “natural transformation”.



| | | | |
|--------|--|--------|--|
| §1.3 | Fig. 1 : FOLE Architecture | §1.4 | Tbl. 1 : Figures & Tables |
| §2.1 | Fig. 2 : FOLE Table Basics | §2.2 | Tbl. 2 : Sort List/Subset Reflection |
| §2.2 | Fig. 3 : List Morphism | §2.5.3 | Tbl. 3 : Tuple Functions |
| §2.5.1 | Fig. 4 : Tuple Bridge: Signature | §3.2 | Tbl. 4 : Reflection: Signed Domain |
| §2.5.2 | Fig. 5 : Tuple Bridge: Type Domain | §3.3.1 | Tbl. 5 : Reflection: Signature |
| §2.5.3 | Fig. 6 : Tuple Function Factorization | §3.4.1 | Tbl. 6 : Reflection: Type Domain |
| §3.1 | Fig. 7 : FOLE Table | §3.5 | Tbl. 7 : Grothendieck Constructions |
| | Fig. 8 : FOLE Table Morphism | §4.2 | Tbl. 8 : Complete/Cocomplete Contexts |
| | Fig. 9 : FOLE Table Mathematical Context | §5.1 | Tbl. 9 : Lemmas, Propositions & Theorems |
| §3.2 | Fig. 10 : Table Morphism: Signed Domain | | |
| §3.3.1 | Fig. 11 : \mathcal{S} -Table Morphism | | |
| §3.3.2 | Fig. 12 : Table Fiber Passage Factorization | | |
| | Fig. 13 : Table Morphism: Signature | | |
| §3.4.1 | Fig. 14 : \mathcal{A} -Table Morphism | | |
| §3.4.2 | Fig. 15 : Table Fiber Adjunction Factorization | | |
| | Fig. 16 : Table Morphism: Type Domain | | |
| | Fig. 17 : Indexed Adjunction of Tables | | |
| §3.5 | Fig. 18 : The Fibered Hierarchy of FOLE Tables | | |
| §4.4 | Fig. 19 : Binary Join | | |
| §5.2 | Fig. 20 : FOLE Papers: Sequence & Dependency | | |

Table 1. Figures and Tables

2 Table Basics

2.1 Overview

A table in the relational model is represented as an array, organized into rows and columns. The rows are called the tuples (records) of the table, whereas the columns are called the attributes of the table. The rows are indexed by keys. Both rows and columns are unordered; instead of indexing headers and tuples as n -tuples, the FOLE approach uses attribute names for tuples (as advocated by Codd [3]). In the relational model, all components can be resolved into sets and functions. ³

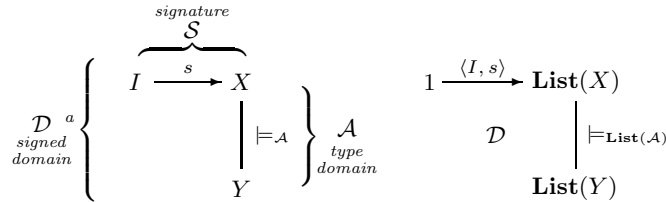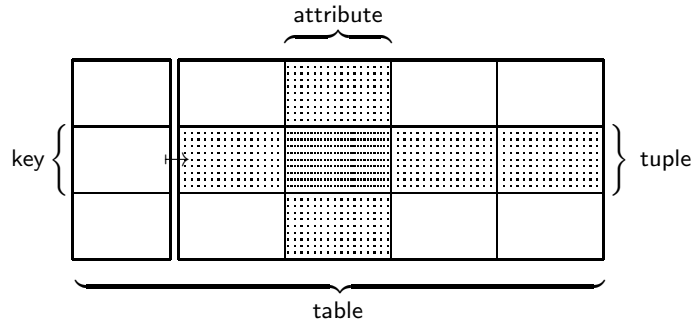

^a A FOLE table $\mathcal{T} = \langle K, t, \mathcal{D} \rangle$ (defined in §3.1) consists of a signed domain \mathcal{D} , with a key set K and tuple map $K \xrightarrow{t} \mathbf{tup}_{\mathcal{A}}(I, s) = \mathbf{ext}_{\mathbf{List}(\mathcal{A})}(I, s)$.

Fig. 2. FOLE Table Basics

³ The relational data model is based upon the context **Set** of sets and functions.

2.2 Signatures

A signature, which represents the header of a relational table, provides typing for the tuples permitted in the table.⁴

Fibers. Let X be a sort set. The fiber mathematical context of X -signatures is the comma context

$$\mathbf{List}(X) = \mathbf{List}(X) = (\mathbf{Set} \downarrow X)$$

associated with the sort set (constant passage) $\mathbf{1} \xrightarrow{X} \mathbf{Set}$. It has the index and trivial projection passages $\mathbf{Set} \xleftarrow{\mathit{ind}_X} \mathbf{List}(X) \xrightarrow{\Delta} \mathbf{1}$ and the defining bridge $\mathit{ind}_X \xrightarrow{\sigma_X} \Delta \circ X$. An $\mathbf{List}(X)$ -object $\mathcal{S} = \langle I, s \rangle$, called an X -signature (header), consists of an indexing set (arity) I and a map $I \xrightarrow{s} X$ from I to the set of sorts X . An $\mathbf{List}(X)$ -morphism $\mathcal{S}' = \langle I', s' \rangle \xrightarrow{h} \langle I, s \rangle = \mathcal{S}$ is an arity function $I' \xrightarrow{h} I$ that preserves signatures by satisfying the naturality condition $h \cdot s = s'$.

Fibered Context. The fibered context of signatures is the comma context

$$\mathbf{List} = (\mathbf{Set} \downarrow \mathbf{Set}).$$

It has index and set projection passages $\mathbf{Set} \xleftarrow{\mathit{arity}} \mathbf{List} \xrightarrow{\mathit{sort}} \mathbf{Set}$ and the defining bridge $\mathit{arity} \xrightarrow{\sigma} \mathit{sort}$. A \mathbf{List} -object (signature, sort list) $\langle I, s, X \rangle$ consists of a sort set X and an X -signature $\langle I, s \rangle$. A \mathbf{List} -morphism (signature morphism) $\langle I_2, s_2, X_2 \rangle \xrightarrow{\langle h, f \rangle} \langle I_1, s_1, X_1 \rangle$ consists of a sort function $X_2 \xrightarrow{f} X_1$ and an arity function $I_2 \xrightarrow{h} I_1$ satisfying the naturality condition $h \cdot s_1 = s_2 \cdot f$. This condition gives two alternate and adjoint definitions. In terms of fibers, a

$$\begin{array}{ccc}
 I_2 & \xrightarrow{h} & I_1 \\
 \downarrow s_2 & \searrow \hat{h} & \downarrow s_1 \\
 & \hat{I}_2 & \\
 & \nearrow \hat{f} & \\
 X_2 & \xrightarrow{f} & X_1 \\
 & \nearrow \hat{s}_2 & \lrcorner \\
 & &
 \end{array}$$

Fig. 3. List Morphism

signature morphism consists of a sort function $X_2 \xrightarrow{f} X_1$ and either a morphism $\langle I_2, s_2 \rangle \xrightarrow{\hat{h}} f^*(I, s)$ in the fiber context $\mathbf{List}(X_2)$ or a morphism $\Sigma_f(I_2, s_2) \xrightarrow{h} \langle I, s \rangle$ in the fiber context $\mathbf{List}(X_1)$.

$$\Sigma_f(I_2, s_2) \xrightarrow{h} \langle I_1, s_1 \rangle \quad \Leftrightarrow \quad \langle I_2, s_2 \rangle \xrightarrow{\hat{h}} f^*(I_1, s_1) \quad (1)$$

in $\mathbf{List}(X_1)$
in $\mathbf{List}(X_2)$

⁴ The use of lists for signatures (and tuples) follows Codd's recommendation to use attribute names to index the tuples of a relation instead of a numerical ordering.

The X_1 -signature morphism $\Sigma_f(I_2, s_2) \xrightarrow{h} \langle I_1, s_1 \rangle$ is the composition (Fig. 3) of the fiber morphism $\Sigma_f(\langle I_2, s_2 \rangle \xrightarrow{\hat{h}} f^*(I_1, s_1))$ with the $\langle I_1, s_1 \rangle^{\text{th}}$ counit component $\Sigma_f(f^*(I_1, s_1)) \xrightarrow{\hat{f}} \langle I_1, s_1 \rangle$ for the fiber adjunction $\mathbf{List}(X_2) \xrightarrow{\text{list}(f)} \mathbf{List}(X_1)$. This fiber adjunction (top part of Tbl. 2) is a component of the sort indexed adjunction of signatures $\mathbf{Set} \xrightarrow{\text{list}} \mathbf{Adj}$.

| | |
|---|---|
| $\begin{array}{ccc} \mathbf{List}(X_2) & \xrightarrow{\Sigma_f} & \mathbf{List}(X_1) \\ \text{= (Set}\downarrow X_2\text{)} & \xleftarrow{f^*} & \text{= (Set}\downarrow X_1\text{)} \\ \uparrow \text{inc}_{X_2} & & \uparrow \text{inc}_{X_1} \\ \text{im}_{X_2} & & \text{im}_{X_1} \\ \downarrow \wp_{X_2} & & \downarrow \wp_{X_1} \\ \text{im}_{X_2} & \xrightarrow{\exists_f} & \text{im}_{X_1} \\ \text{im}_{X_2} & \xleftarrow{f^{-1}} & \text{im}_{X_1} \\ & \xrightarrow{\forall_f} & \end{array}$ | $\begin{array}{l} X_2 \xrightarrow{f} X_1 \\ \Sigma_f \dashv f^* \dashv \Pi_f \\ \exists_f \dashv f^{-1} \dashv \forall_f \\ \text{im}_{X_2} \dashv \text{inc}_{X_2}, \text{im}_{X_1} \dashv \text{inc}_{X_1} \\ \text{inc}_{X_1} \circ f^* = f^{-1} \circ \text{inc}_{X_2} \\ \text{inc}_{X_2} \circ \Pi_f = \forall_f \circ \text{inc}_{X_1} \\ \Sigma_f \circ \text{im}_{X_1} \cong \text{im}_{X_2} \circ \exists_f \\ f^* \circ \text{im}_{X_2} \cong \text{im}_{X_1} \circ f^{-1} \end{array}$ |
|---|---|

Table 2. Sort List/Subset Reflection

Theorem 1. *The fibered context of signatures $\mathbf{List} \xrightarrow{\text{sort}} \mathbf{Set}$ is the Grothendieck construction of the sort indexed adjunction of signatures $\mathbf{Set} \xrightarrow{\text{list}} \mathbf{Adj}$.⁵*

2.3 Type Domains

A type domain, which constrains the body of a relational table, is an indexed collection of data types from which a table's tuples are chosen.

Fiber. Let X be a sort set. The fiber mathematical context of X -sorted type domains⁶ is the context $\mathbf{Cls}(X)$ described as follows. An X -sorted type domain

⁵ A fibration (fibered context over \mathbf{B}) (nLab [27]) is a passage $\mathbf{E} \xrightarrow{P} \mathbf{B}$ such that the fibers $\mathbf{E}_B = P^{-1}(B)$ depend (contravariantly) pseudofunctorially on $B \in \mathbf{B}$. Dually, in an opfibration the dependence is covariant. There is an equivalence of 2-contexts

$$\int : [\mathbf{B}^{\text{op}}, \mathbf{Cxt}] \xrightarrow{\cong} \mathbf{Fib}(\mathbf{B})$$

between the 2-context $\mathbf{Fib}(\mathbf{B})$ of fibrations over \mathbf{B} and the 2-context $[\mathbf{B}^{\text{op}}, \mathbf{Cxt}]$ of contravariant pseudo-passages from \mathbf{B} to \mathbf{Cxt} , also called \mathbf{B} -indexed contexts. The construction $\int : [\mathbf{B}^{\text{op}}, \mathbf{Cxt}] \rightarrow \mathbf{Fib}(\mathbf{B}) : \mathbf{F} \mapsto \int \mathbf{F}$ of a fibered context from an indexed context is called the *Grothendieck construction*. We say that fibered context $\int \mathbf{F}$ is the oplax sum of indexed context \mathbf{F} . § A.3 has a more detailed discussion of fibered contexts.

⁶ In the ERA data model (Kent [14]), attributes are represented by a typed domain consisting of a collection of data types. In FOLE, a typed domain is represented by an

$\mathcal{A} = \langle X, Y, \models_{\mathcal{A}} \rangle$ consists of a data value set Y and a classification relation $\models_{\mathcal{A}} \subseteq X \times Y$; hence, a data-type collection $\{\mathcal{A}_x \subseteq Y \mid x \in X\}$, with each sort $x \in X$ indexing the data-type $\mathbf{ext}_{\mathcal{A}}(x) = \mathcal{A}_x$. An X -sorted type domain morphism is an infomorphism $\mathcal{A}_2 \xrightarrow{\langle 1_X, g \rangle} \mathcal{A}_1$ satisfying $g(y_1) \models_{\mathcal{A}_2} x$ iff $y_1 \models_{\mathcal{A}_1} x$ for each sort $x \in X$ and data value $y_1 \in Y_1$; hence, consisting of a data value function $Y_2 \xleftarrow{g} Y_1$ satisfying $g(y_1) \in \mathcal{A}_{2,x}$ for each sort $x \in X$ and each value $y_1 \in \mathcal{A}_{1,x}$; thus, defining the restrictions $\{\mathcal{A}_{2,x} \xleftarrow{g_x} \mathcal{A}_{1,x} \mid x \in X\}$.⁷

Fibered Context. The fibered context of type domains $\mathbf{Cls} \xrightarrow{\text{sort}} \mathbf{Set}$ is described as follows. A type domain $\mathcal{A} = \langle X, Y, \models_{\mathcal{A}} \rangle$ is a classification; and hence consists of a sort set $\mathbf{sort}(\mathcal{A}) = X$ and an X -sorted type domain $\mathcal{A} = \langle X, Y, \models_{\mathcal{A}} \rangle$. A type domain morphism $\mathcal{A}_2 \xrightarrow{\langle f, g \rangle} \mathcal{A}_1$ is an infomorphism consisting of a sort function $X_2 \xrightarrow[\mathbf{sort}(f, g)]{f} X_1$ and a data value function $Y_2 \xleftarrow{g} Y_1$ that satisfy the infomorphism condition $g(y_1) \models_{\mathcal{A}_2} x_2$ iff $y_1 \models_{\mathcal{A}_1} f(x_2)$ for any source sort $x_2 \in X_2$ and target data value $y_1 \in Y_1$. This condition gives an alternate definition. In terms of fibers, a type domain morphism consists of a sort function $X_2 \xrightarrow{f} X_1$ and a morphism $\mathcal{A}_2 \xrightarrow{\langle 1_X, g \rangle} f^{-1}(\mathcal{A}_1)$ in the fiber context $\mathbf{Cls}(X_2)$.

$$\begin{array}{ccc}
 X_2 & \xrightarrow{f} & X_1 \\
 \downarrow \models_{\mathcal{A}_2} & \searrow \models_{f^{-1}(\mathcal{A}_1)} & \downarrow \models_{\mathcal{A}_1} \\
 Y_2 & \xleftarrow{g} & Y_1
 \end{array}$$

attribute classification $\mathcal{A} = \langle X, Y, \models_{\mathcal{A}} \rangle$ consisting of a set of attribute types (sorts) X , a set of attribute instances (data values) Y and an attribute classification relation $\models_{\mathcal{A}} \subseteq X \times Y$. For each sort (attribute type) $x \in X$, the data domain of that type is the \mathcal{A} -extent $\mathcal{A}_x = \mathbf{ext}_{\mathcal{A}}(x) = \{y \in Y \mid y \models_{\mathcal{A}} x\}$. The passage $X \xrightarrow{\mathbf{ext}_{\mathcal{A}}} \wp Y$ maps a sort $x \in X$ to its data domain (\mathcal{A} -extent) $\mathcal{A}_x \subseteq Y$. The attribute list classification $\mathbf{List}(\mathcal{A}) = \langle \mathbf{List}(X), \mathbf{List}(Y), \models_{\mathbf{List}(\mathcal{A})} \rangle$ has X -signatures as types and Y -tuples as instances, with classification by common arity and universal \mathcal{A} -classification: a Y -tuple $\langle J, t \rangle$ is classified by an X -signature $\langle I, s \rangle$ when $J = I$ and $t_k \models_{\mathcal{A}} s_k$ for all $k \in J = I$.

⁷ More generally, let $\mathcal{A}_2 \xrightarrow{\langle f, g \rangle} \mathcal{A}_1$ be any infomorphism. The condition $g(y_1) \models_{\mathcal{A}_2} x_2$ iff $y_1 \models_{\mathcal{A}_1} f(x_2)$ is equivalent to the abstraction $g^{-1}(\mathbf{ext}_{\mathcal{A}_2}(x_2)) = \mathbf{ext}_{\mathcal{A}_1}(f(x_2))$. Hence, there is a function $\mathbf{ext}_{\mathcal{A}_2}(x_2) \xleftarrow{g_{x_2}} \mathbf{ext}_{\mathcal{A}_1}(f(x_2))$ that is a restriction of the instance function $Y_2 \xleftarrow{g} Y_1$.

For any sort function $X_2 \xrightarrow{f} X_1$, there is a type domain fiber passage⁸ $\mathbf{Cls}(X_2) \xleftarrow{\text{cls}(f)} \mathbf{Cls}(X_1) : \mathcal{A}_1 \mapsto f^{-1}(\mathcal{A}_1)$. This fiber passage is a component of the sort indexed context of type domains $\mathbf{Set}^{\text{op}} \xrightarrow{\text{cls}} \mathbf{Cxt} : X \mapsto \mathbf{Cls}(X)$.

Theorem 2. *The fibered context of type domains (a fibration) $\mathbf{Cls} \xrightarrow{\text{sort}} \mathbf{Set}$ is the Grothendieck construction of the sort indexed context of type domains $\mathbf{Set}^{\text{op}} \xrightarrow{\text{cls}} \mathbf{Cxt}$.*⁵

2.4 Signed Domains

A signed domain represents both the header and the body of a relational table.

Signed Domains. Signed domains are a fundamental component used in the definition of database tables and in the database interpretation of FOLE. Signed domains are used to denote the valid tuples for a database header (signature).

A signed (headed/typed) domain $\mathcal{D} = \langle I, s, \mathcal{A} \rangle$ consists of a type domain $\mathcal{A} = \langle X, Y, \models_{\mathcal{A}} \rangle$ with sort set X and a signature (database header) $\langle I, s, X \rangle$.⁹ A signed domain morphism $\mathcal{D}_2 = \langle I_2, s_2, \mathcal{A}_2 \rangle \xrightarrow{\langle h, f, g \rangle} \langle I_1, s_1, \mathcal{A}_1 \rangle = \mathcal{D}_1$ consists of a signature morphism $\langle I_2, s_2, X_2 \rangle \xrightarrow{\langle h, f \rangle} \langle I_1, s_1, X_1 \rangle$ and a type domain morphism $\mathcal{A}_2 \xleftarrow{\langle f, g \rangle} \mathcal{A}_1$ with a common sort function $X_2 \xrightarrow{f} X_1$. Hence, the mathematical context of signed domains \mathbf{Dom} is the comma context

$$\mathbf{Set} \xleftarrow{\text{arity}} \mathbf{Dom} = (\mathbf{Set} \downarrow \text{sort}) \xrightarrow{\text{data}} \mathbf{Cls}$$

associated with the sort passage $\mathbf{Cls} \xrightarrow{\text{sort}} \mathbf{Set}$. There is a sign mediating passage $\mathbf{Dom} \xrightarrow{\text{sign}} \mathbf{List} : \langle I, s, \mathcal{A} \rangle \mapsto \langle I, s, X \rangle$.

From a different point-of-view, a signed domain $\mathcal{D} = \langle \mathcal{S}, \mathcal{A} \rangle$ consists of a signature $\mathcal{S} = \langle I, s, X \rangle$ and a type domain $\mathcal{A} = \langle X, Y, \models_{\mathcal{A}} \rangle$ with common sort set X , and a signed domain morphism $\langle \mathcal{S}_2, \mathcal{A}_2 \rangle \xrightarrow{\langle h, f, g \rangle} \langle \mathcal{S}_1, \mathcal{A}_1 \rangle$ consists of a signature morphism $\mathcal{S}_2 \xrightarrow{\langle h, f \rangle} \mathcal{S}_1$ and a type domain morphism $\mathcal{A}_2 \xleftarrow{\langle f, g \rangle} \mathcal{A}_1$ with common sort function $X_2 \xrightarrow{f} X_1$. Hence, \mathbf{Dom} can also be defined as the fibered product

$$\mathbf{List} \xleftarrow{\text{sign}} \mathbf{Dom} = \mathbf{List} \times_{\mathbf{Set}} \mathbf{Cls} \xrightarrow{\text{data}} \mathbf{Cls},$$

for the opspan of passages $\mathbf{List} \xrightarrow{\text{sort}} \mathbf{Set} \xleftarrow{\text{sort}} \mathbf{Cls}$.

⁸ For any sort function $X_2 \xrightarrow{f} X_1$, there is an inverse image fiber passage $\mathbf{Cls}(X_2) \xleftarrow{f^{-1}} \mathbf{Cls}(X_1) : f^{-1}(\mathcal{A}_1) \leftarrow \mathcal{A}_1$, where $y_1 \models_{f^{-1}(\mathcal{A}_1)} x_2$ iff $y_1 \models_{\mathcal{A}_1} f(x_2)$ for any source sort $x_2 \in X_2$ and target data value $y_1 \in Y_1$; or in terms of data types, $f^{-1}(\mathcal{A}_1) = \{f^{-1}(\mathcal{A}_1)_{x_2} \mid x_2 \in X_2\} = \{\mathcal{A}_1 f(x_2) \mid x_2 \in X_2\}$.

⁹ Signed domains were called semidesignations in ‘‘Database Semantics’’ [12]. Indeed, a signed domain $\langle I, s, \mathcal{A} \rangle$ is a list designation $\langle \langle I, s \rangle, 0 \rangle : \mathbf{10} \rightrightarrows \mathbf{List}(\mathcal{A})$ from the trivial entity classification $\mathbf{10} = \langle \mathbf{1}, \emptyset, \models_{\mathbf{10}} \rangle$ with element signature map $\mathbf{1} \xrightarrow{\langle I, s \rangle} \mathbf{List}(X)$ and empty tuple map $\emptyset \xrightarrow{0} \mathbf{List}(Y)$.

$$\begin{array}{ccccc}
\mathbf{Set} & \xleftarrow{\text{arity}} & \mathbf{Dom} = (\mathbf{Set} \downarrow \text{sort}) & \xrightarrow{\text{data}} & \mathbf{Cls} \\
1 \downarrow & & \text{sign} \downarrow & & \downarrow \text{sort} \\
\mathbf{Set} & \xleftarrow{\text{arity}} & \mathbf{List} = (\mathbf{Set} \downarrow \mathbf{Set}) & \xrightarrow{\text{sort}} & \mathbf{Set}
\end{array}$$

Definition 1. *There is a tuple passage $\mathbf{tup} : \mathbf{Dom}^{\text{op}} \rightarrow \mathbf{Set}$.*

Proof. The tuple passage $\mathbf{Dom}^{\text{op}} \xrightarrow{\mathbf{tup}} \mathbf{Set}$ maps a signed domain $\langle I, s, \mathcal{A} \rangle$ to its set of tuples $\mathbf{tup}(I, s, \mathcal{A})$,¹⁰ and maps a signed domain morphism $\langle I_2, s_2, \mathcal{A}_2 \rangle \xrightarrow{\langle h, f, g \rangle} \langle I_1, s_1, \mathcal{A}_1 \rangle$ to its tuple function $\mathbf{tup}(I_2, s_2, \mathcal{A}_2) \xleftarrow[\langle h \cdot (-) \cdot ((-) \cdot g) \rangle]{\mathbf{tup}(h, f, g)} \mathbf{tup}(I_1, s_1, \mathcal{A}_1)$; or visually, $(\cdots g(t_{h(i_2)}) \cdots \mid i_2 \in I_2) \leftarrow (\cdots t_{i_1} \cdots \mid i_1 \in I_1)$. ■

2.5 Inclusion/Tuple Bridges

2.5.1 Signatures. Let $\mathcal{S} = \langle I, s, X \rangle$ be a signature. There is an inclusion passage $\mathbf{Cls}(X) \xrightarrow{\text{inc}_{\mathcal{S}}} \mathbf{Dom}$ that maps an X -sorted type domain $\mathcal{A} = \langle X, Y, \models_{\mathcal{A}} \rangle$ to the signed domain $\langle I, s, \mathcal{A} \rangle$ and maps an X -sorted type domain morphism $\mathcal{A}_2 = \langle X, Y_2, \models_{\mathcal{A}_2} \rangle \xrightarrow{\langle 1_X, g \rangle} \langle X, Y_1, \models_{\mathcal{A}_1} \rangle = \mathcal{A}_1$ to the signed domain morphism $\langle I, s, \mathcal{A}_2 \rangle \xrightarrow{\langle 1_I, 1_X, g \rangle} \langle I, s, \mathcal{A}_1 \rangle$. Composition of the inclusion passage with the signed domain tuple passage (Def. 1) gives a signature tuple passage

$$\mathbf{Cls}(X)^{\text{op}} \xrightarrow[\text{inc}_{\mathcal{S}}^{\text{op}} \circ \mathbf{tup}]{\mathbf{tup}_{\mathcal{S}}} \mathbf{Set}.$$

which maps an X -sorted type domain $\mathcal{A} = \langle X, Y, \models_{\mathcal{A}} \rangle$ to the tuple set $\mathbf{tup}(\mathcal{S}, \mathcal{A}) = \mathbf{tup}(I, s, \mathcal{A}) = \mathbf{tup}_{\mathcal{S}}(Y, \models_{\mathcal{A}})$ and maps an X -sorted type domain morphism (in-fomorphism) $\mathcal{A}_2 = \langle X, Y_2, \models_{\mathcal{A}_2} \rangle \xrightarrow{\langle 1_X, g \rangle} \langle X, Y_1, \models_{\mathcal{A}_1} \rangle = \mathcal{A}_1$ to the tuple function associated with g : $\mathbf{tup}_{\mathcal{S}}(Y_2, \models_{\mathcal{A}_2}) \xleftarrow[\langle (-) \cdot g \rangle]{\mathbf{tup}_{\mathcal{S}}(g)} \mathbf{tup}_{\mathcal{S}}(Y_1, \models_{\mathcal{A}_1})$; or visually, $(\cdots g(t_i) \cdots \mid i \in I) \leftarrow (\cdots t_i \cdots \mid i \in I)$.¹¹


¹⁰ This important concept can intuitively be regarded as the set of legal tuples under the database header $\mathcal{S} = \langle I, s, X \rangle$. It is define to be the extent in the list type domain $\mathbf{List}(\mathcal{A})$: $\mathbf{tup}(I, s, \mathcal{A}) = \text{ext}_{\mathbf{List}(\mathcal{A})}(I, s) = \{\langle J, t \rangle \in \mathbf{List}(Y) \mid \langle J, t \rangle \models_{\mathbf{List}(\mathcal{A})} \langle I, s \rangle\}$. Various notations are used for this concept depending upon circumstance: $\mathbf{tup}(\mathcal{S}, \mathcal{A}) = \mathbf{tup}(I, s, \mathcal{A})$ in § 2.4, 3.2; $= \mathbf{tup}_{\mathcal{A}}(\mathcal{S}) = \mathbf{tup}_{\mathcal{A}}(I, s)$ in § 2.5.2, 3.4; $= \mathbf{tup}_{\mathcal{S}}(\mathcal{A}) = \mathbf{tup}_{\mathcal{S}}(Y, \models_{\mathcal{A}})$ in § 2.5.1, 3.3.

¹¹ The tuple passage $\mathbf{tup}_{\mathcal{S}} : \mathbf{Cls}(X)^{\text{op}} \rightarrow \mathbf{Set}$ maps an X -sorted type domain $\mathcal{A} = \langle X, Y, \models_{\mathcal{A}} \rangle$ to the tuple set $\mathbf{tup}_{\mathcal{S}}(\mathcal{A}) = \mathbf{tup}_{\mathcal{A}}(I, s) = \prod_{i \in I} \mathcal{A}_{s(i)}$ and maps an X -sorted type domain morphism $\mathcal{A} \xrightarrow{\langle 1_X, g \rangle} \tilde{\mathcal{A}}$ to the tuple function

$$\mathbf{tup}_{\mathcal{A}}(I, s) = \prod_{i \in I} \mathcal{A}_{s(i)} \xleftarrow[\prod_{i \in I} g_{s(i)}]{\mathbf{tup}_{\mathcal{S}}(g) = \langle (-) \cdot g \rangle} \prod_{i \in I} \tilde{\mathcal{A}}_{s(i)} = \mathbf{tup}_{\tilde{\mathcal{A}}}(I, s),$$

a restriction of the tuple function $\mathbf{List}(Y) \xleftarrow[\Sigma_g]{\text{list}(g)} \mathbf{List}(\tilde{Y})$.

Let $\mathcal{S}_2 \xrightarrow{\langle h, f \rangle} \mathcal{S}_1$ be a signature morphism. There is an inclusion bridge $f^{-1} \circ \mathbf{inc}_{\mathcal{S}_2} \xrightarrow{\iota_{\langle h, f \rangle}} \mathbf{inc}_{\mathcal{A}_1}$ (illustrated below right).

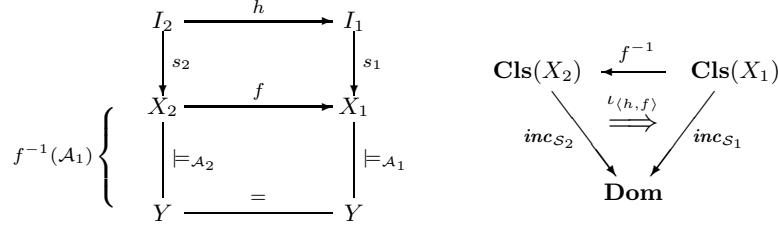

For any target type domain $\mathcal{A}_1 = \langle X, Y_1, \models_{\mathcal{A}_1} \rangle \in \mathbf{Cls}(X_1)$, the signed domain morphism

$$\mathbf{inc}_{\mathcal{S}_2}(f^{-1}(\mathcal{A}_1)) \xrightarrow[\langle h, f, 1_Y \rangle]{\iota_{\langle h, f \rangle}(\mathcal{A}_1)} \mathbf{inc}_{\mathcal{S}_1}(\mathcal{A}_1)$$

is illustrated above left. This is natural in type domain. Hence, there is an inclusion passage $\mathbf{List} \xrightarrow{\mathbf{inc}} (\mathbf{Cxt} \Downarrow \mathbf{Dom})^{\text{op}}$. Composition of the inclusion bridge $f^{-1} \circ \mathbf{inc}_{\mathcal{S}_2} \xrightarrow{\iota_{\langle h, f \rangle}} \mathbf{inc}_{\mathcal{S}_1}$ with the signated above left domain tuple passage (Def. 1) gives a signature tuple bridge (Fig. 4)

$$f^{-1 \text{op}} \circ \underbrace{\mathbf{tup}_{\mathcal{S}_2}}_{\mathbf{inc}_{\mathcal{S}_2}^{\text{op}} \circ \mathbf{tup}} \xleftarrow[\iota_{\langle h, f \rangle}^{\text{op}} \circ \mathbf{tup}]{\tau_{\langle h, f \rangle}} \underbrace{\mathbf{tup}_{\mathcal{S}_1}}_{\mathbf{inc}_{\mathcal{S}_1}^{\text{op}} \circ \mathbf{tup}} \doteq (f^{-1} \circ \mathbf{inc}_{\mathcal{S}_2} \xrightarrow{\iota_{\langle h, f \rangle}} \mathbf{inc}_{\mathcal{S}_1})^{\text{op}} \circ \mathbf{tup}. \quad (2)$$

For any target type domain $\mathcal{A}_1 = \langle X, Y_1, \models_{\mathcal{A}_1} \rangle \in \mathbf{Cls}(X_1)$, the $\mathcal{A}_1^{\text{th}}$ -component of the signature tuple bridge is the tuple function $\tau_{\langle h, f \rangle}(\mathcal{A}_1) = h \cdot (-) : \mathbf{tup}_{\mathcal{S}_1}(\mathcal{A}_1) = \mathbf{tup}_{\langle I_1, s_1, \mathcal{A}_1 \rangle} \rightarrow \mathbf{tup}_{\langle I_2, s_2, f^{-1}(\mathcal{A}_1) \rangle} = \mathbf{tup}_{\mathcal{S}_2}(f^{-1}(\mathcal{A}_1))$. This is natural in signature. Hence, there is a tuple passage $\mathbf{List} \xrightarrow{\mathbf{tup}} (\mathbf{Cxt} \Uparrow \mathbf{Set})^{\text{op}}$.




Fig. 4. Tuple Bridge: Signature

2.5.2 Type Domains. Let $\mathcal{A} = \langle X, Y, \models_{\mathcal{A}} \rangle$ be a type domain. There is an inclusion passage $\mathbf{List}(X) \xrightarrow{\mathbf{inc}_{\mathcal{A}}} \mathbf{Dom}$ that maps an X -signature $\langle I, s \rangle$ to the signed domain $\langle I, s, \mathcal{A} \rangle$ and maps an X -signature morphism $\langle I_2, s_2 \rangle \xrightarrow{h} \langle I_1, s_1 \rangle$ to the signed domain morphism $\langle I_2, s_2, \mathcal{A} \rangle \xrightarrow{\langle h, 1_X, 1_Y \rangle} \langle I_1, s_1, \mathcal{A} \rangle$. Composition of

the inclusion passage with the signed domain tuple passage (Def. 1) gives a type domain tuple passage

$$\mathbf{List}(X)^{\text{op}} \xrightarrow[\text{inc}_{\mathcal{A}}^{\text{op}} \circ \text{tup}]{\text{tup}_{\mathcal{A}} = \text{ext}_{\mathbf{List}(\mathcal{A})}} \mathbf{Set},$$

which maps an X -signature $\langle I, s \rangle$ to the tuple set (its $\mathbf{List}(\mathcal{A})$ -extent) $\text{tup}_{\langle I, s, \mathcal{A} \rangle} = \text{tup}_{\mathcal{A}}(I, s)$ and maps an X -signature morphism $\langle I_2, s_2 \rangle \xrightarrow{h} \langle I_1, s_1 \rangle$ to the tuple function associated with h : $\text{tup}_{\mathcal{A}}(I_2, s_2) \xleftarrow[h \cdot (-)]{\text{tup}_{\mathcal{A}}(h)} \text{tup}_{\mathcal{A}}(I_1, s_1)$; or visually,

$$(\cdots t_{h(i_2)} \cdots | i_2 \in I_2) \leftarrow (\cdots t_{i_1} \cdots | i_1 \in I_1).$$

levo: Let $\mathcal{A}_2 \xrightarrow{\langle f, g \rangle} \mathcal{A}_1$ be a type domain morphism.

$$f^*(I_1, s_1) \left\{ \begin{array}{ccc} \hat{I}_1 & \xrightarrow{\hat{f}} & I_1 \\ \hat{s}_1 \downarrow & & \downarrow s_1 \\ X_2 & \xrightarrow{f} & X_1 \\ \models_{\mathcal{A}_2} \downarrow & & \downarrow \models_{\mathcal{A}_1} \\ Y_2 & \xleftarrow{g} & Y_1 \end{array} \right. \quad \begin{array}{ccc} \mathbf{List}(X_2) & \xleftarrow{f^*} & \mathbf{List}(X_1) \\ \text{inc}_{\mathcal{A}_2} \swarrow & \xrightarrow{\hat{\lambda}_{\langle f, g \rangle}} & \searrow \text{inc}_{\mathcal{A}_1} \\ & \mathbf{Dom} & \end{array}$$

There is an inclusion bridge $f^* \circ \text{inc}_{\mathcal{A}_2} \xrightarrow{\hat{\lambda}_{\langle f, g \rangle}} \text{inc}_{\mathcal{A}_1}$ (illustrated above right). For any target signature $\langle I_1, s_1 \rangle \in \mathbf{List}(X_1)$, the signed domain morphism

$$\text{inc}_{\mathcal{A}_2}(f^*(I_1, s_1)) \xrightarrow[\langle \hat{f}, \hat{f}, g \rangle]{\hat{\lambda}_{\langle f, g \rangle}(I_1, s_1)} \text{inc}_{\mathcal{A}_1}(I_1, s_1)$$

is define by pullback (illustrated above left). This is natural in signature.¹²

Hence, there is an inclusion passage $\mathbf{Cls} \xrightarrow{\text{inc}} (\mathbf{Cxt} \Downarrow \mathbf{Dom})^{\text{op}}$.¹³ Composition of the inclusion bridge $f^* \circ \text{inc}_{\mathcal{A}_2} \xrightarrow{\hat{\lambda}_{\langle f, g \rangle}} \text{inc}_{\mathcal{A}_1}$ with the signed domain tuple passage (Def.1) gives a type domain tuple bridge (left-side Fig. 4)


$$\underbrace{f^{*\text{op}} \circ \text{tup}_{\mathcal{A}_2}}_{\text{inc}_{\mathcal{A}_2}^{\text{op}} \circ \text{tup}} \xleftarrow[\text{inc}_{\mathcal{A}_2}^{\text{op}} \circ \text{tup}]{\hat{\tau}_{\langle f, g \rangle}} \underbrace{\text{tup}_{\mathcal{A}_1}}_{\text{inc}_{\mathcal{A}_1}^{\text{op}} \circ \text{tup}} \doteq (f^* \circ \text{inc}_{\mathcal{A}_2} \xrightarrow{\hat{\lambda}_{\langle f, g \rangle}} \text{inc}_{\mathcal{A}_1})^{\text{op}} \circ \text{tup}. \quad (3)$$

¹² For any X_1 -signature morphism $\langle I'_1, s'_1 \rangle \xrightarrow{h} \langle I_1, s_1 \rangle$ with inverse image X_2 -signature morphism $\langle \hat{I}'_1, \hat{s}'_1 \rangle \xrightarrow{f^*(h)} \langle \hat{I}_1, \hat{s}_1 \rangle$ we have the commutative diagram $\hat{\lambda}_{\langle f, g \rangle}(I'_1, s'_1) \cdot \text{inc}_{\mathcal{A}_1}(h) = \text{inc}_{\mathcal{A}_2}(f^*(h)) \cdot \hat{\lambda}_{\langle f, g \rangle}(I_1, s_1)$.

¹³ For any context \mathbf{C} , the “super-comma” context $(\mathbf{Cxt} \Downarrow \mathbf{C})$ is defined [20] as follows:
 (1) an object is a \mathbf{C} -diagram $\langle \mathbf{I}, \mathbf{D} \rangle$ with indexing context \mathbf{I} and passage $\mathbf{I} \xrightarrow{\mathbf{D}} \mathbf{C}$;
 (2) a morphism is a \mathbf{C} -diagram morphism $\langle \mathbf{I}_2, \mathbf{D}_2 \rangle \xrightarrow{\langle \mathbf{F}, \alpha \rangle} \langle \mathbf{I}_1, \mathbf{D}_1 \rangle$ with indexing passage $\mathbf{I}_2 \xrightarrow{\mathbf{F}} \mathbf{I}_1$ and bridge $\mathbf{D}_2 \xleftarrow{\alpha} \mathbf{F} \circ \mathbf{D}_1$.

For any target signature $\langle I_1, s_1 \rangle \in \mathbf{List}(X_1)$, the tuple function $\hat{\tau}_{\langle f, g \rangle}(I_1, s_1) = \hat{f} \cdot (-) \cdot g : \mathbf{tup}_{\mathcal{A}_1}(I_1, s_1) \rightarrow \mathbf{tup}_{\mathcal{A}_2}(f^*(I_1, s_1))$ is define by pullback (illustrated above left). This is natural in signature. Hence, there is a tuple passage $\mathbf{Cls} \xrightarrow{\mathbf{tup}} (\mathbf{Cxt} \uparrow \mathbf{Set})^{\text{op}}$.

dextro: Let $\mathcal{A}_2 \xrightleftharpoons{\langle f, g \rangle} \mathcal{A}_1$ be a type domain morphism.

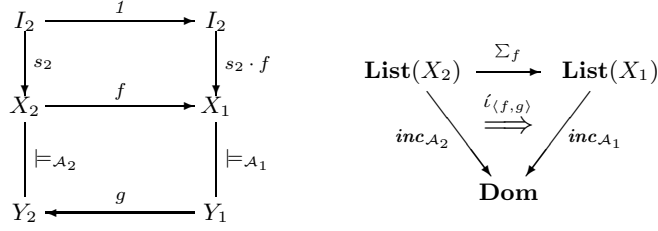

There is an inclusion bridge $\mathit{inc}_{\mathcal{A}_2} \xrightleftharpoons{\hat{\iota}_{\langle f, g \rangle}} \Sigma_f \circ \mathit{inc}_{\mathcal{A}_1}$ (illustrated above right). For any source signature $\langle I_2, s_2 \rangle \in \mathbf{List}(X_2)$, the signed domain morphism

$$\mathit{inc}_{\mathcal{A}_2}(I_2, s_2) \xrightarrow[\langle 1_{I_2}, f, g \rangle]{\hat{\iota}_{\langle f, g \rangle}(I_2, s_2)} \mathit{inc}_{\mathcal{A}_1}(\Sigma_f(I_2, s_2))$$

is define by composition (illustrated above left). This is natural in signature. Hence, there is an inclusion passage $\mathbf{Cls} \xrightarrow{\mathit{inc}} (\mathbf{Cxt} \uparrow \mathbf{Dom})$. Composition of the inclusion bridge $\mathit{inc}_{\mathcal{A}_2} \xrightleftharpoons{\hat{\iota}_{\langle f, g \rangle}} \Sigma_f \circ \mathit{inc}_{\mathcal{A}_1}$ with the signed domain tuple passage (Def.1) gives a type domain tuple bridge (right-side Fig. 5)

$$\underbrace{\mathbf{tup}_{\mathcal{A}_2}}_{\mathit{inc}_{\mathcal{A}_2}^{\text{op}} \circ \mathbf{tup}} \xleftarrow[\hat{\iota}_{\langle f, g \rangle}^{\text{op}} \circ \mathbf{tup}]{\hat{\tau}_{\langle f, g \rangle}} \Sigma_f^{\text{op}} \circ \underbrace{\mathbf{tup}_{\mathcal{A}_1}}_{\mathit{inc}_{\mathcal{A}_1}^{\text{op}} \circ \mathbf{tup}} \doteq (\mathit{inc}_{\mathcal{A}_2} \xrightleftharpoons{\hat{\iota}_{\langle f, g \rangle}} \Sigma_f \circ \mathit{inc}_{\mathcal{A}_1})^{\text{op}} \circ \mathbf{tup}.$$

For any source signature $\langle I_2, s_2 \rangle \in \mathbf{List}(X_2)$, the tuple function $\hat{\tau}_{\langle f, g \rangle}(I_2, s_2) = (-) \cdot g : \mathbf{tup}_{\mathcal{A}_1}(\Sigma_f(I_2, s_2)) \rightarrow \mathbf{tup}_{\mathcal{A}_2}(I_2, s_2)$ is define by composition (illustrated above left). This is natural in signature. Hence, there is a tuple passage $\mathbf{Cls} \xrightarrow{\mathbf{tup}} (\mathbf{Cxt} \downarrow \mathbf{Set})$.

Lemma 1. *There are natural isomorphisms*¹⁴

$$\Sigma_f \circ \mathit{inc}_{\mathcal{A}_1} \xleftarrow{\hat{\iota}_{\langle f,g \rangle}} \mathit{inc}_{\mathcal{A}_2} \cong \mathit{inc}_{\mathcal{A}_1} \xleftarrow{\hat{\iota}_{\langle f,g \rangle}} f^* \circ \mathit{inc}_{\mathcal{A}_2}$$

with $\hat{\iota}_{\langle f,g \rangle} = (\eta_f \circ \mathit{inc}_{\mathcal{A}_2}) \bullet (\Sigma_f \circ \hat{\iota}_{\langle f,g \rangle})$ and $\hat{\iota}_{\langle f,g \rangle} = (f^* \circ \hat{\iota}_{\langle f,g \rangle}) \bullet (\varepsilon_f \circ \mathit{inc}_{\mathcal{A}_1})$;
and

$$f^{*\text{op}} \circ \mathit{tup}_{\mathcal{A}_2} \xleftarrow[\hat{\iota}_{\langle f,g \rangle}^{\text{op}} \circ \mathit{tup}]{\hat{\tau}_{\langle f,g \rangle}} \mathit{tup}_{\mathcal{A}_1} \cong \mathit{tup}_{\mathcal{A}_2} \xleftarrow[\hat{\iota}_{\langle f,g \rangle}^{\text{op}} \circ \mathit{tup}]{\hat{\tau}_{\langle f,g \rangle}} \Sigma_f^{\text{op}} \circ \mathit{tup}_{\mathcal{A}_1}$$

with $\hat{\tau}_{\langle f,g \rangle} = (\varepsilon_f^{\text{op}} \circ \mathit{tup}_{\mathcal{A}_1}) \bullet (f^{*\text{op}} \circ \hat{\tau}_{\langle f,g \rangle})$ and $\hat{\tau}_{\langle f,g \rangle} = (\Sigma_f^{\text{op}} \circ \hat{\tau}_{\langle f,g \rangle}) \bullet (\eta_f^{\text{op}} \circ \mathit{tup}_{\mathcal{A}_2})$.

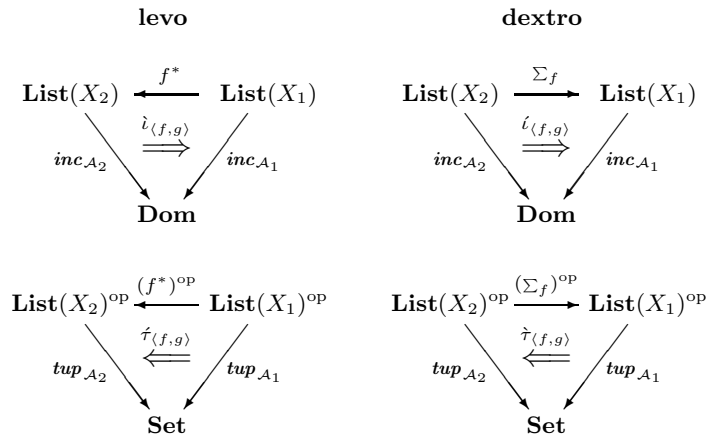


Fig. 5. Tuple Bridge: Type Domain

| levo | dextro |
|---|--|
| $\hat{\tau}_{\langle f,g \rangle} : f^{*\text{op}} \circ \mathit{tup}_{\mathcal{A}_2} \leftarrow \mathit{tup}_{\mathcal{A}_1}$ | $\hat{\tau}_{\langle f,g \rangle} : \mathit{tup}_{\mathcal{A}_2} \leftarrow \Sigma_f^{\text{op}} \circ \mathit{tup}_{\mathcal{A}_1}$ |
| $\hat{\tau}_{\langle f,g \rangle} = (\varepsilon_f^{\text{op}} \circ \mathit{tup}_{\mathcal{A}_1}) \bullet (f^{*\text{op}} \circ \hat{\tau}_{\langle f,g \rangle})$ | $\hat{\tau}_{\langle f,g \rangle} = (\Sigma_f^{\text{op}} \circ \hat{\tau}_{\langle f,g \rangle}) \bullet (\eta_f^{\text{op}} \circ \mathit{tup}_{\mathcal{A}_2})$ |

¹⁴ For adjunction $\mathbf{A}_2 \xrightarrow{\langle F, G, \eta, \varepsilon \rangle} \mathbf{A}_1$ with left adjoint $\mathbf{A}_2 \xrightarrow{F} \mathbf{A}_1$, right adjoint $\mathbf{A}_2 \xleftarrow{G} \mathbf{A}_1$, unit $\mathbf{1}_{\mathbf{A}_2} \xrightarrow{\eta} F \circ G$ and counit $G \circ F \xrightarrow{\varepsilon} \mathbf{1}_{\mathbf{A}_1}$, there is a natural isomorphism

$$F \circ \mathbf{A}_1 \xleftarrow{\hat{\alpha}} \mathbf{A}_2 \cong \mathbf{A}_1 \xleftarrow{\hat{\alpha}} G \circ \mathbf{A}_2$$

with $\hat{\alpha} = (\eta \circ \mathbf{A}_2) \bullet (F \circ \hat{\alpha})$ and $\hat{\alpha} = (G \circ \hat{\alpha}) \bullet (\varepsilon \circ \mathbf{A}_1)$.

Proposition 1. *There are inclusion/tuple passages from the context of type domains to the lax comma context of adjointly connected presheaves:*

$$\begin{aligned} \mathbf{Cls} &\xrightarrow{inc} (\mathbf{Adj} \uparrow \mathbf{Dom}) \\ \mathbf{Cls}^{\text{op}} &\xrightarrow{tup} (\mathbf{Adj} \uparrow \mathbf{Set}) \end{aligned}$$

2.5.3 Tuple Function Factorization In § 2.5 we composed with the signed domain tuple passage (Def. 1) to define the tuple passage and bridge for both signatures and type domains. Here, we factor components of the signed domain tuple passage in terms of components of these defined notions.

Lemma 2. For any signed domain morphism $\langle I_2, s_2, \mathcal{A}_2 \rangle \xrightarrow{\langle h, f, g \rangle} \langle I_1, s_1, \mathcal{A}_1 \rangle$, the tuple function $\mathbf{tup}_{\mathcal{A}_2}(I_2, s_2) \xleftarrow{\mathbf{tup}(h, f, g)} \mathbf{tup}_{\mathcal{A}_1}(I_1, s_1)$ has two factorizations:

- (Fig. 6 left side) in terms of the signature tuple bridge of §2.5.1 (Fig. 4) (used in the table fiber passage along a signature morphism).
- (Fig. 6 right side) in terms of the type domain tuple bridges of §2.5.2 (Fig. 5) (used in the table fiber adjoint passages along a type domain morphism).

$$\begin{array}{ccc}
 \begin{array}{c}
 \mathbf{tup}_{\mathcal{S}_2}(\mathcal{A}_2) \\
 = \text{ext}_{\mathbf{List}(\mathcal{A}_2)}(I_2, s_2) \\
 \uparrow \mathbf{tup}_{\mathcal{S}_2}(g) \\
 = (-) \cdot g \\
 \mathbf{tup}_{\mathcal{S}_2}(f^{-1}(\mathcal{A}_1)) \\
 = \text{ext}_{\mathbf{List}(f^{-1}(\mathcal{A}_1))}(I_2, s_2)
 \end{array}
 &
 \begin{array}{c}
 \mathbf{tup}(h, f, g) \\
 = (h \cdot (-)) \cdot ((-) \cdot g) \\
 \xleftarrow{\tau_{(h, f)}(\mathcal{A}_1)} \\
 \mathbf{tup}_{\mathcal{S}_1}(\mathcal{A}_1) \\
 = \text{ext}_{\mathbf{List}(\mathcal{A}_1)}(I_1, s_1)
 \end{array}
 &
 \begin{array}{c}
 \mathbf{tup}_{\mathcal{A}_2}(I_2, s_2) \\
 = \text{ext}_{\mathbf{List}(\mathcal{A}_2)}(I_2, s_2) \\
 \uparrow \mathbf{tup}_{\mathcal{A}_2}(\hat{h}) \\
 = \hat{h} \cdot (-) \\
 \mathbf{tup}_{\mathcal{A}_2}(f^*(I_1, s_1)) \\
 = \text{ext}_{\mathbf{List}(\mathcal{A}_2)}(f^*(I_1, s_1))
 \end{array}
 &
 \begin{array}{c}
 \xrightarrow{\hat{\tau}_{(f, g)}(I_2, s_2)} \\
 \mathbf{tup}_{\mathcal{A}_1}(\Sigma_f(I_2, s_2)) \\
 = (-) \cdot g = \text{ext}_{\mathbf{List}(\mathcal{A}_1)}(I_1, s_1) \\
 \uparrow \mathbf{tup}_{\mathcal{A}_1}(h) \\
 = h \cdot (-) \\
 \mathbf{tup}_{\mathcal{A}_1}(I_1, s_1) \\
 = \text{ext}_{\mathbf{List}(\mathcal{A}_1)}(I_1, s_1)
 \end{array}
 \end{array}$$

signature type domain

Fig. 6. Tuple Function Factorization

Proof. We prove the type domain case (Fig. 6 left side).

For any target signature $\langle I_1, s_1 \rangle \in (\mathbf{Set} \downarrow X_1)$, if $\langle \hat{I}_2, \hat{s}_2 \rangle = f^*(I_1, s_1)$ is its substitution signature (defined by pullback), the tuple function $\hat{\tau}_{(f, g)}(I_1, s_1) : \mathbf{tup}_{\mathcal{A}_1}(I_1, s_1) \rightarrow \mathbf{tup}_{\mathcal{A}_2}(f^*(I_1, s_1))$ (Fig. 5) maps a target tuple $t_1 \in \mathbf{tup}_{\mathcal{S}_1} = \mathbf{tup}_{\mathcal{A}_1}(I_1, s_1)$ to the intermediate tuple $\hat{t}_1 = \hat{f} \cdot t_1 \cdot g \in \mathbf{tup}_{\mathcal{A}_2}(\hat{I}_1, \hat{s}_1)$, where $\hat{f} = \varepsilon_{\langle I_1, s_1 \rangle}^f$ is the $\langle I_1, s_1 \rangle^{\text{th}}$ -component of the counit ε^f

of the signature fiber adjunction $\mathbf{List}(X_2) \xrightarrow{\langle \Sigma_f^{-1} f^* \rangle} \mathbf{List}(X_1)$. Signature preservation, $s_2 \cdot f = h \cdot s_1$ means that $X_2 \xleftarrow{s_2} I_2 \xrightarrow{h} I_1$ is a span of the opspan $X_2 \xrightarrow{f} X_1 \xleftarrow{s_1} I_1$. Let $I_2 \xrightarrow{\hat{h}} \hat{I}_2$ be the mediating function, so that $\langle \hat{h}, 1_{X_2} \rangle : \langle I_2, s_2 \rangle \rightarrow \langle \hat{I}_2, \hat{s}_2 \rangle$ is a signature morphism and $\hat{h} \cdot \hat{f} = h$. Then the tuple function $\mathbf{tup}_{\mathcal{A}_2}(\hat{h}) : \mathbf{tup}_{\mathcal{A}_2}(f^*(I_1, s_1)) \rightarrow \mathbf{tup}_{\mathcal{A}_2}(I_2, s_2)$ maps the intermediate tuple $\hat{t}_1 \in \mathbf{tup}_{\mathcal{A}_2}(\hat{I}_1, \hat{s}_1)$ to the source tuple $t_2 = \hat{h} \cdot \hat{t}_1 \in \mathbf{tup}_{\mathcal{A}_2}(I_2, s_2)$. Since pullbacks compose, this is functorial. \blacksquare

| |
|---|
| signed domain morphism $\langle I_2, X_2, \mathcal{A}_2 \rangle \xrightarrow{\langle h, f, g \rangle} \langle I_1, X_1, \mathcal{A}_1 \rangle$ $\mathbf{tup}_{\mathcal{A}_2}(I_2, s_2) \xleftarrow[h \cdot (-) \cdot g]{\mathbf{tup}^{\langle h, f, g \rangle}} \mathbf{tup}_{\mathcal{A}_1}(I_1, s_1)$ |
| signature morphism $\mathcal{S}_2 \xrightarrow{\langle h, f \rangle} \mathcal{S}_1$ — tuple bridge — $\tau_{\langle h, f \rangle} : (f^{-1})^{\text{op}} \circ \mathbf{tup}_{\mathcal{S}_2} \Leftarrow \mathbf{tup}_{\mathcal{S}_1}$ $\mathbf{tup}_{\mathcal{S}_2}(f^{-1}(\mathcal{A}_1)) \xleftarrow[h \cdot (-)]{\tau_{\langle h, f \rangle}(\mathcal{A}_1)} \mathbf{tup}_{\mathcal{S}_1}(\mathcal{A}_1)$ |
| type domain morphism $\mathcal{A}_2 \xrightleftharpoons{\langle f, g \rangle} \mathcal{A}_1$ — levo tuple bridge — $\dot{\tau}_{\langle f, g \rangle} : (f^*)^{\text{op}} \circ \mathbf{tup}_{\mathcal{A}_2} \Leftarrow \mathbf{tup}_{\mathcal{A}_1}$ $\mathbf{tup}_{\mathcal{A}_2}(f^*(I_1, s_1)) \xleftarrow[f \cdot (-) \cdot g]{\dot{\tau}_{\langle f, g \rangle}(I_1, s_1)} \mathbf{tup}_{\mathcal{A}_1}(I_1, s_1)$ — dextro tuple bridge — $\dot{\tau}_{\langle f, g \rangle} : \mathbf{tup}_{\mathcal{A}_2} \Leftarrow \Sigma_f^{\text{op}} \circ \mathbf{tup}_{\mathcal{A}_1}$ $\mathbf{tup}_{\mathcal{A}_2}(I_2, s_2) \xleftarrow[(-) \cdot g]{\dot{\tau}_{\langle f, g \rangle}(I_2, s_2)} \mathbf{tup}_{\mathcal{A}_1}(\Sigma_f(I_2, s_2))$ |

Table 3. Tuple Functions

3 Table Hierarchy

The relational table is the basic concept in the relational model for databases.

3.1 FOLE Tables

Tables. A table (database relation) $\mathcal{T} = \langle \mathcal{D}, K, t \rangle$ consists of a signed domain \mathcal{D} , a set K of (primary) keys and a tuple function $K \xrightarrow{t} \mathbf{tup}(\mathcal{D})$ mapping keys to \mathcal{D} -tuples.¹⁵ Equivalently, it is an object in the comma context $(\mathbf{Set} \downarrow \mathbf{tup})$ defined by the tuple passage $\mathbf{Dom}^{\text{op}} \xrightarrow{\mathbf{tup}} \mathbf{Set}$ (Def. 1 of § 2.4). A precise description of the FOLE Table is given in Fig. 7.

$$\begin{array}{l}
 \mathcal{T} = \langle K, t, \mathcal{D} \rangle \\
 \mathcal{D} = \langle \mathcal{S}, \mathcal{A} \rangle \\
 K \xrightarrow{t} \mathbf{tup}_{\mathcal{A}}(I, s) \\
 t(k) = \langle I, t_k \rangle, I \xrightarrow{t_k} Y \\
 t_{k,i} \in \mathcal{A}_{s_i}
 \end{array}
 \quad
 \left\{
 \begin{array}{c}
 \mathcal{S} = \langle I, s, X \rangle \\
 \hline
 \mathcal{T} \quad \cdots \quad i: s_i \quad \cdots \\
 \hline
 k \quad \cdots \quad t_{k,i} \quad \cdots
 \end{array}
 \right.$$

Fig. 7. FOLE Table


Hence, a table $\mathcal{T} = \langle \mathcal{S}, \mathcal{A}, K, t \rangle$ consists of a signature $\mathcal{S} = \langle I, s, X \rangle$ and type domain $\mathcal{A} = \langle X, Y, \models_{\mathcal{A}} \rangle$ that share a common sort set X , a key set K , and a tuple function $K \xrightarrow{t} \mathbf{tup}(\mathcal{D}) = \mathbf{tup}_{\mathcal{A}}(I, s)$. Three alternate expressions are as follows.

signed domain: Given a signed domain $\mathcal{D} = \langle \mathcal{S}, \mathcal{A} \rangle$, a table $\mathcal{T} = \langle K, t \rangle$ consists of a set K of keys and a tuple function $K \xrightarrow{t} \mathbf{tup}(\mathcal{D})$. Hence, a table is an object in the fiber context $\mathbf{Tbl}(\mathcal{D})$. (See §3.2.)

signature: Given a signature $\mathcal{S} = \langle I, s, X \rangle$, a table $\mathcal{T} = \langle \mathcal{A}, K, t \rangle$ consists of an X -sorted type domain $\mathcal{A} = \langle X, Y, \models_{\mathcal{A}} \rangle$, a set K of keys, and a tuple function $K \xrightarrow{t} \mathbf{tup}_{\mathcal{A}}(I, s)$. Hence, a table is an object in the fiber context $\mathbf{Tbl}(\mathcal{S})$. (See §3.3.1.)

type domain: Given a type domain $\mathcal{A} = \langle X, Y, \models_{\mathcal{A}} \rangle$, a table $\mathcal{T} = \langle \mathcal{S}, K, t \rangle$ consists of an X -sorted signature $\mathcal{S} = \langle I, s, X \rangle$, a set K of keys, and a tuple function $K \xrightarrow{t} \mathbf{tup}_{\mathcal{A}}(I, s)$. Hence, a table is an object in the fiber context $\mathbf{Tbl}(\mathcal{A})$. (See §3.4.1.)

¹⁵ FOLE tables correspond to improper relations (Codd [3]), since they strictly violate the property the “all rows are distinct from one another in content”. Proper relations correspond to FOLE relations (§ A.1). One method for converting to the proper relations of Codd, and thus getting an injective tuple function, is to incorporate keys into their corresponding tuple by defining a key datatype. This was done in Kent [15].

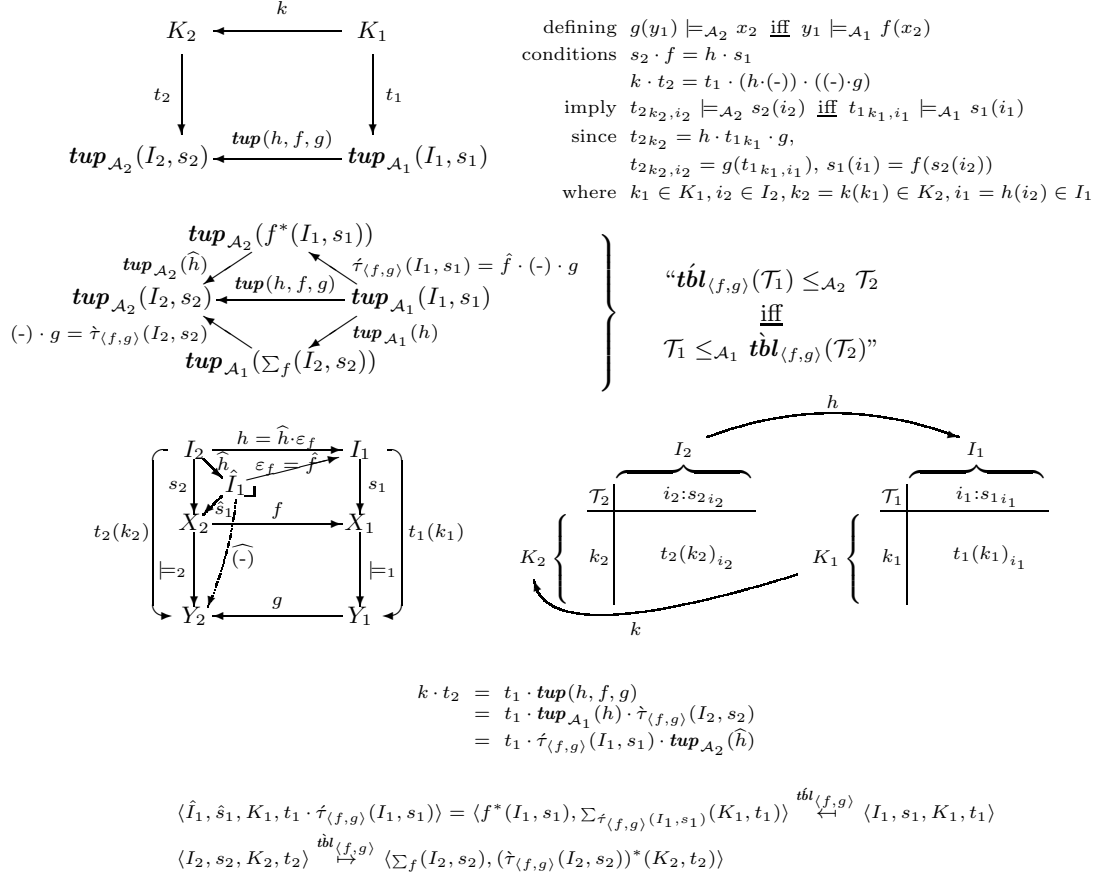

This four-part figure illustrates the defining conditions on table morphisms. It has been annotated to help guide the understanding. The condition is symbolically stated in terms of set functions in the line of text just above. The top left diagram illustrates the condition, and the bottom left diagram expands on this. The top right diagram text is more detailed in terms of a source row (tuple) $k_1 \in K_1$ and a target column (attribute) $i_2 \in I_2$. Here we see appearance of the infomorphism condition

$$g(t_1(k_1)_{i_1}) \models_{\mathcal{A}_2} s_2 i_2 \iff t_1(k_1)_{i_1} \models_{\mathcal{A}_1} f(s_2 i_2).$$

Finally, the bottom right figure illustrates the meaning of the morphism's defining condition with respect to source/target tables \mathcal{T}_1 and \mathcal{T}_2 .

Fig. 8. FOLE Table Morphism

Table Morphisms. A table morphism (morphism of database relations)

$$\mathcal{T}_2 = \langle \langle I_2, s_2, \mathcal{A}_2 \rangle, K_2, t_2 \rangle \xleftarrow{\langle \langle h, f, g \rangle, k \rangle} \langle \langle I_1, s_1, \mathcal{A}_1 \rangle, K_1, t_1 \rangle = \mathcal{T}_1$$

consists of a signed domain morphism $\langle I_2, s_2, \mathcal{A}_2 \rangle \xrightarrow{\langle h, f, g \rangle} \langle I_1, s_1, \mathcal{A}_1 \rangle$ and a key function $K_2 \xleftarrow{k} K_1$, which satisfy the naturality condition $k \cdot t_2 = t_1 \cdot \mathbf{tup}(h, f, g)$.

¹⁶ Hence, a table morphism $\mathcal{T}_2 = \langle \mathcal{S}_2, \mathcal{A}_2, K_2, t_2 \rangle \xleftarrow{\langle \langle h, f, g \rangle, k \rangle} \langle \mathcal{S}_1, \mathcal{A}_1, K_1, t_1 \rangle = \mathcal{T}_1$ consists of a signature morphism $\mathcal{A}_2 = \langle I_2, s_2, X_2 \rangle \xrightarrow{\langle h, f \rangle} \langle I_1, s_1, X_1 \rangle = \mathcal{S}_1$ and a type domain morphism $\mathcal{A}_2 = \langle X_2, Y_2, \models_{\mathcal{A}_2} \rangle \xrightarrow{\langle f, g \rangle} \langle X_1, Y_1, \models_{\mathcal{A}_1} \rangle = \mathcal{A}_1$ with common sort function $X_2 \xrightarrow{f} X_1$, and a key function $K_2 \xleftarrow{k} K_1$, which satisfy the naturality condition above.

Table morphisms are illustrated in Fig. 8. Here we see that table morphisms have the pleasing property that corresponding entries in the source and target tables satisfy the infomorphism condition from the theory of information flow (Barwise and Seligman [1]). Composition of morphisms is defined component-wise. Let

$$\mathbf{Set} \xleftarrow{\mathit{key}} \mathbf{Tbl} = (\mathbf{Set} \downarrow \mathit{tup}) \xrightarrow{\mathit{dom}} \mathbf{Dom}^{\text{op}}$$

denote the comma context of tables (Fig. 9) with the key/signed-domain projection passages. There is a defining tuple bridge $\mathit{key} \xrightarrow{\tau} \mathit{dom} \circ \mathit{tup}$, whose \mathcal{T}^{th} component is the tuple function $K \xrightarrow{t} \mathbf{tup}(\mathcal{D})$. Composition yields signature/type-domain projection passages $\mathbf{List}^{\text{op}} \xleftarrow{\mathit{sign}} \mathbf{Tbl} \xrightarrow{\mathit{data}} \mathbf{Cls}^{\text{op}}$. We can have three

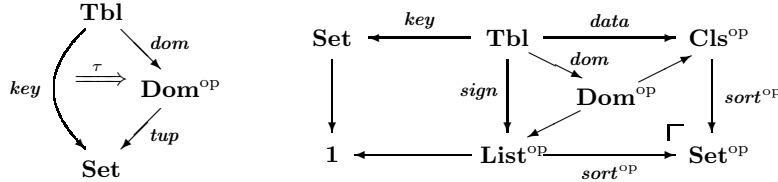


Fig. 9. FOLE Table Mathematical Context

indexing contexts for tables (above diagram): signatures **List**, type domains **Cls** and signed domains **Dom**. Each has their uses: signature indexing follows the true formal-semantics distinction, type domain indexing proves that the context of tables is complete (§ 4.2.2) (and the fibers help explain database fibers), and signed domain indexing proves that the context of tables is cocomplete (§ 4.2.1).

¹⁶ Since the table tuple function embodies the entity/domain integrity constraints, this condition on morphisms asserts the preservation of data integrity.

Corresponding to this indexing (as illustrated in Fig. 18), there are two chains of fiber contexts: fibers indexed by a signed domain $\mathcal{D} = \langle I, s, \mathcal{A} \rangle$ are smallest, and contained in either fibers indexed by a type domain $\mathcal{A} = \langle X, Y, \models_{\mathcal{A}} \rangle$ or fibers indexed by a signature $\mathcal{S} = \langle I, s, X \rangle$.

Restatement: We now sharpen the definition for the the context of tables. This will be useful for defining and working with relational databases. The fibered context of tables is the comma mathematical context

$$\mathbf{Tbl} = (\mathbf{Set} \downarrow \mathit{tup})$$

for the opspan of passages $\mathbf{Set} \xrightarrow{I} \mathbf{Set} \xleftarrow{\mathit{tup}} \mathbf{Dom}^{\text{op}}$. It has the key and signed domain projection passages $\mathbf{Set} \xleftarrow{\mathit{key}} \mathbf{Tbl} \xrightarrow{\mathit{dom}} \mathbf{Dom}^{\text{op}}$ and the defining tuple bridge $\mathit{key} \xrightarrow{\tau} \mathit{dom} \circ \mathit{tup}$ such that for any span of passages $\mathbf{Set} \xleftarrow{K} \mathbf{R} \xrightarrow{Q} \mathbf{Dom}^{\text{op}}$, there is a bijection $\mathbf{T} \mapsto \hat{\tau} = \mathbf{T} \circ \tau$ between

- passages $\mathbf{R} \xrightarrow{\mathbf{T}} \mathbf{Tbl}$ satisfying $\mathbf{T} \circ \mathit{key} = K$ and $\mathbf{T} \circ \mathit{dom} = Q$, and
- bridges $K \xrightarrow{\hat{\tau}} Q \circ \mathit{tup}$.

By composition, there are also signature and classification projection passages $\mathbf{List}^{\text{op}} \xleftarrow{\mathit{sign}} \mathbf{Tbl} \xrightarrow{\mathit{data}} \mathbf{Cls}^{\text{op}}$.

3.2 Signed Domain Indexing

In this section we show that the context of tables is a fibered context over signed domains. We first define the table fiber for fixed signed domain. We next move between table fibers along signed domain morphisms. Finally, we invoke the Grothendieck construction indexed by signed domains.

Fiber Contexts (small-size). Let $\langle I, s, \mathcal{A} \rangle$ be a fixed signed domain. The fiber mathematical context of $\langle I, s, \mathcal{A} \rangle$ -tables is the comma context

$$\mathbf{Tbl}(I, s, \mathcal{A}) = \mathbf{Tbl}_{\mathcal{A}}(I, s) = (\mathbf{Set} \downarrow \mathit{tup}_{\mathcal{A}}(I, s))$$

associated with the tuple set (constant passage) $\mathbf{1} \xrightarrow[\mathit{tup}(I, s, \mathcal{A})]{\mathit{tup}_{\mathcal{A}}(I, s)} \mathbf{Set}$. It has the

key and trivial projection passages $\mathbf{Set} \xleftarrow{\mathit{key}_{\mathcal{A}}(I, s)} \mathbf{Tbl}_{\mathcal{A}}(I, s) \xrightarrow{\Delta} \mathbf{1}$ and the defining bridge $\mathit{key}_{\mathcal{A}}(I, s) \xrightarrow{\tau_{\mathcal{A}}(I, s)} \Delta \circ \mathit{tup}_{\mathcal{A}}(I, s)$. A $\mathbf{Tbl}_{\mathcal{A}}(I, s)$ -object $\mathcal{T} = \langle K, t \rangle$, called an $\langle I, s, \mathcal{A} \rangle$ -table, consists of a set K of (primary) keys and a tuple function $K \xrightarrow{t} \mathit{tup}_{\mathcal{A}}(I, s)$ mapping each key to its descriptor \mathcal{A} -tuple of type (signature) $\langle I, s \rangle$. A $\mathbf{Tbl}_{\mathcal{A}}(I, s)$ -morphism $\mathcal{T}' = \langle K', t' \rangle \xleftarrow{k} \langle K, t \rangle = \mathcal{T}$ is a key function $K' \xleftarrow{k} K$ that preserves descriptors by satisfying the naturality condition $k \cdot t' = t$.

Fibered Context (large-size). The fibered context of tables $\mathbf{Tbl}^{\text{op}} \xrightarrow{\text{dom}} \mathbf{Dom}$ is defined as follows. We use the same definitions as in § 3.1. A **Tbl**-object $\mathcal{T} = \langle I, s, \mathcal{A}, K, t \rangle$, called a table, consists of a signed domain $\text{dom}(\mathcal{T}) = \langle I, s, \mathcal{A} \rangle$ and an $\langle I, s, \mathcal{A} \rangle$ -table $\langle K, t \rangle$. A **Tbl**-morphism $\mathcal{T}_2 = \langle I_2, s_2, \mathcal{A}_2, K_2, t_2 \rangle \xleftarrow{\langle h, f, g, k \rangle} \langle I_1, s_1, \mathcal{A}_1, K_1, t_1 \rangle = \mathcal{T}_1$ called a table morphism, consists of Morphism a signed domain morphism $\langle I_2, X_2, \mathcal{A}_2 \rangle \xrightarrow[\text{dom}(h, f, g, k)]{\langle h, f, g \rangle} \langle I_1, X_1, \mathcal{A}_1 \rangle$ and a key function $K_2 \xleftarrow{k} K_1$ satisfying the naturality condition $k \cdot t_2 = t_1 \cdot \text{tup}(h, f, g)$. This condition gives two alternate and adjoint definitions. In terms of fibers, an table mor-

$$\begin{array}{ccc}
 \begin{array}{c}
 \xleftarrow{k} \\
 \begin{array}{ccc}
 K_2 & \xleftarrow{k} & K_1 \\
 \downarrow t_2 & \swarrow t_1 \cdot \text{tup}(h, f, g) & \downarrow t_1 \\
 \text{tup}(I_2, s_2, \mathcal{A}_2) & \xleftarrow{\text{tup}(h, f, g)} & \text{tup}(I_1, s_1, \mathcal{A}_1) \\
 \underbrace{\qquad\qquad\qquad}_{\mathcal{T}_2} & \underbrace{\qquad\qquad\qquad}_{\Sigma_{\langle h, f, g \rangle}(\mathcal{T}_1)} & \underbrace{\qquad\qquad\qquad}_{\mathcal{T}_1} \\
 \underbrace{\qquad\qquad\qquad}_{\mathbf{Tbl}(I_2, s_2, \mathcal{A}_2)} & &
 \end{array}
 \end{array}
 =
 \begin{array}{c}
 \xleftarrow{k} \\
 \begin{array}{ccc}
 K_2 & \xleftarrow{e} & K_1 & \xleftarrow{k'} & K_1 \\
 \downarrow t_2 & \swarrow \hat{t} & \downarrow t_1 & \swarrow t_1 & \\
 \text{tup}(I_2, s_2, \mathcal{A}_2) & \xleftarrow{\text{tup}(h, f, g)} & \text{tup}(I_1, s_1, \mathcal{A}_1) & & \\
 \underbrace{\qquad\qquad\qquad}_{\mathcal{T}_2} & \underbrace{\qquad\qquad\qquad}_{\langle h, f, g \rangle^*(\mathcal{T}_2)} & \underbrace{\qquad\qquad\qquad}_{\mathcal{T}_1} & & \\
 \underbrace{\qquad\qquad\qquad}_{\mathbf{Tbl}(I_1, s_1, \mathcal{A}_1)} & & & &
 \end{array}
 \end{array}
 \cong
 \end{array}$$

Fig. 10. Table Morphism: Signed Domain

phism consists of a signed domain morphism $\langle I_2, s_2, \mathcal{A}_2 \rangle \xrightarrow{\langle h, f, g \rangle} \langle I_1, s_1, \mathcal{A}_1 \rangle$ and either a morphism $\mathcal{T}_2 \xleftarrow{k} \Sigma_{\langle h, f, g \rangle}(\mathcal{T}_1)$ in the fiber context $\mathbf{Tbl}(I_2, s_2, \mathcal{A}_2)$ or a morphism $\langle h, f, g \rangle^*(\mathcal{T}_2) \xleftarrow{k'} \mathcal{T}_1$ in the fiber context $\mathbf{Tbl}(I_1, s_1, \mathcal{A}_1)$.

$$\begin{array}{ccc}
 \mathcal{T}_2 \xleftarrow{k} \Sigma_{\langle h, f, g \rangle}(\mathcal{T}_1) & \Leftrightarrow & \langle h, f, g \rangle^*(\mathcal{T}_2) \xleftarrow{k'} \mathcal{T}_1 \\
 \text{in } \mathbf{Tbl}(I_2, s_2, \mathcal{A}_2) & & \text{in } \mathbf{Tbl}(I_1, s_1, \mathcal{A}_1)
 \end{array} \quad (4)$$

The $\langle I_2, s_2, \mathcal{A}_2 \rangle$ -table morphism $\mathcal{T}_2 \xleftarrow{k} \Sigma_{\langle h, f, g \rangle}(\mathcal{T}_1)$ is the composition (RHS of Fig. 10) of the fiber morphism $\Sigma_{\langle h, f, g \rangle}(\langle h, f, g \rangle^*(\mathcal{T}_2) \xleftarrow{k'} \mathcal{T}_1)$ with the $\mathcal{T}_2^{\text{th}}$ counit component $\mathcal{T}_2 \xleftarrow{e} \Sigma_{\langle h, f, g \rangle}(\langle h, f, g \rangle^*(\mathcal{T}_2))$ for the fiber adjunction

$$\mathbf{Tbl}(I_2, s_2, \mathcal{A}_2) \xrightleftharpoons[\langle h, f, g \rangle^*]{\Sigma_{\langle h, f, g \rangle}} \mathbf{Tbl}(I_1, s_1, \mathcal{A}_1).$$

This fiber adjunction (top part of Tbl. 4) is a component of the signed domain indexed adjunction of tables $\mathbf{Dom}^{\text{op}} \xrightarrow{\text{tbl}} \mathbf{Adj}$.

Theorem 3. *The fibered context of tables $\mathbf{Tbl} \xrightarrow{\text{dom}} \mathbf{Dom}^{\text{op}}$ is the Grothendieck construction $\int_{\mathbf{Dom}} \text{tbl}$ of the signed domain indexed adjunction $\mathbf{Dom}^{\text{op}} \xrightarrow{\text{tbl}} \mathbf{Adj}$.⁵*

$$\begin{array}{ccc}
 \langle I_2, X_2, \mathcal{A}_2 \rangle & \xrightarrow{\langle h, f, g \rangle} & \langle I_1, X_1, \mathcal{A}_1 \rangle \\
 \text{tup}_{\mathcal{A}_2}(I_2, s_2) & \xleftarrow{\text{tup}(h, f, g)} & \text{tup}_{\mathcal{A}_1}(I_1, s_1) \\
 \\
 \mathbf{Tbl}_{\mathcal{A}_2}(I_2, s_2) & \xleftarrow{\Sigma_{\langle h, f, g \rangle}} & \mathbf{Tbl}_{\mathcal{A}_1}(I_1, s_1) \\
 = (\mathbf{Set} \downarrow \text{tup}_{\mathcal{A}_2}(I_2, s_2)) & \xrightarrow{\langle h, f, g \rangle^*} & = (\mathbf{Set} \downarrow \text{tup}_{\mathcal{A}_1}(I_1, s_1)) \\
 & \xleftarrow{\Pi_{\langle h, f, g \rangle}} & \\
 \begin{array}{c} \downarrow \\ \text{im}_{\mathcal{A}_2}(I_2, s_2) \end{array} & \begin{array}{c} \uparrow \\ \text{inc}_{\mathcal{A}_2}(I_2, s_2) \end{array} & \begin{array}{c} \downarrow \\ \text{im}_{\mathcal{A}_1}(I_1, s_1) \end{array} & \begin{array}{c} \uparrow \\ \text{inc}_{\mathcal{A}_1}(I_1, s_1) \end{array} \\
 \\
 \mathbf{Rel}_{\mathcal{A}_2}(I_2, s_2) & \xleftarrow{\exists_{\langle h, f, g \rangle}} & \mathbf{Rel}_{\mathcal{A}_1}(I_1, s_1) \\
 = \emptyset \text{tup}_{\mathcal{A}_2}(I_2, s_2) & \xrightarrow{\langle h, f, g \rangle^{-1}} & = \emptyset \text{tup}_{\mathcal{A}_1}(I_1, s_1) \\
 & \xleftarrow{\forall_{\langle h, f, g \rangle}} &
 \end{array}$$

| |
|--|
| $\Sigma_{\langle h, f, g \rangle} \dashv \langle h, f, g \rangle^* \dashv \Pi_{\langle h, f, g \rangle}$ |
| $\exists_{\langle h, f, g \rangle} \dashv \langle h, f, g \rangle^{-1} \dashv \forall_{\langle h, f, g \rangle}$ |
| $\text{im}_{\mathcal{A}_2}(I_2, s_2) \dashv \text{inc}_{\mathcal{A}_2}(I_2, s_2), \text{im}_{\mathcal{A}_1}(I_1, s_1) \dashv \text{inc}_{\mathcal{A}_1}(I_1, s_1)$ |
| $\text{inc}_{\mathcal{A}_2}(I_2, s_2) \circ \langle h, f, g \rangle^* = \langle h, f, g \rangle^{-1} \circ \text{inc}_{\mathcal{A}_1}(I_1, s_1)$ |
| $\text{inc}_{\mathcal{A}_1}(I_1, s_1) \circ \Pi_{\langle h, f, g \rangle} = \forall_{\langle h, f, g \rangle} \circ \text{inc}_{\mathcal{A}_2}(I_2, s_2)$ |
| $\Sigma_{\langle h, f, g \rangle} \circ \text{im}_{\mathcal{A}_2}(I_2, s_2) \cong \text{im}_{\mathcal{A}_1}(I_1, s_1) \circ \exists_{\langle h, f, g \rangle}$ |
| $\langle h, f, g \rangle^* \circ \text{im}_{\mathcal{A}_1}(I_1, s_1) \cong \text{im}_{\mathcal{A}_2}(I_2, s_2) \circ \langle h, f, g \rangle^{-1}$ |

small fibers – long distance

Table 4. Reflection: Signed Domain

3.3 Signature Indexing

In this section we show that the context of tables is a fibered context over signatures. We first define the table fiber for fixed signature. We next move between table fibers along signature morphisms. Finally, we invoke the Grothendieck construction indexed by signatures.

3.3.1 Lower Aspect. Let $\mathcal{S} = \langle I, s, X \rangle$ be a fixed signature. For database tables, the signature (header) \mathcal{S} consists of a fixed sort set X and a fixed X -signature $\langle I, s \rangle$. Here, we show that the context of \mathcal{S} -tables $\mathbf{Tbl}(\mathcal{S})$ is fibered over X -sorted type domains $\mathbf{Tbl}(\mathcal{S}) \xrightarrow{\text{data}_{\mathcal{S}}} \mathbf{Cls}(X)^{\text{op}}$. We use the Grothendieck construction $\int_{\mathbf{Cls}(X)}$ on the indexed adjunction $\mathbf{Cls}(X) \xrightarrow{\text{tbl}_{\mathcal{S}}} \mathbf{Adj} : \mathcal{A} \mapsto \mathbf{Tbl}_{\mathcal{S}}(\mathcal{A})$.

Fiber(ed) Contexts (medium-size). The fiber(ed) mathematical context of \mathcal{S} -tables is the comma context

$$\mathbf{Set} \xleftarrow{\text{key}_{\mathcal{S}}} \mathbf{Tbl}(\mathcal{S}) = (\mathbf{Set} \downarrow \text{tup}_{\mathcal{S}}) \xrightarrow{\text{data}_{\mathcal{S}}} \mathbf{Cls}(X)^{\text{op}}.$$

associated with the signature tuple passage $\mathbf{Cls}(X)^{\text{op}} \xrightarrow{\text{tup}_{\mathcal{S}}} \mathbf{Set}$ defined in § 2.5.1. A $\mathbf{Tbl}(\mathcal{S})$ -object $\mathcal{T} = \langle \mathcal{A}, K, t \rangle$, called an \mathcal{S} -table, consists of an X -sorted type domain $\mathcal{A} = \langle X, Y, \models_{\mathcal{A}} \rangle$ with data-type collection $\{\mathcal{A}_x \mid x \in X\}$, a set K of (primary) keys and a tuple function $K \xrightarrow{t} \text{tup}_{\mathcal{A}}(I, s) = \prod_{i \in I} \mathcal{A}_{s(i)}$ mapping each key to its descriptor \mathcal{A} -tuple of type (signature) $\langle I, s \rangle$. A $\mathbf{Tbl}(\mathcal{S})$ -morphism $\mathcal{T} = \langle \mathcal{A}, K, t \rangle \xleftarrow{\langle g, k \rangle} \langle \tilde{\mathcal{A}}, \tilde{K}, \tilde{t} \rangle = \tilde{\mathcal{T}}$ consists of an X -sorted type domain morphism $\mathcal{A} \xleftarrow{\langle 1_X, g \rangle} \tilde{\mathcal{A}}$ and a key function $K \xleftarrow{k} \tilde{K}$, which satisfies the condition $k \cdot t = \tilde{t} \cdot \text{tup}_{\mathcal{S}}(g)$. In terms of fibers, an \mathcal{S} -table morphism consists

$$\begin{array}{ccc}
 \begin{array}{c}
 \xrightarrow{k} \\
 K \xleftarrow{k} \tilde{K} = \tilde{K} \\
 \downarrow t \quad \searrow \tilde{t} \cdot \text{tup}_{\mathcal{S}}(g) \quad \downarrow \tilde{t} \\
 \underbrace{\text{tup}_{\mathcal{S}}(\mathcal{A})}_{\mathcal{T}} \xleftarrow{\text{tup}_{\mathcal{S}}(g)} \underbrace{\text{tup}_{\mathcal{S}}(\tilde{\mathcal{A}})}_{\tilde{\mathcal{T}}} \\
 \underbrace{\hspace{10em}}_{\Sigma_g(\tilde{\mathcal{T}})} \\
 \mathbf{Tbl}_{\mathcal{S}}(\mathcal{A})
 \end{array}
 & \cong &
 \begin{array}{c}
 \xrightarrow{k} \\
 K \xleftarrow{e} \hat{K} \xleftarrow{\hat{k}} \tilde{K} \\
 \downarrow t \quad \searrow \hat{t} \quad \searrow \tilde{t} \\
 \underbrace{\text{tup}_{\mathcal{S}}(\mathcal{A})}_{\mathcal{T}} \xleftarrow{\text{tup}_{\mathcal{S}}(g)} \underbrace{\text{tup}_{\mathcal{S}}(\tilde{\mathcal{A}})}_{g^*(\mathcal{T})} \\
 \underbrace{\hspace{10em}}_{\tilde{\mathcal{T}}} \\
 \mathbf{Tbl}_{\mathcal{S}}(\tilde{\mathcal{A}})
 \end{array}
 \end{array}$$

Fig. 11. \mathcal{S} -Table Morphism

of an X -sorted type domain morphism $\mathcal{A} \xleftarrow{\langle 1_X, g \rangle} \tilde{\mathcal{A}}$ and either a morphism $\mathcal{T} \xleftarrow{k} \Sigma_g(\tilde{\mathcal{T}})$ in the fiber context $\mathbf{Tbl}_{\mathcal{S}}(\mathcal{A})$ or a morphism $g^*(\mathcal{T}) \xleftarrow{\hat{k}} \tilde{\mathcal{T}}$ in

the fiber context $\mathbf{Tbl}_S(\tilde{\mathcal{A}})$. The $\langle I, s, \mathcal{A} \rangle$ -table morphism $\mathcal{T} \xleftarrow{k} \Sigma_g(\tilde{\mathcal{T}})$ is the composition (RHS of Fig. 11) of the fiber morphism $\Sigma_g(g^*(\mathcal{T}) \xleftarrow{\tilde{k}} \tilde{\mathcal{T}})$ with the \mathcal{T}^{th} counit component $\mathcal{T} \xleftarrow{e} \Sigma_g(g^*(\mathcal{T}))$ for fiber adjunction $\langle \Sigma_g \dashv g^* \rangle : \mathbf{Tbl}_S(\mathcal{A}) \rightleftarrows \mathbf{Tbl}_S(\tilde{\mathcal{A}})$.¹⁷

$$\begin{array}{ccc} \mathcal{T} \xleftarrow{k} \Sigma_g(\tilde{\mathcal{T}}) & \cong & g^*(\mathcal{T}) \xleftarrow{\tilde{k}} \tilde{\mathcal{T}} \\ \text{in } \mathbf{Tbl}_S(\mathcal{A}) & & \text{in } \mathbf{Tbl}_S(\tilde{\mathcal{A}}) \end{array} \quad (5)$$

This fiber adjunction (top part of Tbl. 5) is a component of the signed domain indexed adjunction of tables $\mathbf{Cls}(X)^{\text{op}} \xrightarrow{\mathbf{tbl}_S} \mathbf{Adj} : \mathcal{A} \mapsto \mathbf{Tbl}_S(\mathcal{A})$.

$$\begin{array}{ccc} \mathcal{A} \xleftarrow{\langle I_X, g \rangle} \tilde{\mathcal{A}} & & \\ \text{tup}_S(\mathcal{A}) \xleftarrow{\text{tup}_S(g)} \text{tup}_S(\tilde{\mathcal{A}}) & & \\ = \text{tup}_{\mathcal{A}}(I, s) \xleftarrow{(-) \cdot g} = \text{tup}_{\tilde{\mathcal{A}}}(I, s) & & \\ \\ \mathbf{Tbl}_S(\mathcal{A}) & \xleftarrow{\Sigma_g} & \mathbf{Tbl}_S(\tilde{\mathcal{A}}) \\ = (\mathbf{Set} \downarrow \text{tup}_{\mathcal{A}}(I, s)) & \xrightarrow{g^*} & = (\mathbf{Set} \downarrow \text{tup}_{\tilde{\mathcal{A}}}(I, s)) \\ \uparrow \text{inc}_{\mathcal{A}}(I, s) & \xleftarrow{\Pi_g} & \uparrow \text{inc}_{\tilde{\mathcal{A}}}(I, s) \\ \text{im}_{\mathcal{A}}(I, s) & & \text{im}_{\tilde{\mathcal{A}}}(I, s) \\ \\ \mathbf{Rel}_S(\mathcal{A}) & \xleftarrow{\exists_g} & \mathbf{Rel}_S(\tilde{\mathcal{A}}) \\ = \varnothing \text{tup}_{\mathcal{A}}(I, s) & \xrightarrow{g^{-1}} & = \varnothing \text{tup}_{\tilde{\mathcal{A}}}(I, s) \\ \uparrow \text{inc}_{\mathcal{A}}(I, s) & \xleftarrow{\forall_g} & \uparrow \text{inc}_{\tilde{\mathcal{A}}}(I, s) \end{array}$$

| |
|--|
| $\Sigma_g \dashv g^* \dashv \Pi_g, \exists_g \dashv g^{-1} \dashv \forall_g$ |
| $\text{im}_{\mathcal{A}}(I, s) \dashv \text{inc}_{\mathcal{A}}(I, s), \text{im}_{\tilde{\mathcal{A}}}(I, s) \dashv \text{inc}_{\tilde{\mathcal{A}}}(I, s)$ |
| $\text{inc}_{\mathcal{A}}(I, s) \circ g^* = g^{-1} \circ \text{inc}_{\tilde{\mathcal{A}}}(I, s)$ |
| $\text{inc}_{\tilde{\mathcal{A}}}(I, s) \circ \Pi_g = \forall_g \circ \text{inc}_{\mathcal{A}}(I, s)$ |
| $\Sigma_g \circ \text{im}_{\mathcal{A}}(I, s) \cong \text{im}_{\tilde{\mathcal{A}}}(I_1, s_1) \circ \exists_g$ |
| $g^* \circ \text{im}_{\tilde{\mathcal{A}}}(I, s) \cong \text{im}_{\mathcal{A}}(I, s) \circ g^{-1}$ |

small fibers – short distance

Table 5. Reflection: Signature

¹⁷ Here, the span $K' \xleftarrow{e} \widehat{K} \xrightarrow{\tilde{t}} \text{tup}_S(\tilde{\mathcal{A}})$ is the pullback in the context \mathbf{Set} of the opspan $K \xrightarrow{t} \text{tup}_S(\mathcal{A}) \xleftarrow{\text{tup}_S(g)} \text{tup}_S(\tilde{\mathcal{A}})$ and $\widehat{K} \xleftarrow{\tilde{k}} \tilde{K}$ is the mediating morphism for the span $K \xleftarrow{k} \tilde{K} \xrightarrow{\tilde{t}} \text{tup}_S(\tilde{\mathcal{A}})$.

Theorem 4. *The fibered context of \mathcal{S} -tables $\mathbf{Tbl}(\mathcal{S}) \xrightarrow{\text{data}_{\mathcal{S}}} \mathbf{Cls}(X)^{\text{op}}$ is the Grothendieck construction $\int_{\mathbf{Cls}(X)}$ of the type domain indexed adjunction $\mathbf{Cls}(X)^{\text{op}} \xrightarrow{\text{tbl}_{\mathcal{S}}} \mathbf{Adj}$.⁵*

3.3.2 Upper Aspect. Here, we show that the context of tables \mathbf{Tbl} is fibered over signatures via the projection passage $\mathbf{Tbl} \xrightarrow{\text{sign}} \mathbf{List}^{\text{op}}$. We use the Grothendieck construction $\int_{\mathbf{List}}$ on the indexed context $\mathbf{List}^{\text{op}} \xrightarrow{\text{tbl}} \mathbf{Cxt} : \mathcal{S} \mapsto \mathbf{Tbl}(\mathcal{S})$. We use the same definitions as in § 3.1. A \mathbf{Tbl} -object $\mathcal{T} = \langle \mathcal{S}, \mathcal{A}, K, t \rangle$, called an \mathcal{S} -table (database relation), consists of a signature $\mathcal{S} = \langle I, s, X \rangle \in \mathbf{List}$ and an \mathcal{S} -table $\langle \mathcal{A}, K, t \rangle \in \mathbf{Tbl}(\mathcal{S})$. A \mathbf{Tbl} -morphism $\mathcal{T}_2 = \langle I_2, s_2, \mathcal{A}_2, K_2, t_2 \rangle \xleftarrow{\langle h, f, g, k \rangle} \langle I_1, s_1, \mathcal{A}_1, K_1, t_1 \rangle = \mathcal{T}_1$, called a table morphism (see Fig. 8), consists of a signed domain morphism $\langle I_2, s_2, \mathcal{A}_2 \rangle \xrightarrow{\langle h, f, g \rangle} \langle I_1, s_1, \mathcal{A}_1 \rangle$ ¹⁸ and a key function $K_2 \xleftarrow{k} K_1$, which satisfy the condition (using Lem. 2 in §2.5.3): $k \cdot t_2 = t_1 \cdot \mathbf{tup}(h, f, g) = (t_1 \cdot \tau_{\langle h, f \rangle}(\mathcal{A}_1)) \cdot \mathbf{tup}_{\mathcal{S}_2}(g)$. This gives an alternate, but equivalent, definition in terms of fibers.

Lemma 3. *For any signed domain morphism $\langle I_2, s_2, \mathcal{A}_2 \rangle \xrightarrow{\langle h, f, g \rangle} \langle I_1, s_1, \mathcal{A}_1 \rangle$, the tuple resolution $\mathbf{tup}(h, f, g) = \tau_{\langle h, f \rangle}(\mathcal{A}_1) \cdot \mathbf{tup}_{\mathcal{S}_2}(g)$ (Lem. 2 in § 2.5.3) resolves the table fiber passage*

$$\mathbf{Tbl}(I_2, s_2, \mathcal{A}_2) \xleftarrow{\Sigma_{\langle h, f, g \rangle}} \mathbf{Tbl}(I_1, s_1, \mathcal{A}_1).$$

into the table fiber passage factorization in Fig. 12.

$$\begin{array}{ccc}
 \mathbf{Tbl}_{\mathcal{S}_2}(\mathcal{A}_2) & & \\
 = (\mathbf{Set} \downarrow \mathbf{tup}_{\mathcal{A}_2}(\mathcal{S}_2)) & & \\
 \uparrow \Sigma_{\mathbf{tup}_{\mathcal{S}_2}(g)} & \swarrow \Sigma_{\langle h, f, g \rangle} & \\
 \mathbf{Tbl}_{\mathcal{S}_2}(f^{-1}(\mathcal{A}_1)) & \xleftarrow{\Sigma_{\tau_{\langle h, f \rangle}(\mathcal{A}_1)}} & \mathbf{Tbl}_{\mathcal{S}_1}(\mathcal{A}_1) \\
 = (\mathbf{Set} \downarrow \mathbf{tup}_{f^{-1}(\mathcal{A}_1)}(\mathcal{S}_2)) & & = (\mathbf{Set} \downarrow \mathbf{tup}_{\mathcal{A}_1}(\mathcal{S}_1))
 \end{array}
 \quad
 \begin{array}{l}
 X_2 \xrightarrow{f} X_1 \\
 \text{sort function} \\
 \mathcal{A}_2 \xrightarrow{g} f^{-1}(\mathcal{A}_1) \\
 X_2\text{-type domain morphism}
 \end{array}$$

$$\mathcal{S}_2 \xrightarrow{\langle h, f \rangle} \mathcal{S}_1$$

signature morphism

Fig. 12. Table Fiber Passage Factorization

¹⁸ A signed domain morphism factors into a signature morphism $\mathcal{S}_2 = \langle I_2, s_2, X_2 \rangle \xrightarrow{\langle h, f \rangle} \langle I_1, s_1, X_1 \rangle = \mathcal{S}_1$ and a type domain morphism $\mathcal{A}_2 = \langle X_2, Y_2, \models_{\mathcal{A}_2} \rangle \xleftarrow{\langle f, g \rangle} \langle X_1, Y_1, \models_{\mathcal{A}_1} \rangle = \mathcal{A}_1$ with common sort function $X_2 \xrightarrow{f} X_1$.

For any signature $\mathcal{S} = \langle I, s, X \rangle$, the fibered context of \mathcal{S} -tables $\mathbf{Tbl}(\mathcal{S})$ separates into the partition $\mathbf{Tbl}(\mathcal{S}) = \coprod_{\mathcal{A} \in \mathbf{Cls}(X)} \mathbf{Tbl}_{\mathcal{A}}(I, s)$. For any signature morphism $\mathcal{S}_2 \xrightarrow{\langle h, f \rangle} \mathcal{S}_1$, we can sum the partitions of fibered passages as follows:

$$\underbrace{\coprod_{\mathcal{A}_2 \in \mathbf{Cls}(X_2)} \mathbf{Tbl}_{\mathcal{S}_2}(\mathcal{A}_2)}_{\mathbf{Tbl}(\mathcal{S}_2)} \xleftarrow{\mathit{tbl}_{\langle h, f \rangle}} \underbrace{\coprod_{\mathcal{A}_1 \in \mathbf{Cls}(X_1)} \mathbf{Tbl}_{\mathcal{S}_1}(\mathcal{A}_1)}_{\mathbf{Tbl}(\mathcal{S}_1)}$$

The factorization in Fig. 12, suggests the following definition of table fiber passage, where the fiber passage $\mathbf{Tbl}(\mathcal{S}_2) \xleftarrow{\mathit{tbl}_{\langle h, f \rangle}} \mathbf{Tbl}(\mathcal{S}_1)$ is define in terms of the component tuple functions $\mathit{tup}_{\mathcal{S}_2}(f^{-1}(\mathcal{A}_1)) \xleftarrow[h \cdot (-)]{\tau_{\langle h, f \rangle}(\mathcal{A}_1)} \mathit{tup}_{\mathcal{S}_1}(\mathcal{A}_1)$ and the inverse image function $\mathbf{Cls}(X_2) \xleftarrow{f^{-1}} \mathbf{Cls}(X_1)$.

Definition 2. (table fiber passage)

$\mathit{tbl}_{\langle h, f \rangle}$: An \mathcal{S}_1 -table is mapped to an \mathcal{S}_2 -table as follows:

$$\langle f^{-1}(\mathcal{A}_1), \Sigma_{\tau_{\langle h, f \rangle}(\mathcal{A}_1)}(K_1, t_1) \rangle \xleftarrow{\mathit{tbl}_{\langle h, f \rangle}} \langle \mathcal{A}_1, (K_1, t_1) \rangle$$

where $\langle I_2, s_2, f^{-1}(\mathcal{A}_1) \rangle$ -tuple $\Sigma_{\tau_{\langle h, f \rangle}(\mathcal{A}_1)}(K_1, t_1) = \langle K_1, t_1 \cdot \tau_{\langle h, f \rangle}(\mathcal{A}_1) \rangle \in \mathit{tup}_{\mathcal{S}_2}(f^{-1}(\mathcal{A}_1))$ is the existential (direct) image of $\langle I_1, s_1, \mathcal{A}_1 \rangle$ -tuple $\langle K_1, t_1 \rangle \in \mathit{tup}_{\mathcal{S}_1}(\mathcal{A}_1)$

along $\tau_{\langle h, f \rangle}(\mathcal{A}_1)$. A morphism of \mathcal{S}_1 -tables $\langle \mathcal{A}_1, K_1, t_1 \rangle \xleftarrow{\langle g, k \rangle} \langle \tilde{\mathcal{A}}_1, \tilde{K}_1, \tilde{t}_1 \rangle$ is mapped to the morphism of \mathcal{S}_2 -tables

$$\langle f^{-1}(\mathcal{A}_1), \Sigma_{\tau_{\langle h, f \rangle}(\mathcal{A}_1)}(K_1, t_1) \rangle \xleftarrow{\langle f^{-1}(g), k \rangle} \langle f^{-1}(\tilde{\mathcal{A}}_1), \Sigma_{\tau_{\langle h, f \rangle}(\tilde{\mathcal{A}}_1)}(\tilde{K}_1, \tilde{t}_1) \rangle.$$

$$\begin{array}{c} \begin{array}{c} \xleftarrow{k} \\ K_2 \xleftarrow{k} K_1 = K_1 = K_1 \\ \downarrow t_2 \quad \downarrow \tilde{t} \cdot \mathit{tup}_{\mathcal{S}_2}(g) \quad \downarrow \tilde{t} = t_1 \cdot \tau_{\langle h, f \rangle}(\mathcal{A}_1) \quad \downarrow t_1 \\ \underbrace{\mathit{tup}_{\mathcal{S}_2}(\mathcal{A}_2)}_{\mathcal{T}_2} \xleftarrow[(-) \cdot g]{\mathit{tup}_{\mathcal{S}_2}(g)} \underbrace{\mathit{tup}_{\mathcal{S}_2}(f^{-1}(\mathcal{A}_1))}_{\mathit{tbl}_{\langle h, f \rangle}(\mathcal{T}_1)} \xleftarrow[h \cdot (-)]{\tau_{\langle h, f \rangle}(\mathcal{A}_1)} \underbrace{\mathit{tup}_{\mathcal{S}_1}(\mathcal{A}_1)}_{\mathcal{T}_1} \end{array} \\ \underbrace{\hspace{10em}}_{\mathbf{Tbl}(\mathcal{S}_2)} \qquad \underbrace{\hspace{10em}}_{\mathbf{Tbl}(\mathcal{S}_1)} \end{array}$$

Fig. 13. Table Morphism: Signature

A table morphism (Fig. 13) consists of signature morphism $\mathcal{S}_2 \xrightarrow{\langle h, f \rangle} \mathcal{S}_1$ and a morphism $\mathcal{T}_2 \xleftarrow{\langle g, k \rangle} \mathit{tbl}_{\langle h, f \rangle}(\mathcal{T}_1)$ in the fiber context $\mathbf{Tbl}(\mathcal{S}_2)$, where the fiber

passage $\mathbf{Tbl}(\mathcal{S}_2) \xleftarrow{\mathit{tbl}_{\langle h, f \rangle}} \mathbf{Tbl}(\mathcal{S}_1)$ along the signature morphism $\mathcal{S}_2 \xrightarrow{\langle h, f \rangle} \mathcal{S}_1$ is defined in Def. 2 of §3.3.2. This fiber passage is a component of the signature indexed context of tables $\mathbf{List}^{\text{op}} \xrightarrow{\mathit{tbl}} \mathbf{Cxt}$.

Theorem 5. *The fibered context of tables (an opfibration) $\mathbf{Tbl} \xrightarrow{\mathit{sign}} \mathbf{List}^{\text{op}}$ is the Grothendieck construction $\int_{\mathbf{List}}$ — visualized in the upper-left quadrant of Fig. 18 — of the signature indexed context of tables $\mathbf{List}^{\text{op}} \xrightarrow{\mathit{tbl}} \mathbf{Cxt}$. ⁵*

3.4 Type Domain Indexing

In this section we show that the context of tables is a fibered context over type domains. We first define the table fiber for fixed type domain. We next move between table fibers along type domain morphisms. Finally, we invoke the Grothendieck construction indexed by type domains.

3.4.1 Lower Aspect. Let $\mathcal{A} = \langle X, Y, \models_{\mathcal{A}} \rangle$ be a fixed type domain. For database tables, the type domain \mathcal{A} consists of a fixed sort set X and a fixed X -indexed collection of data types $\{\mathcal{A}_x = \mathit{ext}_{\mathcal{A}}(x) \mid x \in X\}$. Here, we show that the context of \mathcal{A} -tables $\mathbf{Tbl}(\mathcal{A})$ is fibered over X -sorted signatures $\mathbf{Tbl}(\mathcal{A}) \xrightarrow{\mathit{sign}_{\mathcal{A}}} \mathbf{List}(X)^{\text{op}}$. We use the Grothendieck construction $\int_{\mathbf{List}(X)}$ on the indexed adjunction $\mathbf{List}(X)^{\text{op}} \xrightarrow{\mathit{tbl}_{\mathcal{A}}} \mathbf{Adj} : \langle I, s \rangle \mapsto \mathbf{Tbl}_{\mathcal{A}}(I, s)$.

Fibered Context (medium-size). The fibered context of \mathcal{A} -tables ¹⁹ is the comma mathematical context

$$\mathbf{Tbl}(\mathcal{A}) = (\mathbf{Set} \downarrow \mathit{tup}_{\mathcal{A}})$$

associated with the type domain tuple passage $\mathbf{List}(X)^{\text{op}} \xrightarrow{\mathit{tup}_{\mathcal{A}}} \mathbf{Set}$ defined in §2.5.2. It has key and signature projection passages $\mathbf{Set} \xleftarrow{\mathit{key}_{\mathcal{A}}} \mathbf{Tbl}(\mathcal{A}) \xrightarrow{\mathit{sign}_{\mathcal{A}}} \mathbf{List}(X)^{\text{op}}$ and defining bridge $\mathit{key}_{\mathcal{A}} \xrightarrow{\tau_{\mathcal{A}}} \mathit{sign}_{\mathcal{A}} \circ \mathit{tup}_{\mathcal{A}}$. A $\mathbf{Tbl}(\mathcal{A})$ -object $\mathcal{T} = \langle I, s, K, t \rangle$, called an \mathcal{A} -table, consists of an indexing X -sorted signature $\mathit{sign}_{\mathcal{A}}(\mathcal{T}) = \langle I, s \rangle$, a key set $\mathit{key}_{\mathcal{A}}(\mathcal{T}) = K$ and a tuple function $K \xrightarrow[\mathit{t}]{\tau_{\mathcal{A}}(\mathcal{T})}$ $\mathit{tup}_{\mathcal{A}}(I, s)$. A $\mathbf{Tbl}(\mathcal{A})$ -morphism $\mathcal{T}' = \langle I', s', K', t' \rangle \xleftarrow{\langle h, k \rangle} \langle I, s, K, t \rangle = \mathcal{T}$ consists of an indexing X -sorted signature morphism $\langle I', s' \rangle \xrightarrow[h]{\mathit{sign}_{\mathcal{A}}(h, k)} \langle I, s \rangle$ and a key function $K' \xleftarrow{k} K$ satisfying the naturality condition $k \cdot t' = t \cdot \mathit{tup}_{\mathcal{A}}(h)$. The naturality condition gives two alternate and adjoint definitions. In terms of

¹⁹ The context of \mathcal{A} -tables $\mathbf{Tbl}(\mathcal{A})$ corresponds to the context of tables \mathbf{Tables}^{π} in (Spivak [22]) for a (fixed) datatype specification $U \xrightarrow{\pi} \mathbf{DT}$ with universe U and set of datatypes \mathbf{DT} , since a data-type specification is a special case of a type domain. However, in [22] there is no connection between contexts of tables with different data-type specifications, analogous to the fiber adjunction (Prop. 2 of §3.4.2)

$$\mathbf{Tbl}(\mathcal{A}_2) \xleftarrow{\langle \mathit{tbl}_{\langle f, g \rangle}^{-1} \mathit{tbl}_{\langle f, g \rangle} \rangle} \mathbf{Tbl}(\mathcal{A}_1) \text{ for type domain morphism } \mathcal{A}_2 \xleftarrow{\langle f, g \rangle} \mathcal{A}_1.$$

$$\begin{array}{ccc}
\begin{array}{c}
\overbrace{K' \xleftarrow{k} K}^k = K \\
\downarrow t' \quad \downarrow t \cdot \text{tup}_{\mathcal{A}}(h) \quad \downarrow t \\
\underbrace{\text{tup}_{\mathcal{A}}(I', s')}_{\mathcal{T}'} \xleftarrow{\text{tup}_{\mathcal{A}}(h)} \underbrace{\text{tup}_{\mathcal{A}}(I, s)}_{\mathcal{T}} \\
\underbrace{\hspace{10em}}_{\mathbf{Tbl}_{\mathcal{A}}(I', s')}
\end{array}
& \cong &
\begin{array}{c}
\overbrace{K' \xleftarrow{e} \widehat{K} \xleftarrow{k'} K}^k \\
\downarrow t' \quad \downarrow \hat{t} \quad \downarrow t \\
\underbrace{\text{tup}_{\mathcal{A}}(I', s')}_{\mathcal{T}'} \xleftarrow{\text{tup}_{\mathcal{A}}(h)} \underbrace{\text{tup}_{\mathcal{A}}(I, s)}_{\mathcal{T}} \\
\underbrace{\hspace{10em}}_{\mathbf{Tbl}_{\mathcal{A}}(I, s)}
\end{array}
\end{array}$$

Fig. 14. \mathcal{A} -Table Morphism

fibers, an \mathcal{A} -table morphism (see Fig. 14) consists of a X -signature morphism $\langle I', s' \rangle \xrightarrow{h} \langle I, s \rangle$ and either a morphism $\mathcal{T}' \xleftarrow{k} \Sigma_h(\mathcal{T})$ in the fiber context $\mathbf{Tbl}_{\mathcal{A}}(I', s')$ or a morphism $h^*(\mathcal{T}') \xleftarrow{k'} \mathcal{T}$ in the fiber context $\mathbf{Tbl}_{\mathcal{A}}(I, s)$. The $\langle I', s', \mathcal{A} \rangle$ -table morphism $\mathcal{T}' \xleftarrow{k} \Sigma_h(\mathcal{T})$ is the composition (RHS of Fig. 14) of the fiber morphism $\Sigma_h(h^*(\mathcal{T}') \xleftarrow{k'} \mathcal{T})$ with the \mathcal{T}' th counit component $\mathcal{T}' \xleftarrow{e} \Sigma_h(h^*(\mathcal{T}'))$ for the fiber adjunction $\mathbf{Tbl}_{\mathcal{A}}(I', s') \xleftarrow{\langle \Sigma_h^{-1} h^* \rangle} \mathbf{Tbl}_{\mathcal{A}}(I, s)$.

$$\begin{array}{ccc}
\mathcal{T}' \xleftarrow{k} \Sigma_h(\mathcal{T}) & \cong & h^*(\mathcal{T}') \xleftarrow{k'} \mathcal{T} \\
\text{in } \mathbf{Tbl}_{\mathcal{A}}(I', s') & & \text{in } \mathbf{Tbl}_{\mathcal{A}}(I, s)
\end{array} \quad (6)$$

This fiber adjunction (top part of Tbl. 6) is a component of the X -signature indexed adjunction of tables $\mathbf{List}(X)^{\text{op}} \xrightarrow{\text{tbl}_{\mathcal{A}}} \mathbf{Adj} : \langle I, s \rangle \mapsto \mathbf{Tbl}_{\mathcal{A}}(I, s)$.²⁰

Theorem 6. *The fibered context of \mathcal{A} -tables $\mathbf{Tbl}(\mathcal{A}) \xrightarrow{\text{sign}_{\mathcal{A}}} \mathbf{List}(X)^{\text{op}}$ is the Grothendieck construction $\int_{\mathbf{List}(X)} -$ visualized in the lower-right quadrant of Fig. 18 — of the X -signature indexed adjunction $\mathbf{List}(X)^{\text{op}} \xrightarrow{\text{tbl}_{\mathcal{A}}} \mathbf{Adj}$.⁵*

3.4.2 Upper Aspect. Here, we show that the context of tables \mathbf{Tbl} is fibered over type domains via the projection passage $\mathbf{Tbl} \xrightarrow{\text{data}} \mathbf{Cls}^{\text{op}}$. We use the Grothendieck construction $\int_{\mathbf{Cls}}$ on the indexed adjunction $\mathbf{Cls}^{\text{op}} \xrightarrow{\text{tbl}} \mathbf{Adj} : \mathcal{A} \mapsto \mathbf{Tbl}(\mathcal{A})$. We use the same definitions as in § 3.1. A \mathbf{Tbl} -object $\mathcal{T} = \langle I, s, \mathcal{A}, K, t \rangle$, called a table (database relation), consists of a type domain $\mathcal{A} = \langle X, Y, \models_{\mathcal{A}} \rangle$ and an \mathcal{A} -table $\langle I, s, K, t \rangle \in \mathbf{Tbl}(\mathcal{A})$. A \mathbf{Tbl} -morphism $\mathcal{T}_2 = \langle I_2, s_2, \mathcal{A}_2, K_2, t_2 \rangle \xleftarrow{\langle h, f, g, k \rangle} \langle I_1, s_1, \mathcal{A}_1, K_1, t_1 \rangle = \mathcal{T}_1$, called a table morphism (see

²⁰ Here, the span $K' \xleftarrow{e} \widehat{K} \xrightarrow{\hat{t}} \text{tup}_{\mathcal{A}}(I, s)$ is the pullback in the context \mathbf{Set} of the opspan $K' \xrightarrow{t'} \text{tup}_{\mathcal{A}}(I', s') \xleftarrow{\text{tup}_{\mathcal{A}}(h)} \text{tup}_{\mathcal{A}}(I, s)$ and $\widehat{K} \xleftarrow{k'} K$ is the mediating morphism for the span $K' \xleftarrow{k} K \xrightarrow{t} \text{tup}_{\mathcal{A}}(I, s)$.

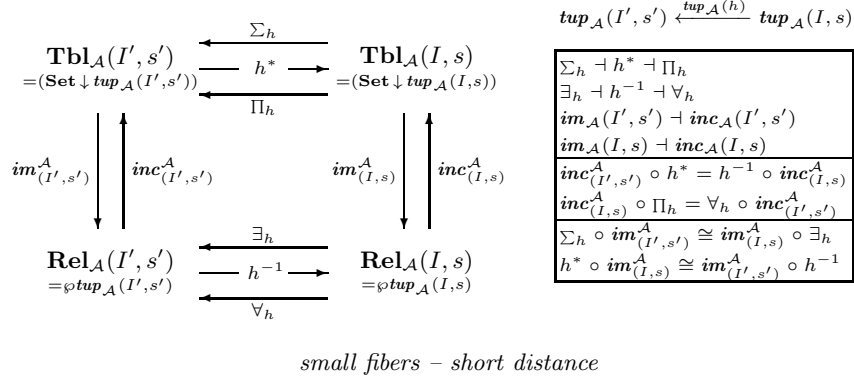

Table 6. Reflection: Type Domain

Fig. 8), consists of a signed domain morphism $\langle I_2, s_2, \mathcal{A}_2 \rangle \xrightarrow{\langle h, f, g \rangle} \langle I_1, s_1, \mathcal{A}_1 \rangle$ ²¹ and a key function $K_2 \xleftarrow{k} K_1$, which satisfy the condition (using Lem. 2 in §2.5.3): $k \cdot t_2 = t_1 \cdot \mathbf{tup}(h, f, g) = (t_1 \cdot \hat{\tau}_{\langle f, g \rangle}(I_1, s_1)) \cdot \mathbf{tup}_{\mathcal{A}_2}(\hat{h}) = t_1 \cdot \mathbf{tup}_{\mathcal{A}_1}(h) \cdot \hat{\tau}_{\langle f, g \rangle}(I_2, s_2)$. This gives two alternate, but equivalent, definitions in terms of fibers.

Lemma 4. For any signed domain morphism $\langle I_2, s_2, \mathcal{A}_2 \rangle \xrightarrow{\langle h, f, g \rangle} \langle I_1, s_1, \mathcal{A}_1 \rangle$, the tuple resolution $\mathbf{tup}(h, f, g) = \hat{\tau}_{\langle f, g \rangle}(I_1, s_1) \cdot \mathbf{tup}_{\mathcal{A}_2}(\hat{h}) = \mathbf{tup}_{\mathcal{A}_1}(h) \cdot \hat{\tau}_{\langle f, g \rangle}(I_2, s_2)$ (Lem. 2 in § 2.5.3) resolves the table fiber adjunction

$$\mathbf{Tbl}(I_2, s_2, \mathcal{A}_2) \xrightleftharpoons[\langle h, f, g \rangle^*]{\Sigma_{\langle h, f, g \rangle}} \mathbf{Tbl}(I_1, s_1, \mathcal{A}_1).$$

into the table fiber adjunction factorization in Fig. 15.

For any type domain \mathcal{A} , the fibered context of \mathcal{A} -tables $\mathbf{Tbl}(\mathcal{A})$ separates into the partition $\mathbf{Tbl}(\mathcal{A}) = \coprod_{\langle I, s \rangle \in \mathbf{List}(X)} \mathbf{Tbl}_{\mathcal{A}}(I, s)$. For any type domain morphism

$\mathcal{A}_2 \xrightarrow{\langle f, g \rangle} \mathcal{A}_1$, we can sum the partitions of fibered passages as follows:

$$\begin{array}{ccc}
 \underbrace{\mathbf{Tbl}(\mathcal{A}_2)}_{\prod_{\langle I_2, s_2 \rangle \in \mathbf{List}(X_2)} \mathbf{Tbl}_{\mathcal{A}_2}(I_2, s_2)} & \xrightarrow[\prod_{\langle I_2, s_2 \rangle \in \mathbf{List}(X_2)} \hat{\tau}_{\langle f, g \rangle}(I_2, s_2)^*]{\mathit{tbl}_{\langle f, g \rangle}} & \underbrace{\mathbf{Tbl}(\mathcal{A}_1)}_{\prod_{\langle I_1, s_1 \rangle \in \mathbf{List}(X_1)} \mathbf{Tbl}_{\mathcal{A}_1}(I_1, s_1)} \\
 & \xleftarrow[\prod_{\langle I_1, s_1 \rangle \in \mathbf{List}(X_1)} \Sigma_{\hat{\tau}_{\langle f, g \rangle}(I_1, s_1)}]{\mathit{tbl}_{\langle f, g \rangle}} &
 \end{array}$$

²¹ A signed domain morphism factors into a signature morphism $\mathcal{S}_2 = \langle I_2, s_2, X_2 \rangle \xrightarrow{\langle h, f \rangle} \langle I_1, s_1, X_1 \rangle = \mathcal{S}_1$ and a type domain morphism $\mathcal{A}_2 = \langle X_2, Y_2, \models_{\mathcal{A}_2} \rangle \xleftarrow{\langle f, g \rangle} \langle X_1, Y_1, \models_{\mathcal{A}_1} \rangle = \mathcal{A}_1$ with common sort function $X_2 \xrightarrow{f} X_1$.

$$\begin{array}{ccc}
\begin{array}{c}
\mathbf{Tbl}_{\mathcal{A}_2}(I_2, s_2) \\
= (\mathbf{Set} \downarrow \mathit{tup}_{\mathcal{A}_2}(I_2, s_2))
\end{array}
& \xrightarrow{\hat{\tau}_{\langle f, g \rangle}(I_2, s_2)^*} &
\begin{array}{c}
\mathbf{Tbl}_{\mathcal{A}_1}(\Sigma_f(I_2, s_2)) \\
= (\mathbf{Set} \downarrow \mathit{tup}_{\mathcal{A}_1}(\Sigma_f(I_2, s_2)))
\end{array} \\
\uparrow \Sigma_{\mathit{tup}_{\mathcal{A}_2}(\hat{h})} & \swarrow \langle h, f, g \rangle^* & \downarrow \mathit{tup}_{\mathcal{A}_1}(h)^* \\
\begin{array}{c}
\mathbf{Tbl}_{\mathcal{A}_2}(f^*(I_1, s_1)) \\
= (\mathbf{Set} \downarrow \mathit{tup}_{\mathcal{A}_2}(f^*(I_1, s_1)))
\end{array}
& \xleftarrow{\Sigma_{\hat{\tau}_{\langle f, g \rangle}(I_1, s_1)}} &
\begin{array}{c}
\mathbf{Tbl}_{\mathcal{A}_1}(I_1, s_1) \\
= (\mathbf{Set} \downarrow \mathit{tup}_{\mathcal{A}_1}(I_1, s_1))
\end{array} \\
& \searrow \langle f, g \rangle & \\
& \mathcal{A}_2 \xrightarrow{\langle f, g \rangle} \mathcal{A}_1 & \\
& \text{type domain morphism} &
\end{array}
\quad
\begin{array}{l}
X_2 \xrightarrow{f} X_1 \\
\text{sort function} \\
\Sigma_f(I_2, s_2) \xrightarrow{h} \langle I_1, s_1 \rangle \\
X_1\text{-signature morphism} \\
\langle I_2, s_2 \rangle \xrightarrow{\hat{h}} f^*(I_1, s_1) \\
X_2\text{-signature morphism}
\end{array}$$

Fig. 15. Table Fiber Adjunction Factorization

The factorization in Fig. 15, suggests the following definitions of table fiber passages, where the fiber passage $\mathbf{Tbl}(\mathcal{A}_2) \xleftarrow{\mathit{tbl}_{\langle f, g \rangle}} \mathbf{Tbl}(\mathcal{A}_1)$ is define in terms of the tuple function $\mathit{tup}_{\mathcal{A}_2}(f^*(I_1, s_1)) \xleftarrow[\mathit{f} \cdot (-) \cdot g]{\hat{\tau}_{\langle f, g \rangle}(I_1, s_1)} \mathit{tup}_{\mathcal{A}_1}(I_1, s_1)$ and the substitution (inverse image, pullback) function $\mathbf{List}(X_2) \xleftarrow{f^*} \mathbf{List}(X_1)$, and the adjoint fiber passage $\mathbf{Tbl}(\mathcal{A}_2) \xrightarrow{\mathit{tbl}_{\langle f, g \rangle}} \mathbf{Tbl}(\mathcal{A}_1)$ is define in terms the adjoints, the tuple function $\mathit{tup}_{\mathcal{A}_2}(I_2, s_2) \xleftarrow[\mathit{(-) \cdot g}]{\hat{\tau}_{\langle f, g \rangle}(I_2, s_2)} \mathit{tup}_{\mathcal{A}_1}(\Sigma_f(I_2, s_2))$ and the existential quantifier (direct image) function $\mathbf{List}(X_2) \xrightarrow{\Sigma_f} \mathbf{List}(X_1)$.

Definition 3. (*adjoint table fiber passages*)

$\mathit{tbl}_{\langle f, g \rangle}$: An \mathcal{A}_1 -table is mapped to an \mathcal{A}_2 -table as follows:

$$\langle f^*(I_1, s_1), \Sigma_{\hat{\tau}_{\langle f, g \rangle}(I_1, s_1)}(K_1, t_1) \rangle \xrightarrow{\mathit{tbl}_{\langle f, g \rangle}} \langle I_1, s_1, K_1, t_1 \rangle,$$

where $\langle f^*(I_1, s_1), \mathcal{A}_2 \rangle$ -tuple $\Sigma_{\hat{\tau}_{\langle f, g \rangle}(I_1, s_1)}(K_1, t_1) = \langle K_1, t_1 \cdot \hat{\tau}_{\langle f, g \rangle}(I_1, s_1) \rangle \in \mathit{tup}_{\mathcal{A}_2}(f^*(I_1, s_1))$ is the existential (direct) image of $\langle I_1, s_1, \mathcal{A}_1 \rangle$ -tuple $\langle K_1, t_1 \rangle \in \mathit{tup}_{\mathcal{A}_1}(I_1, s_1)$ along $\hat{\tau}_{\langle f, g \rangle}(I_1, s_1)$. A morphism of \mathcal{A}_1 -tables $\langle h_1, k_1 \rangle : \langle I_1, s_1, K_1, t_1 \rangle \rightarrow \langle I'_1, s'_1, K'_1, t'_1 \rangle$ is mapped to the morphism of \mathcal{A}_2 -tables $\langle f^*(h_1), k_1 \rangle : \langle f^*(I_1, s_1), K_1, t_1 \cdot \hat{\tau}_{\langle f, g \rangle}(I_1, s_1) \rangle \rightarrow \langle f^*(I'_1, s'_1), K'_1, t'_1 \cdot \hat{\tau}_{\langle f, g \rangle}(I'_1, s'_1) \rangle$.

$\mathit{tbl}_{\langle f, g \rangle}$: An \mathcal{A}_2 -table is mapped to an \mathcal{A}_1 -table as follows:

$$\langle I_2, s_2, K_2, t_2 \rangle \xrightarrow{\mathit{tbl}_{\langle f, g \rangle}} \langle \Sigma_f(I_2, s_2), (\hat{\tau}_{\langle f, g \rangle}(I_2, s_2))^*(K_2, t_2) \rangle,$$

where $\langle \Sigma_f(I_2, s_2), \mathcal{A}_1 \rangle$ -tuple $(\hat{\tau}_{\langle f, g \rangle}(I_2, s_2))^*(K_2, t_2) = \langle \hat{K}_1, \hat{t}_1 \rangle$ is the substitution (inverse image) of $\langle I_2, s_2, \mathcal{A}_2 \rangle$ -tuple $\langle K_2, t_2 \rangle$ along $\hat{\tau}_{\langle f, g \rangle}(I_2, s_2)$ (Fig. 16). A morphism of \mathcal{A}_2 -tables $\langle h_2, k_2 \rangle : \langle I_2, s_2, K_2, t_2 \rangle \rightarrow \langle I'_2, s'_2, K'_2, t'_2 \rangle$ is mapped

to the morphism of \mathcal{A}_1 -tables $\langle \Sigma_f(h_2), k_1 \rangle : \langle \Sigma_f(I_2, s_2), \widehat{K}_1, \hat{t}_1 \rangle \rightarrow \langle \Sigma_f(I'_2, s'_2), \widehat{K}'_1, \hat{t}'_1 \rangle$,
 where $k_1 : \widehat{K}_1 \rightarrow \widehat{K}'_1$ is the unique mediating function for the span $K'_2 \xleftarrow{\hat{k} \cdot k_2}$
 $K_1 \xrightarrow{\hat{t}_1 \cdot \mathbf{tup}_{\mathcal{A}_1}(\Sigma_f(h_2))} \mathbf{tup}_{\mathcal{A}_1}(\Sigma_f(I'_2, s'_2))$, since $(\hat{k} \cdot k_2) \cdot t'_2 = \hat{k} \cdot t_2 \cdot \mathbf{tup}_{\mathcal{A}_2}(h_2) =$
 $\hat{t}_1 \cdot \hat{\tau}_{\langle f, g \rangle}(I_2, s_2) \cdot \mathbf{tup}_{\mathcal{A}_2}(h_2) = (\hat{t}_1 \cdot \mathbf{tup}_{\mathcal{A}_1}(\Sigma_f(h_2))) \cdot \hat{\tau}_{\langle f, g \rangle}(I'_2, s'_2)$.

$$\begin{array}{ccc}
 \begin{array}{c}
 \xrightarrow{k} \\
 K_2 \xleftarrow{k} K_1 = K_1 \\
 \downarrow t_2 \quad \downarrow t_1 \cdot \hat{\tau}_{\langle f, g \rangle}(I_1, s_1) \quad \downarrow t_1 \\
 \underbrace{\mathbf{tup}_{\mathcal{A}_2}(S_2) \xleftarrow{(-) \cdot \hat{h}} \mathbf{tup}_{\mathcal{A}_2}(f^*(S_1))}_{\mathcal{T}_2} \xleftarrow{f \cdot (-) \cdot g} \underbrace{\mathbf{tup}_{\mathcal{A}_1}(S_1)}_{\mathcal{T}_1} \\
 \underbrace{\hspace{10em}}_{\mathbf{Tbl}(\mathcal{A}_2)} \quad \underbrace{\hspace{10em}}_{\mathbf{Tbl}(\mathcal{A}_1)}
 \end{array}
 & \cong &
 \begin{array}{c}
 \xrightarrow{k} \\
 K_2 \xleftarrow{\hat{k}} \widehat{K}_1 \xleftarrow{\bar{k}} K_1 \\
 \downarrow t_2 \quad \downarrow \text{pullback} \quad \downarrow \hat{t}_1 \quad \downarrow t_1 \\
 \underbrace{\mathbf{tup}_{\mathcal{A}_2}(S_2) \xleftarrow{(-) \cdot g} \mathbf{tup}_{\mathcal{A}_1}(\Sigma_f(S_2))}_{\mathcal{T}_2} \xleftarrow{h \cdot (-)} \underbrace{\mathbf{tup}_{\mathcal{A}_1}(S_1)}_{\mathcal{T}_1} \\
 \underbrace{\hspace{10em}}_{\mathbf{Tbl}(\mathcal{A}_2)} \quad \underbrace{\hspace{10em}}_{\mathbf{Tbl}(\mathcal{A}_1)}
 \end{array}
 \end{array}$$

$$k \cdot t_2 = t_1 \cdot \mathbf{tup}(h, f, g) = t_1 \cdot \hat{\tau}_{\langle f, g \rangle}(I_1, s_1) \cdot \mathbf{tup}_{\mathcal{A}_2}(\hat{h}) = t_1 \cdot \mathbf{tup}_{\mathcal{A}_1}(h) \cdot \hat{\tau}_{\langle f, g \rangle}(I_2, s_2)$$

Fig. 16. Table Morphism: Type Domain

levo: A table morphism (left side Fig. 16) consists of type domain morphism $\mathcal{A}_2 \xleftarrow{\langle f, g \rangle} \mathcal{A}_1$ and a morphism $\mathcal{T}_2 \xleftarrow{\langle \hat{h}, k \rangle} \mathbf{tbl}_{\langle f, g \rangle}(\mathcal{T}_1)$ in the fiber context $\mathbf{Tbl}(\mathcal{A}_2)$, where the fiber passage $\mathbf{Tbl}(\mathcal{A}_2) \xleftarrow{\mathbf{tbl}_{\langle f, g \rangle}} \mathbf{Tbl}(\mathcal{A}_1)$ along the type domain morphism $\mathcal{A}_2 \xleftarrow{\langle f, g \rangle} \mathcal{A}_1$ is defined in Def. 3. This fiber passage is a component of the type domain indexed context of tables $\mathbf{Cls}^{\text{op}} \xrightarrow{\mathbf{tbl}} \mathbf{Cxt}$.

dextro: A table morphism (right side Fig. 16) consists of type domain morphism $\mathcal{A}_2 \xleftarrow{\langle f, g \rangle} \mathcal{A}_1$ and a morphism $\mathbf{tbl}_{\langle f, g \rangle}(\mathcal{T}_2) \xleftarrow{\langle h, \bar{k} \rangle} \mathcal{T}_1$ in the fiber context $\mathbf{Tbl}(\mathcal{A}_1)$, where the fiber passage $\mathbf{Tbl}(\mathcal{A}_2) \xrightarrow{\mathbf{tbl}_{\langle f, g \rangle}} \mathbf{Tbl}(\mathcal{A}_1)$ along the type domain morphism $\mathcal{A}_2 \xleftarrow{\langle f, g \rangle} \mathcal{A}_1$ is defined in Def. 3. This fiber passage is a component of the type domain indexed context of tables $\mathbf{Cls} \xrightarrow{\mathbf{tbl}} \mathbf{Cxt}$.

Proposition 2. For any type domain morphism $\mathcal{A}_2 \xleftarrow{\langle f, g \rangle} \mathcal{A}_1$, there is a table fiber adjunction $\mathbf{Tbl}(\mathcal{A}_2) \xleftarrow{\langle \mathbf{tbl}_{\langle f, g \rangle}^{-1} \mathbf{tbl}_{\langle f, g \rangle} \rangle} \mathbf{Tbl}(\mathcal{A}_1)$. This fiber adjunction is a component of a type domain indexed adjunction of tables $\mathbf{Cls}^{\text{op}} \xrightarrow{\mathbf{tbl}} \mathbf{Adj}$.

Theorem 7. *The fibered context of tables $\mathbf{Tbl} \xrightarrow{\text{data}} \mathbf{Cls}^{\text{op}}$ is the Grothendieck construction $\int_{\mathbf{Cls}}$ — visualized in the upper-right quadrant of Fig. 18 — of the type domain indexed adjunction $\mathbf{Cls}^{\text{op}} \xrightarrow{\text{tbl}} \mathbf{Adj}$. ⁵*

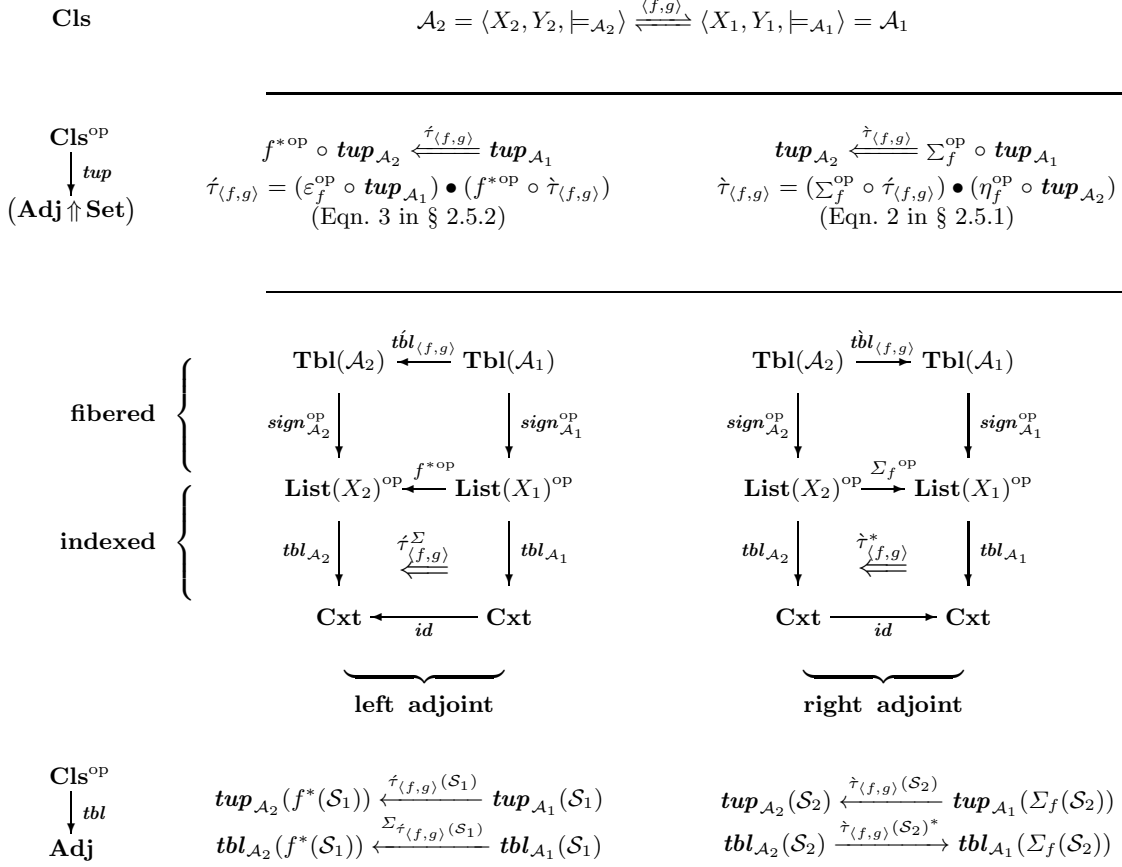


Fig. 17. Indexed Adjunction of Tables

3.5 Fibered Contexts of FOLE Tables

The Grothendieck constructions for FOLE tables are listed in Tbl. 7. Here we indicated whether the construction is a fibration, an opfibration or a bifibration. We also list the proposition or theorem proving the construction and its location. The Grothendieck constructions for FOLE tables are displayed in Fig. 18.

| | | fibred construct | | indexed construct |
|------------------|----------------|---|-------|---|
| \bowtie | §2.2 (Thm.1) | $\mathbf{List} \xrightarrow{sort} \mathbf{Set}$ | $= f$ | $\mathbf{Set} \xrightarrow{list} \mathbf{Adj}$ |
| \triangleleft | §2.3 (Thm.2) | $\mathbf{Cls} \xrightarrow{sort} \mathbf{Set}$ | $= f$ | $\mathbf{Set}^{\text{op}} \xrightarrow{cls} \mathbf{Cxt}$ |
| \bowtie | §3.2 (Thm.3) | $\mathbf{Tbl} \xrightarrow{dom} \mathbf{Dom}^{\text{op}}$ | $= f$ | $\mathbf{Dom}^{\text{op}} \xrightarrow{tbl} \mathbf{Adj}$ |
| \bowtie | §3.3.1 (Thm.4) | $\mathbf{Tbl}(S) \xrightarrow{data_S} \mathbf{Cls}(X)^{\text{op}}$ | $= f$ | $\mathbf{Cls}(X)^{\text{op}} \xrightarrow{tbl_S} \mathbf{Adj}$ |
| \triangleright | §3.3.2 (Thm.5) | $\mathbf{Tbl} \xrightarrow{sign} \mathbf{List}^{\text{op}}$ | $= f$ | $\mathbf{List}^{\text{op}} \xrightarrow{tbl} \mathbf{Cxt}$ |
| \bowtie | §3.4.1 (Thm.6) | $\mathbf{Tbl}(\mathcal{A}) \xrightarrow{sign_{\mathcal{A}}} \mathbf{List}(X)^{\text{op}}$ | $= f$ | $\mathbf{List}(X)^{\text{op}} \xrightarrow{tbl_{\mathcal{A}}} \mathbf{Adj}$ |
| \bowtie | §3.4.2 (Thm.7) | $\mathbf{Tbl} \xrightarrow{data} \mathbf{Cls}^{\text{op}}$ | $= f$ | $\mathbf{Cls}^{\text{op}} \xrightarrow{tbl} \mathbf{Adj}$ |
| | | $\bowtie = \text{bifibration}, \triangleleft = \text{fibration}, \triangleright = \text{opfibration}$ | | |

Table 7. Grothendieck Constructions

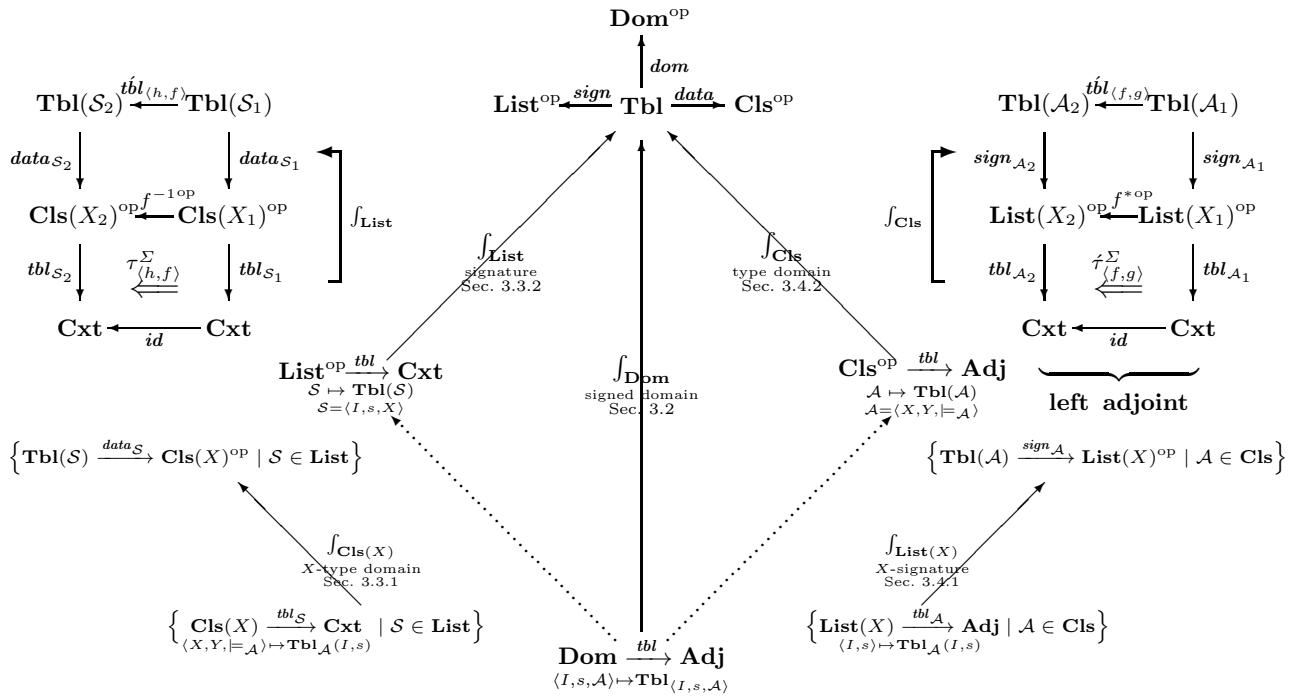


Fig. 18. The Fibred Hierarchy of FOLE Tables

4 Table Constructions

In this section we use properties of comma contexts and the Grothendieck construction to prove that the various (sub)contexts of FOLE tables are complete (joins exist) and cocomplete (unions exist).

4.1 Preliminaries

Proposition 3. *The mathematical context of classifications (type domains) \mathbf{Cls} is (co)complete, and its type (sort) and instance (data) projections $\mathbf{Set}^{\text{op}} \xleftarrow{\text{data}^{\text{op}}} \mathbf{Cls} \xrightarrow{\text{sort}} \mathbf{Set}$ are (co)continuous.*


Proof. Barwise and Seligman [1]. ■

Proposition 4. *For any sort set X , the context of X -sorted type domains $\mathbf{Cls}(X)$ is complete, and its instance (data) projection $\mathbf{Set} \xleftarrow{\text{data}_X} \mathbf{Cls}(X)^{\text{op}}$ is cocontinuous.*

Proof. To prove the proposition in general, use the three special cases: any collection of X -sorted type domains has a *product*, whose instance set is the coproduct (disjoint union) of the collection of instance (data) sets; there is a *terminal* X -sorted type domain, whose instance (data) set is the empty set \emptyset ; and any opspan of X -sorted type domain morphisms has a *pullback*, whose instance set is the pushout of the instance (data) projection span. ■

Proposition 5.

For any sort function $X_2 \xrightarrow{f} X_1$, the type domain fiber passage $\mathbf{Cls}(X_2) \xleftarrow{\text{cls}(f)} \mathbf{Cls}(X_1)$ is continuous (preserves limits): $\prod(\mathbf{A} \circ f^{-1}) = f^{-1}(\prod \mathbf{A})$ for any diagram $\mathbf{I} \xrightarrow{\mathbf{A}} \mathbf{Cls}(X_1)$.



Proof. To prove this, show that the inverse image of the limit is the limit of the inverse image of any diagram in $\mathbf{Cls}(X_1)$. We need only show this for products and pullbacks. We note that inverse image preserves data projection: $f^{-1} \circ \text{data}_{X_2}^{\text{op}} = \text{data}_{X_1}^{\text{op}}$. ■

Proposition 6. *The tuple passage $\mathbf{List}(X)^{\text{op}} \xrightarrow{\text{tup}_A} \mathbf{Set}$ is continuous.*

Proof. We need only show that the tuple passage maps the initial object in $\mathbf{List}(X)$ to the terminal object in \mathbf{Set} and maps the pushout of a span in $\mathbf{List}(X)$ to the pullback of the image opspan in \mathbf{Set} . ■

4.2 Propositions

| | |
|-------------|--|
| complete: | $\text{List}(X)$, List , Cls , Dom , $\text{Tbl}_{\mathcal{A}}(I, s)$, $\text{Tbl}(\mathcal{A})$, Tbl |
| cocomplete: | $\text{List}(X)$, List , Cls , Dom , $\text{Tbl}_{\mathcal{A}}(I, s)$, $\text{Tbl}(\mathcal{S})$, $\text{Tbl}(\mathcal{A})$, Tbl |

Table 8. Complete/Cocomplete Contexts

4.2.1 Using Comma Contexts. These propositions use Facts 1, 2 in § A.2.

Proposition 7. *The comma contexts of X -signatures, signatures, signed domains, $\langle \mathcal{A}, I, s \rangle$ -tables, and \mathcal{A} -tables are associated with the following passage opsans:*

| comma context | passage opspan |
|---|--|
| $\text{List}(X) = (\text{Set} \downarrow X)$ | $\text{Set} \xrightarrow{1} \text{Set} \xleftarrow{X} \mathbf{1}$ |
| $\text{List} = (\text{Set} \downarrow \text{Set})$ | $\text{Set} \xrightarrow{1} \text{Set} \xleftarrow{1} \text{Set}$ |
| $\text{Dom} = (\text{Set} \downarrow \text{sort})$ | $\text{Set} \xrightarrow{1} \text{Set} \xleftarrow{\text{sort}} \text{Cls}$ |
| $\text{Tbl}_{\mathcal{A}}(I, s) = (\text{Set} \downarrow \text{tup}_{\mathcal{A}}(I, s))$ | $\text{Set} \xrightarrow{1} \text{Set} \xleftarrow{\text{tup}_{\mathcal{A}}(I, s)} \mathbf{1}$ |
| $\text{Tbl}(\mathcal{A}) = (\text{Set} \downarrow \text{tup}_{\mathcal{A}})$ | $\text{Set} \xrightarrow{1} \text{Set} \xleftarrow{\text{tup}_{\mathcal{A}}} \text{List}(X)^{\text{op}}$. |

respectively. Hence, they are (co)complete and their projections

$$\begin{aligned}
 & \text{Set} \xleftarrow{\text{arity}_X} \text{List}(X) \rightarrow \mathbf{1} \\
 & \text{Set} \xleftarrow{\text{arity}} \text{List} \xrightarrow{\text{sort}} \text{Set} \\
 & \text{Set} \xleftarrow{\text{arity}} \text{Dom} \xrightarrow{\text{data}} \text{Cls} \\
 & \text{Set} \xleftarrow{\text{key}_{\mathcal{A}}(I, s)} \text{Tbl}_{\mathcal{A}}(I, s) \rightarrow \mathbf{1} \\
 & \text{Set} \xleftarrow{\text{key}_{\mathcal{A}}} \text{Tbl}(\mathcal{A}) \xrightarrow{\text{sign}_{\mathcal{A}}} \text{List}(X)^{\text{op}}
 \end{aligned}$$

are (co)continuous.

Proof. The contexts Set , Cls , $\mathbf{1}$ and $\text{List}(X)^{\text{op}}$ are (co)complete; the passage $\text{Set} \xrightarrow{1} \text{Set}$ is (co)cocontinuous; and the passages $\text{Set} \xrightarrow{1} \text{Set}$, $\text{Cls} \xrightarrow{\text{sort}} \text{Set}$, $\mathbf{1} \xrightarrow{X, \text{tup}_{\mathcal{A}}(I, s)} \text{Set}$, and $\text{List}(X)^{\text{op}} \xrightarrow{\text{tup}_{\mathcal{A}}} \text{Set}$ are continuous. ■

Proposition 8. *The comma contexts of tables and \mathcal{S} -tables are associated with the following passage opspans:*

$$\begin{array}{lcl} \text{comma context} & & \text{passage opspan} \\ \mathbf{Tbl} = (\mathbf{Set} \downarrow \mathit{tup}) & : & \mathbf{Set} \xrightarrow{1} \mathbf{Set} \xleftarrow{\mathit{tup}} \mathbf{Dom}^{\text{op}} \\ \mathbf{Tbl}(\mathcal{S}) = (\mathbf{Set} \downarrow \mathit{tup}_{\mathcal{S}}) & : & \mathbf{Set} \xrightarrow{1} \mathbf{Set} \xleftarrow{\mathit{tup}_{\mathcal{S}}} \mathbf{Cls}(X)^{\text{op}}. \end{array}$$

respectively. Hence, they are cocomplete and their projections

$$\begin{array}{lcl} \mathbf{Set} \xleftarrow{\mathit{key}} \mathbf{Tbl} & \xrightarrow{\mathit{dom}} & \mathbf{Dom}^{\text{op}} \\ \mathbf{Set} \xleftarrow{\mathit{key}_{\mathcal{S}}} \mathbf{Tbl}(\mathcal{S}) & \xrightarrow{\mathit{data}_{\mathcal{S}}} & \mathbf{Cls}(X)^{\text{op}} \end{array}$$

are cocontinuous.

Proof. The contexts \mathbf{Set} , \mathbf{Dom}^{op} and $\mathbf{Cls}(X)^{\text{op}}$ are cocomplete (Prop. 4); and the passage $\mathbf{Set} \xrightarrow{1} \mathbf{Set}$ is cococontinuous. ■

4.2.2 Using the Grothendieck Construction.

Proposition 9. *The fibered contexts (Tbl. 7) of signatures \mathbf{List} , tables \mathbf{Tbl} and \mathcal{A} -table $\mathbf{Tbl}(\mathcal{A})$ are (co)complete and their projections are (co)continuous.*

| | fibered construct | | indexed construct |
|----------------|--|-------|--|
| §2.2 (Thm.1) | $\mathbf{List} \xrightarrow{\mathit{sort}} \mathbf{Set}$ | $= f$ | $\mathbf{Set} \xrightarrow{\mathit{list}} \mathbf{Adj}$ |
| §3.2 (Thm.3) | $\mathbf{Tbl} \xrightarrow{\mathit{dom}} \mathbf{Dom}^{\text{op}}$ | $= f$ | $\mathbf{Dom}^{\text{op}} \xrightarrow{\mathit{tbl}} \mathbf{Adj}$ |
| §3.4.1 (Thm.6) | $\mathbf{Tbl}(\mathcal{A}) \xrightarrow{\mathit{sign}_{\mathcal{A}}} \mathbf{List}(X)^{\text{op}}$ | $= f$ | $\mathbf{List}(X)^{\text{op}} \xrightarrow{\mathit{tbl}_{\mathcal{A}}} \mathbf{Adj}$ |
| §3.4.2 (Thm.7) | $\mathbf{Tbl} \xrightarrow{\mathit{data}} \mathbf{Cls}^{\text{op}}$ | $= f$ | $\mathbf{Cls}^{\text{op}} \xrightarrow{\mathit{tbl}} \mathbf{Adj}$ |

Proof. This proposition uses Fact. 5 of §A.3. The indexing contexts \mathbf{Set} , \mathbf{Dom}^{op} , $\mathbf{List}(X)^{\text{op}}$, \mathbf{Cls}^{op} are (co)complete (Prop.7), and the fiber contexts $\mathbf{List}(X)$, $\mathbf{Tbl}(I, s, \mathcal{A})$ and $\mathbf{Tbl}(\mathcal{A})$ are (co)complete (Prop.7). ■

Proposition 10. *[signature-lower] The fibered context of \mathcal{S} -tables $\mathbf{Tbl}(\mathcal{S})$ is co-complete and the projection $\mathbf{Tbl}(\mathcal{S}) \xrightarrow{\mathit{data}_{\mathcal{S}}} \mathbf{Cls}(X)^{\text{op}}$ is cocontinuous.*

Proof. Uses Fact. 4 in §A.3 and the discussion in § 3.3.1. For the contravariant pseudo-passage $\mathbf{Cls}(X)^{\text{op}} \xrightarrow{\mathit{tbl}_{\mathcal{S}}} \mathbf{Cxt}$ that uses the existential quantification,

1. the indexing context $\mathbf{Cls}(X)^{\text{op}}$ is cocomplete,
2. the fiber context $\mathbf{Tbl}_{\mathcal{S}}(\mathcal{A})$ is cocomplete for each X -sorted type domain \mathcal{A} , and
3. the fiber passage $\mathbf{Tbl}_{\mathcal{S}}(\mathcal{A}) \xleftarrow[\Sigma_g]{\mathit{tbl}_{\mathcal{S}}(g)} \mathbf{Tbl}_{\mathcal{S}}(\tilde{\mathcal{A}})$ is cocontinuous (being left adjoint) for each X -sorted type domain morphism $\mathcal{A} \xleftarrow[\langle 1_X, g \rangle]{\tilde{\mathcal{A}}}$. ■

4.3 Constructive Proof

Proposition 11. *The context of \mathcal{A} -tables $\mathbf{Tbl}(\mathcal{A})$ is complete.*

Proof. We have already proved this using comma contexts and the Grothendieck construction. Now we give a constructive proof of this fact, which illustrates that “limits (natural joins) are resolvable into substitutions followed by meets.” Suppose that $\mathbf{T} : G \rightarrow \mathbf{Tbl}(\mathcal{A})$ is a diagram of \mathcal{A} -tables and \mathcal{A} -table morphisms

$$\mathbf{T} = \{ \mathbf{T}_n = \langle I_n, s_n, K_n, t_n \rangle \xrightarrow{\langle h_e, k_e \rangle} \langle I_m, s_m, K_m, t_m \rangle = \mathbf{T}_m \mid (n \xrightarrow{e} m) \in G \}.$$

$$\begin{array}{ccc} \langle I_n, s_n, K_n, t_n \rangle & \xrightarrow{\langle h_e, k_e \rangle} & \langle I_m, s_m, K_m, t_m \rangle \\ \Sigma_{h_e}(K_n, t_n) \xrightarrow{k_e} \langle K_m, t_m \rangle & \xrightarrow{\cong} & \langle K_n, t_n \rangle \xrightarrow{\hat{k}_e} h_e^*(K_m, t_m) \\ & & \Sigma_{h_e}(\hat{k}_e) \cdot \varepsilon_{T_m}^{h_e} = \hat{k}_e \cdot \varepsilon_{T_m}^{h_e} = k_e \end{array}$$

Let $\mathbf{S} = \mathbf{T}^{\text{op}} \circ \mathbf{sign}_{\mathcal{A}} : G^{\text{op}} \rightarrow \mathbf{List}(X)$ be the underlying diagram of signatures and signature morphisms

$$\mathbf{S} = \{ \mathbf{S}_n = \langle I_n, s_n \rangle \xleftarrow{h_e} \langle I_m, s_m \rangle = \mathbf{S}_m \mid (n \xrightarrow{e} m) \in G \}.$$

Assume that $\gamma : \mathbf{S} \Rightarrow \Delta\langle I, s \rangle$ is a colimiting cocone $\gamma = \{ \gamma_n : \langle I_n, s_n \rangle \rightarrow \langle I, s \rangle \mid n \in G \}$ with base diagram \mathbf{S} and colimit signature $\langle I, s \rangle$, so that $h_e \cdot \gamma_n = \gamma_m$ for all edges $n \xrightarrow{e} m$ in G . For each G -node n , use substitution to move fiber tables and fiber table morphisms from the peripheral fiber categories $\{ \mathbf{Tbl}_{\mathcal{A}}(I_n, s_n) \}$ to the central fiber context $\mathbf{Tbl}_{\mathcal{A}}(I, s)$:

| peripheral | central |
|---|--|
| $\langle K_n, t_n \rangle \mapsto$ | $\gamma_n^*(K_n, t_n) = \langle K_n^*, t_n^* \rangle$ |
| $\langle K_n, t_n \rangle \xrightarrow{\hat{k}_e} h_e^*(K_m, t_m) \mapsto$ | $\gamma_n^*(K_n, t_n) \xrightarrow{\gamma_n^*(\hat{k}_e)} \gamma_n^*(h_e^*(K_m, t_m)) = \gamma_m^*(K_m, t_m)$ |
| $\Sigma_{h_e}(K_n, t_n) \xrightarrow{k_e} \langle K_m, t_m \rangle \mapsto$ | $\gamma_m^*(\Sigma_{h_e}(K_n, t_n)) \xrightarrow{\gamma_m^*(k_e)} \gamma_m^*(K_m, t_m)$ |
| \mapsto | $\xrightarrow{\cong} \Sigma_{\gamma_m}(\gamma_m^*(\Sigma_{h_e}(K_n, t_n))) \xrightarrow{\gamma_m^*(\hat{k}_e)} \langle K_m, t_m \rangle$ |

Hence, there is diagram $\mathbf{T}^* : G \rightarrow \mathbf{Tbl}_{\mathcal{A}}(I, s)$ in the central fiber

$$\mathbf{T}^* = \{ \langle K_n^*, t_n^* \rangle = \gamma_n^*(K_n, t_n) \xrightarrow{\gamma_n^*(\hat{k}_e)} \gamma_n^*(h_e^*(K_m, t_m)) \cong \gamma_m^*(K_m, t_m) = \langle K_m^*, t_m^* \rangle \mid (n \xrightarrow{e} m) \in G \}.$$

Assume that $\pi : \mathbf{T}^* \Rightarrow \Delta\langle K, t \rangle$ is a limiting cone $\pi = \{ \langle K, t \rangle \xrightarrow{\pi_n} \langle K_n^*, t_n^* \rangle \mid n \in G \}$ with base diagram \mathbf{T}^* and join table $\langle K, t \rangle = \prod_{n \in G} \langle K_n^*, t_n^* \rangle$ with fiber projections, so that $\pi_n \cdot \gamma_n^*(\hat{k}_e) = \pi_m$ for all edges $n \xrightarrow{e} m$ in G . We claim that the composite \mathcal{A} -table morphism $\mathcal{T} = \langle I, s, K, t \rangle \xrightarrow{\langle \gamma_n, \pi_n \cdot \varepsilon_{T_n}^{\gamma_n} \rangle} \langle I_n, s_n, K_n, t_n \rangle$ is the n^{th} component of a limiting cone $\hat{\gamma} : \langle I, s, K, t \rangle \Rightarrow \mathbf{T}$ for \mathbf{T} in $\mathbf{Tbl}(\mathcal{A})$, where each component has signature morphism $\langle I_n, s_n \rangle \xrightarrow{\gamma_n} \langle I, s \rangle$ and key function $\pi_n \cdot \varepsilon_{T_n}^{\gamma_n} : K \rightarrow K_n$. It is natural with respect to the diagram \mathbf{T} . Now suppose that $\alpha : \langle I', s', K', t' \rangle \Rightarrow \mathbf{T}$ is another cone $\alpha = \{ \langle I', s', K', t' \rangle \xrightarrow{\langle h_n, k_n \rangle} \langle I_n, s_n, K_n, t_n \rangle \mid n \in G \}$ over \mathbf{T} , each component with signature morphism $\langle I_n, s_n \rangle \xrightarrow{h_n} \langle I', s' \rangle$ and key function $k_n : K' \rightarrow K_n$ satisfying the condition

$t' \cdot \mathbf{tup}_{\mathcal{A}}(h_n) = k_n \cdot t_n$. Since γ is a colimiting cocone, there is a unique signature morphism $\langle I, s \rangle \xrightarrow{h} \langle I', s' \rangle$ such that $\alpha = \gamma \bullet \Delta h$, or $\alpha_n = \gamma_n \cdot h$, and hence, $\mathbf{tup}_{\mathcal{A}}(\alpha_n) = \mathbf{tup}_{\mathcal{A}}(h) \cdot \mathbf{tup}_{\mathcal{A}}(\gamma_n)$, for each node $n \in G$. Since $k_n \cdot t_n = t' \cdot \mathbf{tup}_{\mathcal{A}}(h_n) = t' \cdot \mathbf{tup}_{\mathcal{A}}(h) \cdot \mathbf{tup}_{\mathcal{A}}(\gamma_n)$, there is a unique mediating key function $K' \xrightarrow{k_n^*} K_n^*$ satisfying $k_n^* \cdot t_n^* = t' \cdot \mathbf{tup}_{\mathcal{A}}(h)$ and $k_n^* \cdot \varepsilon_{\mathbf{T}_n}^{\gamma_n} = k_n$. Hence, we have the \mathcal{A} -table morphism $\mathcal{T}' = \langle I', s', K', t' \rangle \xrightarrow{\langle h, k_n^* \rangle} \langle I, s, K_n^*, t_n^* \rangle = \gamma_n^*(\mathbf{T}_n)$, which satisfies $\langle h, k_n^* \rangle \cdot \langle \gamma_n, \varepsilon_{\mathbf{T}_n}^{\gamma_n} \rangle = \langle h_n, k_n \rangle$ for each $n \in G$. The central fiber table morphism $\Sigma_h(K', t') \xrightarrow{k_n^*} \langle K_n^*, t_n^* \rangle = \gamma_n^*(\mathbf{T}_n)$, is the n^{th} component of a central fiber cone $\alpha^* : \langle K', t' \rangle \Rightarrow \Delta \mathbf{T}^*$. Hence, there is a unique mediating function $K' \xrightarrow{k} K$ such that $\Delta k \bullet \pi = \alpha^*$, or $k \bullet \pi_n = k_n^*$ for each $n \in G$. Hence, we have the commuting diagram of \mathcal{A} -table morphisms $\mathcal{T}' \xrightarrow{\langle h, k_n^* \rangle} \mathcal{T} \xrightarrow{\langle \gamma_n, \pi_n \cdot \varepsilon_{\mathbf{T}_n}^{\gamma_n} \rangle} \mathbf{T}_n = \mathcal{T}' \xrightarrow{\langle h_n, k_n \rangle} \mathbf{T}_n$. Uniqueness is straightforward. ■

4.4 Example

We illustrate the use of these semantic operations by using the observation made in Prop. 11 that limits are resolvable into substitutions followed by meets. Here we discuss the special case of pullback — the join of two \mathcal{A} -tables. Consider the $\mathbf{Tbl}(\mathcal{A})$ -opspan

$$\mathcal{T}_1 = \langle I_1, s_1, K_1, t_1 \rangle \xrightarrow{\langle h_1, k_1 \rangle} \overbrace{\langle I, s, K, t \rangle}^{\mathcal{T}} \xleftarrow{\langle h_2, k_2 \rangle} \langle I_2, s_2, K_2, t_2 \rangle = \mathcal{T}_2 \quad (7)$$

illustrated in the bottom part of Figure 19 with key opspan $K_1 \xrightarrow{k_1} K \xleftarrow{k_2} K_2$ and signature span $\langle I_1, s_1 \rangle \xleftarrow{h_1} \langle I, s \rangle \xrightarrow{h_2} \langle I_2, s_2 \rangle$. Since $\mathbf{List}(X)$ is cocomplete, we can form the colimiting cocone (opspan) of this signature span, with pushout signature $\langle I_1 +_I I_2, [s_1, s_2] \rangle$ and injection signature morphisms

$$\langle I_1, s_1 \rangle \xrightarrow{\iota_1} \langle I_1 +_I I_2, [s_1, s_2] \rangle \xleftarrow{\iota_2} \langle I_2, s_2 \rangle$$

that satisfies the commutative diagram $h_1 \cdot \iota_1 = h_2 \cdot \iota_2$. Apply the continuous tuple passage $\mathbf{tup}_{\mathcal{A}} : \mathbf{List}(X)^{\text{op}} \rightarrow \mathbf{Set}$ to this signature opspan to get the

limiting cone over the \mathbf{Set} -opspan $\mathbf{tup}_{\mathcal{A}}(I_1, s_1) \xrightarrow{\mathbf{tup}_{\mathcal{A}}(h_1)} \mathbf{tup}_{\mathcal{A}}(I, s) \xleftarrow{\mathbf{tup}_{\mathcal{A}}(h_2)} \mathbf{tup}_{\mathcal{A}}(I_2, s_2)$ with pullback set $\mathbf{tup}_{\mathcal{A}}(I_1, s_1) \times_{\mathbf{tup}_{\mathcal{A}}(I, s)} \mathbf{tup}_{\mathcal{A}}(I_2, s_2)$ and projection functions

$$\mathbf{tup}_{\mathcal{A}}(I_1, s_1) \xleftarrow{\mathbf{tup}_{\mathcal{A}}(\iota_1)} \mathbf{tup}_{\mathcal{A}}(I_1 +_I I_2, [s_1, s_2]) \xrightarrow{\mathbf{tup}_{\mathcal{A}}(\iota_2)} \mathbf{tup}_{\mathcal{A}}(I_2, s_2)$$

This is illustrated in the top part of Figure 19.

In general, the join (limit) of an arbitrary diagram in $\mathbf{Tbl}(\mathcal{A})$ is obtained by (1) inverse image (substitution) of the component tables along the colimit signature injections over the underlying signature diagram, followed by (2) meet (conjunction) at the colimit signature. In particular, the pullback of $\mathbf{Tbl}(\mathcal{A})$ -opspan (7) is the table $\mathcal{T}_1 \times_{\mathcal{T}} \mathcal{T}_2$ whose signature is the pushout signature $\langle I_1 +_I I_2, [s_1, s_2] \rangle$, whose key set is the pullback set $K_1 \times_K K_2$, and whose tuple function

$$t_1 \times_i t_2 : K_1 \times_K K_2 \rightarrow \mathbf{tup}_{\mathcal{A}}(I_1 +_I I_2, [s_1, s_2]) = \mathbf{tup}_{\mathcal{A}}(I_1, s_1) \times_{\mathbf{tup}_{\mathcal{A}}(I, s)} \mathbf{tup}_{\mathcal{A}}(I_2, s_2)$$

is the mediating function obtained by taking the pullback of sources and targets in (7). For proof, use a continuity proposition for comma categories, and show that the key set and projection functions, obtained by inverse image (substitution) and meet, forms the pullback.²²

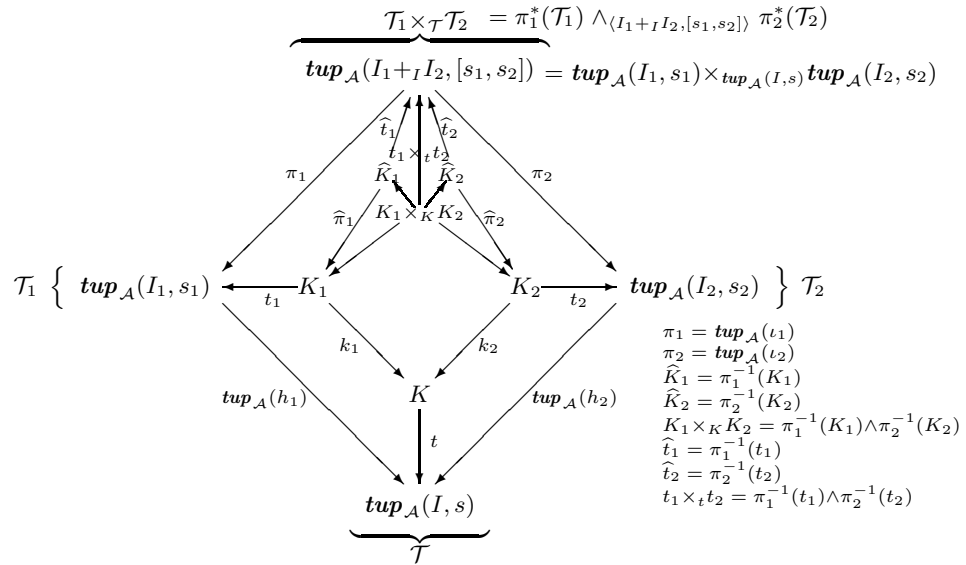


Fig. 19. Binary Join

²² Since we identify database joins with limits in $\mathbf{Tbl}(\mathcal{A})$, this allows us to compute joins as inverse images followed by meets, both of which are elementary logical operations. The dual approach will identify database unions with colimits in $\mathbf{Tbl}(\mathcal{A})$. This is the key insight for a structured/logical approach to database formalism using fiber Boolean operations (conjunction and disjunction), substitution and the quantifiers.

5 Conclusion and Future Work

5.1 This Paper in Review

A precise mathematical basis for FOLE interpretation consists of two notions: relational tables and relation databases. This paper has developed the notion of *relational table* in terms of comma contexts and the Grothendieck construction. Table 9 lists the lemmas, propositions and theorems in this paper.

The table concept is built upon the three more elementary concepts of signature, type domain, and signed domain. In § 2, we have discussed the mathematical contexts for these three elementary concepts: Thm. 1 describes the fibered context of signatures **List** as a Grothendieck construction indexed by sort sets; and Thm. 2 describes the fibered context of type domains **Cls** as a Grothendieck construction also indexed by sort sets.

In § 3, we have described how each elementary concept provides a distinct, but related, approach to the fibered nature of the table concept via the Grothendieck construction (illustrated in Tbl. 18 of § 3.5) — each fixed elementary concept providing a fiber subcontext of tables: Thm. 3 describes the fibered context of tables **Tbl** as a Grothendieck construction indexed by signed domains; Thm. 5 describes the fibered context of tables **Tbl** as a Grothendieck construction indexed by signatures, with the indexing defined by means of Thm. 4; and Thm. 7 describes the fibered context of tables **Tbl** as a Grothendieck construction indexed by type domains, with the indexing defined by means of Thm. 6.

In § 4, we proved the existence of sum and product constructions (database unions and joins) on various fiber contexts of tables by using both comma contexts and the Grothendieck construction: Prop. 3–10 prove that the contexts of signatures, type domains, signed domains, and tables have limits and colimits (joins and unions); and Prop. 11 gives a detailed description of the limit construction (join) for tables with fixed type domain, arguing that limits are resolvable into substitutions followed by meets.

In the appendix §A, we discuss relations, comma contexts and fibrations: Prop. 12 describes the reflection between tables and relations, thus linking traditional logic interpretation with relational database interpretation; and Facts. 1–5 state facts about comma contexts and the Grothendieck construction.

| |
|---|
| <p>§2 : Table Basics</p> <p>Thm. 1 : $\mathbf{List} \xrightarrow{sort} \mathbf{Set} = \check{J}(\mathbf{Set} \xrightarrow{list} \mathbf{Adj})$</p> <p>Thm. 2 : $\mathbf{Cls} \xrightarrow{sort} \mathbf{Set} = \check{J}(\mathbf{Set}^{op} \xrightarrow{cls} \mathbf{Cxt})$</p> <p>Lem. 1 : natural isomorphisms (levo \cong dextro) inclusion & tuple</p> <p>Prop. 1 : inclusion/tuple passages $\begin{cases} \mathbf{Cls} \xrightarrow{inc} (\mathbf{Adj} \uparrow \mathbf{Dom}) \\ \mathbf{Cls}^{op} \xrightarrow{tup} (\mathbf{Adj} \uparrow \mathbf{Set}) \end{cases}$</p> <p>Lem. 2 : tuple function factorizations: type domain & signature</p> |
| <p>§3 : Hierarchy</p> <p>Thm. 3 : $\mathbf{Tbl} \xrightarrow{dom} \mathbf{Dom}^{op} = \check{J}(\mathbf{Dom}^{op} \xrightarrow{tbl} \mathbf{Adj})$</p> <p>Thm. 4 : $\mathbf{Tbl}(S) \xrightarrow{data_S} \mathbf{Cls}(X)^{op} = \check{J}(\mathbf{Cls}(X)^{op} \xrightarrow{tbl_S} \mathbf{Adj})$</p> <p>Lem. 3 : table fiber adjunction factorization (signature)</p> <p>Thm. 5 : $\mathbf{Tbl} \xrightarrow{sign} \mathbf{List}^{op} = \check{J}(\mathbf{List}^{op} \xrightarrow{tbl} \mathbf{Cxt})$</p> <p>Thm. 6 : $\mathbf{Tbl}(\mathcal{A}) \xrightarrow{sign_{\mathcal{A}}} \mathbf{List}(X)^{op} = \check{J}(\mathbf{List}(X)^{op} \xrightarrow{tbl_{\mathcal{A}}} \mathbf{Adj})$</p> <p>Lem. 4 : table fiber adjunction factorization (type domain)</p> <p>Prop. 2 : adjunction $\mathbf{Tbl}(\mathcal{A}_2) \xleftarrow{\langle tbl_{\langle f,g \rangle}^{-1} tbl_{\langle f,g \rangle} \rangle} \mathbf{Tbl}(\mathcal{A}_1)$</p> <p>Thm. 7 : $\mathbf{Tbl} \xrightarrow{data} \mathbf{Cls}^{op} = \check{J}(\mathbf{Cls}^{op} \xrightarrow{tbl} \mathbf{Adj})$</p> |
| <p>§4: Table Constructions</p> <p><u>preliminaries</u></p> <p>Prop. 3 : (co)completeness of Cls</p> <p>Prop. 4 : completeness of Cls(X)</p> <p>Prop. 5 : continuity of $\mathbf{Cls}(X_2) \xleftarrow{cls(f)} \mathbf{Cls}(X_1)$</p> <p>Prop. 6 : continuity of $\mathbf{List}(X)^{op} \xrightarrow{tup_{\mathcal{A}}} \mathbf{Set}$</p> <p><u>using comma contexts</u></p> <p>Prop. 7 : (co)completeness of List(X), List, Dom, $\mathbf{Tbl}_{\mathcal{A}}(I, s)$ & $\mathbf{Tbl}_{\mathcal{A}}$</p> <p>Prop. 8 : cocompleteness of Tbl & Tbl(S)</p> <p><u>using Grothendieck construction</u></p> <p>Prop. 9 : (co)completeness of List, Tbl and $\mathbf{Tbl}(\mathcal{A})$</p> <p>Prop. 10 : cocompleteness of $\mathbf{Tbl}(S)$</p> <p><u>by construction</u></p> <p>Prop. 11 : completeness of $\mathbf{Tbl}(\mathcal{A})$</p> |
| <p>§ A: Appendix</p> <p><u>\mathcal{A}-relations</u></p> <p>Prop. 12 : reflection $\mathbf{Tbl}_{\mathcal{A}} \xrightarrow{\langle im_{\mathcal{A}}^{-1} inc_{\mathcal{A}} \rangle} \mathbf{Rel}_{\mathcal{A}}$</p> <p><u>comma contexts</u></p> <p>Fact. 1 : comma context completeness</p> <p>Fact. 2 : comma context cocompleteness</p> <p><u>Grothendieck construction</u></p> <p>Fact. 3 : fibration completeness</p> <p>Fact. 4 : opfibration cocompleteness</p> <p>Fact. 5 : bifibration (co)completeness</p> |

Table 9. Lemmas, Propositions and Theorems

5.2 The Presentation of FOLE

The first-order logical environment FOLE (Fig. 20: 0) was first described in Kent [13]. A series of three papers (Fig. 20: 1,2,5) describe in detail a mathematical representation for ontologies within FOLE. The FOLE representation can be expressed in two forms: a classification form and interpretative form. The foundation paper (Kent [14]) and the superstructure paper (Kent [15]) developed the classification form of FOLE. A third paper (Kent [16]) will develop the interpretative form of FOLE as a transformational passage from sound logics (Kent [13]),²³ thereby defining the formalism and semantics of first-order logical/relational database systems (Kent [12]). A series of two papers (Fig. 20: 3,4) provide a rigorous mathematical foundation for the interpretation of FOLE: the first [this paper] describes the notion of a FOLE table and the second describes the notion of a FOLE database. System interoperability, in the general setting of institutions and logical environments, was defined in the paper “System Consequence” (Kent [11]). This was inspired by the channel theory of information flow (Barwise and Seligman [1]). Since FOLE is a logical environment (Kent [15]), in two further papers (Fig. 20: 6,7) we apply this approach to interoperability for information systems based on first-order logic and relational databases: one paper discusses integration over a fixed type domain and the other paper discusses integration over a fixed universe.

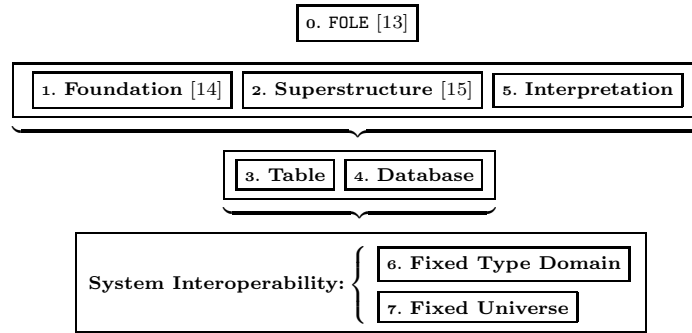


Fig. 20. FOLE Papers: Sequence and Dependency

²³ Following the relational model, we assume a semantic structure and use a logical theory consistent with that structure in terms of first-order logic (E.F. Codd [3]).

A Appendix

A.1 \mathcal{A} -Relations.

Let $\mathcal{A} = \langle X, Y, \models_{\mathcal{A}} \rangle$ be a fixed type domain. The mathematical contexts of \mathcal{A} -relations and \mathcal{A} -tables²⁴ are used for satisfaction and interpretation ([14]), \mathcal{A} -relations for traditional interpretation and \mathcal{A} -tables for database interpretation.

Fiber Contexts. Let $\langle I, s \rangle$ be any signature. The $\langle I, s \rangle^{\text{th}}$ -fiber context of relations is the subset order

$$\mathbf{Rel}_{\mathcal{A}}(I, s) = \langle \wp \mathbf{tup}_{\mathcal{A}}(I, s), \subseteq \rangle.$$

An object $R \in \mathbf{Rel}_{\mathcal{A}}(I, s)$ consists of a subset of tuples $R \subseteq \mathbf{tup}_{\mathcal{A}}(I, s)$.²⁵ A morphism $R' \leftarrow R$ in $\mathbf{Rel}_{\mathcal{A}}(I, s)$ consists of subset order $R' \supseteq R$.

Fibered Context. The fibered context $\mathbf{Rel}(\mathcal{A})$ has indexed \mathcal{A} -relations $\langle I, s, R \rangle$ as objects with $R \subseteq \mathbf{tup}_{\mathcal{A}}(I, s)$ and morphisms $\langle I', s', R' \rangle \xleftarrow{h} \langle I, s, R \rangle$ ²⁶ consisting of a signature morphism $\langle I', s' \rangle \xrightarrow{h} \langle I, s \rangle$ satisfying either of the adjoint fiber orderings

$$\begin{array}{ccc} R' \supseteq \exists_h(R) & \Leftrightarrow & h^{-1}(R') \supseteq R \\ \text{in } \mathbf{Rel}_{\mathcal{A}}(I', s') & & \text{in } \mathbf{Rel}_{\mathcal{A}}(I, s) \end{array} \quad (8)$$

defined in terms of the fiber adjunction $\langle \exists_h \dashv h^{-1} \rangle : \mathbf{Rel}_{\mathcal{A}}(I', s') \rightleftarrows \mathbf{Rel}_{\mathcal{A}}(I, s)$ (Tbl. 6 in § 3.4.1). As we show below, the context $\mathbf{Rel}(\mathcal{A})$ of \mathcal{A} -relations can be viewed as a mathematical subcontext of the context $\mathbf{Tbl}(\mathcal{A})$ of \mathcal{A} -tables.

Inclusion. Let $\langle I, s \rangle$ be any signature. The $\langle I, s \rangle^{\text{th}}$ -fiber inclusion passage²⁷

$$\mathbf{Rel}_{\mathcal{A}}(I, s) \xrightarrow{\mathit{inc}_{\langle I, s \rangle}^{\mathcal{A}}} \mathbf{Tbl}_{\mathcal{A}}(I, s)$$

is defined as follows. An fiber relation $R \in \mathbf{Rel}_{\mathcal{A}}(I, s)$ is mapped to the fiber table $\langle R, \mathit{inc} \rangle \in \mathbf{Tbl}_{\mathcal{A}}(I, s)$. A fiber morphism $R' \supseteq R$ in $\mathbf{Rel}_{\mathcal{A}}(I, s)$ is mapped to the fiber morphism $\langle R', \mathit{inc} \rangle \xleftarrow{\mathit{inc}} \langle R, \mathit{inc} \rangle$ in $\mathbf{Tbl}_{\mathcal{A}}(I, s)$. The fibered inclusion passage

$$\mathbf{Rel}(\mathcal{A}) \xrightarrow{\mathit{inc}_{\mathcal{A}}} \mathbf{Tbl}(\mathcal{A})$$

can be defined in terms of the fiber passages $\{\mathit{inc}_{\langle I, s \rangle}^{\mathcal{A}} \mid \langle I, s \rangle \in \mathbf{List}(X)\}$. An \mathcal{A} -relation $\langle I, s, R \rangle \in \mathbf{Rel}(\mathcal{A})$ is mapped to the \mathcal{A} -table $\langle I, s, R, \mathit{inc} \rangle = \langle I, s, \mathit{inc}_{\langle I, s \rangle}^{\mathcal{A}}(R) \rangle \in \mathbf{Tbl}(\mathcal{A})$.

An \mathcal{A} -relation morphism $\langle I', s', R' \rangle \xleftarrow{h} \langle I, s, R \rangle$ consisting of a signature morphism $\langle I', s' \rangle \xrightarrow{h} \langle I, s \rangle$ satisfying either of the adjoint fiber orderings in Eqn. 8

²⁴ For fixed type domain \mathcal{A} , the context of \mathcal{A} -Tables is discussed in § 3.4.1.

²⁵ More abstractly, we could define a relation to be a *subobject* of $\langle I, s, \mathcal{A} \rangle$ -tuples; that is, an isomorphism class of monomorphisms $R \xrightarrow{i} \mathbf{tup}_{\mathcal{A}}(I, s)$. These correspond to the proper or uncorrupted relational tables of Codd [3].

²⁶ We use this orientation to accord with both relational fibers and table morphisms.

²⁷ For fixed signed domain $\langle I, s, \mathcal{A} \rangle$, the fiber mathematical context of $\langle I, s, \mathcal{A} \rangle$ -tables is discussed in § 3.2.

is mapped to the \mathcal{A} -table morphism $\langle I', s', R', inc \rangle \xleftarrow{\langle h, r \rangle} \langle I, s, R, inc \rangle$, where the key function $R' \xleftarrow{r} R$ satisfying the condition $r \cdot inc = inc \cdot \mathbf{tup}_{\mathcal{A}}(h)$ is a restriction of the tuple function $\mathbf{tup}_{\mathcal{A}}(I', s') \xleftarrow{\mathbf{tup}_{\mathcal{A}}(h)} \mathbf{tup}_{\mathcal{A}}(I, s)$. Hence, we have the adjointly-related fiber context morphisms (see Eqn. 6).

$$\underbrace{\mathbf{inc}_{\langle I', s' \rangle}^{\mathcal{A}}(R' \supseteq \exists_h(R))}_{\mathbf{inc}_{\langle I', s' \rangle}^{\mathcal{A}}(R') \xleftarrow{\mathbf{inc}} \mathbf{inc}_{\langle I, s \rangle}^{\mathcal{A}}(\exists_h(R))} \xrightarrow{\hat{r}} \underbrace{\mathbf{inc}_{\langle I, s \rangle}^{\mathcal{A}}(h^{-1}(R') \supseteq R)}_{h^{-1}(\mathbf{inc}_{\langle I', s' \rangle}^{\mathcal{A}}(R')) \xleftarrow{\mathbf{inc}} \mathbf{inc}_{\langle I, s \rangle}^{\mathcal{A}}(R)} \quad (9)$$

Either pullback or image factorization can be used (Tbl. 21) to define the key function $R' \xleftarrow{r} R$. Using pullback, the \mathcal{A} -table morphism is the composition of the fiber morphism $\exists_h(h^{-1}(\mathbf{inc}_{\langle I', s' \rangle}^{\mathcal{A}}(R')) \xleftarrow{\mathbf{inc}} \mathbf{inc}_{\langle I, s \rangle}^{\mathcal{A}}(R))$ with the $\mathbf{inc}_{\langle I', s' \rangle}^{\mathcal{A}}(R')$ th counit component $\mathbf{inc}_{\langle I', s' \rangle}^{\mathcal{A}}(R') \xleftarrow{\hat{r}} \exists_h(h^{-1}(\mathbf{inc}_{\langle I', s' \rangle}^{\mathcal{A}}(R')))$ for the fiber adjunction $\langle \exists_h \dashv h^{-1} \rangle : \mathbf{Tbl}_{\mathcal{A}}(I', s') \rightleftarrows \mathbf{Tbl}_{\mathcal{A}}(I, s)$ (Tbl. 6 in § 3.4.1).

Fig. 21. Inclusion Table Morphism

Image. Let $\langle I, s \rangle$ be any signature. The $\langle I, s \rangle$ th-fiber image passage

$$\mathbf{Tbl}_{\mathcal{A}}(I, s) \xrightarrow{\mathbf{im}_{\langle I, s \rangle}^{\mathcal{A}}} \mathbf{Rel}_{\mathcal{A}}(I, s)$$

is defined as follows. A fiber table $\langle K, t \rangle \in \mathbf{Tbl}_{\mathcal{A}}(I, s)$ is mapped to the fiber relation $\wp t(K) \in \mathbf{Rel}_{\mathcal{A}}(I, s)$. A fiber morphism $\langle K', t' \rangle \xleftarrow{k} \langle K, t \rangle$ in $\mathbf{Tbl}_{\mathcal{A}}(I, s)$ is mapped to the fiber morphism $\wp t'(K') \supseteq \wp t(K)$ in $\mathbf{Rel}_{\mathcal{A}}(I, s)$ guaranteed by the table morphism condition $k \cdot t' = t$. The fibered image passage

$$\mathbf{Tbl}(\mathcal{A}) \xrightarrow{\mathbf{im}_{\mathcal{A}}} \mathbf{Rel}(\mathcal{A})$$

can be defined in terms of the fiber image passages $\{\mathbf{im}_{\langle I, s \rangle}^{\mathcal{A}} \mid \langle I, s \rangle \in \mathbf{List}(X)\}$. An \mathcal{A} -table $\langle I, s, K, t \rangle \in \mathbf{Tbl}(\mathcal{A})$ with signature $\langle I, s \rangle$ and table $\langle K, t \rangle \in \mathbf{Tbl}_{\mathcal{A}}(I, s)$

is mapped to the \mathcal{A} -relation $\langle I, s, \wp t(K) \rangle \in \mathbf{Rel}(\mathcal{A})$ with the same signature and the relation $\wp t(K) = \mathbf{im}_{\langle I, s \rangle}^{\mathcal{A}}(K, t) \in \mathbf{Rel}_{\mathcal{A}}(I, s)$. An \mathcal{A} -table morphism $\mathcal{T}' = \langle I', s', K', t' \rangle \xleftarrow{\langle h, k \rangle} \langle I, s, K, t \rangle = \mathcal{T}$ consisting of signature morphism $\langle I', s' \rangle \xrightarrow{h} \langle I, s \rangle$ satisfying either of the adjoint fiber orderings in Eqn. 6 is mapped to the \mathcal{A} -relation morphism $\mathbf{im}_{\mathcal{A}}(\mathcal{T}') = \langle I', s', R' \rangle \xleftarrow{h} \langle I, s, R \rangle = \mathbf{im}_{\mathcal{A}}(\mathcal{T})$ with the same signature morphism and satisfying either of the adjoint fiber orderings

$$\mathbf{im}_{\langle I', s' \rangle}^{\mathcal{A}}(K', t') \supseteq \underbrace{\mathbf{im}_{\langle I', s' \rangle}^{\mathcal{A}}(\exists_h(K, t))}_{\text{in } \mathbf{Rel}_{\mathcal{A}}(I', s')} \Leftrightarrow \underbrace{\mathbf{im}_{\langle I, s \rangle}^{\mathcal{A}}(h^{-1}(K', t'))}_{\text{in } \mathbf{Rel}_{\mathcal{A}}(I, s)} \supseteq \mathbf{im}_{\langle I, s \rangle}^{\mathcal{A}}(K, t).$$

Reflection. The inclusion passage $\mathbf{Rel}(\mathcal{A}) \xrightarrow{\mathbf{inc}_{\mathcal{A}}} \mathbf{Tbl}(\mathcal{A})$ is full. The composite passage $\mathbf{Rel}(\mathcal{A}) \xrightarrow{\mathbf{inc}_{\mathcal{A}} \circ \mathbf{im}_{\mathcal{A}}} \mathbf{Rel}(\mathcal{A})$ is the identity passage.

Definition 4. *There is an image-factorization bridge $1_{\mathbf{Tbl}(\mathcal{A})} \xrightarrow{\eta} \mathbf{im}_{\mathcal{A}} \circ \mathbf{inc}_{\mathcal{A}}$.*

The \mathcal{T}^{th} -component for \mathcal{A} -table $\mathcal{T} = \langle I, s, K, t \rangle$ is the \mathcal{A} -table morphism $\mathcal{T} \xrightarrow[\langle 1, e \rangle]{\eta \mathcal{T}} \mathbf{inc}_{\mathcal{A}}(\mathbf{im}_{\mathcal{A}}(\mathcal{T}))$, where $K \xrightarrow{e} \wp t(K) \xrightarrow{\mathbf{inc}} \mathbf{tup}_{\mathcal{A}}(I, s)$ is the image factorization of the tuple function $K \xrightarrow{t} \mathbf{tup}_{\mathcal{A}}(I, s)$. The naturality diagram

$$\mathbf{inc}_{\mathcal{A}}(\mathbf{im}_{\mathcal{A}}(\mathcal{T}')) \left\{ \begin{array}{ccc} K' & \xleftarrow{k} & K \\ \downarrow & & \downarrow \\ \wp t'(K') & \xleftarrow{r} & \wp t(K) \\ \downarrow \lrcorner & & \downarrow \lrcorner \\ \mathbf{tup}_{\mathcal{A}}(I', s') & \xleftarrow{\mathbf{tup}_{\mathcal{A}}(h)} & \mathbf{tup}_{\mathcal{A}}(I, s) \end{array} \right\} \mathbf{inc}_{\mathcal{A}}(\mathbf{im}_{\mathcal{A}}(\mathcal{T}))$$

factors the condition $k \cdot t' = t \cdot \mathbf{tup}_{\mathcal{A}}(h)$ by diagonal fill-in. This gives the \mathcal{A} -table morphism $\mathbf{inc}_{\mathcal{A}}(\mathbf{im}_{\mathcal{A}}(\mathcal{T}')) \xleftarrow{\langle h, r \rangle} \mathbf{inc}_{\mathcal{A}}(\mathbf{im}_{\mathcal{A}}(\mathcal{T}))$, which is the image-inclusion composite passage applied to the \mathcal{A} -table morphism $\mathcal{T}' \xleftarrow{\langle h, k \rangle} \mathcal{T}$.

Proposition 12. *There is a reflection $\mathbf{Tbl}_{\mathcal{A}} \xrightarrow{\langle \mathbf{im}_{\mathcal{A}}^{-1} \mathbf{inc}_{\mathcal{A}} \rangle} \mathbf{Rel}_{\mathcal{A}}$.*

This reflection embodies the notion of informational equivalence.


A.2 Comma Contexts

Fact 1 *Let $\mathbf{A} \xrightarrow{L} \mathbf{C} \xleftarrow{R} \mathbf{B}$ be a passage opspan with both $\mathbf{A} \xrightarrow{L} \mathbf{C}$ and $\mathbf{B} \xrightarrow{R} \mathbf{C}$ continuous passages.²⁸ If \mathbf{A} and \mathbf{B} are complete contexts, then the comma context $(\mathbf{L} \downarrow \mathbf{R})$ is complete and the projection passages $\mathbf{A} \leftarrow (\mathbf{L} \downarrow \mathbf{R}) \rightarrow \mathbf{B}$ are continuous.*

²⁸ A passage $\mathbf{C} \xrightarrow{F} \mathbf{D}$ is *continuous* when it preserves all small limits that exist in \mathbf{C} .

Fact 2 Let $\mathbf{A} \xrightarrow{L} \mathbf{C} \xleftarrow{R} \mathbf{B}$ be a passage opspan with $\mathbf{A} \xrightarrow{L} \mathbf{C}$ cocontinuous.²⁹ If \mathbf{A} and \mathbf{B} are cocomplete contexts, then the comma context $(\mathbf{L} \downarrow \mathbf{R})$ is cocomplete and the projection passages $\mathbf{A} \leftarrow (\mathbf{L} \downarrow \mathbf{R}) \rightarrow \mathbf{B}$ are cocontinuous.

A.3 The Grothendieck Construction

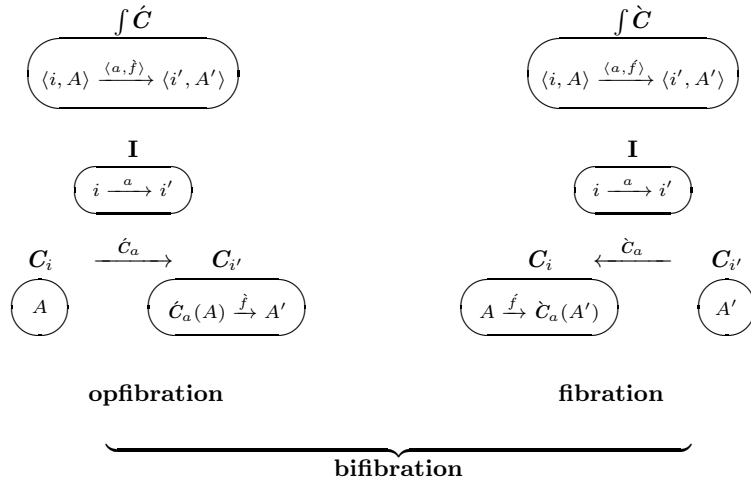

The adjunction $\mathbf{C}_i \xrightarrow{\langle \check{c}_a \dashv \check{c}_a \rangle} \mathbf{C}_{i'}$ has unit $1_{\mathbf{C}_i} \xrightarrow{\eta_a} \check{C}_a \circ \check{c}_a$ with the \mathbf{C}_i -morphism $A \xrightarrow{\eta_a(A)} \check{C}_a(\check{C}_a(A))$ as its A^{th} component, and has counit $\check{C}_a \circ \check{c}_a \xrightarrow{\varepsilon_a} 1_{\mathbf{C}_{i'}}$ with the $\mathbf{C}_{i'}$ -morphism $\check{C}_a(\check{C}_a(A')) \xrightarrow{\varepsilon_a(A')} A'$ as its A'^{th} component.

$$\begin{aligned} A \xrightarrow{\check{f}} \check{C}_a(A') &= A \xrightarrow{\eta_a(A)} \check{C}_a(\check{C}_a(A)) \xrightarrow{\check{c}_a(\check{f})} \check{C}_a(A') \\ \check{C}_a(A) \xrightarrow{\check{f}} A' &= \check{C}_a(A) \xrightarrow{\check{c}_a(\check{f})} \check{C}_a(\check{C}_a(A')) \xrightarrow{\varepsilon_a(A')} A' \end{aligned}$$

Fig. 22. Bifibration

fibration: A fibration (fibered context) $\int \check{\mathbf{C}}$ is the Grothendieck construction of a contravariant pseudo-passage (indexed context) $\mathbf{I}^{\text{op}} \xrightarrow{\check{\mathbf{C}}} \mathbf{Cxt}$, where the action on any indexing object i in \mathbf{I} is the fiber context $\check{\mathbf{C}}_i$ and the action on any indexing morphism $i \xrightarrow{a} i'$ is the fiber passage $\mathbf{C}_i \xleftarrow{\check{c}_a} \mathbf{C}_{i'}$. An object in

²⁹ A passage $\mathbf{C} \xrightarrow{F} \mathbf{D}$ is *cocontinuous* when it preserves all small colimits that exist in \mathbf{C} . A passage $\mathbf{C} \xrightarrow{F} \mathbf{D}$ is cocontinuous **iff** the opposite passage $\mathbf{C}^{\text{op}} \xrightarrow{F^{\text{op}}} \mathbf{D}^{\text{op}}$ between opposite contexts is a continuous passage.

$\int \check{\mathbf{C}}$ is a pair $\langle i, A \rangle$, where i is an indexing object in \mathbf{I} and A is an object in the fiber context $\check{\mathbf{C}}_i$. A morphism in $\int \check{\mathbf{C}}$ is a pair $\langle i, A \rangle \xrightarrow{\langle a, f \rangle} \langle i', A' \rangle$, where $i \xrightarrow{a} i'$ is an indexing morphism in \mathbf{I} and $A \xrightarrow{f} \check{\mathbf{C}}_a(A')$ is a fiber morphism in $\check{\mathbf{C}}_i$. There is a projection passage $\int \check{\mathbf{C}} \rightarrow \mathbf{I}$.

opfibration: An opfibration $\int \hat{\mathbf{C}}$ is the Grothendieck construction of a covariant pseudo-passage (indexed context) $\mathbf{I} \xrightarrow{\hat{\mathbf{C}}} \mathbf{Cxt}$, where the action on any indexing object i in \mathbf{I} is the fiber context $\hat{\mathbf{C}}_i$ and the action on any indexing morphism $i \xrightarrow{a} i'$ is the fiber passage $\mathbf{C}_i \xrightarrow{\hat{c}_a} \mathbf{C}_{i'}$. An object in $\int \hat{\mathbf{C}}$ is a pair $\langle i, A \rangle$, where i is an indexing object in \mathbf{I} and A is an object in the fiber context $\hat{\mathbf{C}}_i$. A morphism in $\int \hat{\mathbf{C}}$ is a pair $\langle i, A \rangle \xrightarrow{\langle a, f \rangle} \langle i', A' \rangle$, where $i \xrightarrow{a} i'$ is an indexing morphism in \mathbf{I} and $\hat{\mathbf{C}}_a(A) \xrightarrow{f} A'$ is a fiber morphism in $\hat{\mathbf{C}}_{i'}$. There is a projection passage $\int \hat{\mathbf{C}} \rightarrow \mathbf{I}$.

bifibration: A bifibration $\int \mathbf{C}$ (Fig.22) is the Grothendieck construction of an indexed adjunction $\mathbf{I} \xrightarrow{\mathbf{C}} \mathbf{Adj}$ consisting of a left adjoint covariant pseudo-passage $\mathbf{I} \xrightarrow{\hat{\mathbf{C}}} \mathbf{Cxt}$ and a right adjoint contravariant pseudo-passage $\mathbf{I}^{\text{op}} \xrightarrow{\check{\mathbf{C}}} \mathbf{Cxt}$. The action on any indexing object i in \mathbf{I} is the fiber context $\mathbf{C}_i = \hat{\mathbf{C}}_i = \check{\mathbf{C}}_i$ and the action on any indexing morphism $i \xrightarrow{a} i'$ is the fiber adjunction $(\mathbf{C}_i \xrightarrow{c_a} \mathbf{C}_{i'}) = (\mathbf{C}_i \xrightarrow{\langle \hat{\mathbf{C}}_a \dashv \check{c}_a \rangle} \mathbf{C}_{i'})$. The Grothendieck constructions of component fibration and component opfibration are isomorphic $\int \check{\mathbf{C}} \cong \int \hat{\mathbf{C}}$

$$(\langle i, A \rangle \xrightarrow{\langle a, f \rangle} \langle i', A' \rangle) \cong (\langle i, A \rangle \xrightarrow{\langle a, f \rangle} \langle i', A' \rangle)$$

via (Fig. 22) the adjoint pair $A \xrightarrow{f} \check{\mathbf{C}}_a(A') \cong \hat{\mathbf{C}}_a(A) \xrightarrow{f} A'$. Define the Grothendieck construction of the bifibration to be the Grothendieck construction of component fibration $\int \mathbf{C} \doteq \int \check{\mathbf{C}}$ with projection $\int \mathbf{C} \rightarrow \mathbf{I}$.

Fact 3 If $\mathbf{I}^{\text{op}} \xrightarrow{\check{\mathbf{C}}} \mathbf{Cxt}$ is a contravariant pseudo-passage (indexed context) s.t.

1. the indexing context \mathbf{I} is complete,
2. the fiber context \mathbf{C}_i is complete for each $i \in \mathbf{I}$, and
3. the fiber passage $\mathbf{C}_i \xleftarrow{c_a} \mathbf{C}_j$ is continuous for each $i \xrightarrow{a} j$ in \mathbf{I} ,

then the fibered context (Grothendieck construction) $\int \mathbf{C}$ is complete and the projection $\int \mathbf{C} \xrightarrow{P} \mathbf{I}$ is continuous.

Proof. Tarlecki, Burstall and Goguen [25].

Fact 4 If $\mathbf{I} \xrightarrow{\mathbf{C}} \mathbf{Cxt}$ is a covariant pseudo-passage (indexed context) s.t.

1. the indexing context \mathbf{I} is cocomplete,

2. the fiber context \mathbf{C}_i is cocomplete for each $i \in \mathbf{I}$, and
3. the fiber passage $\mathbf{C}_i \xrightarrow{C_a} \mathbf{C}_j$ is cocontinuous for each $i \xrightarrow{a} j$ in \mathbf{I} ,

then the fibered context (Grothendieck construction) $\int \mathbf{C}$ is cocomplete and the projection $\int \mathbf{C} \xrightarrow{P} \mathbf{I}$ is cocontinuous.

Proof. Dual to the above. ■

Fact 5 If $\mathbf{I} \xrightarrow{C} \mathbf{Adj}$ is an indexed adjunction consisting of a contravariant pseudo-passage $\mathbf{I}^{\text{op}} \xrightarrow{\check{C}} \mathbf{Cxt}$ and a covariant pseudo-passage $\mathbf{I} \xrightarrow{\check{C}} \mathbf{Cxt}$ that are locally adjunctive ($\mathbf{C}_i \xrightarrow{\langle \check{C}_a^{-1}, \check{C}_a \rangle} \mathbf{C}_{i'}$) for each $i \xrightarrow{a} j$ in \mathbf{I} , s.t.

1. the indexing context \mathbf{I} is complete and cocomplete,
2. the fiber context \mathbf{C}_i is complete and cocomplete for each $i \in \mathbf{I}$,

then the fibered context (Grothendieck construction) $\int \mathbf{C} \rightarrow \mathbf{I}$ is complete and cocomplete and the projection $\int \mathbf{C} \rightarrow \mathbf{I}$ is continuous and cocontinuous.

Proof. Use Facts. 3 & 4, since the fiber passage $\mathbf{C}_i \xleftarrow{\check{C}_a} \mathbf{C}_{i'}$ is continuous (being right adjoint) and the fiber passage $\mathbf{C}_i \xrightarrow{\check{C}_a} \mathbf{C}_{i'}$ is cocontinuous (being left adjoint) for each $i \xrightarrow{a} j$ in \mathbf{I} . ■

References

1. Barwise, J., and Seligman, J.: *Information Flow: The Logic of Distributed Systems*. Cambridge University Press, Cambridge (1997).
2. Chen, P.: “The Entity-Relationship Model - Toward a Unified View of Data”. *ACM Trans. on Database Sys.*, 1 (1): pp. 9–36. doi:10.1145/320434.320440.
3. Codd, E.F.: *The relational model for database management : version 2*. Addison Wesley, Boston (1990).
4. Ganter, B., and Wille, R.: *Formal Concept Analysis: Mathematical Foundations*. Springer, New York (1999).
5. Goguen, J.: *A categorical manifesto*. *Mathematical Structures in Computer Science* 1, 49–67 (1991).
6. Goguen, J., and Burstall, R.: “Institutions: Abstract Model Theory for Specification and Programming”. *J. Assoc. Comp. Mach.* vol. 39, pp. 95–146 (1992).
7. Gruber, T. “Ontology”. In: Ling Liu and M. Tamer Özsu (eds.) *The Encyclopedia of Database Systems*, Springer-Verlag (2009). Available online: tomgruber.org/writing/ontology-definition-2007.htm.
8. Johnson, M., Rosebrugh, R.: “Fibrations and Universal View Updatibility”. *Th. Comp. Sci.* 388: 109–129 (2007).
9. Johnson, M., Rosebrugh, R., and Wood, R. “Entity Relationship Attribute Designs and Sketches”. *Theory and Application of Categories* 10, 3, 94–112 (2002).
10. Johnstone, P.T.: *Topos Theory*. Academic Press, London (1977).
11. Kent, R.E. “System Consequence”. In: Rudolph, S., Dau, F., and Kuznetsov, S.O. (eds.) *Conceptual Structures: Leveraging Semantic Technologies*, LNCS vol. 5662, pp. 201–218. Springer, Heidelberg (2009).
12. Kent, R.E.: “Database Semantics”. (2011). Available online: <http://arxiv.org/abs/1209.3054>.
13. Kent, R.E.: “The First-order Logical Environment”. In: Pfeiffer, H.D., Ignatov, D.I., Poelmans, J., and Nagarjuna G. (eds.) *Conceptual Structures in Research and Education*, LNCS vol. 7735, pp. 210–230. Springer, Heidelberg (2013). Available online: arxiv.org/abs/1305.5240.
14. Kent, R.E.: “The ERA of FOLE: Foundation” (2015). Available online: arxiv.org/abs/1512.07430.
15. Kent, R.E.: “The ERA of FOLE: Superstructure” (2016). Available online: arxiv.org/abs/1602.04268.
16. Kent, R.E.: “The ERA of FOLE: Interpretation”.
17. Kent, R.E.: “The FOLE Table”. Submitted for publication. Available online: <https://arxiv.org/abs/1810.12100>.
18. Kent, R.E.: “The FOLE Database”. Available online: <https://arxiv.org/abs/2302.05997>.
19. Kent, R.E.: “FOLE Equivalence”. Available online: <https://arXiv:2201.07373>.
20. Mac Lane, S., *Categories for the Working Mathematician*. Springer-Verlag (1971).
21. Sowa, J.F.: *Knowledge Representation: Logical, Philosophical, and Computational Foundations*. Brookes/Coles (2000).
22. Spivak, D.I.: “Simplicial Databases” (2009). Available online: <http://arxiv.org/abs/0904.2012>.
23. Spivak, D.I.: “Functorial Data Migration” (2010). Available online: <http://arxiv.org/abs/1009.1166>.

24. Spivak, D.I., and Kent, R.E.: “Ologs: a categorical framework for knowledge representation”. PLoS ONE 7(1): e24274. doi:10.1371/journal.pone.0024274. (2012). Available online: <http://arxiv.org/abs/1102.1889>.
25. Tarlecki, A., Burstall, R., Goguen, J.: “Some Fundamental Algebraic Tools for the Semantics of Computation, Part 3: Indexed Categories”. Th. Comp. Sci. vol. 91, pp. 239–264. Elsevier (1991).
26. *The Information Flow Framework (IFF)*. The Standard Upper Ontology (SUO) working group IEEE P1600.1. Previously available online: <http://suo.ieee.org/IFF/>.
27. nLab Grothendieck fibration. Online: ncatlab.org/nlab/show/Grothendieck+fibration.