

IMPROVING THE QUERY COMPLEXITY OF QUANTUM SPATIAL SEARCH IN TWO DIMENSIONS

ABHIJITH J.^a and APOORVA PATEL^b

*Centre for High Energy Physics, Indian Institute of Science
Bangalore 560012, India*

Received (received date)

Revised (revised date)

The question of whether quantum spatial search in two dimensions can be made optimal has long been an open problem. We report progress towards its resolution by showing that the oracle complexity for target location can be made optimal, by increasing the number of calls to the walk operator that incorporates the graph structure. Our algorithm also uses Tulsi's controlled search technique to avoid amplitude amplification. An important ingredient of our algorithm is a novel way to implement multi-step quantum walks, using a coin space of walk-length dependent dimension, which may be of independent interest.

Keywords: Controlled search, Flip-flop quantum walk, Graph powering, Spatial search, Spectral gap

Communicated by: to be filled by the Editorial

1 Introduction

Quantum spatial search is an extension of Grover search, with the items arranged in a spatially distributed database and locality constraints on how they may be explored. Most algorithms for its solution work by alternatively applying a quantum walk operator and an oracle operator on a starting state, till the final state has a large overlap with a target state. Then the final state is measured, and the location of a marked item is revealed with high probability. Quantum search algorithms with locality constraints have been extensively used in the quantum information literature to design many query efficient algorithms [2], and also as tools to prove interesting complexity theoretic results such as exponential quantum speed-up in an oracular setting [7] and fast gap amplification in QMA [12].

The performance of quantum spatial search is constrained by the connectivity of the underlying database. The optimal query complexity value of $O(\sqrt{N})$ is not achieved for all graphs. For instance, the best known query complexity for quantum spatial search on a 2D grid is $O(\sqrt{N \log N})$, which was achieved by Tulsi [18], building on earlier work by Ambainis, Kempe and Rivosh (AKR) [3]. For more general graphs with multiple marked items, indirect variants of quantum search, which combine the phase estimation procedure with quantum walks, have good query complexity [10]. More recently, we have analyzed

^aE-mail: abhijithj@iisc.ac.in

^bE-mail: adpatel@iisc.ac.in

direct quantum search for regular graphs with multiple targets, and have found that the direct approach matches the performance of the indirect search algorithms [1]. For all these cases, the speed-up is quadratic or sub-quadratic over the corresponding classical random walk search. Super-quadratic speed-ups are ruled out by the fact that Grover search without any locality constraint is optimal. In this work, we present a systematic way to relax the locality constraints to achieve the optimal query complexity.

Our strategy is to introduce a form of multi-stepping in the coin space of the walk, which leads to a new quantum walk whose spectral properties are simply related to the spectral properties of the original quantum walk. Multi-stepping in the context of quantum walks refers to applying the walk more than once between consecutive oracle operations. Search algorithms that use this technique are usually difficult to analyze except for very specific cases.^a This is because the performance of the quantum search depends crucially on the spectral properties of the walk operator, and these properties become obscured by repeated powering of the walk operator. Nevertheless, the properties of such multi-step walks have been studied numerically [13], and improvements in performance of the algorithm have been observed. We introduce a different kind of multi-stepping here compared to previous approaches in the literature. It results in a graph on which two-dimensional quantum search is optimal despite having small algebraic connectivity, similar to the graphs studied in Ref. [11] in a continuous time setting.

This article is organized as follows. In Section 2, we explain how multi-stepping leads to two types of query complexity. Our notation and the graph-powering method are presented in Section 3. We obtain the spectrum of the multi-step quantum walk in Section 4. Our analysis of quantum search on a two-dimensional grid is presented in 5. Section 6 describes how our multi-step walk technique can be applied to general Markov chains, while two appendices contain technical proofs of the bounds used in our analysis.

2 Two query complexities

The quantum spatial search algorithms of AKR [3] and Tulsi[18] work by alternatively applying a local walk operator (W) and an oracle operator (O) that marks the target state. A particular choice of the quantum walk operator is the flip-flop walk [16]. It is a product of two reflection operators, the shift operator (S) and a coin operator (C). The full search operator that is iterated in the algorithm is then,

$$U = WO = SCO . \tag{1}$$

The number of iterations of U required to find the target state is the query complexity of the algorithm, and equals the number of times the oracle encoded in O is called. But with closer scrutiny, we can define another oracle buried inside the shift operator, which provides the connectivity information of the graph when invoked. Thus one can have separate query complexities corresponding to both these oracles. In the AKR and Tulsi's algorithms, both these oracles are invoked only once per iteration, and hence their query complexities match.

We denote the query complexity for the target state oracle, O , as Q_O , and the query complexity for the graph structure oracle as Q_G . For spatial search on a two-dimensional grid, the AKR algorithm has $Q_O = Q_G = \Theta(\sqrt{N} \log N)$, and Tulsi's algorithm improves

^aFor instance the walk used by Ambainis in Ref. [4], and also the results in Ref. [19].

that to $Q_O = Q_G = \Theta(\sqrt{N \log N})$. The optimal value of $Q_O = \Theta(\sqrt{N})$ is achieved by Grover's algorithm, which corresponds to search on a complete graph without any locality constraints. It is an open problem whether spatial search on a two-dimensional grid can achieve this optimal value. In this work, we show that Q_O can be made optimal at the expense of increasing Q_G by logarithmic factors.

The central idea of our algorithm is to increase the connectivity of the graph by the technique of graph powering. It corresponds to taking multiple walk steps on the graph before applying the target state oracle, i.e. $U_t = W^t O$. Increasing the graph connectivity by appropriately increasing t , we can make Q_O attain its optimal value. One may guess that the required value of t would scale as the diameter of the graph, but we show that it is only logarithmic in the size of the graph.

A multi-step classical random walk can be easily implemented by taking higher powers of the random walk operator. But this procedure is not effective in case of quantum walks, because the walk operator is unitary and its eigenvalues show periodic behaviour when powered. As we show in this work, this difficulty can be circumvented by using a coin space whose dimension increases with the number of walk steps. The eigenvalues of this modified walk operator show a much more controlled behaviour when the underlying graph is powered, in contrast to quantum walk operators that use a coin space of fixed dimension.

3 Preliminaries and notation

3.1 Graph properties

We consider a d -regular, undirected graph $G(V, E)$. Here V is the vertex set and E is the edge set of the graph. We denote the size of V by N , i.e. $|V| = N$, while the size of E is $|E| = dN/2$. The adjacency matrix A_G of this graph is an $N \times N$ matrix that encodes the connectivity information of the graph. We use the normalized adjacency matrix for our work:

$$(A_G)_{ij} = \begin{cases} \frac{1}{d}, & \text{if } i, j \in E, \\ 0, & \text{otherwise.} \end{cases} \quad (2)$$

A_G is a real symmetric matrix. So all its eigenvalues are real, all its eigenvectors can be chosen to be real, and they form a complete orthonormal set. With our normalization, the eigenvalues of A_G lie in the interval $[-1, 1]$ and hence can be expressed as $\cos(\phi)$ for some $\phi \in [0, \pi]$. We call the angle ϕ an eigenphase of A_G . This adjacency matrix is related to the discrete Laplacian for the graph,

$$\Delta_G = A_G - \mathbb{I}. \quad (3)$$

The largest eigenvalue of A_G is always 1, and the corresponding eigenvector is the uniform superposition vector.

A_G is a doubly stochastic matrix, as every row and column of A_G adds up to 1:

$$\sum_i (A_G)_{ij} = \sum_j (A_G)_{ij} = 1. \quad (4)$$

It follows that any positive power of A_G is also doubly stochastic, in addition to being a real symmetric matrix. We use positive powers of A_G throughout this work, and denote the set of all t step paths in G by E^t . The value of $(A_G^t)_{ij}$ is the number of t step paths connecting i and j , divided by d^t .

3.2 Shift operator and rotation maps

The connectivity information of the graph is provided the shift operator S , acting in a space of dN dimensions. For the two-dimensional grid, with vertices labeled as (x, y) and four directions at each vertex, S is defined by:

$$S|x, y, \rightarrow\rangle = |x + 1, y, \leftarrow\rangle, \quad S|x, y, \leftarrow\rangle = |x - 1, y, \rightarrow\rangle, \quad (5)$$

$$S|x, y, \uparrow\rangle = |x, y + 1, \downarrow\rangle, \quad S|x, y, \downarrow\rangle = |x, y - 1, \uparrow\rangle. \quad (6)$$

It is possible to define shift operators for any regular graph [1].

In the computer science literature, a function that encodes the locality structure of the graph is called a rotation map \mathcal{R}_G [15]. For an N vertex graph that is d regular, the rotation map is a function $\mathcal{R}_G : [N] \times [d] \rightarrow [N] \times [d]$. When v is a neighbour of u , and the edge that connects them is labeled by g at u and h at v , then $\mathcal{R}_G(u, g) = (v, h)$. From the definition of S , it is clear that it encodes such a rotation map on the grid, albeit with a more natural labeling of the edges.

3.3 Graph powering

The shift operator S acts in a space of dimension dN , and encodes the structure of the graph G via \mathcal{R}_G . Now we define a new shift operator on an expanded space of size $d^t N$, which encodes the structure of the graph G^t , obtained from G by taking its t^{th} power.

The powering of a graph is done in terms of the normalized adjacency matrix A_G , by viewing A_G^t as the normalized adjacency matrix for a d^t -regular graph. This new graph is labeled G^t . The vertices in G^t are the same as the vertices in G , but the edges in G^t correspond to paths of length t in G . Note that G^t can have multiple edges between the same vertices, and also self-loops, even if G doesn't have these. Also by definition, $A_{G^t} = (A_G)^t$.

The rotation map of the powered graph, \mathcal{R}_{G^t} , can be computed by t applications of \mathcal{R}_G . It lifts the degeneracy between paths with the same end points. Specifically, $\mathcal{R}_{G^t} : [N] \times [d]^t \rightarrow [N] \times [d]^t$, such that if $\mathcal{R}_{G^t}(u, g_1, \dots, g_t) = (v, h_1, \dots, h_t)$, then u and v are connected by a path of length t in G , and the edges of this path are labeled g_1 to g_t when going from u to v and h_1 to h_t when going from v to u . An illustration is provided in Figure 1.




Fig. 1. An edge in G^4 such that $\mathcal{R}_{G^4}(u, g_1, g_2, g_3, g_4) = (v, h_1, h_2, h_3, h_4)$.

We can now define the shift operator S_t , using \mathcal{R}_{G^t} :

$$S_t|u, g_1, \dots, g_t\rangle = |v, h_1, \dots, h_t\rangle, \quad \text{if } \mathcal{R}_{G^t}(u, g_1, \dots, g_t) = (v, h_1, \dots, h_t). \quad (7)$$

S_t is a reflection operator and can be implemented using t uses of S , as follows. First apply S to u and g_1 . That reverses the direction of g_1 , and shifts u to the second vertex in the

path. Next apply S to the vertex in the first register and g_2 , and so on till we reach g_t . At his point, the vertex in the first register will be v , but the registers with the edge labels will be in the reverse direction. So to obtain S_t , we reverse the order of all the edge labels. Thus a single application of S_t requires t calls to the function \mathcal{R}_G .

We construct our quantum spatial search algorithm in the Hilbert space $\mathbb{C}^N \otimes \mathbb{C}^{d^t}$, associated with the powered graph G^t . In this Hilbert space, we define the coin operator,

$$C_t = 2 \sum_u |\psi_u^t\rangle\langle\psi_u^t| - \mathbb{I}, \quad (8)$$

where $|\psi_u^t\rangle = \frac{1}{d^{t/2}} \sum_{\mathbf{g} \in [d]^t} |u, \mathbf{g}\rangle$. It is a simple extension of the definition of the coin operator on the graph G , i.e. $C = 2 \sum_u |\psi_u\rangle\langle\psi_u| - \mathbb{I}$ with $|\psi_u\rangle = \frac{1}{d^{1/2}} \sum_{g \in [d]^1} |u, g\rangle$. C_t is also a reflection operator, and can be implemented by applying C to each of the t edge labels.

Our quantum walk operator on the graph G^t is $W_t = S_t C_t$. A search algorithm that uses such a walk operator between oracle calls has different values of Q_O and Q_G . Since we need t calls to \mathcal{R}_G for each step of W_t , we have $Q_G = t Q_O$.

4 Spectrum of W_t

To understand the properties of W_t , we define a complete orthonormal basis for the Hilbert space $\mathbb{C}^N \otimes \mathbb{C}^{d^t}$, which captures the connectivity structure of G^t . Let \mathbf{p} be a t step path in G connecting vertices u and v ; alternatively it is an edge in G^t , and we label it as an element of E^t . Let the sequence of edge labels along this path be g_1, \dots, g_t as we go from u to v , and h_1, \dots, h_t as we go from v to u . Then we define a complete orthonormal basis for \mathbb{C}^{Nd^t} , with two basis vectors corresponding to each such path, as

$$|\mathbf{p}^\pm\rangle = \frac{1}{\sqrt{2}}(|u, g_1, \dots, g_t\rangle \pm |v, h_1, \dots, h_t\rangle). \quad (9)$$

All these vectors are the eigenvectors of the shift operator S_t , with $S_t|\mathbf{p}^\pm\rangle = \pm|\mathbf{p}^\pm\rangle$.^b

Now we prove an important theorem that helps us completely characterize the eigenvectors and eigenvalues of W_t in terms of those of A_{G^t} .

Theorem 1 *Let W_t satisfy the eigenvalue equation $W_t|\Phi_k^t\rangle = e^{i\phi_k^{(t)}}|\Phi_k^t\rangle$, and let $a_{ku} = \langle\Phi_k^t|\psi_u^t\rangle$. Then the vector $\vec{a}_k = (a_{k1}, a_{k2}, \dots, a_{kN})$ is an eigenvector of A_{G^t} , with eigenvalue $\cos(\phi_k^{(t)})$, when $0 < \phi_k^{(t)} < \pi$ (i.e. for all the eigenvectors of W_t which do not have eigenvalues ± 1).*

(Converse) Also, for every eigenvector of A_{G^t} with eigenvalue $\cos(\phi^{(t)})$ and $0 < \phi^{(t)} < \pi$, there exist two eigenvectors of W_t with eigenvalues $e^{i\phi^{(t)}}$ and $e^{-i\phi^{(t)}}$.

Proof: The proof closely follows the logic of Ref. [1], where similar techniques have been used to find relations between properties of classical and quantum walks. The key idea is to find expressions for the components of $|\Phi_k^t\rangle$ in the $|\mathbf{p}^\pm\rangle$ basis that implicitly captures the locality structure of the graph.

^bSome of the $|\mathbf{p}^- \rangle$ vectors may vanish, when the contributing paths double back on themselves. Such a situation can be avoided by choosing t to be odd.

With $W_t = S_t C_t$, we look at the components of the eigenvalue equation in the path basis,

$$e^{i\phi_k^{(t)}} \langle \mathbf{p}^+ | \Phi_k^t \rangle = \langle \mathbf{p}^+ | S_t C_t | \Phi_k^t \rangle, \quad (10)$$

$$= \langle \mathbf{p}^+ | C_t | \Phi_k^t \rangle, \quad (11)$$

$$= \langle \mathbf{p}^+ | 2 \sum_u |\psi_u^t\rangle \langle \psi_u^t| - \mathbb{I} | \Phi_k^t \rangle. \quad (12)$$

These can be rewritten as,

$$(e^{i\phi_k^{(t)}} + 1) \langle \mathbf{p}^+ | \Phi_k^t \rangle = 2 \sum_u \langle \mathbf{p}^+ | \psi_u^t \rangle \langle \psi_u^t | \Phi_k^t \rangle, \quad (13)$$

$$= 2 \sum_u \langle \mathbf{p}^+ | \psi_u^t \rangle a_{ku}^*. \quad (14)$$

Now $\langle \mathbf{p}^+ | \psi_u^t \rangle$ is nonzero only if u is one of the end-points of \mathbf{p} . So for a path \mathbf{p} that has vertices u and v as the end points, we have the result,

$$\langle \Phi_k^t | \mathbf{p}^+ \rangle = \sqrt{\frac{2}{d^t}} \frac{a_{ku} + a_{kv}}{1 + e^{-i\phi_k^{(t)}}}. \quad (15)$$

Similarly,

$$\langle \Phi_k^t | \mathbf{p}^- \rangle = \sqrt{\frac{2}{d^t}} \frac{a_{ku} - a_{kv}}{1 - e^{-i\phi_k^{(t)}}}. \quad (16)$$

There is a sign ambiguity in this expression arising from the ordering of u and v in the definition of $|\mathbf{p}^- \rangle$, but it disappears from the final results.

Since $|\mathbf{p}^\pm \rangle$ form a complete basis, $|\Phi_k^t \rangle$ is completely determined in terms of the values of a_{ku} and $\phi_k^{(t)}$. Now,

$$a_{ki} = \langle \Phi_k^t | \psi_i^t \rangle, \quad (17)$$

$$= \sum_{\mathbf{p} \in E^t} \langle \Phi_k^t | \mathbf{p}^+ \rangle \langle \mathbf{p}^+ | \psi_i^t \rangle + \langle \Phi_k^t | \mathbf{p}^- \rangle \langle \mathbf{p}^- | \psi_i^t \rangle. \quad (18)$$

The number of paths of length t connecting vertices i and j is d^t times the matrix element $(A_G^t)_{ij}$. So, inserting the values of the overlaps, we get,

$$a_{ki} = \sum_{j \in V} d^t (A_G^t)_{ij} \left(\frac{1}{d^t} \frac{a_{ki} + a_{kj}}{1 + e^{-i\phi_k^{(t)}}} + \frac{1}{d^t} \frac{a_{ki} - a_{kj}}{1 - e^{-i\phi_k^{(t)}}} \right), \quad (19)$$

$$= \sum_{j \in V} (A_G^t)_{ij} \left(\frac{a_{ki} + a_{kj}}{1 + e^{-i\phi_k^{(t)}}} + \frac{a_{ki} - a_{kj}}{1 - e^{-i\phi_k^{(t)}}} \right), \quad (20)$$

$$= a_{ki} \left(\frac{1}{1 + e^{-i\phi_k^{(t)}}} + \frac{1}{1 - e^{-i\phi_k^{(t)}}} \right) + \sum_{j \in V} (A_G^t)_{ij} a_{kj} \left(\frac{1}{1 + e^{-i\phi_k^{(t)}}} - \frac{1}{1 - e^{-i\phi_k^{(t)}}} \right). \quad (21)$$

In the last step, we have used the fact that A_G^t is a doubly stochastic matrix.

We can derive another expression for a_{ki} , using the fact that $|\psi_i^t\rangle$ is an eigenvector of C_t with eigenvalue 1. Unitarity of W_t implies $W_t^\dagger S_t = W_t^{-1} S_t = C_t^{-1} S_t^{-1} S_t = C_t$. So,

$$a_{ki} = \langle \Phi_k^t | C_t | \psi_i^t \rangle, \quad (22)$$

$$= e^{-i\phi_k^{(t)}} \langle \Phi_k^t | S_t | \psi_i^t \rangle, \quad (23)$$

$$= \sum_{\mathbf{p} \in E^t} \left(e^{-i\phi_k^{(t)}} \langle \Phi_k^t | \mathbf{p}^+ \rangle \langle \mathbf{p}^+ | \psi_i^t \rangle - e^{-i\phi_k^{(t)}} \langle \Phi_k^t | \mathbf{p}^- \rangle \langle \mathbf{p}^- | \psi_i^t \rangle \right). \quad (24)$$

Repetition of the steps leading to Eq.(21) then gives,

$$a_{ki} = a_{ki} e^{-i\phi_k^{(t)}} \left(\frac{1}{1 + e^{-i\phi_k^{(t)}}} - \frac{1}{1 - e^{-i\phi_k^{(t)}}} \right) \quad (25)$$

$$+ \sum_{j \in V} (A_G^t)_{ij} a_{kj} e^{-i\phi_k^{(t)}} \left(\frac{1}{1 + e^{-i\phi_k^{(t)}}} + \frac{1}{1 - e^{-i\phi_k^{(t)}}} \right). \quad (26)$$

Subtraction of Eq.(26) from Eq.(21) yields,

$$a_{ki} \left(\tan \frac{\phi_k^{(t)}}{2} - \cot \frac{\phi_k^{(t)}}{2} \right) + \sum_{j \in V} (A_G^t)_{ij} a_{kj} \left(\tan \frac{\phi_k^{(t)}}{2} + \cot \frac{\phi_k^{(t)}}{2} \right) = 0, \quad (27)$$

which can be rearranged as the eigenvalue equation,

$$\sum_{j \in V} (A_G^t)_{ij} a_{kj} = \cos(\phi_k^{(t)}) a_{ki} \quad (28)$$

Proof of converse: Let \vec{a} be an eigenvector of A_{G^t} with eigenvalue $\cos(\phi^{(t)})$. Let a_u be the component of \vec{a} at the vertex u . Now we define a vector $|\Phi\rangle \in C^N \otimes C^{d^t}$ such that its components in the path basis are,

$$\langle \Phi | \mathbf{p}^\pm \rangle = \sqrt{\frac{2}{d^t}} \frac{a_u \pm a_v}{1 \pm e^{-i\phi^{(t)}}}, \quad (29)$$

where \mathbf{p} connects u and v .

The uniform superposition state of all the paths starting at a vertex u can be written as,

$$|\psi_u^t\rangle = \frac{1}{d^{t/2}} \sum_{\mathbf{g} \in [d]^t} |u, \mathbf{g}\rangle = \frac{1}{\sqrt{2d^t}} \sum_{\mathbf{p}=(u,w)} (|\mathbf{p}^+\rangle + |\mathbf{p}^-\rangle). \quad (30)$$

Therefore,

$$\langle \psi_u^t | \Phi \rangle = \frac{1}{\sqrt{2d^t}} \sum_{\mathbf{p}=(u,w)} (\langle \mathbf{p}^+ | \Phi \rangle + \langle \mathbf{p}^- | \Phi \rangle), \quad (31)$$

$$= \sum_{w \in V} (A_G^t)_{uw} \left(\frac{a_u + a_w}{1 + e^{i\phi^{(t)}}} + \frac{a_u - a_w}{1 - e^{i\phi^{(t)}}} \right), \quad (32)$$

$$= a_u \left(\frac{1}{1 + e^{i\phi^{(t)}}} + \frac{1}{1 - e^{i\phi^{(t)}}} \right) + \cos(\phi^{(t)}) a_u \left(\frac{1}{1 + e^{i\phi^{(t)}}} - \frac{1}{1 - e^{i\phi^{(t)}}} \right), \quad (33)$$

where in the last step we have used the eigenvalue equation, $\sum_w (A_G^t)_{uw} a_w = \cos(\phi^{(t)}) a_u$. Simplifying further, we find

$$\langle \psi_u^t | \Phi \rangle = a_u . \quad (34)$$

Now we are ready to look at the action of W_t on $|\Phi\rangle$ in the path basis. Let \mathbf{p} be a path connecting u and v . Then

$$\langle \mathbf{p}^\pm | W_t | \Phi \rangle = \langle \mathbf{p}^\pm | S_t C_t | \Phi \rangle = \pm \langle \mathbf{p}^\pm | C_t | \Phi \rangle , \quad (35)$$

$$= \pm \langle \mathbf{p}^\pm | 2 \sum_{i \in V} |\psi_i^t\rangle \langle \psi_i^t| - \mathbb{I} | \Phi \rangle , \quad (36)$$

$$= \pm \sqrt{\frac{2}{d^t}} (\langle \psi_u^t | \Phi \rangle \pm \langle \psi_v^t | \Phi \rangle) \mp \langle \mathbf{p}^\pm | \Phi \rangle , \quad (37)$$

$$= \pm \sqrt{\frac{2}{d^t}} (a_u \pm a_v) \mp \sqrt{\frac{2}{d^t}} \frac{a_u \pm a_v}{1 \pm e^{i\phi^{(t)}}} , \quad (38)$$

$$= e^{i\phi^{(t)}} \sqrt{\frac{2}{d^t}} \frac{a_u \pm a_v}{1 \pm e^{i\phi^{(t)}}} , \quad (39)$$

$$= e^{i\phi^{(t)}} \langle \mathbf{p}^\pm | \Phi \rangle . \quad (40)$$

So it is clear that $|\Phi\rangle$ is an eigenvector of W_t for with eigenvalue $e^{i\phi^{(t)}}$. By taking the complex conjugate of $|\Phi\rangle$, we get the eigenvector with eigenvalue $e^{-i\phi^{(t)}}$. This proves the converse of our theorem. \square

This theorem has two important corollaries which make it possible to improve the query complexity of quantum search in 2D. The first one is a trivial consequence of the theorem and the fact that $A_{G^t} = (A_G)^t$.

Corollary 1 $\cos(\phi_k^{(t)}) = \cos^t(\phi_k)$, for $\phi_k \in (0, \pi)$.

The second, somewhat non-trivial corollary is that the coefficients a_{ki} are independent of t . Since the eigenvectors of A_{G^t} are the same as that of A_G , one would expect a_{ki} to be independent of t up to an overall proportionality factor. But we show that even this factor is independent of t . We state this important result as a corollary.

Corollary 2 For $0 < \phi_k^{(t)} < \pi$, and for all odd integers t ,

$$\sum_u |\langle \Phi_k^t | \psi_u^t \rangle|^2 = \sum_u a_{ku}^2 = \frac{1}{8} . \quad (41)$$

Proof: We impose the normalization condition on the eigenvectors $|\Phi_k^t\rangle$,

$$1 = \|\Phi_k^t\|^2, \quad (42)$$

$$= \sum_{\mathbf{p} \in E^t} |\langle \Phi_k^t | \mathbf{p}^+ \rangle|^2 + |\langle \Phi_k^t | \mathbf{p}^- \rangle|^2, \quad (43)$$

$$= \sum_{(u,v) \in V \times V} \left((A_G^t)_{uv} \left| \frac{a_{ku} + a_{kv}}{1 + e^{-i\phi_k^{(t)}}} \right|^2 + (A_G^t)_{uv} \left| \frac{a_{ku} - a_{kv}}{1 - e^{-i\phi_k^{(t)}}} \right|^2 \right) . \quad (44)$$

Here we have used our earlier expression for the components of $|\Phi_k\rangle$ in the $|\mathbf{p}^\pm\rangle$ basis, and also the fact that the number of length t paths between two vertices are proportional to the

corresponding element of A_G^t . An extra factor of 2 is taken care of by the double summation over u, v . Since a_{ki} are the components of an eigenvector of a real symmetric matrix, we have chosen them to be real. Thus,

$$1 = \sum_{u,v} \left((A_G^t)_{uv} \frac{(a_{ku} + a_{kv})^2}{\cos^2(\phi_k^{(t)}/2)} + (A_G^t)_{uv} \frac{(a_{ku} - a_{kv})^2}{\sin^2(\phi_k^{(t)}/2)} \right). \quad (45)$$

Rearranging the terms, we get the result,

$$\sum_{u,v} \left((A_G^t)_{uv} a_{ku}^2 + (A_G^t)_{uv} a_{kv}^2 - 2a_{ku} (A_G^t)_{uv} a_{kv} \cos(\phi_k^{(t)}) \right) = \frac{1}{4} \sin^2(\phi_k^{(t)}). \quad (46)$$

We know that $\sum_v (A_G^t)_{uv} = \sum_u (A_G^t)_{uv} = 1$, and $\sum_{u,v} a_{ku} (A_G^t)_{uv} a_{kv} = \cos(\phi_k^{(t)}) \sum_u a_{ku}^2$. Using these conditions, we obtain the projection condition,

$$\sum_u a_{ku}^2 = \frac{1}{8}. \quad (47)$$

This condition is independent of t , and we choose t to be odd in order to avoid zero length paths. \square

Thus the values of a_{ku} are completely independent of t . The projection is less than one because the states $|\psi_u^t\rangle$ do not span $\mathbb{C}^N \otimes \mathbb{C}^{d^t}$. What we have shown is that the magnitude of the projections of the eigenvectors of W_t , on to the subspace spanned by $\{|\psi_u^t\rangle \mid u \in V\}$, is a constant.

Now we proceed to analyze the performance of W_t for search on a two-dimensional grid with periodic boundary conditions.

5 Quantum search on a two-dimensional grid with W_t

The quantum search algorithm requires an oracle that marks the target states. Following the perturbed coin approach of AKR [3], we define the oracle O_t as,

$$O_t = \mathbb{I} - 2|\psi_m^t\rangle\langle\psi_m^t|. \quad (48)$$

Here $m \in V$ labels the marked states that we want to locate. The abstract quantum search algorithm then proceeds as follows. The search operator $U_t = W_t O_t$ is applied to the starting state, $|\Psi_S\rangle$, Q times. The resultant state, up on measurement, collapses to the target state with some success probability. If this success probability is not large enough, one possibility is to boost it to a constant value, with sufficient rounds of amplitude amplification. A better alternative is to use Tulsi's controlled search technique [18], which enhances the success probability to a constant without any need for amplitude amplification. The algorithm is always optimized by minimizing the total number of required steps.

5.1 Abstract search framework

We take the starting state of our algorithm to be the uniform superposition state, which also happens to be an eigenvector of W_t with eigenvalue 1,

$$|\Psi_S\rangle = |\Phi_0^t\rangle = \frac{1}{\sqrt{N}} \sum_{u \in V} |\psi_u^t\rangle \quad (49)$$

Note that for $t = 1$, our algorithm reduces to the flip-flop quantum search. To analyze it for general t , we first show that quantum search using U_t fits into the abstract search framework constructed by AKR [3]. This framework requires a subspace $\mathcal{H} \in \mathbb{C}^{Nd^t}$ such that,

- \mathcal{H} is invariant under U_t .
- U_t is expressible as a real operator on \mathcal{H} .
- Only one eigenvector of U_t corresponding to eigenvalue 1 lies in \mathcal{H} , and it is the starting state $|\Psi_S\rangle$.

We take \mathcal{H} to be the space spanned by $|\Phi_0^t\rangle$ and all the eigenvectors of W_t with non-real eigenvalues. As a consequence of Theorem 1, this subspace has dimension $2N - 1$.^c Then the last two conditions listed above are satisfied in \mathcal{H} by construction. Moreover, since \mathcal{H} is invariant under W_t , the first condition is satisfied provided \mathcal{H} is invariant under O_t as well. This is indeed the case, because O_t is a reflection about the state $|\psi_m^t\rangle$, and we show in the following lemma that all the states of the form $|\psi_u^t\rangle$ lie in \mathcal{H} .

Lemma 1 *For all u and odd integers t , $|\psi_u^t\rangle \in \mathcal{H}$.*

Proof: The part of \mathbb{C}^{Nd^t} orthogonal to \mathcal{H} is spanned by eigenvectors of W_t with eigenvalues ± 1 . Let $|\Phi_l\rangle$ to be an eigenvector of W_t with eigenvalue 1. Then using the same steps that were used to derive Eq.(14), we find,

$$\sum_u a_{lu} \langle \psi_u^t | \mathbf{p}^- \rangle = 0 . \quad (50)$$

It implies that for any u and v connected by a length t path, $a_{lu} - a_{lv} = 0$. Since the two-dimensional grid is strongly connected, and we have chosen t to be odd,^d this means that a_{lu} must be the same for all u . When the common value of a_{lu} is nonzero, we have $|\Phi_l\rangle = |\Phi_0^t\rangle$. Otherwise, $a_{lu} = 0$ implies that all such eigenvectors of W_t with eigenvalue 1 are orthogonal to the states of the form $|\psi_u^t\rangle$.

Similarly, by choosing $|\Phi_l\rangle$ to be an eigenvector of W_t with eigenvalue -1 , and considering its overlap with $|\mathbf{p}^+\rangle$, we find that $a_{lu} + a_{lv} = 0$ for any u and v connected by a length t path. For a bipartite graph, it is possible that the components a_{lu} are nonzero with their values alternating in sign, but then we have $|\Phi_l\rangle = |\Phi_b^t\rangle$. Otherwise, $a_{lu} = 0$ for all u , which implies that all such eigenvectors of W_t with eigenvalue -1 have no overlap with the states of the form $|\psi_u^t\rangle$.

Thus all the states of the form $|\psi_u^t\rangle$ are orthogonal to all the states that lie outside \mathcal{H} , and so O_t leaves \mathcal{H} invariant. \square

With \mathcal{H} being invariant under U_t , we can now analyze our quantum search algorithm within the abstract search framework. For convenience, we first recollect the main results obtained by AKR in this framework; their detailed explanations can be found in Ref. [3].

Let $U = WO$ be the search operator in a subspace \mathcal{H} , satisfying the three conditions we have listed. Let $|\Psi_S\rangle$ and $|\Psi_T\rangle$ be the starting state and the target state for the search problem respectively. We define $|\Theta_k\rangle$ to be the eigenvectors of W with eigenphases θ_k (which

^cThis is true only when G_t is not bipartite. For bipartite graphs, one of the complex eigenvalue pairs of W_t is replaced by a -1 eigenvalue, and the subspace has dimension $2N - 2$. The eigenvector $|\Phi_b^t\rangle$ corresponding to the -1 eigenvalue has the same structure as $|\Phi_0^t\rangle$, except that the coefficients for the two partitions have opposite sign. This case is analyzed in detail in Ref. [1].

^dOdd t allows neighbouring vertices of G to be connected by a length t path.

are arranged in ascending order), and call the overlap of these eigenvectors with $|\Psi_T\rangle$ as a_k (which are chosen to be real by convention). As before, we choose $|\Psi_S\rangle = |\Theta_0\rangle$, which is the only eigenvector of W in \mathcal{H} with eigenvalue 1. The only relevant eigenvalues of U in this framework are $e^{\pm i\alpha}$, where α is the smallest non-zero eigenphase of U ; we label the corresponding eigenvectors $|\pm\alpha\rangle$. Three important results were proven by AKR in this abstract search framework, which we state without proof.^e

Result 1: The eigenphase α scales as,

$$\alpha = \Theta \left(\frac{1}{\sqrt{\sum_{k \neq 0} \frac{a_k^2}{a_0^2} \frac{1}{1 - \cos \theta_k}}} \right). \quad (51)$$

Result 2: The starting state has a high overlap with the subspace spanned by $|\pm\alpha\rangle$. Let $|w_S\rangle = \frac{1}{\sqrt{2}}(|\alpha\rangle + |-\alpha\rangle)$. Provided $\alpha < \frac{1}{2}\theta_1$, the overlap of this state with the starting state is,

$$|\langle w_S | \Psi_S \rangle| = 1 - \Theta \left(\alpha^4 \sum_{k \neq 0} \frac{a_k^2}{a_0^2} \frac{1}{(1 - \cos \theta_k)^2} \right). \quad (52)$$

Result 3: Action of U for $Q = \lfloor \frac{\pi}{2\alpha} \rfloor$ iterations on $|w_S\rangle$ produces a state close to $|w_T\rangle = \frac{1}{\sqrt{2}}(|\alpha\rangle - |-\alpha\rangle)$. Provided $\alpha < \frac{1}{2}\theta_1$, the overlap of this state with the target state is,^f

$$|\langle w_T | \Psi_T \rangle| = \min \left(\Theta \left(\frac{1}{\sqrt{\sum_{k \neq 0} a_k^2 \cot^2(\theta_k/2)}} \right), 1 \right). \quad (53)$$

These results can be combined to find the success probability of an abstract search algorithm after $\lfloor \frac{\pi}{2\alpha} \rfloor$ iterations.

5.2 Analysis of spatial search with U_t on a two-dimensional grid

We take the two-dimensional grid to be of size $\sqrt{N} \times \sqrt{N}$. The adjacency matrix of the grid is diagonalized using a Fourier transform to obtain its eigenvalues and eigenvectors. We label the eigenvalues by a tuple $\mathbf{k} = (k_x, k_y)$, where k_x and k_y take integral values from 0 to $\sqrt{N} - 1$.^g The eigenvalues are,^h

$$\cos \phi_{\mathbf{k}} = \frac{1}{2} \left(\cos\left(\frac{2\pi k_x}{\sqrt{N}}\right) + \cos\left(\frac{2\pi k_y}{\sqrt{N}}\right) \right), \quad (54)$$

and the corresponding eigenvectors have components $\frac{1}{\sqrt{N}} \exp\left(\frac{2\pi i \mathbf{k} \cdot \mathbf{x}}{\sqrt{N}}\right)$ at the point $\mathbf{x} = (x, y)$.

As per the definition of the oracle in Eq.(48), we are searching for the state $|\Psi_T\rangle = |\psi_m^t\rangle$. According to Theorem 1, the overlap of this state with the eigenvectors of W_t in \mathcal{H}

^eOur phase conventions [1] are different from those of AKR.

^fIn the AKR paper, this result is reported with $\cot^2(\theta_k/4)$, but a more careful analysis of their proof improves it to $\cot^2(\theta_k/2)$.

^gWe use modulo \sqrt{N} labels, so that $-k \equiv \sqrt{N} - k$.

^hFor simplicity, we refer to $\phi_{\mathbf{k}}^{(1)}$ as just $\phi_{\mathbf{k}}$ from now on.

is proportional to the corresponding component of the eigenvectors of A_G . In the standard convention, the Fourier coefficients are complex, while we have chosen a_{ku} to be real. This is not a problem, because Eq.(54) shows that the eigenvectors with \mathbf{k} and $-\mathbf{k}$ have the same eigenvalue, and so the corresponding complex conjugate coefficients can be mixed to get real coefficients.ⁱ Then using the result of Corollary 2, together with translational invariance of W_t and appropriate choice of global phases, we find the overlaps to be,

$$a_{\mathbf{k}}^2 = \langle \Phi_{\mathbf{k}} | \Psi_T \rangle^2 = \langle \Phi_{\mathbf{k}} | \psi_m^t \rangle^2 = \frac{1}{8N}, \quad (55)$$

for $\mathbf{k} \neq 0$. We also have $a_0 = \frac{1}{\sqrt{N}}$ from the definition of the starting state in Eq.(49).

Until now we have not selected a specific value for t . To proceed further, we demand t to be some function of N , which is tuned to get the desired scaling behaviour of Q_O and Q_G . The performance of the search algorithm is governed by the grid sums involving the eigenphases of the adjacency matrix that occur in Eqs.(51-53). For $t = O(\log N)$, as proved in Appendix A, these sums scale as,

$$\sum_{\mathbf{k} \neq 0} \frac{a_{\mathbf{k}}^2}{a_0^2} \frac{1}{1 - \cos(\phi_{\mathbf{k}}^{(t)})} = \frac{1}{8} \sum_{\mathbf{k} \neq 0} \frac{1}{1 - \cos^t \phi_{\mathbf{k}}} = \Theta\left(\frac{N \log N}{t}\right), \quad (56)$$

$$\sum_{\mathbf{k} \neq 0} \frac{a_{\mathbf{k}}^2}{a_0^2} \frac{1}{(1 - \cos(\phi_{\mathbf{k}}^{(t)}))^2} = \frac{1}{8} \sum_{\mathbf{k} \neq 0} \frac{1}{(1 - \cos^t \phi_{\mathbf{k}})^2} = \Theta\left(\frac{N^2}{t^2}\right), \quad (57)$$

$$\sum_{\mathbf{k} \neq 0} a_{\mathbf{k}}^2 \cot^2(\phi_{\mathbf{k}}^{(t)}/2) = \frac{1}{8N} \sum_{\mathbf{k} \neq 0} \cot^2(\phi_{\mathbf{k}}^{(t)}/2) = \Theta\left(\frac{\log N}{t}\right). \quad (58)$$

Using these expressions in Eqs.(51-53), we get for $t = O(\log N)$,

$$\alpha = \Theta\left(\sqrt{\frac{t}{N \log N}}\right), \quad (59)$$

$$|\langle w_S | \Psi_S \rangle| = 1 - \Theta\left(\frac{1}{\log^2 N}\right), \quad (60)$$

$$|\langle w_T | \Psi_T \rangle| = \Theta\left(\sqrt{\frac{t}{\log N}}\right). \quad (61)$$

The last two equations are valid only when $\alpha < \frac{1}{2}\phi_1^{(t)}$. We show in Appendix B that this condition holds asymptotically.

With these results, we can determine the performance of the quantum search algorithm that applies U_t on $|\Psi_S\rangle$, $Q = \lfloor \frac{\pi}{2\alpha} \rfloor$ times. There are three sources of error that limit the success of the algorithm: (i) $\frac{\pi}{2\alpha}$ may not be an integer, (ii) the initial state $|\Psi_S\rangle$ may have a component outside the $|\pm\alpha\rangle$ subspace, and (iii) the final state $(U_t)^Q |\Psi_S\rangle$ may not coincide with $|\Psi_T\rangle$. Consequently, the success probability of the algorithm is at least,

$$p_s \geq \cos^2 \alpha |\langle w_S | \Psi_S \rangle|^2 |\langle w_T | \Psi_T \rangle|^2 = \Omega\left(\frac{t}{\log N}\right), \quad (62)$$

ⁱ Equivalently, we can replace the projections a_{ku}^2 by $|a_{ku}|^2$ in our formulae.

with the error being dominated by the third source as per Eqs.(59-61).

To boost the success probability to a constant, we can use the amplitude amplification technique [5]. The algorithm then requires $\Omega(\sqrt{\frac{\log N}{t}})$ rounds of amplification. That makes the query complexity of the target state oracle, $Q_O = O(\sqrt{\frac{\log N}{t}} Q) = O(\frac{\sqrt{N \log N}}{t})$, and that for the graph structure oracle, $Q_G = tQ_O = O(\sqrt{N} \log N)$.

In particular, by taking $t = \Theta(\log N)$, we have $p_s = \Theta(1)$, and the amplitude amplification step becomes unnecessary. Then Q_O achieves its optimal scaling behaviour $\Theta(\sqrt{N})$, while Q_G remains independent of t . Increasing t beyond $\Theta(\log N)$ worsens Q_G , with no further improvement in Q_O .

5.3 Multi-step version of Tulsi's algorithm

The quantum search using U_t can be seen as a multi-step version of the AKR algorithm. A natural question to consider is whether its scaling can be further improved by Tulsi's technique of controlling the quantum walk and the oracle using an ancilla qubit [18]. This technique can also be interpreted as adding a selective mass term at the marked vertex to a relativistic walk [14], or as adding a self-loop to the graph at the marked vertex [9]. We now show that we cannot further improve the performance of our quantum search algorithm using Tulsi's technique, but we can make Q_G more controllable at the expense of Q_O .

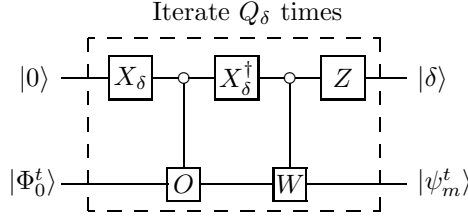


Fig. 2. Quantum logic circuit for Tulsi's controlled spatial search algorithm.

Tulsi's controlled spatial search algorithm uses a tunable parameter δ , and can be implemented using the quantum logic circuit shown in Figure 2. The starting state for the algorithm is $|\Phi_0^t\rangle|0\rangle$. The single qubit operators are:

$$X_\delta = \begin{pmatrix} \cos \delta & \sin \delta \\ -\sin \delta & \cos \delta \end{pmatrix}, \quad Z = \begin{pmatrix} 1 & 0 \\ 0 & -1 \end{pmatrix}. \quad (63)$$

After Q_δ iterations of the search operator, enclosed in the dashed box, the algorithm reaches a final state that has $\Theta(1)$ overlap with the target state $|\psi_m^t\rangle|\delta\rangle$, where $|\delta\rangle = X_\delta^\dagger|0\rangle$.

This modified algorithm can be analyzed in the abstract search framework with a new search operator $\tilde{U}_t = \tilde{W}_t \tilde{O}_t(\delta)$. The new walk operator is,

$$\tilde{W}_t = \begin{pmatrix} W_t & 0 \\ 0 & -\mathbb{I} \end{pmatrix}, \quad (64)$$

which adds an extra walk eigenstate with eigenvalue -1 to the invariant space \mathcal{H} , while the new oracle is,

$$\tilde{O}_t(\delta) = \mathbb{I} - 2|\psi_m^t\rangle|\delta\rangle\langle\psi_m^t| \langle\delta|, \quad (65)$$

which searches for the state $|\tilde{\Psi}_T(\delta)\rangle = |\Psi_T\rangle|\delta\rangle$.

Let $a_\pi(\delta)$ be the overlap of the target state with the extra walk eigenstate with eigenvalue -1 . Inclusion of its contribution modifies the results in Eqs.(51-53) to [18]:

$$\alpha_\delta = \Theta \left(\frac{a_0(\delta)}{\sqrt{\sum_{k \neq 0} \frac{a_k^2(\delta)}{1 - \cos \theta_k} + \frac{a_\pi^2(\delta)}{4}}} \right), \quad (66)$$

$$|\langle \tilde{w}_S | \tilde{\Psi}_S \rangle| = 1 - \Theta \left(\alpha_\delta^4 \sum_{k \neq 0} \frac{a_k^2(\delta)}{a_0^2(\delta)} \frac{1}{(1 - \cos \theta_k)^2} \right) - \Theta \left(\frac{\alpha_\delta^4 a_\pi^2(\delta)}{a_0^2(\delta)} \right), \quad (67)$$

$$|\langle \tilde{w}_T | \tilde{\Psi}_T \rangle| = \min \left(\Theta \left(\frac{1}{\sqrt{\sum_{k \neq 0} a_k^2(\delta) \cot^2(\theta_k/2)}} \right), 1 \right). \quad (68)$$

Note that the last equation remains the same as Eq.(53).

The overlaps for our algorithm are,

$$a_{\mathbf{k}}^2(\delta) = |\langle \tilde{\Psi}_T(\delta) | \tilde{\Phi}_{\mathbf{k}} \rangle|^2 = a_{\mathbf{k}}^2 \cos^2 \delta, \quad a_\pi^2(\delta) = \sin^2 \delta. \quad (69)$$

So using the estimates in Eqs.(56-58), Eqs.(66-68) become:

$$\alpha_\delta = \Theta \left(\frac{1}{\sqrt{\frac{N \log N}{t} + \frac{N}{4} \tan^2 \delta}} \right), \quad (70)$$

$$|\langle \tilde{w}_S | \tilde{\Psi}_S \rangle| = 1 - \Theta \left(\frac{\alpha_\delta^4 N^2}{t^2} \right) - \Theta(\alpha_\delta^4 N \tan^2 \delta), \quad (71)$$

$$|\langle \tilde{w}_T | \tilde{\Psi}_T \rangle| = \min \left(\Theta \left(\sqrt{\frac{t(1 + \tan^2 \delta)}{\log N}} \right), 1 \right). \quad (72)$$

We have assumed $t = O(\log N)$. So Eq.(70) implies that $\alpha_\delta = O(\frac{1}{\sqrt{N}})$. Then, following the analysis that led to Eq.(62), the quantum search algorithm with $Q_\delta = \lfloor \frac{\pi}{2\alpha_\delta} \rfloor$ iterations of \tilde{U}_t , succeeds with probability

$$p_s(\delta) = \Omega \left(\frac{t(1 + \tan^2 \delta)}{\log N} \right). \quad (73)$$

The choice $t \tan^2 \delta = \Theta(\log N)$ maximizes $p_s(\delta)$ to $\Theta(1)$, and then $Q_O = Q_\delta$ without any need for amplitude amplification. It also implies that $Q_O Q_G = \Theta(t/\alpha^2) = \Theta(N \log N)$. For $t = 1$ and $\tan^2 \delta = \Theta(\log N)$, we recover Tulsı's original algorithm, with $Q_O = Q_G = \Theta(\sqrt{N \log N})$. For $t = \Theta(\log N)$ and $\tan^2 \delta = \Theta(1)$, we obtain $Q_O = \Theta(\sqrt{N})$ and $Q_G = \Theta(\sqrt{N} \log N)$, which is the same computational complexity as in the previous subsection. The only advantage of the multi-step version of Tulsı's algorithm is that Q_O and Q_G can be varied between these two extremes, by an intermediate choice of t while maintaining $t \tan^2 \delta = \Theta(\log N)$. That can be useful when we have to minimize the overall computational complexity of the algorithm, given the effort required to evaluate the oracle as well as the rotation map.

5.4 Multi-step quantum search on regular graphs:

Our multi-step algorithm can be used to perform a quantum search on any regular graph. For the adjacency matrix of general regular graphs, however, we may have an estimate of only the spectral gap g , without the knowledge of the entire spectrum. In such cases, the best known oracle complexity of quantum search is $Q_O = \Theta(\sqrt{\frac{N}{g}})$ for $t = 1$ [10, 1]. Powering the graph sufficiently many times makes it an expander with $g_t = \Theta(1)$, and then the oracle complexity would attain its optimal scaling behaviour, $Q_O = \Theta(\sqrt{N})$ [3]. As per Corollary 1, our multi-step algorithm replaces $\cos(\phi_k)$ by $\cos^t(\phi_k)$ in the computational complexity analysis. With $1 - g_t = \cos^t(\phi_1) = (1 - g)^t \approx e^{-gt}$, we see that g_t would become $\Theta(1)$ for $t = \Theta(\frac{1}{g})$. Thus our multi-step quantum search algorithm can provide $Q_O = \Theta(\sqrt{N})$ and $Q_G = \frac{\sqrt{N}}{g}$ for any regular graph.

6 Extension to symmetric Markov chains

A method to quantize general Markov chains was introduced by Szegedy [17]. In this Section, we describe how to implement a quantum walk corresponding to multiple steps of a classical symmetric Markov chain without explicitly powering the transition matrix of the chain. We judge the complexity of this procedure in terms of the number of queries made to the elements of the transition matrix.

Let $M = \sum_{i,j} M_{ij} |i\rangle\langle j|$ be an $N \times N$ stochastic transition matrix of a symmetric Markov chain, i.e $M = M^T$. Following Szegedy, we define two sets of orthonormal states in \mathbb{C}^{N^2} for $i \in [N]$:

$$|A_i\rangle = \sum_{j=1}^N \sqrt{M_{ij}} |i\rangle|j\rangle, \quad |B_i\rangle = \sum_{j=1}^N \sqrt{M_{ij}} |j\rangle|i\rangle. \quad (74)$$

We also define two isometric linear operators from $\mathbb{C}^N \rightarrow \mathbb{C}^{N^2}$, using these states:

$$A = \sum_{i=1}^N |A_i\rangle\langle i|, \quad B = \sum_{i=1}^N |B_i\rangle\langle i|, \quad (75)$$

and two reflection operators constructed from them:

$$R_1 = 2AA^\dagger - I, \quad R_2 = 2BB^\dagger - I. \quad (76)$$

Then the quantum walk corresponding to the Markov chain is defined as,

$$W(M) = R_2 R_1. \quad (77)$$

A single step of this walk is equivalent to two steps of the flip-flop walk [?].

As in the case of flip-flop walks, the walk operator here is also a product of two reflection operators. If a vector lies in the simultaneous eigenspace of the projectors AA^\dagger and BB^\dagger , then $W(M)$ will act on it trivially (either as I or $-I$). On the other hand, in applications of quantum walks, one is usually interested in subspaces where $W(M)$ acts non-trivially. It was shown by Szegedy [17, Theorem 1] that the spectral properties of $W(M)$ in the non-trivial subspace are determined by its discriminant matrix,

$$D(M) := A^\dagger B = M. \quad (78)$$

To implement $W(M)$ one requires operators that construct $|A_i\rangle$ and $|B_i\rangle$ from simpler states. Let V_1 and V_2 be the unitary operators that effect this transformation,

$$V_1|i\rangle|0\rangle = |A_i\rangle, \quad V_2|0\rangle|i\rangle = |B_i\rangle. \quad (79)$$

Let the number of queries required to implement each of these transformations be Q . Then a single step of $W(M)$ has the query complexity $4Q$.

Now we address the question of implementing a quantum walk corresponding to k steps of M , i.e. $W(M^k)$. The naive way to do this is to classically compute the matrix M^k , and then quantize it using Szegedy's framework. This approach has two problems. First, classical powering of the transition matrix requires us to query all the elements of M , with $O(N^2)$ query complexity. Second, M may have a structure that makes its quantization easy (like random walks on hypercubic lattices), but M^k might not inherit that structure making its quantization difficult.

We now demonstrate how to implement $W(M^k)$ without classically powering M , using techniques very similar to those we used for the flip-flop walk. To implement $W(M)$, two state registers are required, each having $O(\log N)$ qubits. To quantize M^k , we require $k+1$ such registers. Let these registers be numbered from 1 to k starting from the left, and let V_i^m denote V_i applied between the registers numbered m and $m+1$. Next we define two sets of orthonormal states for $i \in [N]$:

$$|A_i^k\rangle = V_1^k \dots V_1^2 V_1^1 |i\rangle |0\rangle \dots |0\rangle = \sum_{j_1 \dots j_k} \sqrt{M_{ij_1} M_{j_1 j_2} \dots M_{j_{k-1} j_k}} |i\rangle |j_1\rangle \dots |j_k\rangle, \quad (80)$$

$$|B_i^k\rangle = V_2^1 \dots V_2^{k-1} V_2^k |0\rangle \dots |0\rangle |i\rangle = \sum_{j_1 \dots j_k} \sqrt{M_{j_{k-1} j_k} \dots M_{j_1 j_2} M_{ij_1}} |j_k\rangle \dots |j_1\rangle |i\rangle. \quad (81)$$

As before, we define two isometric operators from $\mathbb{C} \rightarrow \mathbb{C}^{N^{k+1}}$:

$$A_k = \sum_{i=1}^N |A_i^k\rangle \langle i|, \quad B_k = \sum_{i=1}^N |B_i^k\rangle \langle i|. \quad (82)$$

In terms of these operators, we construct a multi-step quantum walk as,

$$W_k(M) = (2B_k B_k^\dagger - I)(2A_k A_k^\dagger - I). \quad (83)$$

The discriminant of this walk is $A_k^\dagger B_k$. From the definitions of the states in Eq.(80), it is seen that $A_k^\dagger B_k = M^k$. So the action of the quantum walk $W_k(M)$ is identical to that of $W(M^k)$ in its non-trivial subspace. Moreover, each step of $W_k(M)$ requires only $4kQ$ queries to implement.

7 Discussion

We have presented an algorithm for quantum search on the two-dimensional grid, which is more efficient compared to AKR and Tulsu's algorithms in terms of the target state oracle complexity Q_O . In terms of the graph structure oracle complexity Q_G , it is as good as the AKR algorithm, but is worse than Tulsu's algorithm by a factor of $\sqrt{\log N}$. Our approach improves the effective connectivity of the graph by taking multiple walk steps inbetween target

state oracles. Naively, one may think that optimization of Q_O would require the graph to be completely connected, as in Grover search, and so the number of walk steps should scale as the diameter of the graph, $O(\sqrt{N})$. But surprisingly this guess is an overestimate, and we can optimize Q_O by taking only $\Theta(\log N)$ walk steps.

We can understand our result as follows. The performance of the quantum search algorithm depends, as per Eqs.(51-53), on all the eigenvalues of the graph and how far away they are from 1. The naive guess for optimizing the performance is to take enough walk steps to make the graph an expander, i.e. to make sure that all the eigenvalues are at a constant distance away from 1. But for the two-dimensional grid, most of the eigenvalues are already far away from 1, and make constant contributions to the sums in Eqs.(59-61). The eigenvalues close to 1, which cause suboptimal behaviour of the algorithm, are comparatively few. So we need to take only those many number of walk steps, which make the contribution of these few eigenvalues optimal. As we have shown, $\Theta(\log N)$ walk steps suffice in case of the two-dimensional grid; they increase the spectral gap of the walk operator from $\Theta(\frac{1}{N})$ to only $\Theta(\frac{\log N}{N})$.

Finally, we note that we have improved the effective connectivity of the graph using the technique of graph powering. There also exist other graph product techniques, like the replacement product and the zig-zag product, which can improve the connectivity of graphs [15, 8]. It would be interesting to explore if these techniques can be used to further improve the query complexity of the quantum spatial search problem.

1. Abhijith J. and A. Patel (2018), *Spatial search on graphs with multiple targets using flip-flop quantum walk*, arXiv:1801.01305.
2. A. Ambainis (2003), *Quantum walks and their algorithmic applications*, Int. J. Quantum Information, 1, pp. 507-518.
3. A. Ambainis, J. Kempe and A. Rivosh (2005), *Coins make quantum walks faster*, Proc. 16th Annual ACM-SIAM Symp. on Discrete Algorithms, ACM, pp. 1099-1108.
4. A. Ambainis (2007), *Quantum walk algorithm for element distinctness*, SIAM J. Computing, 37, pp. 210-239.
5. G. Brassard, P. Hoyer, M. Mosca and A. Tapp (2002), *Quantum amplitude amplification and estimation*, AMS Contemporary Mathematics Series Vol. 305, Eds. S.J. Lomonaco and H.E. Brandt, AMS, pp. 53-74.
6. A. M. Childs (2009), *Universal computation by quantum walk*, Phys. Rev. Lett., 102, 180501.
7. A. M. Childs, R. Cleve, E. Deotto, E. Farhi, S. Gutmann and D. Spielman (2003), *Exponential algorithmic speedup by a quantum walk*, Proc. 35th Annual ACM Symp. on Theory of computing, ACM, pp. 59-68.
8. S. Hoory, N. Linial and A. Wigderson (2006), *Expander graphs and their applications*, Bull. Amer. Math. Soc., 43, pp. 439-561.
9. H. Krovi, F. Magniez, M. Ozols, J. Roland (2010), *Finding is as easy as detecting for quantum walks*, in "ICALP 2010: Automata, Languages and Programming", Eds. S. Abramsky, C. Gavaille, C. Kirchner, F. Meyer auf der Heide and P.G. Spirakis, LNCS vol. 6198, Springer, pp. 540-551.
10. H. Krovi, F. Magniez, M. Ozols and J. Roland (2016), *Quantum walks can find a marked element on any graph.*, Algorithmica, 74, pp. 851-907.
11. D. A. Meyer and T. G. Wong (2015), *Connectivity is a poor indicator of fast quantum search*, Phys. Rev. Lett., 114, 110503.
12. D. Nagaj, P. Wocjan and Y. Zhang (2009), *Fast amplification of QMA*, Quantum Inf. Comput., 9, pp. 1053-1068.
13. A. Patel, and Md. A. Rahaman (2010), *Search on a hypercubic lattice using a quantum random walk. I. $d \geq 2$* , Phys. Rev. A, 82, 032330.

14. A. Patel, K. S. Raghunathan and Md. A. Rahaman (2010), *Search on a hypercubic lattice using a quantum random walk. II. $d=2$* , Phys. Rev. A, 82, 032331.
15. O. Reingold, S. Vadhan and A. Wigderson (2002), *Entropy waves, the zig-zag graph product, and new constant-degree expanders*, Annals of Mathematics, 155, pp. 157-187.
16. N. Shenvi, J. Kempe and K.B. Whaley (2003), *Quantum random-walk search algorithm*, Phys. Rev. A, 67, 052307.
17. M. Szegedy (2004), *Quantum speed-up of Markov chain based algorithms*, Proc. 45th Annual IEEE Symposium on Foundations of Computer Science (FOCS'04), IEEE, pp. 32-41.
18. A. Tulsi (2008), *Faster quantum-walk algorithm for the two-dimensional spatial search*, Phys. Rev. A, 78, 012310.
19. T. G. Wong and A. Ambainis (2015), *Quantum search with multiple walk steps per oracle query*, Phys. Rev. A, 92, 022338.

Appendix A: Bounds on relevant sums for the two-dimensional grid

Bounding $\sum_{\mathbf{k} \neq 0} \frac{1}{1 - \cos^t \phi_{\mathbf{k}}}$: For our algorithm to work well, we need to find a small enough t such that $\sum_{\mathbf{k} \neq 0} \frac{1}{1 - \cos^t \phi_{\mathbf{k}}} = \Theta(N)$. For $t = 1$, this sum scales as $\Theta(N \log N)$ [3], and we need to improve up on that by choosing a larger t .

For any t , a simple lower bound for this sum can be derived as follows:

$$\sum_{\mathbf{k} \neq 0} \frac{1}{1 - \cos^t \phi_{\mathbf{k}}} = \sum_{\mathbf{k} \neq 0} \frac{1}{(1 - \cos \phi_{\mathbf{k}})(\sum_{n=0}^{t-1} \cos^n \phi_{\mathbf{k}})}, \quad (\text{A.1})$$

$$\geq \frac{1}{t} \sum_{\mathbf{k} \neq 0} \frac{1}{1 - \cos \phi_{\mathbf{k}}}, \quad (\text{A.2})$$

$$= \Omega\left(\frac{N \log N}{t}\right). \quad (\text{A.3})$$

Deriving a good upper bound requires more work. For $\theta \in [0, \pi]$, we have

$$\cos \theta \leq 1 - \frac{2\theta^2}{\pi^2}. \quad (\text{A.4})$$

Using this inequality, together with $1 - x \leq e^{-x}$, we obtain

$$\cos^t \phi_{\mathbf{k}} = 2^{-t} \left(\cos\left(\frac{2\pi k_x}{\sqrt{N}}\right) + \cos\left(\frac{2\pi k_y}{\sqrt{N}}\right) \right)^t \leq \left(1 - \frac{4\mathbf{k}^2}{N}\right)^t \leq e^{-4\mathbf{k}^2 t/N}. \quad (\text{A.5})$$

Inserting it in our original sum, we get

$$\sum_{\mathbf{k} \neq 0} \frac{1}{1 - \cos^t \phi_{\mathbf{k}}} \leq \sum_{\mathbf{k} \neq 0} \frac{1}{1 - e^{-4\mathbf{k}^2 t/N}}. \quad (\text{A.6})$$

Now $\sum_{\mathbf{k} \neq 0}$ goes over the points of a two-dimensional grid, with side length $L = \sqrt{N}$. We can choose $k_i \in \{-\lfloor L/2 \rfloor, \dots, 0, \dots, \lfloor L/2 \rfloor\}$, with a weight $1/2$ for the end-points when L is even. This grid can be divided in to concentric square shells, with the center at the origin, and inner side length $l \in \{1, 2, \dots, \lfloor L/2 \rfloor\}$. The l^{th} shell has $(2l+1)^2 - (2l-1)^2 = 8l$ points in it, and for every point,

$$l^2 \leq \mathbf{k}^2 \leq 2l^2. \quad (\text{A.7})$$

So for each term on such a square,

$$\frac{1}{1 - e^{-4\mathbf{k}^2 t/N}} \leq \frac{1}{1 - e^{-4l^2 t/N}}, \quad (\text{A.8})$$

and adding up all the terms, we get

$$\sum_{\mathbf{k} \neq 0} \frac{1}{1 - \cos^t \phi_{\mathbf{k}}} \leq 8 \sum_{l=1}^{\lfloor L/2 \rfloor} \frac{l}{1 - e^{-4l^2 t/N}}. \quad (\text{A.9})$$

So far we have managed to upper bound our two-dimensional sum by a simpler looking one-dimensional sum. To proceed further, we split this sum into two parts at the point \tilde{l} , such that $\tilde{l} = \lfloor \sqrt{\frac{N}{4t}} \rfloor$. Then for all $l \leq \tilde{l}$, we ensure that $\frac{4l^2 t}{N} \leq 1$. Now for $x \in [0, 1]$, we have $1 - \frac{x}{2} \geq e^{-x}$, and for $x \geq 1$ we have $e^{-x} \leq e^{-1}$. Using these inequalities in the split sum, we obtain

$$8 \sum_{l=1}^{\lfloor L/2 \rfloor} \frac{l}{1 - e^{-4l^2 t/N}} \leq \frac{4N}{t} \sum_{l=1}^{\tilde{l}} \frac{1}{l} + \frac{8}{1 - e^{-1}} \sum_{l=\tilde{l}+1}^{\lfloor L/2 \rfloor} l, \quad (\text{A.10})$$

$$= O\left(\frac{N}{t} \log(\tilde{l}) + L^2\right), \quad (\text{A.11})$$

$$= O\left(\frac{N}{t} \log \frac{N}{t} + N\right). \quad (\text{A.12})$$

We can bring together the lower bound of Eq.(A.3), and the upper bound of Eq.(A.12), by choosing $t = O(\log N)$. Then we get the result, $\sum_{\mathbf{k} \neq 0} \frac{1}{1 - \cos^t \phi_{\mathbf{k}}} = \Theta\left(\frac{N \log N}{t}\right)$. Our optimal choice $t = \Theta(\log N)$ gives, $\sum_{\mathbf{k} \neq 0} \frac{1}{1 - \cos^t \phi_{\mathbf{k}}} = \Theta(N)$.

Bounding $\sum_{\mathbf{k} \neq 0} \frac{1}{(1 - \cos^t \phi_{\mathbf{k}})^2}$: We can bound this sum also by repeating the same steps. For $t = 1$, this sum scales as $\Theta(N^2)$ [3], and we want to improve up on that. A lower bound can be found, in a manner analogous to the derivation of Eq.(A.3), as

$$\sum_{\mathbf{k} \neq 0} \frac{1}{(1 - \cos^t \phi_{\mathbf{k}})^2} = \Omega\left(\frac{N^2}{t^2}\right). \quad (\text{A.13})$$

To find the upper bound, first we use the same steps that led to Eq.(A.9), converting the two-dimensional sum to a one-dimensional one,

$$\sum_{\mathbf{k} \neq 0} \frac{1}{(1 - \cos^t \phi_{\mathbf{k}})^2} \leq \sum_{\mathbf{k} \neq 0} \frac{1}{(1 - e^{-4\mathbf{k}^2 t/N})^2} \leq 8 \sum_{l=1}^{\lfloor L/2 \rfloor} \frac{l}{(1 - e^{-4l^2 t/N})^2}. \quad (\text{A.14})$$

We then split the one-dimensional sum in to two parts at $\tilde{l} = \lfloor \sqrt{\frac{N}{4t}} \rfloor$, as before. Working out the details, we find

$$8 \sum_{l=1}^{\lfloor L/2 \rfloor} \frac{l}{(1 - e^{-4l^2 t/N})^2} \leq \frac{2N^2}{t^2} \sum_{l=1}^{\tilde{l}} \frac{1}{l^3} + \frac{8}{(1 - e^{-1})^2} \sum_{l=\tilde{l}+1}^{\lfloor L/2 \rfloor} l, \quad (\text{A.15})$$

$$= O\left(\frac{N^2}{t^2} + N\right). \quad (\text{A.16})$$

For any $t = O(\sqrt{N})$, the lower bound of Eq.(A.13) and the upper bound of Eq.(A.16) are brought together, giving $\sum_{k \neq 0} \frac{1}{(1 - \cos^t \phi_k)^2} = \Theta(\frac{N^2}{t^2})$.

Bounding $\sum_{k \neq 0} \cot^2(\phi_k^{(t)}/2)$: Using $\cot^2 \theta = \operatorname{cosec}^2 \theta - 1$, and Corollary 1, we have

$$\sum_{k \neq 0} \cot^2 \frac{\phi_k^{(t)}}{2} = 1 - N + \sum_{k \neq 0} \operatorname{cosec}^2 \frac{\phi_k^{(t)}}{2} = 1 - N + \sum_{k \neq 0} \frac{2}{1 - \cos^t \phi_k}. \quad (\text{A.17})$$

Hence, Eq.(A.3) implies that $\sum_{k \neq 0} \cot^2(\phi_k^{(t)}/2)$ has the lower bound $\Omega(\frac{N}{t} \log N)$, and Eq.(A.12) implies that it has the upper bound $O(\frac{N}{t} \log \frac{N}{t} + N)$. The two bounds come together for the choice $t = O(\log N)$, giving $\sum_{k \neq 0} \cot^2(\phi_k^{(t)}/2) = \Theta(\frac{N \log N}{t})$. Our optimal choice $t = \Theta(\log N)$ gives, $\sum_{k \neq 0} \cot^2(\phi_k^{(t)}/2) = \Theta(N)$.

Appendix B: Proof that $\alpha < \frac{1}{2}\phi_1^{(t)}$

As per Corollary 1, we have $\cos \phi_1^{(t)} = \cos^t \phi_1$. Our strategy is to lower bound $\phi_1^{(t)}$ with a quantity asymptotically greater than α . To this end, we use the inequalities,

$$1 - \frac{\theta^2}{2} \leq \cos \theta \leq 1 - \frac{2\theta^2}{\pi^2}, \quad (\text{B.1})$$

for $\theta \in [0, \pi]$, to express

$$\phi_1^{(t)} \geq \sqrt{2(1 - \cos^t \phi_1)} \geq \sqrt{2 \left(1 - \left(1 - \frac{2\phi_1^2}{\pi^2} \right)^t \right)}. \quad (\text{B.2})$$

Then using the inequality $1 - x \leq e^{-x}$, we have the bound,

$$\phi_1^{(t)} \geq \sqrt{2(1 - e^{-2\phi_1^2 t / \pi^2})}. \quad (\text{B.3})$$

For the two-dimensional grid, $\cos \phi_1 = \cos^2 \frac{\pi}{\sqrt{N}}$ and $\phi_1 = \Theta(\frac{1}{\sqrt{N}})$. So for the choice $t = \Theta(\log N)$, the exponent $\frac{2\phi_1^2 t}{\pi^2}$ is much smaller than 1. Combining this fact with the inequality $1 - \frac{x}{2} \geq e^{-x}$ for $x \in [0, 1]$, we finally get

$$\phi_1^{(t)} \geq \sqrt{\frac{2\phi_1^2 t}{\pi^2}} = \Omega\left(\sqrt{\frac{t}{N}}\right). \quad (\text{B.4})$$

From Eq.(59), we know that $\alpha = \Theta(\sqrt{\frac{t}{N \log N}})$. As a result, the condition $\alpha < \frac{1}{2}\phi_1^{(t)}$ holds asymptotically.