

# Decision Procedures for Path Feasibility of String-Manipulating Programs with Complex Operations

Taolue Chen, Matthew Hague, Anthony W. Lin, Philipp Rümmer and Zhilin Wu

<sup>1</sup> Birkbeck, University of London

<sup>2</sup> Royal Holloway, University of London

<sup>3</sup> University of Oxford

<sup>4</sup> Uppsala University

<sup>5</sup> Institute of Software, Chinese Academy of Sciences

## Abstract

The design and implementation of decision procedures for checking path feasibility in string-manipulating programs is an important problem, with such applications as symbolic execution of programs with strings and automated detection of cross-site scripting (XSS) vulnerabilities in web applications. A (symbolic) path is given as a finite sequence of assignments and assertions (i.e. without loops), and checking its feasibility amounts to determining the existence of inputs that yield a successful execution. Modern programming languages (e.g. JavaScript, PHP, and Python) support many complex string operations, and strings are also often implicitly modified during a computation in some intricate fashion (e.g. by some autoescaping mechanisms).

In this paper we provide two general semantic conditions which together ensure the decidability of path feasibility: (1) each assertion admits regular monadic decomposition (i.e. is an effectively recognisable relation), and (2) each assignment uses a (possibly nondeterministic) function whose inverse relation preserves regularity. We show that the semantic conditions are *expressive* since they are satisfied by a multitude of string operations including concatenation, one-way and two-way finite-state transducers, `replaceAll` functions (where the replacement string could contain variables), string-reverse functions, regular-expression matching, and some (restricted) forms of letter-counting/length functions. The semantic conditions also strictly subsume existing decidable string theories (e.g. straight-line fragments, and acyclic logics), and most existing benchmarks (e.g. most of Kaluza's, and all of SLOG's, Stranger's, and SLOTH's benchmarks). Our semantic conditions also yield a conceptually *simple* decision procedure, as well as an *extensible* architecture of a string solver in that a user may easily incorporate his/her own string functions into the solver by simply providing code for the pre-image computation without worrying about other parts of the solver. Despite these, the semantic conditions are unfortunately too general to provide a fast and complete decision procedure. We provide strong theoretical evidence for this in the form of complexity results. To rectify this problem, we propose two solutions. Our main solution is to allow only partial string functions (i.e., prohibit nondeterminism) in condition (2). This restriction is satisfied in many cases in practice, and yields decision procedures that are effective in both theory and practice. Whenever nondeterministic functions are still needed (e.g. the string function `split`), our second solution is to provide a syntactic fragment that provides a support of nondeterministic functions, and operations like one-way transducers, `replaceAll` (with constant replacement string), the string-reverse function, concatenation, and regular-expression matching. We show that this fragment can be reduced to an existing solver SLOTH that exploits fast model checking algorithms like IC3.

We provide an efficient implementation of our decision procedure (assuming our first solution above, i.e., deterministic partial string functions) in a new string solver OSTRICH. Our implementation provides built-in support for concatenation, reverse, functional transducers (FFT), and `replaceAll` and provides a framework for extensibility to support further string functions. We demonstrate the efficacy of our new solver against other competitive solvers.

## 1 Introduction

Strings are a fundamental data type in virtually all programming languages. Their generic nature can, however, lead to many subtle programming bugs, some with security consequences, e.g., cross-site scripting (XSS), which is among the OWASP Top 10 Application Security Risks [55]. One effective automatic testing method for identifying subtle programming errors is based on *symbolic execution* [37] and combinations with dynamic analysis called *dynamic symbolic execution* [51, 29, 15, 52, 14]. See [16] for an excellent survey. Unlike purely random testing, which runs only *concrete* program executions on different inputs, the techniques of symbolic execution analyse *static* paths (also called symbolic executions) through the software system under test. Such a path can be viewed as a constraint  $\varphi$  (over appropriate data domains) and the hope is that a fast solver is available for checking the satisfiability of  $\varphi$  (i.e. to check the *feasibility* of the static path), which can be used for generating inputs that lead to certain parts of the program or an erroneous behaviour.

Constraints from symbolic execution on string-manipulating programs can be understood in terms of the problem of path feasibility over a bounded program  $S$  with neither loops nor branching (e.g. see [10]). That is,  $S$  is a sequence of assignments and conditionals/assertions, i.e., generated by the grammar

$$S ::= y := f(x_1, \dots, x_r) \mid \mathbf{assert}(g(x_1, \dots, x_r)) \mid S; S \quad (1)$$

where  $f : (\Sigma^*)^r \rightarrow \Sigma^*$  is a partial string function and  $g \subseteq (\Sigma^*)^r$  is a string relation. The following is a simple example of a symbolic execution  $S$  which uses string variables ( $x$ ,  $y$ , and  $z$ 's) and string constants (letters **a** and **b**), and the concatenation operator ( $\circ$ ):

$$z_1 := x \circ \mathbf{ba} \circ y; \quad z_2 := y \circ \mathbf{ab} \circ x; \quad \mathbf{assert}(z_1 == z_2) \quad (2)$$

The problem of *path feasibility/satisfiability*<sup>1</sup> asks whether, for a given program  $S$ , there exist *input* strings (e.g.  $x$  and  $y$  in (2)) that can successfully take  $S$  to the end of the program while satisfying all the assertions. This path can be satisfied by assigning  $y$  (resp.  $x$ ) to **b** (resp. the empty string). In this paper, we will also allow nondeterministic functions  $f : (\Sigma^*)^r \rightarrow 2^{\Sigma^*}$  since nondeterminism can be a useful modelling construct. For example, consider the code in Figure 1. It ensures that each element in **s1** (construed as a list delimited by  $-$ ) is longer than each element in **s2**. If  $f : \Sigma^* \rightarrow 2^{\Sigma^*}$  is a function that nondeterministically outputs a substring delimited by  $-$ , our symbolic execution analysis can be reduced to feasibility of the path:

$$x := f(s_1); \quad y := f(s_2); \quad \mathbf{assert}(\mathbf{len}(x) \leq \mathbf{len}(y))$$

<sup>1</sup>It is equivalent to satisfiability of string constraints in the SMT framework [23, 7, 39]. Simply convert a symbolic execution  $S$  into a *Static Single Assignment* (SSA) form (i.e. use a new variable on l.h.s. of each assignment) and treat assignments as equality, e.g., formula for the above example is  $z_1 = x + \mathbf{ba} + y \wedge z_2 = y + \mathbf{ab} + x \wedge z_1 = z_2$ , where  $+$  denotes the string concatenation operation.

In the last few decades much research on the satisfiability problem of string constraints suggests that it takes very little for a string constraint language to become undecidable. For example, although the existential theory of concatenation and regular constraints (i.e. an atomic expression is either  $E = E'$ , where  $E$  and  $E'$  are concatenations of string constants and variables, or  $x \in L$ , where  $L$  is a regular language) is decidable and in fact PSPACE-complete [48, 25, 33], the theory becomes undecidable when enriched with letter-counting [12], i.e., expressions of the form  $|x|_a = |y|_b$ , where  $|\cdot|_a$  is a function mapping a word to the number of occurrences of the letter  $a$  in the word. Similarly, although finite-state transductions [42, 22, 31] are crucial for expressing many functions used in string-manipulating programs — including autoescaping mechanisms (e.g. backslash escape, and HTML escape in JavaScript), and the `replaceAll` function with a constant replacement pattern — checking a simple formula of the form  $\exists xR(x, x)$ , for a given rational transduction<sup>2</sup>  $R$ , can easily encode the Post Correspondence Problem [45], and therefore is undecidable.

Despite the undecidability of allowing various operations in string constraints, in practice it is common for a string-manipulating program to contain multiple operations (e.g. concatenation and finite-state transductions), and so a path feasibility solver nonetheless needs to be able to handle them. This is one reason why some string solving practitioners opted to support more string operations and settle with incomplete solvers (e.g. with no guarantee of termination) that could still solve some constraints that arise in practice, e.g., see [53, 54, 63, 62, 9, 50, 60, 1, 59, 36, 40, 2]. For example, the tool S3 [53, 54] supports general recursively-defined predicates and uses a number of incomplete heuristics to detect unsatisfiable constraints. As another example, the tool Stranger [59, 60] supports concatenation, `replaceAll` (but with both pattern and replacement strings being constants), and regular constraints, and performs widening (i.e. an overapproximation) when a concatenation operator is seen in the analysis. Despite the excellent performance of some of these solvers on several existing benchmarks, there are good reasons for designing decision procedures with stronger theoretical guarantees, e.g., in the form of decidability (perhaps accompanied by a complexity analysis). One such reason is that string constraint solving is a research area in its infancy with an insufficient range of benchmarking examples to convince us that if a string solver works well on existing benchmarks, it will also work well on future benchmarks. A theoretical result provides a kind of robustness guarantee upon which a practical solver could further improve and optimise.

Fortunately, recent years have seen the possibility of recovering some decidability of string constraint languages with multiple string operations, while retaining applicability for constraints that arise in practical symbolic execution applications. This is done by imposing syntactic restrictions including acyclicity [6, 3], solved form [28], and straight-line [42, 30, 18]. These restrictions are known to be satisfied by many existing string constraint benchmarks, e.g., Kaluza [50], Stranger [59], SLOG [57, 30], and mutation XSS benchmarks of [42]. However, these results are unfortunately rather fragmented, and it is difficult to extend the comparatively limited number of supported string operations. In the following, we will elaborate this point more precisely. The acyclic logic of [6] permits only rational transductions, in which the

```
# s1, s2: strings with delimiter '-'
for x in s1.split('-')
  for y in s2.split('-')
    assert(len(x) > len(y))
```

Figure 1: A Python code snippet

<sup>2</sup>A rational transduction is a transduction defined by a rational transducer, namely, a finite automaton over the alphabet  $(\Sigma \cup \{\varepsilon\})^2$ , where  $\varepsilon$  denotes the empty string.

`replaceAll` function with constant pattern/replacement strings and regular constraints (but not concatenation) can be expressed. On the other hand, the acyclic logic of [3] permits concatenation, regular constraints, and the length function, but neither the `replaceAll` function nor transductions. This logic is in fact quite related to the solved-form logic proposed earlier by [28]. The straight-line logic of [42] unified the earlier logics by allowing concatenation, regular constraints, rational transductions, and length and letter-counting functions. It was pointed out by [18] that this logic cannot express the `replaceAll` function with the replacement string provided as a variable, which was never studied in the context of verification and program analysis. Chen *et al.* proceeded by showing that a new straight-line logic with the more general `replaceAll` function and concatenation is decidable, but becomes undecidable when the length function is permitted.

Although the aforementioned results have been rather successful in capturing many string constraints that arise in applications (e.g. see the benchmarking results of [28] and [42, 30]), many natural problems remain unaddressed. *To what extent can one combine these operations without sacrificing decidability?* For example, can a useful decidable logic permit the more general `replaceAll`, rational transductions, and concatenation at the same time? *To what extent can one introduce new string operations without sacrificing decidability?* For example, can we allow the string-reverse function (a standard library function, e.g., in Python), or more generally functions given by two-way transducers (i.e. the input head can also move to the left)? Last but not least, since there are a plethora of complex string operations, it is impossible for a solver designer to incorporate all the string operations that will be useful in all application domains. Thus, *can (and, if so, how do) we design an effective string solver that can easily be extended with user-defined string functions, while providing a strong completeness/termination guarantee?* Our goal is to provide theoretically-sound and practically implementable solutions to these problems.

**Contributions.** We provide two general semantic conditions (see Section 3) which together ensure decidability of path feasibility for string-manipulating programs:

- (1) the conditional  $R \subseteq (\Sigma^*)^k$  in each assertion admits a regular monadic decomposition, and
- (2) each assignment uses a function  $f : (\Sigma^*)^k \rightarrow 2^{\Sigma^*}$  whose inverse relation preserves “regularity”.

Before describing these conditions in more detail, we comment on the four main features (4Es) of our decidability result: (a) *Expressive*: the two conditions are satisfied by most string constraint benchmarks (existing and new ones including those of [50, 59, 57, 30, 42]) and strictly generalise several expressive and decidable constraint languages (e.g. those of [42, 18]), (b) *Easy*: it leads to a decision procedure that is conceptually simple (in particular, substantially simpler than many existing ones), (c) *Extensible*: it provides an extensible architecture of a string solver that allows users to easily incorporate their own user-defined functions to the solver, and (d) *Efficient*: it provides a sound basis of our new fast string solver OSTRICH that is highly competitive on string constraint benchmarks. We elaborate the details of the two aforementioned semantic conditions, and our contributions below.

The first semantic condition simply means that  $R$  can be effectively transformed into a finite union  $\bigcup_{i=1}^n (L_i^{(1)} \times \dots \times L_i^{(k)})$  of Cartesian products of regular languages. (Note that this is *not* the intersection/product of regular languages.) A relation that is definable in this way is often called a *recognisable relation* [17], which is one standard extension of the notion of regular languages (i.e. unary relations) to general  $k$ -ary relations. The framework of recognisable relations can express interesting conditions that might at a first glance seem beyond

“regularity”, e.g.,  $|x_1| + |x_2| \geq 3$  as can be seen below in Example 3.2. Furthermore, there are algorithms (i.e. called *monadic decompositions* in [56]) for deciding whether a given relation represented in highly expressive symbolic representations (e.g. a *synchronised rational relation* or a *deterministic rational relation*) is recognisable and, if so, output a symbolic representation of the recognisable relation [17]. On the other hand, the second condition means that the pre-image  $f^{-1}(L)$  of a regular language  $L$  under the function  $f$  is a  $k$ -ary recognisable relation. This is an expressive condition (see Section 4) satisfied by many string functions including concatenation, the string reverse function, one-way and two-way finite-state transducers, and the `replaceAll` function where the replacement string can contain variables. Therefore, we obtain strict generalisations of the decidable string constraint languages in [42] (concatenation, one-way transducers, and regular constraints) and in [18] (concatenation, the `replaceAll` function, and regular constraints). In addition, many string solving benchmarks (both existing and new ones) derived from practical applications satisfy our two semantics conditions including the benchmarks of SLOG [57] with `replace` and `replaceAll`, the benchmarks of Stranger [59],  $\sim 80\%$  of Kaluza benchmarks [50], and the transducer benchmarks of [42, 30]. We provide a simple and clean decision procedure (see Section 3) which propagates the regular language constraints in a *backward* manner via the regularity-preserving pre-image computation. Our semantic conditions also naturally lead to extensible architecture of a string solver: a user can easily extend our solver with one’s own string functions by simply providing one’s code for computing the pre-image  $f^{-1}(L)$  for an input regular language  $L$  without worrying about other parts of the solver.

Having talked about the Expressive, Easy, and Extensible features of our decidability result (first three of the four Es), our decidability result does not immediately lead to an Efficient decision procedure and a fast string solver. A substantial proportion of the remaining paper is dedicated to analysing the cause of the problem and proposing ways of addressing it which are effective from both theoretical and practical standpoints.

Our hypothesis is that allowing general string relations  $f : (\Sigma^*)^k \rightarrow 2^{\Sigma^*}$  (instead of just partial functions  $f : \Sigma^* \rightarrow \Sigma^*$ ), although broadening the applicability of the resulting theory (e.g. see Figure 1), makes the constraint solving problem considerably more difficult. One reason is that propagating  $n$  regular constraints  $L_1, \dots, L_n$  backwards through a string relation  $f : (\Sigma^*)^k \rightarrow 2^{\Sigma^*}$  seems to require performing a product automata construction for  $\bigcap_{i=1}^n L_i$  before computing a recognisable relation for  $f^{-1}(\bigcap_{i=1}^n L_i)$ . To make things worse, this product construction has to be done *for practically every variable in the constraint*, each of which causes an exponential blowup. We illustrate this with a concrete example in Example 5.2. We provide a strong piece of theoretical evidence that unfortunately this is unavoidable in the worst case. More precisely, we show (see Section 4) that the complexity of the path feasibility problem with binary relations represented by one-way finite transducers (a.k.a. *binary rational relations*) and the `replaceAll` function (allowing a variable in the replacement string) has a NON-ELEMENTARY complexity (i.e., time/space complexity cannot be bounded by a fixed tower of exponentials) with a single level of exponentials caused by a product automata construction for each variable in the constraint. This is especially surprising since allowing either binary rational relations or the aforementioned `replaceAll` function results in a constraint language whose complexity is at most double exponential time and single exponential space (i.e. EXPSPACE); see [42, 18]. To provide further evidence of our hypothesis, we accompany this with another lower bound (also see Section 4) that the path feasibility problem has a NON-ELEMENTARY complexity for relations that are represented by two-way finite transducers (without the `replaceAll` function), which are possibly one of the most natural and well-studied classes of models of string relations  $f : \Sigma^* \rightarrow 2^{\Sigma^*}$  (e.g. see [4, 26, 27] for the model).

We propose two remedies to the problem. The first one is to allow only string functions in our constraint language. This allows one to avoid the computationally expensive product automata construction for each variable in the constraint. In fact, we show (see Section 5.1) that the NON-ELEMENTARY complexity for the case of binary rational relations and the `replaceAll` function can be substantially brought down to double exponential time and single exponential space (in fact, EXPSPACE-complete) if the binary rational relations are restricted to partial functions. In fact, we prove that this complexity still holds if we additionally allow the string-reverse function and the concatenation operator. The EXPSPACE complexity might still sound prohibitive, but the highly competitive performance of our new solver OSTRICH (see below) shows that this is not the case.

Our second solution (see Section 5.2) is to still allow string relations, but find an appropriate syntactic fragment of our semantic conditions that yield better computational complexity. Our proposal for such a fragment is to *restrict the use of `replaceAll` to constant replacement strings*, but allow the string-reverse function and binary rational relations. The complexity of this fragment is shown to be EXPSPACE-complete, building on the result of [42]. There are at least two advantages of the second solution. While string relations are supported, our algorithm reduces the problem to constraints which can be handled by the existing solver SLOTH [30] that has a reasonable performance. Secondly, the fully-fledged length constraints (e.g.  $|x| = |y|$  and more generally linear arithmetic expressions on the lengths of string variables) can be incorporated into this syntactic fragment without sacrificing decidability or increasing the EXPSPACE complexity. Our experimentation and the comparison of our tool with SLOTH (see below) suggest that *our first proposed solution is to be strongly preferred when string relations are not used in the constraints*.

We have implemented our first proposed decision procedure in a new fast string solver OSTRICH<sup>3</sup> (*Optimistic STRIng Constraint Handler*). Our solver provides built-in support for concatenation, reverse, functional transducers (FFT), and `replaceAll`. Moreover, it is designed to be extensible and adding support for new string functions is a straight-forward task. We compare OSTRICH with several state-of-the-art string solving tools — including SLOTH [30], CVC4 [40], and Z3 [9] — on a wide range of challenging benchmarks — including SLOG’s `replace/replaceall` [57], Stranger’s [59], mutation XSS [42, 30], and the benchmarks of Kaluza that satisfy our semantic conditions (i.e. ~80% of them) [50]. It is the only tool that was able to return an answer on all of the benchmarks we used. Moreover, it significantly outperforms SLOTH, the only tool comparable with OSTRICH in terms of theoretical guarantees and closest in terms of expressibility. It also competes well with CVC4 — a fast, but incomplete solver — on the benchmarks for which CVC4 was able to return a conclusive response. We report details of OSTRICH and empirical results in Section 6.

## 2 Preliminaries

**General Notation.** Let  $\mathbb{Z}$  and  $\mathbb{N}$  denote the set of integers and natural numbers respectively. For  $k \in \mathbb{N}$ , let  $[k] = \{1, \dots, k\}$ . For a vector  $\vec{x} = (x_1, \dots, x_n)$ , let  $|\vec{x}|$  denote the length of  $\vec{x}$  (i.e.,  $n$ ) and  $\vec{x}[i]$  denote  $x_i$  for each  $i \in [n]$ . Given a function  $f : A \rightarrow B$  and  $X \subseteq B$ , we use  $f^{-1}(X)$  to define the pre-image of  $X$  under  $f$ , i.e.,  $\{a \in A : f(a) \in X\}$ .

**Regular Languages.** Fix a finite *alphabet*  $\Sigma$ . Elements in  $\Sigma^*$  are called *strings*. Let  $\varepsilon$  denote the empty string and  $\Sigma^+ = \Sigma^* \setminus \{\varepsilon\}$ . We will use  $a, b, \dots$  to denote letters from  $\Sigma$  and  $u, v, w, \dots$

<sup>3</sup>As an aside, in contrast to an emu, an ostrich is known to be able to walk backwards, and hence the name of our solver, which propagates regular constraints in a backward direction.

to denote strings from  $\Sigma^*$ . For a string  $u \in \Sigma^*$ , let  $|u|$  denote the *length* of  $u$  (in particular,  $|\varepsilon| = 0$ ), moreover, for  $a \in \Sigma$ , let  $|u|_a$  denote the number of occurrences of  $a$  in  $u$ . A *position* of a nonempty string  $u$  of length  $n$  is a number  $i \in [n]$  (Note that the first position is 1, instead of 0). In addition, for  $i \in [|u|]$ , let  $u[i]$  denote the  $i$ -th letter of  $u$ . For a string  $u \in \Sigma^*$ , we use  $u^R$  to denote the reverse of  $u$ , that is, if  $u = a_1 \cdots a_n$ , then  $u^R = a_n \cdots a_1$ . For two strings  $u_1, u_2$ , we use  $u_1 \cdot u_2$  to denote the *concatenation* of  $u_1$  and  $u_2$ , that is, the string  $v$  such that  $|v| = |u_1| + |u_2|$  and for each  $i \in [|u_1|]$ ,  $v[i] = u_1[i]$ , and for each  $i \in |u_2|$ ,  $v[|u_1| + i] = u_2[i]$ . Let  $u, v$  be two strings. If  $v = u \cdot v'$  for some string  $v'$ , then  $u$  is said to be a *prefix* of  $v$ . In addition, if  $u \neq v$ , then  $u$  is said to be a *strict prefix* of  $v$ . If  $u$  is a prefix of  $v$ , that is,  $v = u \cdot v'$  for some string  $v'$ , then we use  $u^{-1}v$  to denote  $v'$ . In particular,  $\varepsilon^{-1}v = v$ .

A *language* over  $\Sigma$  is a subset of  $\Sigma^*$ . We will use  $L_1, L_2, \dots$  to denote languages. For two languages  $L_1, L_2$ , we use  $L_1 \cup L_2$  to denote the union of  $L_1$  and  $L_2$ , and  $L_1 \cdot L_2$  to denote the concatenation of  $L_1$  and  $L_2$ , that is, the language  $\{u_1 \cdot u_2 \mid u_1 \in L_1, u_2 \in L_2\}$ . For a language  $L$  and  $n \in \mathbb{N}$ , we define  $L^n$ , the *iteration* of  $L$  for  $n$  times, inductively as follows:  $L^0 = \{\varepsilon\}$  and  $L^n = L \cdot L^{n-1}$  for  $n > 0$ . We also use  $L^*$  to denote an arbitrary number of iterations of  $L$ , that is,  $L^* = \bigcup_{n \in \mathbb{N}} L^n$ . Moreover, let  $L^+ = \bigcup_{n \in \mathbb{N} \setminus \{0\}} L^n$ .

**Definition 2.1** (Regular expressions RegExp).

$$e \stackrel{\text{def}}{=} \emptyset \mid \varepsilon \mid a \mid e + e \mid e \circ e \mid e^*, \text{ where } a \in \Sigma.$$

Since  $+$  is associative and commutative, we also write  $(e_1 + e_2) + e_3$  as  $e_1 + e_2 + e_3$  for brevity. We use the abbreviation  $e^+ \equiv e \circ e^*$ . Moreover, for  $\Gamma = \{a_1, \dots, a_n\} \subseteq \Sigma$ , we use the abbreviations  $\Gamma \equiv a_1 + \dots + a_n$  and  $\Gamma^* \equiv (a_1 + \dots + a_n)^*$ .

We define  $\mathcal{L}(e)$  to be the language defined by  $e$ , that is, the set of strings that match  $e$ , inductively as follows:  $\mathcal{L}(\emptyset) = \emptyset$ ,  $\mathcal{L}(\varepsilon) = \{\varepsilon\}$ ,  $\mathcal{L}(a) = \{a\}$ ,  $\mathcal{L}(e_1 + e_2) = \mathcal{L}(e_1) \cup \mathcal{L}(e_2)$ ,  $\mathcal{L}(e_1 \circ e_2) = \mathcal{L}(e_1) \cdot \mathcal{L}(e_2)$ ,  $\mathcal{L}(e_1^*) = (\mathcal{L}(e_1))^*$ . In addition, we use  $|e|$  to denote the number of symbols occurring in  $e$ .

**Automata models.** We review some background from automata theory; for more, see [38, 32]. Let  $\Sigma$  be a finite set (called *alphabet*).

**Definition 2.2** (Finite-state automata). A (nondeterministic) finite-state automaton (FA) over a finite alphabet  $\Sigma$  is a tuple  $\mathcal{A} = (\Sigma, Q, q_0, F, \delta)$  where  $Q$  is a finite set of states,  $q_0 \in Q$  is the initial state,  $F \subseteq Q$  is a set of final states, and  $\delta \subseteq Q \times \Sigma \times Q$  is the transition relation.

For an input string  $w = a_1 \dots a_n$ , a *run* of  $\mathcal{A}$  on  $w$  is a sequence of states  $q_0, \dots, q_n$  such that  $(q_{j-1}, a_j, q_j) \in \delta$  for every  $j \in [n]$ . The run is said to be *accepting* if  $q_n \in F$ . A string  $w$  is *accepted* by  $\mathcal{A}$  if there is an accepting run of  $\mathcal{A}$  on  $w$ . In particular, the empty string  $\varepsilon$  is accepted by  $\mathcal{A}$  iff  $q_0 \in F$ . The set of strings accepted by  $\mathcal{A}$  is denoted by  $\mathcal{L}(\mathcal{A})$ , a.k.a., the language *recognised* by  $\mathcal{A}$ . The *size*  $|\mathcal{A}|$  of  $\mathcal{A}$  is defined to be  $|Q|$ ; we will use this when we discuss computational complexity.

For convenience, we will also refer to an FA without initial and final states, that is, a pair  $(Q, \delta)$ , as a *transition graph*.

**Operations of FAs.** For an FA  $\mathcal{A} = (Q, q_0, F, \delta)$ ,  $q \in Q$  and  $P \subseteq Q$ , we use  $\mathcal{A}(q, P)$  to denote the FA  $(Q, q, P, \delta)$ , that is, the FA obtained from  $\mathcal{A}$  by changing the initial state and the set of final states to  $q$  and  $P$  respectively. We use  $q \xrightarrow[\mathcal{A}]{w} q'$  to denote that a string  $w$  is accepted by  $\mathcal{A}(q, \{q'\})$ .

Given two FAs  $\mathcal{A}_1 = (Q_1, q_{0,1}, F_1, \delta_1)$  and  $\mathcal{A}_2 = (Q_2, q_{0,2}, F_2, \delta_2)$ , the *product* of  $\mathcal{A}_1$  and  $\mathcal{A}_2$ , denoted by  $\mathcal{A}_1 \times \mathcal{A}_2$ , is defined as  $(Q_1 \times Q_2, (q_{0,1}, q_{0,2}), F_1 \times F_2, \delta_1 \times \delta_2)$ , where  $\delta_1 \times \delta_2$  is the set of tuples  $((q_1, q_2), a, (q'_1, q'_2))$  such that  $(q_1, a, q'_1) \in \delta_1$  and  $(q_2, a, q'_2) \in \delta_2$ . Evidently, we have  $\mathcal{L}(\mathcal{A}_1 \times \mathcal{A}_2) = \mathcal{L}(\mathcal{A}_1) \cap \mathcal{L}(\mathcal{A}_2)$ .

Moreover, let  $\mathcal{A} = (Q, q_0, F, \delta)$ , we define  $\mathcal{A}^\pi$  as  $(Q, q_f, \{q_0\}, \delta')$ , where  $q_f$  is a newly introduced state not in  $Q$  and  $\delta'$  comprises the transitions  $(q', a, q)$  such that  $(q, a, q') \in \delta$  as well as the transitions  $(q_f, a, q)$  such that  $(q, a, q') \in \delta$  for some  $q' \in F$ . Intuitively,  $\mathcal{A}^\pi$  is obtained from  $\mathcal{A} = (Q, q_0, F, \delta)$  by reversing the direction of each transition of  $\mathcal{A}$  and swapping initial and final states. The new state  $q_f$  in  $\mathcal{A}^\pi$  is introduced to meet the unique initial state requirement in the definition of FA. Evidently,  $\mathcal{A}^\pi$  recognises the reverse language of  $\mathcal{L}(\mathcal{A})$ , namely, the language  $\{u^R \mid u \in \mathcal{L}(\mathcal{A})\}$ .

It is well-known (e.g. see [32]) that regular expressions and FAs are expressively equivalent, and generate precisely all *regular languages*. In particular, from a regular expression, an equivalent FA can be constructed in linear time. Moreover, regular languages are closed under Boolean operations, i.e., union, intersection, and complementation.

**Definition 2.3** (Finite-state transducers). *Let  $\Sigma$  be an alphabet. A (nondeterministic) finite transducer (FT)  $T$  over  $\Sigma$  is a tuple  $(\Sigma, Q, q_0, F, \delta)$ , where  $\delta$  is a finite subset of  $Q \times \Sigma \times Q \times \Sigma^*$ .*

The notion of runs of FTs on an input string can be seen as a generalisation of FAs by adding outputs. More precisely, given a string  $w = a_1 \dots a_n$ , a *run* of  $T$  on  $w$  is a sequence of pairs  $(q_1, w'_1), \dots, (q_n, w'_n) \in Q \times \Sigma^*$  such that for every  $j \in [n]$ ,  $(q_{j-1}, a_j, q_j, w'_j) \in \delta$ . The run is said to be *accepting* if  $q_n \in F$ . When a run is accepting,  $w'_1 \dots w'_n$  is said to be the *output* of the run. Note that some of these  $w'_j$ 's could be empty strings. A word  $w'$  is said to be an output of  $T$  on  $w$  if there is an accepting run of  $T$  on  $w$  with output  $w'$ . We use  $\mathcal{T}(T)$  to denote the *transduction* defined by  $T$ , that is, the relation comprising the pairs  $(w, w')$  such that  $w'$  is an output of  $T$  on  $w$ .

We remark that an FT usually defines a *relation*. We shall speak of *functional transducers*, i.e., transducers that define functions instead of relations. (For instance, deterministic transducers are always functional.) We will use FFT to denote the class of functional transducers.

To take into consideration the outputs of transitions, we define the *size*  $|T|$  of  $T$  as the sum of the sizes of transitions in  $T$ , where the size of a transition  $(q, a, q', w')$  is defined as  $|w'| + 1$ .

**Example 2.4.** *We give an example FT for the function `escapeString`, which backslash-escapes every occurrence of ' and ". The FT has a single state, i.e.,  $Q = \{q_0\}$  and the transition relation  $\delta$  comprises  $(q_0, \ell, q_0, \ell)$  for each  $\ell \neq ' \text{ or } "$ ,  $(q_0, ', q_0, n')$ ,  $(q_0, ", q_0, n")$ , and the final state  $F = \{q_0\}$ . We remark that this FT is functional.  $\square$*

**Computational Complexity.** In this paper, we will use computational complexity theory to provide evidence that certain (automata) operations in our generic decision procedure are unavoidable. In particular, we shall deal with the following computational complexity classes (see [32] for more details): PSPACE (problems solvable in polynomial space and thus in exponential time), EXPSPACE (problems solvable in exponential space and thus in double exponential time), and NON-ELEMENTARY (problems not a member of the class ELEMENTARY, where ELEMENTARY comprises elementary recursive functions, which is the union of the complexity classes EXPTIME, 2-EXPTIME, 3-EXPTIME,  $\dots$ , or alternatively, the union of the complexity classes EXPSPACE, 2-EXPSPACE, 3-EXPSPACE,  $\dots$ ). Verification problems that have complexity PSPACE or beyond (see [5] for a few examples) have substantially benefited from techniques such as symbolic model checking [43].



### 3 Semantic conditions and A generic decision procedure

Recall that we consider symbolic executions of string-manipulating programs defined by the rules

$$S ::= y := f(x_1, \dots, x_r) \mid \mathbf{assert}(g(x_1, \dots, x_r)) \mid S; S \quad (3)$$

where  $f : (\Sigma^*)^r \rightarrow 2^{\Sigma^*}$  is a *nondeterministic* partial string function and  $g \subseteq (\Sigma^*)^r$  is a string relation. Without loss of generality, we assume that symbolic executions are in Static Single Assignment (SSA) form.<sup>4</sup>

In this section, we shall provide two general semantic conditions for symbolic executions. The main result is that, whenever the symbolic execution generated by (3) satisfies these two conditions, the path feasibility problem is decidable. We first define the concept of recognisable relations which, intuitively, are simply a finite union of Cartesian products of regular languages.

**Definition 3.1** (Recognisable relations). *An  $r$ -ary relation  $R \subseteq \Sigma^* \times \dots \times \Sigma^*$  is recognisable if  $R = \bigcup_{i=1}^n L_1^{(i)} \times \dots \times L_r^{(i)}$  where  $L_j^{(i)}$  is regular for each  $j \in [r]$ . A representation of a recognisable relation  $R = \bigcup_{i=1}^n L_1^{(i)} \times \dots \times L_r^{(i)}$  is  $(\mathcal{A}_1^{(i)}, \dots, \mathcal{A}_r^{(i)})_{1 \leq i \leq n}$  such that each  $\mathcal{A}_j^{(i)}$  is an FA with  $\mathcal{L}(\mathcal{A}_j^{(i)}) = L_j^{(i)}$ . The tuples  $(\mathcal{A}_1^{(i)}, \dots, \mathcal{A}_r^{(i)})$  are called the disjuncts of the representation and the FAs  $\mathcal{A}_j^{(i)}$  are called the atoms of the representation.*

We remark that the recognisable relation is more expressive than it appears to be. For instance, it can be used to encode some special length constraints, as demonstrated in Example 3.2.

**Example 3.2.** *Let us consider the relation  $|x_1| + |x_2| \geq 3$  where  $x_1$  and  $x_2$  are strings over the alphabet  $\Sigma$ . Although syntactically  $|x_1| + |x_2| \geq 3$  is a length constraint, it indeed defines a recognisable relation. To see this,  $|x_1| + |x_2| \geq 3$  is equivalent to the disjunction of  $|x_1| \geq 3$ ,  $|x_1| \geq 2 \wedge |x_2| \geq 1$ ,  $|x_1| \geq 1 \wedge |x_2| \geq 2$ , and  $|x_2| \geq 3$ , where each disjunct describes a cartesian product of regular languages. For instance, in  $|x_1| \geq 2 \wedge |x_2| \geq 1$ ,  $|x_1| \geq 2$  requires that  $x_1$  belongs to the regular language  $\Sigma \cdot \Sigma^+$ , while  $|x_2| \geq 1$  requires that  $x_2$  belongs to the regular language  $\Sigma^+$ .  $\square$*

The equality binary predicate  $x_1 = x_2$  is a standard non-example of recognisable relations; in fact, expressing  $x_1 = x_2$  as a union  $\bigcup_{i \in I} L_i \times H_i$  of products requires us to have  $|L_i| = |H_i| = 1$ , which in turn forces us to have an infinite index set  $I$ .

The first semantic condition, *Regular Monadic Decomposition* is stated as follows.

**RegMonDec:** For each assertion  $\mathbf{assert}(g(x_1, \dots, x_r))$  in  $S$ ,  $g$  is a recognisable relation, a representation of which, in terms of Definition 3.1, is effectively computable.

When  $r = 1$ , the **RegMonDec** condition requires that  $g(x_1)$  is regular and may be given by an FA  $\mathcal{A}$ , in which case  $x_1 \in \mathcal{L}(\mathcal{A})$ .

The second semantic condition concerns the pre-images of string operations. A string operation  $f(x_1, \dots, x_r)$  with  $r$  parameters ( $r \geq 1$ ) gives rise to a relation  $R_f \subseteq (\Sigma^*)^r \times \Sigma^*$ . Let  $L \subseteq \Sigma^*$ . The *pre-image* of  $L$  under  $f$ , denoted by  $\text{Pre}_{R_f}(L)$ , is

$$\{(w_1, \dots, w_r) \in (\Sigma^*)^r \mid \exists w. w \in f(w_1, \dots, w_r) \text{ and } w \in L\}.$$

<sup>4</sup>Each symbolic execution can be turned into the SSA form by using a new variable on the left-hand-side of each assignment.

For brevity, we use  $\text{Pre}_{R_f}(\mathcal{A})$  to denote  $\text{Pre}_{R_f}(\mathcal{L}(\mathcal{A}))$  for an FA  $\mathcal{A}$ . The second semantic condition, i.e. the inverse relation of  $f$  preserves regularity, is formally stated as follows.

**RegInvRel:** For each operation  $f$  in  $S$  and each FA  $\mathcal{A}$ ,  $\text{Pre}_{R_f}(\mathcal{A})$  is a recognisable relation, a representation of which (Definition 3.1), can be effectively computed from  $\mathcal{A}$  and  $f$ .

When  $r = 1$ , this **RegInvRel** condition would state that the pre-image of a regular language under the operation  $f$  is *effectively regular*, i.e. an FA can be computed to represent the pre-image of the regular language under  $f$ .

**Example 3.3.** Let  $\Sigma = \{a, b\}$ . Consider the string function  $f(x_1, x_2) = a^{|x_1|_a + |x_2|_a} b^{|x_1|_b + |x_2|_b}$ . (Recall that  $|x|_a$  denotes the number of occurrences of  $a$  in  $x$ .) We can show that for each FA  $\mathcal{A}$ ,  $\text{Pre}_{R_f}(\mathcal{A})$  is a recognisable relation. Let  $\mathcal{A}$  be an FA. W.l.o.g. we assume that  $\mathcal{L}(\mathcal{A}) \subseteq a^*b^*$ . It is easy to observe that  $\mathcal{L}(\mathcal{A})$  is a finite union of the languages  $\{a^{c_1p+c_2}b^{c'_1p'+c'_2} \mid p \in \mathbb{N}, p' \in \mathbb{N}\}$ , where  $c_1, c_2, c'_1, c'_2$  are natural number constants. Therefore, to show that  $\text{Pre}_{R_f}(\mathcal{A})$  is a recognisable relation, it is sufficient to show that  $\text{Pre}_{R_f}(\{a^{c_1p+c_2}b^{c'_1p'+c'_2} \mid p \in \mathbb{N}, p' \in \mathbb{N}\})$  is a recognisable relation.

Let us consider the typical situation that  $c_1 \neq 0$  and  $c'_1 \neq 0$ . Then  $\text{Pre}_{R_f}(\{a^{c_1p+c_2}b^{c'_1p'+c'_2} \mid p \in \mathbb{N}, p' \in \mathbb{N}\})$  is the disjunction of  $L_1^{(i,i')} \times L_2^{(j,j')}$  for  $i, j, i', j' \in \mathbb{N}$  with  $i + j = c_2$ , and  $i' + j' = c'_2$ , where  $L_1^{(i,i')} = \{u \in \Sigma^* \mid |u|_a \geq i, |u|_a \equiv i \pmod{c_1}, |u|_b \geq i', |u|_b \equiv i' \pmod{c'_1}\}$ ,  $L_2^{(j,j')} = \{v \in \Sigma^* \mid |v|_a \geq j, |v|_a \equiv j \pmod{c_1}, |v|_b \geq j', |v|_b \equiv j' \pmod{c'_1}\}$ . Evidently,  $L_1^{(i,i')}$  and  $L_2^{(j,j')}$  are regular languages. Therefore,  $\text{Pre}_{R_f}(\{a^{c_1p+c_2}b^{c'_1p'+c'_2} \mid p \in \mathbb{N}, p' \in \mathbb{N}\})$  is a finite union of cartesian products of regular languages, and thus a recognisable relation.  $\square$

Not every string operation satisfies the **RegInvRel** condition, as demonstrated by Example 3.4.

**Example 3.4.** Let us consider the string function  $f$  on the alphabet  $\{0, 1\}$  that transforms the unary representations of natural numbers into their binary representations, namely,  $f(1^n) = b_0b_1 \dots b_m$  such that  $n = 2^m b_0 + \dots + 2b_{m-1} + b_m$  and  $b_0 = 1$ . For instance,  $f(1^4) = 100$ . We claim that  $f$  does not satisfy the **RegInvRel** condition. To see this, consider the regular language  $L = \{10^i \mid i \in \mathbb{N}\}$ . Then  $\text{Pre}_{R_f}(L)$  comprises the strings  $1^{2^j}$  with  $j \in \mathbb{N}$ , which is evidently non-regular. Incidentally, this is an instance of the well-known Cobham's theorem (cf. [47]) that the sets of numbers definable by finite automata in unary are strictly subsumed by the sets of numbers definable by finite automata in binary.  $\square$

We are ready to state the main result of this section.

**Theorem 3.5.** *The path feasibility problem is decidable for symbolic executions satisfying the **RegMonDec** and **RegInvRel** conditions.*

*Proof of Theorem 3.5.* We present a nondeterministic decision procedure from which the theorem follows.

Let  $S$  be a symbolic execution,  $y := f(\vec{x})$  (where  $\vec{x} = x_1, \dots, x_r$ ) be the last assignment in  $S$ , and  $\rho := \{g_1(\vec{z}_1), \dots, g_s(\vec{z}_s)\}$  be the set of all constraints in assertions of  $S$  that involve  $y$  (i.e.  $y$  occurs in  $\vec{z}_i$  for all  $i \in [s]$ ). For each  $i \in [s]$ , let  $\vec{z}_i = (z_{i,1}, \dots, z_{i,\ell_i})$ . Then by the **RegMonDec** assumption,  $g_i$  is a recognisable relation and a representation of it, say  $(\mathcal{A}_{i,1}^{(j)}, \dots, \mathcal{A}_{i,\ell_i}^{(j)})_{1 \leq j \leq n_i}$  with  $n_i \geq 1$ , can be effectively computed.

For each  $i \in [s]$ , we nondeterministically choose one tuple  $(\mathcal{A}_{i,1}^{(j_i)}, \dots, \mathcal{A}_{i,\ell_i}^{(j_i)})$  (where  $1 \leq j_i \leq n_i$ ), and for all  $i \in [s]$ , replace  $\mathbf{assert}(g_i(\vec{z}_i))$  in  $S$  with  $\mathbf{assert}(z_{i,1} \in \mathcal{A}_{i,1}^{(j_i)}; \dots; \mathbf{assert}(z_{i,\ell_i} \in \mathcal{A}_{i,\ell_i}^{(j_i)}))$ . Let  $S'$  denote the resulting program.

We use  $\sigma$  to denote the set of all the FAs  $\mathcal{A}_{i,i'}^{(j_i)}$  such that  $1 \leq i \leq s$ ,  $1 \leq i' \leq \ell_i$ , and  $\mathbf{assert}(y \in \mathcal{A}_{i,i'}^{(j_i)})$  occurs in  $S'$ . We then compute the product FA  $\mathcal{A}$  from FAs  $\mathcal{A}_{i,i'}^{(j_i)} \in \sigma$  such that  $\mathcal{L}(\mathcal{A})$  is the intersection of the languages defined by FAs in  $\sigma$ . By the **RegInvRel** assumption,  $g' = \text{Pre}_{R_f}(\mathcal{A})$  is a recognisable relation and a representation of it can be effectively computed.

Let  $S''$  be the symbolic execution obtained from  $S'$  by (1) removing  $y := f(\vec{x})$  along with all assertions involving  $y$  (i.e. the assertions  $\mathbf{assert}(y \in \mathcal{A}_{i,i'}^{(j_i)})$  for  $\mathcal{A}_{i,i'}^{(j_i)} \in \sigma$ ), (2) and adding the assertion  $\mathbf{assert}(g'(x_1, \dots, x_r))$ .

It is straightforward to verify that  $S$  is path-feasible iff there is a nondeterministic choice resulting in  $S'$  that is path-feasible, moreover,  $S'$  is path feasible iff  $S''$  is path-feasible. Evidently,  $S''$  has one less assignment than  $S$ . Repeating these steps, the procedure will terminate when  $S$  becomes a conjunction of assertions on input variables, the feasibility of which can be checked via language nonemptiness checking of FAs. To sum up, the correctness of the (non-deterministic) procedure follows since the path-feasibility is preserved for each step, and the termination is guaranteed by the finite number of assignments.  $\square$

Let us use the following example to illustrate the generic decision procedure.

**Example 3.6.** *Consider the symbolic execution*

$\mathbf{assert}(x \in \mathcal{A}_0); y_1 := f(x); z := y_1 \circ y_2; \mathbf{assert}(y_1 \in \mathcal{A}_1); \mathbf{assert}(y_2 \in \mathcal{A}_2); \mathbf{assert}(z \in \mathcal{A}_3)$

where  $\mathcal{A}_0, \mathcal{A}_1, \mathcal{A}_2, \mathcal{A}_3$  are FAs illustrated in Figure 2, and  $f : \Sigma^* \rightarrow 2^{\Sigma^*}$  is the function mentioned in Section 1 that nondeterministically outputs a substring delimited by -. At first, we remove the assignment  $z = y_1 \circ y_2$  as well as the assertion  $\mathbf{assert}(z \in \mathcal{A}_3)$ . Moreover, since the pre-image of  $\circ$  under  $\mathcal{A}_3$ , denoted by  $g$ , is a recognisable relation represented by  $(\mathcal{A}_3(q_0, \{q_i\}), \mathcal{A}_3(q_i, \{q_0\}))_{0 \leq i \leq 2}$ , we add the assertion  $\mathbf{assert}(g(y_1, y_2))$ , and get following program

$\mathbf{assert}(x \in \mathcal{A}_0); y_1 := f(x); \mathbf{assert}(y_1 \in \mathcal{A}_1); \mathbf{assert}(y_2 \in \mathcal{A}_2); \mathbf{assert}(g(y_1, y_2))$ .

To continue, we nondeterministically choose one tuple, say  $(\mathcal{A}_3(q_0, \{q_1\}), \mathcal{A}_3(q_1, \{q_0\}))$ , from the representation of  $g$ , and replace  $\mathbf{assert}(g(y_1, y_2))$  with  $\mathbf{assert}(y_1 \in \mathcal{A}_3(q_0, \{q_1\})); \mathbf{assert}(y_2 \in \mathcal{A}_3(q_1, \{q_0\}))$ , and get the program

$\mathbf{assert}(x \in \mathcal{A}_0); y_1 := f(x); \mathbf{assert}(y_1 \in \mathcal{A}_1); \mathbf{assert}(y_2 \in \mathcal{A}_2);$   
 $\mathbf{assert}(y_1 \in \mathcal{A}_3(q_0, \{q_1\})); \mathbf{assert}(y_2 \in \mathcal{A}_3(q_1, \{q_0\}))$ .

Let  $\sigma$  be  $\{\mathcal{A}_1, \mathcal{A}_3(q_0, \{q_1\})\}$ , the set of FAs occurring in the assertions for  $y_1$  in the above program. Compute the product  $\mathcal{A}' = \mathcal{A}_1 \times \mathcal{A}_3(q_0, \{q_1\})$  and  $\mathcal{A}'' = \text{Pre}_{R_f}(\mathcal{A}')$  (see Figure 2).

Then we remove  $y_1 := f(x)$ , as well as the assertions that involve  $y_1$ , namely,  $\mathbf{assert}(y_1 \in \mathcal{A}_1)$  and  $\mathbf{assert}(y_1 \in \mathcal{A}_3(q_0, \{q_1\}))$ , and add the assertion  $\mathbf{assert}(x \in \mathcal{A}'')$ , resulting in the program

$\mathbf{assert}(x \in \mathcal{A}_0); \mathbf{assert}(y_2 \in \mathcal{A}_2); \mathbf{assert}(y_2 \in \mathcal{A}_3(q_1, \{q_0\})); \mathbf{assert}(x \in \mathcal{A}'')$ .

It is not hard to see that  $- a - \in \mathcal{L}(\mathcal{A}_0) \cap \mathcal{L}(\mathcal{A}'')$  and  $abb \in \mathcal{L}(\mathcal{A}_2) \cap \mathcal{L}(\mathcal{A}_3(q_1, \{q_0\}))$ . Then the assignment  $x = - a -$ ,  $y_1 = a$ ,  $y_2 = abb$ , and  $z = aabb$  witnesses the path feasibility of the original symbolic execution.  $\square$

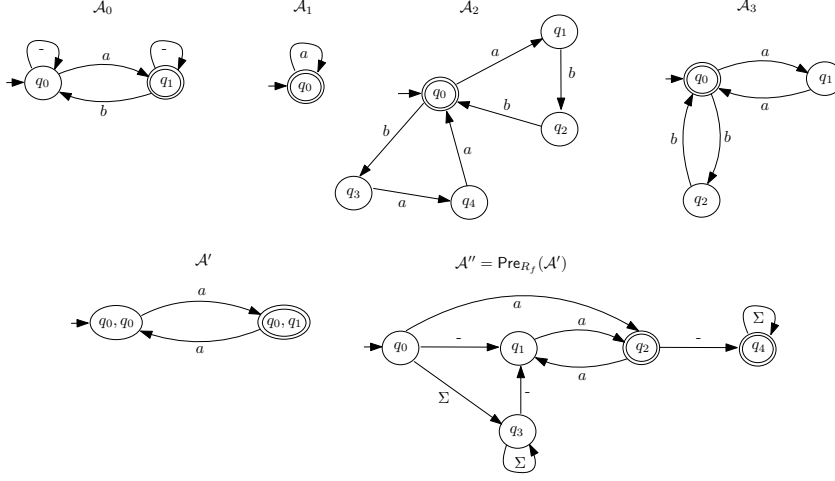


Figure 2:  $\mathcal{A}_0, \mathcal{A}_1, \mathcal{A}_2, \mathcal{A}_3, \mathcal{A}', \text{Pre}_{R_f}(\mathcal{A}')$ , where  $\Sigma = \{a, b, -\}$

**Remark 3.7.** *Theorem 3.5 gives two semantic conditions which are sufficient to render the path feasibility problem decidable. A natural question, however, is how to check whether a given symbolic execution satisfies the two semantic conditions. The answer to this meta-question highly depends on the classes of string operations and relations under consideration. Various classes of relations which admit finite representations have been studied in the literature. They include, in an ascending order of expressiveness, recognisable relations, synchronous relations, deterministic rational relations, and rational relations, giving rise to a strict hierarchy. (We note that slightly different terminologies tend to be used in the literature, for instance, synchronous relations in [17] are called regular relations in [6] which are also known as automatic relations, synchronised rational relations, etc. One may consult the survey [21] and [17].) It is known [17] that determining whether a given deterministic rational relation is recognisable is decidable (for binary relations, this can be done in doubly exponential time), and deciding whether a synchronous relation is recognisable can be done in exponential time [17]. Similar results are also mentioned in [8, 41].*

*By these results, one can check, for a given symbolic execution where the string relations in the assertion and the relations induced by the string operation are all deterministic rational relations, whether it satisfies the two semantic conditions. Hence, one can check algorithmically whether Theorem 3.5 is applicable.*  $\square$

## 4 An Expressive Language Satisfying The Semantic Conditions

Section 3 has identified general *semantic* conditions under which the *decidability* of the path feasibility problem can be attained. Two questions naturally arise:

1. How general are these semantic conditions? In particular, do string functions commonly used in practice satisfy these semantic conditions?
2. What is the computational complexity of checking path feasibility?

The next two sections will be devoted to answering these questions.

For the first question, we shall introduce a *syntactically* defined string constraint language SL, which includes general string operations such as the `replaceAll` function and those definable by two-way transducers, as well as recognisable relations. [Here, SL stands for “straight-line” because our work generalises the straight-line logics of [42, 18].] We first recap the `replaceAll` function that allows a general (i.e. variable) replacement string [18]. Then we give the definition of two-way transducers whose special case (i.e. one-way transducers) has been given in Section 2.

#### 4.1 The `replaceAll` function and two-way transducers

The `replaceAll` function has three parameters: the first parameter is the *subject* string, the second parameter is a *pattern* that is a regular expression, and the third parameter is the *replacement* string. For the semantics of `replaceAll` function, in particular when the pattern is a regular expression, we adopt the *leftmost and longest* matching. For instance, `replaceAll(aababaab, (ab)+, c) = ac·replaceAll(aab, (ab)+, c) = acac`, since the leftmost and longest matching of  $(ab)^+$  in `aababaab` is `abab`. Here we require that the language defined by the pattern parameter does *not* contain the empty string, in order to avoid the troublesome definition of the semantics of the matching of the empty string. We refer the reader to [18] for the formal semantics of the `replaceAll` function. To be consistent with the notation in this paper, for each regular expression  $e$ , we define the string function  $\text{replaceAll}_e : \Sigma^* \times \Sigma^* \rightarrow \Sigma^*$  such that for  $u, v \in \Sigma^*$ ,  $\text{replaceAll}_e(u, v) = \text{replaceAll}(u, e, v)$ , and we write  $\text{replaceAll}(x, e, y)$  as  $\text{replaceAll}_e(x, y)$ .

As in the one-way case, we start with a definition of two-way finite-state automata.

**Definition 4.1** (Two-way finite-state automata). *A (nondeterministic) two-way finite-state automaton (2FA) over a finite alphabet  $\Sigma$  is a tuple  $\mathcal{A} = (\Sigma, \triangleright, \triangleleft, Q, q_0, F, \delta)$  where  $Q, q_0, F$  are as in FAs,  $\triangleright$  (resp.  $\triangleleft$ ) is a left (resp. right) input tape end marker, and the transition relation  $\delta \subseteq Q \times \bar{\Sigma} \times \{-1, 1\} \times Q$ , where  $\bar{\Sigma} = \Sigma \cup \{\triangleright, \triangleleft\}$ . Here, we assume that there are no transitions that take the head of the tape past the left/right end marker (i.e.  $(p, \triangleright, -1, q), (p, \triangleleft, 1, q) \notin \delta$  for every  $p, q \in Q$ ).*

*Whenever they can be easily understood, we will not mention  $\Sigma, \triangleright$ , and  $\triangleleft$  in  $\mathcal{A}$ .*

The notion of runs of 2FA on an input string is exactly the same as that of Turing machines on a read-only input tape. More precisely, for a string  $w = a_1 \dots a_n$ , a *run* of  $\mathcal{A}$  on  $w$  is a sequence of pairs  $(q_0, i_0), \dots, (q_m, i_m) \in Q \times [0, n + 1]$  defined as follows. Let  $a_0 = \triangleright$  and  $a_{n+1} = \triangleleft$ . The following conditions then have to be satisfied:  $i_0 = 0$ , and for every  $j \in [0, m - 1]$ , we have  $(q_j, a_{i_j}, \text{dir}, q_{j+1}) \in \delta$  and  $i_{j+1} = i_j + \text{dir}$  for some  $\text{dir} \in \{-1, 1\}$ .

The run is said to be *accepting* if  $i_m = n + 1$  and  $q_m \in F$ . A string  $w$  is *accepted* by  $\mathcal{A}$  if there is an accepting run of  $\mathcal{A}$  on  $w$ . The set of strings accepted by  $\mathcal{A}$  is denoted by  $\mathcal{L}(\mathcal{A})$ , a.k.a., the language *recognised* by  $\mathcal{A}$ . The *size*  $|\mathcal{A}|$  of  $\mathcal{A}$  is defined to be  $|Q|$ ; this will be needed when we talk about computational complexity.

Note that an FA can be seen as a 2FA such that  $\delta \subseteq Q \times \bar{\Sigma} \times \{1\} \times Q$ , with the two end markers  $\triangleright, \triangleleft$  omitted. 2FA and FA recognise precisely the same class of languages, i.e., *regular languages*. The following result is standard and can be found in textbooks on automata theory (e.g. [32]).

**Proposition 4.2.** *Every 2FA  $\mathcal{A}$  can be transformed in exponential time into an equivalent FA of size  $2^{\mathcal{O}(|\mathcal{A}| \log |\mathcal{A}|)}$ .*

**Definition 4.3** (Two-way finite-state transducers). *Let  $\Sigma$  be an alphabet. A nondeterministic two-way finite transducer (2FT)  $T$  over  $\Sigma$  is a tuple  $(\Sigma, \triangleright, \triangleleft, Q, q_0, F, \delta)$ , where  $\Sigma, Q, q_0, F$  are as in FTs, and  $\delta \subseteq Q \times \bar{\Sigma} \times \{-1, 1\} \times Q \times \Sigma^*$ , satisfying the syntactical constraints of 2FAs, and the additional constraint that the output must be  $\epsilon$  when reading  $\triangleright$  or  $\triangleleft$ . Formally, for each transition  $(q, \triangleright, dir, q', w)$  or  $(q, \triangleleft, dir, q', w)$  in  $\delta$ , we have  $w = \epsilon$ .*

The notion of runs of 2FTs on an input string can be seen as a generalisation of 2FAs by adding outputs. More precisely, given a string  $w = a_1 \dots a_n$ , a *run* of  $T$  on  $w$  is a sequence of tuples  $(q_0, i_0, w'_0), \dots, (q_m, i_m, w'_m) \in Q \times [0, n+1] \times \Sigma^*$  such that, if  $a_0 = \triangleright$  and  $a_{n+1} = \triangleleft$ , we have  $i_0 = 0$ , and for every  $j \in [0, m-1]$ ,  $(q_j, a_{i_j}, dir, q_{j+1}, w'_j) \in \delta$ ,  $i_{j+1} = i_j + dir$  for some  $dir \in \{-1, 1\}$ , and  $w'_0 = w'_m = \epsilon$ . The run is said to be *accepting* if  $i_m = n+1$  and  $q_m \in F$ . When a run is accepting,  $w'_0 \dots w'_m$  is said to be the *output* of the run. Note that some of these  $w'_i$ s could be empty strings. A word  $w'$  is said to be an output of  $T$  on  $w$  if there is an accepting run of  $T$  on  $w$  with output  $w'$ . We use  $\mathcal{T}(T)$  to denote the *transduction* defined by  $T$ , that is, the relation comprising the pairs  $(w, w')$  such that  $w'$  is an output of  $T$  on  $w$ .

Note that an FT over  $\Sigma$  is a 2FT such that  $\delta \subseteq Q \times \bar{\Sigma} \times \{1\} \times Q \times \Sigma^*$ , with the two endmarkers  $\triangleright, \triangleleft$  omitted.

**Example 4.4.** *We give an example of 2FT for the function  $f(w) = ww^R$ . The transducer has three states  $Q = \{q_0, q_1, q_2\}$ , and the transition relation  $\delta$  comprises  $(q_0, \ell, 1, q_0, \ell)$  for  $\ell \in \Sigma$ ,  $(q_0, \triangleright, 1, q_0, \epsilon)$ ,  $(q_0, \triangleleft, -1, q_1, \epsilon)$ ,  $(q_1, \ell, -1, q_1, \ell)$  for  $\ell \in \Sigma$ ,  $(q_1, \triangleright, 1, q_2, \epsilon)$ ,  $(q_2, \ell, 1, q_2, \epsilon)$  for  $\ell \in \Sigma$ . The final state  $F = \{q_2\}$ .  $\square$*

## 4.2 The constraint language SL

The constraint language SL is defined by the following rules,

$$S ::= z := x \circ y \mid z := \text{replaceAll}_e(x, y) \mid y := \text{reverse}(x) \mid y := T(x) \mid \text{assert}(R(\vec{x})) \mid S; S \quad (4)$$

where  $\circ$  is the string concatenation operation which concatenates two strings,  $e$  is a regular expression,  $\text{reverse}$  is the string function which reverses a string,  $T$  is a 2FT, and  $R$  is a recognisable relation represented by a collection of tuples of FAs.

For the convenience of Section 5, for a class of string operations  $\mathcal{O}$ , we will use  $\text{SL}[\mathcal{O}]$  to denote the fragments of SL that only use the string operations from  $\mathcal{O}$ . Moreover, we will use  $\text{sreplaceAll}$  to denote the special case of the  $\text{replaceAll}_e$  function where the replacement parameters are restricted to be *string constants*. Note that, according to the result in [18], an instance of the  $\text{sreplaceAll}$  function  $\text{replaceAll}_e(x, u)$  with  $e$  a regular expression and  $u$  a string constant can be captured by FTs. However, such a transformation incurs an exponential blow-up. We also remark that we do not present SL in the most succinct form. For instance, it is known that the concatenation operation can be simulated by the  $\text{replaceAll}$  function, specifically,  $z = x \circ y \equiv z' = \text{replaceAll}_a(ab, x) \wedge z = \text{replaceAll}_b(z', y)$ , where  $a, b$  are two fresh letters. Moreover, it is evident that the  $\text{reverse}$  function is subsumed by 2FTs.

We remark that SL is able to encode some string functions with multiple (greater than two) arguments by transducers and repeated use of  $\text{replaceAll}$ , which is practically convenient particularly for user-defined functions.

The following theorem answers the two questions raised in the beginning of this section.

**Theorem 4.5.** *The path feasibility problem of SL is decidable with a non-elementary lower-bound.*

To invoke the result of the previous section, we have the following proposition.

**Proposition 4.6.** *The SL language satisfies the two semantic conditions **RegMonDec** and **RegInvRel**.*

*Proof.* It is sufficient to show that the  $\text{replaceAll}_e$  functions and the string operations defined by 2FTs satisfy the **RegInvRel** condition.

The fact that  $\text{replaceAll}_e$  for a given regular expression  $e$  satisfies the **RegInvRel** condition was shown in [18].

That the pre-image of an 2FT  $T$  under a regular language defined by an FA  $\mathcal{A}$  is effectively regular is folklore. Let  $T = (Q, q_0, F, \delta)$  be a 2FT and  $\mathcal{A} = (Q', q'_0, F', \delta')$  be an FA. Then  $\text{Pre}_{\mathcal{T}(T)}(\mathcal{A})$  is the regular language defined by the 2FA  $\mathcal{A}' = (Q \times Q', (q_0, q'_0), F \times F', \delta'')$ , where  $\delta''$  comprises the tuples  $((q_1, q'_1), a, (q_2, q'_2))$  such that there exists  $w \in \Sigma^*$  satisfying that  $(q_1, a, q_2, w) \in \delta$  and  $q'_1 \xrightarrow[\mathcal{A}]{w} q'_2$ . From Proposition 4.2, an equivalent FA can be built from  $\mathcal{A}'$  in exponential time.  $\square$

From Proposition 4.6 and Theorem 3.5, the path feasibility problem of SL is *decidable*.

To address the complexity (viz. the second question raised at the beginning of this section), we show that the path feasibility problem of SL is NON-ELEMENTARY.

**Proposition 4.7.** *The path feasibility problem of the following two fragments is NON-ELEMENTARY: SL with 2FTs, and SL with FTs+replaceAll.*

For each  $n$  we reduce from a tiling problem that is hard for  $n$ -EXPSPACE. For this we need to use large numbers that act as indices. Similar encodings of large numbers appear in the study of higher-order programs (e.g. [34, 13]) except quite different machinery is needed to enforce the encoding. The complete reduction is given in Appendix A in the supplementary material, with some intuition given here.

A *tiling problem* consists of a finite set of tiles  $\Theta$  as well as horizontal and vertical tiling relations  $H, V \subseteq \Theta \times \Theta$ . Given a tiling *corridor* of a certain width, as well as initial and final tiles  $t_I, t_F \in \Theta$  the task is to find a tiling where the first (resp. last) tile of the first (resp. last) row is  $t_I$  (resp.  $t_F$ ), and horizontally (resp. vertically) adjacent tiles  $t, t'$  have  $(t, t') \in H$  (resp.  $V$ ). Corridor width can be considered equivalent to the space of a Turing machine. We will consider problems where the corridor width is  $2^{2^m}$  where the height of the stack of exponentials is  $n$ . E.g. when  $n$  is 0 the width is  $m$ , when  $n$  is 1 the width is  $2^m$ , when  $n$  is 2 the width is  $2^{2^m}$  and so on. Solving tiling problems of width  $2^{2^m}$  is complete for the same amount of space.

Solving a tiling problem of corridor width  $m$  can be reduced to checking whether a 2FT of size polynomial in  $m$  and the number of tiles can output a specified symbol  $\top$ . Equivalently, we could use a 2FA. A solution is a word

$$t_{1,1}t_{1,2} \dots t_{1,m} \# \dots \# t_{h,1}t_{h,2} \dots t_{h,m}$$

where  $\#$  separates rows. The 2FT performs  $m + 1$  passes. During the first pass it checks that the tiling begins with  $t_I$ , ends with  $t_F$ , and  $(t_{i,j}, t_{i,j+1}) \in H$  for all  $1 \leq j < m$ . In  $m$  more passes we verify that  $V$  is obeyed; the  $j$ th pass verifies the  $j$ th column.

Now consider two 2FTs and a tiling problem of width  $2^m$ . Intuitively, we precede each tile with its column number in  $m$  binary bits. That is

$$0 \dots 00 t_{1,1} 0 \dots 01 t_{1,2} \dots 1 \dots 11 t_{1,2^m} \# \dots \# 0 \dots 00 t_{m,1} 0 \dots 01 t_{m,2} \dots 1 \dots 11 t_{m,2^m} .$$

The first 2FT checks the solution similarly to the width  $m$  problem, but needs to handle the large width when checking  $V$ . For this it will use a second 2FT. For each column, the first 2FT nondeterministically selects all the tiles in this column (verifying  $V$  on-the-fly). The addresses of the selected tiles are output to the second 2FT which checks that they are equal. The first 2FT goes through a non-deterministic number of such passes and the second 2FT enforces that there are  $2^m$  of them (in column order). To do this, the second 2FT checks that after the addresses of the  $i$ -th column are output by the first 2FT, then the addresses of the  $(i + 1)$ -th column are output next. Length  $m$  binary numbers are checked similarly to width  $m$  tiling problems.

With another 2FT we can increase the corridor width by another exponential. For doubly-exponential numbers, we precede each tile with a binary sequence of exponential length. For this we precede each bit with another binary sequence, this time of length  $m$ . The first 2FT outputs queries to the second, which outputs queries to the third 2FT, each time removing one exponential. With  $(n + 1)$  2FT, we can encode tiling problems over an  $n$ -fold exponentially wide corridor.

The same proof strategy can be used for FTs+`replaceAll`. The 2FTs used in the proof above proceed by running completely over the word and producing some output, then silently moving back to the beginning of the word. An arbitrary number of passes are made in this way. We can simulate this behaviour using FTs and `replaceAll`.

To simulate  $y := T(x)$  for a 2FT  $T$  making an arbitrary number of passes over the contents of a variable  $x$ , as above, we use fresh variables  $x_1$  and  $x_2$ , and an automaton  $\mathcal{A}_a$  recognising  $(a\ddagger)^*$  for some arbitrary character  $a$  and delimiter  $\ddagger$  not used elsewhere. With these we use the constraint

$$\mathbf{assert}(x_1 \in \mathcal{A}_a); x_2 := \mathbf{replaceAll}_a(x_1, x); y := T'(x_2)$$

where  $T'$  simulates  $T$  in the forwards direction, and simulates (simply by changing state) a silent return to the beginning of the word when reading  $\ddagger$ . It can be seen that  $x_2$  contains an arbitrary number of copies of  $x$ , separated by  $\ddagger$ , hence  $T'$  simulates  $T$ .

It was stated in Section 1 that the NON-ELEMENTARY complexity will be caused by repeated product constructions. These product constructions are not obvious here, but are hidden in the treatment of `replaceAlla`. This treatment is elaborated on in Section 6.2.2. The key point is that to show `replaceAlla` satisfies **RegInvRel** one needs to produce a constraint on  $x$  that is actually the product of several automata.

## 5 More “Tractable” Fragments

In this section, we show that the NON-ELEMENTARY lower-bound of the preceding section should not be read too pessimistically. As we demonstrate in this section, the complexity of the path feasibility problem can be dramatically reduced (EXSPACE-complete) for the following two fragments,

- $\text{SL}[\circ, \mathbf{replaceAll}, \mathbf{reverse}, \mathbf{FFT}]$ , where 2FTs in SL are restricted to be *one-way and functional*,
- $\text{SL}[\circ, \mathbf{sreplaceAll}, \mathbf{reverse}, \mathbf{FT}]$ , where the *replacement* parameter of the `replaceAll` function is restricted to be a string *constant*, and 2FTs are restricted to be *one-way* (but *not necessarily functional*).

These two fragments represent the most practical usage of string functions. In particular, instead of very general two-way transducers, one-way transducers are commonly used to model,



for instance, browser transductions [42].

## 5.1 The fragment $\text{SL}[\circ, \text{replaceAll}, \text{reverse}, \text{FFT}]$

The main result of this subsection is stated in the following theorem.

**Theorem 5.1.** *The path feasibility of  $\text{SL}[\circ, \text{replaceAll}, \text{reverse}, \text{FFT}]$  is EXPSpace-complete.*

To show the upper bound of Theorem 5.1, we will refine the (generic) decision procedure in Section 3 in conjunction with a careful complexity analysis. The crucial idea is to *avoid the product construction* before each pre-image computation in the algorithm given in the proof of Theorem 3.5. This is possible now since all string operations in  $\text{SL}[\circ, \text{replaceAll}, \text{reverse}, \text{FFT}]$  are (partial) functions, and regular constraints are distributive with respect to the pre-image of string (partial) functions.

**Fact 1.** *For every string (partial) function  $f : (\Sigma^*)^r \rightarrow \Sigma^*$  and regular languages  $L_1$  and  $L_2$ , it holds that  $\text{Pre}_{R_f}(L_1 \cap L_2) = \text{Pre}_{R_f}(L_1) \cap \text{Pre}_{R_f}(L_2)$ .*

To see this, suppose  $\vec{u} \in \text{Pre}_{R_f}(L_1) \cap \text{Pre}_{R_f}(L_2)$ . Then  $\vec{u} \in \text{Pre}_{R_f}(L_1)$  and  $\vec{u} \in \text{Pre}_{R_f}(L_2)$ . Therefore, there are  $v_1 \in L_1, v_2 \in L_2$  such that  $(\vec{u}, v_1) \in R_f$  and  $(\vec{u}, v_2) \in R_f$ . Since  $f$  is a (partial) function, it follows that  $v_1 = v_2 \in L_1 \cap L_2$ , thus  $\vec{u} \in \text{Pre}_{R_f}(L_1 \cap L_2)$ . This equality does *not* hold in general if  $f$  is *not* functional, as shown by the following example.

**Example 5.2.** *Let  $- \in \Sigma$  and  $f : \Sigma^* \rightarrow 2^{\Sigma^*}$  be the nondeterministic function mentioned in the introduction (see Figure 1) that nondeterministically outputs a substring delimited by  $-$ . Moreover, let  $a, b$  be two distinct letters from  $\Sigma \setminus \{-\}$ ,  $L_1 = a(\Sigma \setminus \{-\})^*$ , and  $L_2 = (\Sigma \setminus \{-\})^*b$ . Then*

$$\begin{aligned} \text{Pre}_{R_f}(L_1) \cap \text{Pre}_{R_f}(L_2) &= (a(\Sigma \setminus \{-\})^* \cup a(\Sigma \setminus \{-\})^* \Sigma^* \cup \Sigma^* a(\Sigma \setminus \{-\})^* \cup \Sigma^* a(\Sigma \setminus \{-\})^* \Sigma^*) \cap \\ &\quad ((\Sigma \setminus \{-\})^* b \cup (\Sigma \setminus \{-\})^* b \Sigma^* \cup \Sigma^* (\Sigma \setminus \{-\})^* b \cup \Sigma^* (\Sigma \setminus \{-\})^* b \Sigma^*), \end{aligned}$$

which is different from

$$\text{Pre}_{R_f}(L_1 \cap L_2) = a(\Sigma \setminus \{-\})^* b \cup a(\Sigma \setminus \{-\})^* b \Sigma^* \cup \Sigma^* a(\Sigma \setminus \{-\})^* b \cup \Sigma^* a(\Sigma \setminus \{-\})^* b \Sigma^*.$$

For instance,  $a-b \in \text{Pre}_{R_f}(L_1) \cap \text{Pre}_{R_f}(L_2)$ , but  $a-b \notin \text{Pre}_{R_f}(L_1 \cap L_2)$ .  $\square$

The distributivity of the pre-image of string functions means that, for each  $y := f(\vec{x})$  and  $y \in \mathcal{A}$  with  $\mathcal{L}(\mathcal{A}) = \mathcal{L}(\mathcal{A}_1) \cap \dots \cap \mathcal{L}(\mathcal{A}_s)$ , we can compute  $\text{Pre}_{R_f}(\mathcal{A})$  by *separately* computing the pre-image  $\text{Pre}_{R_f}(\mathcal{A}_i)$  for each assertion  $y \in \mathcal{A}_i$ , i.e., no product construction is performed.

Moreover, to obtain the EXPSpace upper bound, we need to carefully examine the complexity of the pre-image computation for each string operation. The pre-image computation of the `replaceAll` function has recently been addressed in [18]. In the following, we tackle other string functions in  $\text{SL}[\circ, \text{replaceAll}, \text{reverse}, \text{FFT}]$ . To this end, we utilise a succinct representation of the conjunction of a special class of regular languages, called *conjunctive FAs*.

**Definition 5.3** (Conjunctive FA). *A conjunctive FA is a pair  $(\mathcal{A}, \Omega)$ , where  $\mathcal{A} = (Q, \delta)$  is a transition graph and  $\Omega \subseteq Q \times Q$  is called a conjunctive acceptance condition. The language defined by  $(\mathcal{A}, \Omega)$ , denoted by  $\mathcal{L}(\mathcal{A}, \Omega)$ , is  $\bigcap_{(q, q') \in \Omega} \mathcal{L}((Q, q, \{q'\}, \delta))$ . The size of  $(\mathcal{A}, \Omega)$ , is defined as  $|Q|$ .*

Note that the conjunctive FA  $(\mathcal{A}, \Omega)$  is exponentially more succinct than the product automaton of all FAs  $(Q, q, \{q'\}, \delta)$  for  $(q, q') \in \Omega$ . For a string operation  $f : (\Sigma^*)^r \rightarrow \Sigma^*$ , we use  $\text{Pre}_{R_f}(\mathcal{A}, \Omega)$  to denote the pre-image of  $\mathcal{L}(\mathcal{A}, \Omega)$  under  $R_f$ . A *conjunctive representation* of  $\text{Pre}_{R_f}(\mathcal{A}, \Omega)$  is a collection  $((\mathcal{A}_j^{(1)}, \Omega_j^{(1)}), \dots, (\mathcal{A}_j^{(r)}, \Omega_j^{(r)}))_{1 \leq j \leq n}$ , where each atom  $(\mathcal{A}_j^{(i)}, \Omega_j^{(i)})$  is a conjunctive FA.

Based on conjunctive FAs and the fact that the product construction of regular constraints can be avoided, we show the EXPSPACE upper bound for  $\text{SL}[\circ, \text{replaceAll}, \text{reverse}, \text{FFT}]$ .

**Proposition 5.4.** *The path feasibility of  $\text{SL}[\circ, \text{replaceAll}, \text{reverse}, \text{FFT}]$  is in EXPSPACE.*

The proof of Proposition 5.4 can be found in Appendix B in the supplementary material. For the EXPSPACE lower bound, it has been shown in [42] that  $\text{SL}$  with  $\text{FFT}$  and  $\circ$  is EXPSPACE-hard. (Note that all transducers used in the reduction therein are functional.) To complement this result, we show that  $\text{SL}$  with  $\text{replaceAll}$  solely is already EXPSPACE-hard. This result is interesting in its own right. In particular, it solves an open problem left over in [18].

**Proposition 5.5.** *The path feasibility problem for  $\text{SL}[\text{replaceAll}]$  is EXPSPACE-hard.*

The proof of the above proposition is by a reduction from a tiling problem over an exponentially wide corridor (see Section 4.2 for a definition). We give the full proof in Appendix C in the supplementary material.

## 5.2 The fragment $\text{SL}[\circ, \text{sreplaceAll}, \text{reverse}, \text{FT}]$

Theorem 5.1 shows that in  $\text{SL}$ , if the transducers are restricted to be functional and one-way, then the complexity of the path feasibility problem becomes EXPSPACE-complete. In the following, we show that the same complexity bound holds if the  $\text{replaceAll}_e$  function is made unary, whereas the transducers are allowed to be relational. We remark that the proof of the complexity upper-bound deviates from that of  $\text{SL}[\circ, \text{replaceAll}, \text{reverse}, \text{FFT}]$ .

**Theorem 5.6.** *The path feasibility of  $\text{SL}[\circ, \text{sreplaceAll}, \text{reverse}, \text{FT}]$  is EXPSPACE-complete.*

The lower-bound in Theorem 5.6 follows from that in [42] for  $\circ$  and FTs. We focus on the upper-bound. Let  $S$  be a symbolic execution in  $\text{SL}[\circ, \text{sreplaceAll}, \text{reverse}, \text{FT}]$ . Without loss of generality, we assume that the subject parameters of the  $\text{sreplaceAll}$  functions in  $S$  are always string variables (otherwise it can be eliminated). We have the four-step procedure below:

- (1) At first, for each assertion  $\text{assert}(R(\vec{x}))$  in  $S$ , we nondeterministically choose one disjunct  $(\mathcal{A}_1, \dots, \mathcal{A}_r)$  of the representation of  $R$ , replace  $\text{assert}(R(\vec{x}))$  with the sequence of assertions  $\text{assert}(x_1 \in \mathcal{A}_1); \dots; \text{assert}(x_r \in \mathcal{A}_r)$ . Let  $S_1$  be the resulting program. Note that the size of  $S_1$  is linear in that of  $S$ .
- (2) Transform each assignment of the form  $y := \text{replaceAll}_e(x, u)$  in  $S_1$  with  $e$  a regular expression and  $u$  a string constant, into  $y := T_{e,u}(x)$ , where  $T_{e,u}$  is an FT corresponding to  $\text{replaceAll}_e(\cdot, u)$  that can be constructed from  $e, u$  in exponential time ([18]). Let  $S_2$  denote the resulting program.
- (3) Remove all the occurrences of the  $\circ$  operator from  $S_2$ , resulting in  $S_3$ . This step can be done in nondeterministic exponential time w.r.t. the size of  $S_1$  (not  $S_2$ ), thus the size of  $S_3$  is at most exponential in that of  $S_1$ .
- (4) Finally, reduce  $S_3$  into a program  $S_4$  that contains no occurrences of the reverse function. The reduction is done in polynomial time.

Note that  $S_4$  is a program that contains only FTs and assertions of the form  $y \in \mathcal{A}$  the size of which is exponential in that of  $S$ . According to [6][Theorem 6.7], the path feasibility of a symbolic execution that contains only FTs and assertions of the form  $y \in \mathcal{A}$  can be solved in polynomial space. Therefore, we conclude that the path feasibility of  $\text{SL}[\circ, \text{sreplaceAll}, \text{reverse}, \text{FT}]$  is in nondeterministic exponential space, thus in  $\text{EXPSPACE}$  by Savitch's theorem.

Since the first step is clear and the second step was shown in [18], we will focus on the third and fourth step.

The third step is similar to the proof of Theorem 5 in [42]: The main idea is to do a bottom-up induction on the structure of the dependency graph (namely starting from the input variables) and split each variable into multiple segments represented by fresh variables. (In the current setting, one additional inductive case should be added to deal with the `reverse` function.) Crucially the number of fresh variables introduced in the third step depends only on the structure of the dependency graph, but is independent of the size of the transducers or automata in  $S_2$ . Therefore, there are at most exponentially (in the size of  $S_1$ ) many fresh variables are introduced. The transducers or automata in  $S_3$  are obtained from those of  $S_2$  by designating one initial and one final state respectively. Therefore, the size of  $S_3$  is at most exponential in that of  $S_1$ .

We mainly describe the fourth step, i.e., to eliminate the `reverse` function while preserving path feasibility. During this course, we need to introduce *reversed transducers*. For an FT  $T$ , we define FT  $T^\pi$  by reversing the direction of each transition of  $T$  and swapping initial and final states.

Let  $X$  denote the set of variables occurring in  $S_3$ . The fourth step comprises the following substeps.

- (4.1) For each  $x \in X$ , add a new variable  $x^{(\pi)}$ , which intuitively denotes the reverse of  $x$ .
- (4.2) Remove each  $y := \text{reverse}(x)$  in  $S_3$  and replace each occurrence of  $y$  in  $S_3$  with  $x^{(\pi)}$ .
- (4.3) In this substep, we intend to make sure for each variable  $x \in X$ , it cannot be the case that both  $x$  and  $x^{(\pi)}$  occur. To this end, we sequentially process the statements of  $S_3$ , as follows.

Mark all the remaining assignments as unprocessed. Repeat the following procedure until all the assignments are processed:

- If the first unprocessed statement is of the form  $y := T(x^{(\pi)})$  (resp.  $y^{(\pi)} = T(x^{(\pi)})$ ) and  $x$  occurs in some processed assignment, then replace  $y := T(x^{(\pi)})$  (resp.  $y^{(\pi)} := T(x^{(\pi)})$ ) by  $y^{(\pi)} := T^\pi(x)$  (resp.  $y := T(x)$ ) and mark the new statement as processed.
- If the first unprocessed statement is of the form  $y^{(\pi)} := T(x)$  (resp.  $y := T(x)$ ) and  $x^{(\pi)}$  occurs in some processed assignment, then replace  $y^{(\pi)} := T(x)$  (resp.  $y := T(x)$ ) by  $y := T^\pi(x^{(\pi)})$  (resp.  $y^{(\pi)} := T^\pi(x^{(\pi)})$ ) and mark the new statement as processed.
- For all the other cases, mark the first unprocessed statement as processed.

By induction, we can show that in each step of the above procedure, for each variable  $x \in X$ , at most one of  $x$  or  $x^{(\pi)}$  occurs in the processed assignments. We then have that, after the step (4.3), for each  $x \in X$ ,  $x$  and  $x^{(\pi)}$  can *not* both occur in the assignments.

- (4.4) For each variable  $x \in X$ , if  $x$  occurs in the assignments, then replace each regular constraint of the form  $x^{(\pi)} \in \mathcal{L}(\mathcal{A})$  by  $x \in \mathcal{L}(\mathcal{A}^\pi)$ , otherwise, replace each regular constraint of the form  $x \in \mathcal{L}(\mathcal{A})$  by  $x^{(\pi)} \in \mathcal{L}(\mathcal{A}^\pi)$ .

Recall that we use  $S_4$  to denote the symbolic execution that results from executing the fourth step on  $S_3$ . From the arguments above, we know that for each  $x \in X$ , exactly one of  $x$  or  $x^{(\pi)}$  occurs in  $S_4$ , but not both. Therefore,  $S_4$  is a symbolic execution in  $\text{SL}[\circ, \text{sreplaceAll}, \text{reverse}, \text{FT}]$  that contains only FTs and regular constraints.

The following example illustrates the fourth step.

**Example 5.7.** *Consider the symbolic execution*

$$z := T(x); y := \text{reverse}(x); z' := T'(y); \mathbf{assert}(x \in \mathcal{A}_1); \mathbf{assert}(z \in \mathcal{A}_2); \mathbf{assert}(z' \in \mathcal{A}_3)$$

where  $T, T'$  are FTs and  $\mathcal{A}_1, \mathcal{A}_2, \mathcal{A}_3$  are FAs. In the first substep, we add the variables  $x^{(\pi)}, y^{(\pi)}, z^{(\pi)}, (z')^{(\pi)}$ . In the second substep, we remove  $y := \text{reverse}(x)$  and replace  $y$  with  $x^{(\pi)}$ , resulting in the program

$$z := T(x); z' := T'(x^{(\pi)}); \mathbf{assert}(x \in \mathcal{A}_1); \mathbf{assert}(z \in \mathcal{A}_2); \mathbf{assert}(z' \in \mathcal{A}_3).$$

In the third substep, since when processing  $z' := T'(x^{(\pi)})$ ,  $x$  has already occurred in the processed assignment  $z := T(x)$ , we transform  $z' := T'(x^{(\pi)})$  into  $(z')^{(\pi)} := T'(x)$ , resulting in the program

$$z := T(x); (z')^{(\pi)} := T'(x); \mathbf{assert}(x \in \mathcal{A}_1); \mathbf{assert}(z \in \mathcal{A}_2); \mathbf{assert}(z' \in \mathcal{A}_3).$$

Note that after the third substep,  $x, z, (z')^{(\pi)}$  occur in the assignments, but none of  $x^{(\pi)}, z^{(\pi)}$  and  $z'$  do. In the fourth substep, we replace  $\mathbf{assert}(z' \in \mathcal{A}_3)$  with  $\mathbf{assert}((z')^{(\pi)} \in \mathcal{A}_3^\pi)$  and get the following symbolic execution in  $\text{SL}[\circ, \text{sreplaceAll}, \text{reverse}, \text{FT}]$  where only FTs and regular constraints occur,

$$z := T(x); (z')^{(\pi)} := T'(x); \mathbf{assert}(x \in \mathcal{A}_1); \mathbf{assert}(z \in \mathcal{A}_2); \mathbf{assert}((z')^{(\pi)} \in \mathcal{A}_3^\pi).$$

□

As mentioned in Section 1, our algorithm reduces the problem to constraints which can be handled by the existing solver SLOTH [30].

**Extensions with length constraints.** Apart from regular constraints in the assertion, length constraints are another class of commonly used constraints in string manipulating programs. Some simple length constraints can be encoded by regular constraints, as partially exemplified in Example 3.2. Here, we show that when  $\text{SL}[\circ, \text{sreplaceAll}, \text{reverse}, \text{FT}]$  is extended with (much more) general length constraints, the EXPSPACE upper bound can still be preserved. We remark that, in contrast, if  $\text{SL}[\circ, \text{replaceAll}, \text{reverse}, \text{FFT}]$  is extended with length constraints, then the path feasibility problem becomes undecidable, which has already been shown in [18].

To specify length constraints properly, we need to slightly extend our constraint language. In particular, we consider variables of type  $\text{Int}$ , which are usually referred to as *integer variables* and range over the set  $\mathbb{N}$  of natural numbers. Recall that, in previous sections, we have used  $x, y, z, \dots$  to denote the variables of  $\text{Str}$  type. Hereafter we typically use  $l, m, n, \dots$  to denote the variables of  $\text{Int}$ . The choice of omitting negative integers is for simplicity. Our results can be easily extended to the case where  $\text{Int}$  includes negative integers.

**Definition 5.8** (Length assertions). *A length assertion is of the form  $\mathbf{assert}(a_1 t_1 + \dots + a_n t_n \leq d)$ , where  $a_1, \dots, a_n, d \in \mathbb{Z}$  are integer constants (represented in binary), and each term  $t_i$  is either*

1. an integer variable  $n$ ;
2.  $|x|$  where  $x$  is a string variable; or
3.  $|x|_a$  where  $x$  is string variable and  $a \in \Sigma$  is a constant letter.

Here,  $|x|$  and  $|x|_a$  denote the length of  $x$  and the number of occurrences of  $a$  in  $x$ , respectively.

**Theorem 5.9.** *The path feasibility of  $SL[o, \text{sreplaceAll}, \text{reverse}, FT]$  extended with length assertions is EXPSPACE-complete.*

The proof of the theorem is given in Appendix D in the supplementary material. Other related constraints, such as character assertions and `IndexOf` assertions, can be encoded by length assertions defined in Definition 5.8 together with regular constraints. Since they are not the focus of this paper, we omit the details here.

We observe that Theorem 5.9 suggests that the two semantic conditions (roughly speaking, being a recognisable relation) is only a sufficient, but not necessary, condition of decidability of path feasibility. This is because length assertions can easily deviate from recognisable relations (for instance  $|x_1| = |x_2|$  does not induce a recognisable relation over  $\Sigma^*$ ), but decidability still remains.

## 6 Implementation

We have implemented our decision procedure for path feasibility in a new tool OSTRICH, which is built on top of the SMT solver Princess [49]. OSTRICH implements the optimised decision procedure for string functions as described in Section 5.1 (i.e. using distributivity of regular constraints across pre-images of functions) and has built-in support for concatenation, reverse, FFT, and `replaceAll`. Moreover, since the optimisation only requires that string operations are functional, we can also support additional functions that satisfy **RegInvRel**, such as `replacee` which replaces only the first (leftmost and longest) match of a regular expression. OSTRICH is extensible and new string functions can be added quite simply (Section 6.3).

Our implementation adds a new theory solver for conjunctive formulas representing path feasibility problems to Princess (Section 6.1). This means that we support disjunction as well as conjunction in formulas, as long as every conjunction of literals fed to the theory solver corresponds to a path feasibility problem. OSTRICH also implements a number of optimisations to efficiently compute pre-images of relevant functions (Section 6.2). OSTRICH is entirely written in Scala and is open-source. We report on our experiments with OSTRICH in Section 6.4. The tool is available on GitHub<sup>5</sup>. The artifact is available on the ACM DL.

### 6.1 Depth-First Path Feasibility

We first discuss the overall decision procedure for path feasibility implemented in OSTRICH. The procedure performs depth-first exploration of the search tree resulting from repeatedly splitting the disjunctions (or unions) in the recognisable pre-images of functions. Similar to the DPLL/CDCL architecture used in SAT solvers, our procedure computes conflict sets and applies back-jumping [46] to skip irrelevant parts of the search tree.

For solving, a path feasibility problem is represented as a set *funApps* of assignments  $x := f(\bar{y})$ , and a set *regex* of regular expression constraints  $x \in L$ , with  $x$  being a string variable and

<sup>5</sup><https://github.com/pruemmer/ostrich>

**Algorithm 1:** Recursive function *findModel* defining depth-first model construction for SL

---

**Input:** Sets *active*, *passive* of regex constraints  $x \in L$ ; acyclic set *funApps* of assignments  $x := f(\bar{y})$ .

**Result:** Either *Model*(*m*) with *m* a model satisfying all constraints and function applications; or *Conflict*(*s*) with *s* a set of regex constraints that is inconsistent with *funApps*.

---

```

1 begin
2   if active = ∅ then
3     /* Extract a model by solving constraints and evaluating functions */
4     leafTerms ← {x | x occurs in passive ∪ funApps} \ {x | (x := f(ȳ)) ∈ funApps};
5     leafModel ← {x ↦ w | x ∈ leafTerms, w satisfies all constraints on x in passive};
6     m ← μm. leafModel ∪ {x ↦ f(w̄) | (x := f(ȳ)) ∈ funApps, m(ȳ) = w̄ is defined};
7     return Model(m)
8   else
9     /* Compute the pre-image of one of the active constraints */
10    choose a constraint x ∈ L in active;
11    if there is an assignment x := f(y1, ..., yr) defining x in funApps then
12      cset ← {x ∈ L}; /* start constructing a conflict set */
13      compute the pre-image f-1(L) = ∪i=1n L1(i) × ... × Lr(i);
14      act ← active \ {x ∈ L}, pas ← passive ∪ {x ∈ L};
15      for i ← 1 to n do
16        newRegexes ← {y1 ∈ L1(i), ..., yr ∈ Lr(i)} \ (act ∪ pas);
17        if act ∪ pas ∪ newRegexes is inconsistent then
18          compute an unsatisfiable core c ⊆ act ∪ pas ∪ newRegexes;
19          cset ← cset ∪ (c \ {y1 ∈ L1(i), ..., yr ∈ Lr(i)});
20        else
21          switch findModel(act ∪ newRegexes, pas, funApps) do
22            case Model(m) do
23              return Model(m);
24            case Conflict(s) do
25              if s ∩ newRegexes = ∅ then
26                return Conflict(s); /* back-jump */
27              else
28                cset ← cset ∪ (s \ {y1 ∈ L1(i), ..., yr ∈ Lr(i)});
29          return Conflict(cset); /* backtrack */
30    else
31      return findModel(active \ {x ∈ L}, passive ∪ {x ∈ L}, funApps);

```

---

$\bar{y}$  a vector of string variables. The set *funApps* by definition contains at most one assignment for each variable  $x$ , and by nature of a path there are no cyclic dependencies. We make two further simplifying assumptions: (i) the set *regex* is on its own satisfiable, i.e., the constraints given for each variable  $x$  are consistent; and (ii) for each variable that occurs as the left-hand side of an assignment  $x := f(\bar{y})$ , there is at least one constraint  $x \in L$  in the set *regex*. Assumption (i) boils down to checking the non-emptiness of intersections of regular languages, i.e., to a reachability check in the product transition system, and can be done efficiently in practical cases. Both assumptions could easily be relaxed, at the cost of making the algorithm slightly more involved.

### 6.1.1 The exploration function

The algorithm is presented as a recursive function  $findModel$  in pseudo-code in Algorithm 1. The function maintains two sets  $active, passive$  of regular expression constraints, kept as parameters, and in addition receives the set  $funApps$  as parameter. *Active* regular expression constraints are those for which no pre-images have been computed yet, while *passive* are the constraints that have already gone through pre-image computation. In the initial call  $findModel(regex, \emptyset, funApps)$  of the function,  $active$  is chosen to be  $regex$ , while  $passive$  is empty.

Depending on the status of a path feasibility problem,  $findModel$  can produce two outcomes:

- $Model(m)$ , where  $m$  is maps string variables to words that satisfy the regular expression constraints in  $active \cup passive$  and the assignments in  $funApps$ , interpreted as equations.
- $Conflict(s)$ , with  $s \subseteq active \cup passive$  being a *conflict set*, i.e., a set of constraints that is inconsistent with  $funApps$ . The set  $s \cup funApps$  can be interpreted as an unsatisfiable core of the path feasibility problem, and is used to identify irrelevant splits during the search.

### 6.1.2 Implementation in detail

Model construction terminates with a positive result when the set  $active$  becomes empty (line 2), in which case it is only necessary to compute a model  $m$  (lines 3–6). For this, the algorithm first computes the set of variables that do not occur on the left-hand side of any assignment (line 3). The values of such leaf terms can be chosen arbitrarily, as long as all derived regular expression constraints are satisfied (line 4). The values of all other variables are extracted from the assignments in  $funApps$ : whenever an assignment  $x := f(\bar{y})$  is found for which all argument variables already have a value, also the value of the left-hand side  $x$  is known (line 5).

Otherwise, one of the active constraints  $x \in L$  is selected for pre-image computation (line 8). For the correctness it is irrelevant in which order the constraints are selected, and branching heuristics from the SAT world might be applicable. Our current implementation selects the constraints in the fixed order in which the constrained variables occur on the path, starting with constraints at the end of the path. If  $x$  is a left-hand side of an assignment, the pre-image of  $L$  is a recognisable relation that can be represented through regular languages (line 11); the constraint  $x \in L$  then becomes passive in subsequent recursive calls (line 12).

The algorithm then iterates over the disjuncts of the pre-image (line 13), generates new regular expression constraints for the function arguments (line 14), and checks whether any disjuncts lead to a solution. During the iteration over disjuncts, the algorithm builds up a conflict set  $cset$  collecting constraints responsible for absence of a solution (lines 10, 17, 26). If the new constraints are inconsistent with existing constraints (line 15), the disjunct does not have to be considered further; the algorithm then computes a (possibly minimal) unsatisfiable subset of the constraints, and adds it to the conflict set  $cset$ . Otherwise,  $findModel$  is called recursively (line 19). If the recursive call produces a model, no further search is necessary, and the function returns (lines 20–21). Similarly, if the recursive call reports a conflict that is independent of the generated regular expression constraints, it follows that no solution can exist for any of the disjuncts of the pre-image, and the function can return immediately (lines 23–24). In case of other conflicts, the conflict set  $cset$  is extended (line 26), and finally returned to explain why no model could be found (line 27).

## 6.2 Optimisation of Pre-Image Computation

We have optimised the pre-image computation of the concatenation and `replaceAll` operations.

### 6.2.1 Concatenation

The pre-image of a regular language  $L$  for concatenation  $x := y \circ z$  can be computed by representing  $L$  as an FA, say with  $n$  states, and generating a union  $\bigcup_{i=1}^n L_1^{(i)} \times L_2^{(i)}$  in which the accepting state of  $L_1^{(i)}$  and the initial state of  $L_2^{(i)}$  iterate over all  $n$  states of  $L$  [3]. In practice, most of the resulting  $n$  cases are immediately inconsistent with other regular expression constraints in  $active \cup passive$ ; this happens for instance when the length of  $y$  or  $z$  are already predetermined by other constraints. Our implementation therefore filters the considered languages  $L_1^{(i)}, L_2^{(i)}$  upfront using length information extracted from other constraints.

### 6.2.2 The `replaceAll` Function

We implement `replaceAlle` by reduction to `replaceAlla` for a single character  $a$ . We translate all  $x := \text{replaceAll}_e(y, z)$  into  $y' := T_e(y); x := \text{replaceAll}_b(y', z)$  where  $b$  is a special character disjoint from the rest of the alphabet. The transducer  $T_e$  copies the contents of  $y$  and replaces all left-most and longest subwords satisfying the regular expression  $e$  with  $b$ . This construction uses a *parsing automaton* and details can be found in [18]. We first recall how `replaceAlla` can be tackled, before explaining the inefficiencies and the solution we use.

**Naive Recognisability** Suppose we have an FA  $\mathcal{A}_x$  giving a regular constraint on  $x$ . We need to translate this automaton into a sequence of regular constraints on  $y$  and  $z$ . To do this, we observe that all satisfying assignments to  $x$  must take the form  $u_1 w_z u_2 w_z \dots w_z u_n$  where  $w_z$  is the value of  $z$ , and  $u_1 a u_2 a \dots a u_n$  is the value of  $y$ . Moreover, each word  $u_i$  cannot contain the character  $a$  since it would have been replaced by  $w_z$ . The (satisfying) assignment to  $x$  must be accepted by  $\mathcal{A}_x$ . Thus, we can extract from an accepting run of  $\mathcal{A}_x$  a set of pairs of states  $Q_z$ , which is the set of all pairs  $(q, q')$  such that the run of  $\mathcal{A}_x$  moves from  $q$  to  $q'$  while reading a copy of  $w_z$ . Then, we can obtain a new FA  $\mathcal{A}_y$  by removing all  $a$ -transitions from  $\mathcal{A}_x$  and then adding  $a$ -transitions  $(q, a, q')$  for each  $(q, q') \in Q_z$ . It is easy to verify that there is an accepting run of  $\mathcal{A}_y$  over  $u_1 a u_2 a \dots a u_n$ . Similarly, we define  $\mathcal{A}_z$  to be the intersection of  $\mathcal{A}_x(q, \{q'\})$  for all  $(q, q') \in Q_z$ . We know by design that there is an accepting run of  $\mathcal{A}_z$  over  $w_z$ .

The value of  $Q_z$  above was extracted from an accepting run of  $\mathcal{A}_x$ . There are, of course, many possible accepting runs of  $\mathcal{A}_x$ , each leading to a different value of  $Q_z$ , and thus a different  $\mathcal{A}_y$  and  $\mathcal{A}_z$ . Since each  $Q_z$  a set of pairs of states of  $\mathcal{A}_x$ , there are only a finite number of values that can be taken by  $Q_z$ . Thus, we can show the pre-image of  $x := \text{replaceAll}_a(y, a, z)$  is recognisable by enumerating all possible values of  $Q_z$ . For each  $Q_z$  we can produce a pair of automata  $(\mathcal{A}_y^{Q_z}, \mathcal{A}_z^{Q_z})$  as described above. Thus, the pre-image can be expressed by  $\bigcup_{Q_z} (\mathcal{L}(\mathcal{A}_x^{Q_z}) \times \mathcal{L}(\mathcal{A}_y^{Q_z}))$ .

**Optimised Recognisability** A problem with the above algorithm is that there are an exponential number of possible values of  $Q_z$ . For example, if  $\mathcal{A}_x$  has 10 states, there are  $2^{100}$  possible values of  $Q_z$ ; it is infeasible to enumerate them all. To reduce the number of considered pairs, we use the notion of a *Cayley Graph* [61, 24]. Note, this technique was already used by Chen [19, 20] as part of an implementation of [18].



Given an automaton  $\mathcal{A}$  and a word  $w$ , we define

$$\langle w \rangle = \{(q_0, q_n) \mid \text{there exists a run } q_0, \dots, q_n \text{ of } \mathcal{A} \text{ over } w\}.$$

The number of distinct  $\langle w \rangle$  is finite for a given FA. We define Cayley Graphs in the context of FA.

**Definition 6.1** (Cayley Graph). *Given an FA  $\mathcal{A} = (\Sigma, Q, q_0, F, \delta)$  the Cayley Graph of  $\mathcal{A}$  is a graph  $(V, E)$  with nodes  $V = \{\langle w \rangle \mid w \in \Sigma^*\}$  and edges  $E = \{(\langle w \rangle, a, \langle wa \rangle) \mid w \in \Sigma^* \wedge a \in \Sigma\}$ .*

For a given automaton, it is straight-forward to compute the Cayley Graph using a fixed point iteration: begin with  $\{\epsilon\} \in V$ , then, until a fixed point is reached, take some  $\langle w \rangle$  in  $V$  and add  $\langle wa \rangle$  for all  $a \in \Sigma$ . Note  $\langle wa \rangle$  is a simple composition of  $\langle w \rangle$  and  $\langle a \rangle = \{(q, q') \mid (q, a, q') \text{ is an edge of } \mathcal{A}\}$ .

We claim that instead of enumerating all  $Q_z$ , one only needs to consider all  $\langle w \rangle \in V$ . Since  $\langle w \rangle$  can be a value of  $Q_z$ , the restriction does not increase the set of potential solutions. We need to argue that it does not reduce them. Hence, take some satisfying value  $u_1 w_z u_2 w_z \dots w_z u_n$  of  $x$ . One can easily verify that  $w_z$  is accepted by the  $\mathcal{A}_z$  constructed from  $\langle w_z \rangle$ . Moreover,  $u_1 a u_2 a \dots a u_n$  is accepted by the corresponding  $\mathcal{A}_y$ . Thus we have not restricted the algorithm.

From experience, it is reasonable to hope that the Cayley Graph has far fewer nodes than the set of all potential  $Q_z$ . Moreover, we can further improve the enumeration by considering any other regular constraints  $\mathcal{A}_z^1, \dots, \mathcal{A}_z^m$  that may exist on the value of  $z$ . As a simple example, if we had **assert**( $z \in b^*$ );  $x := \text{replaceAll}_a(y, z)$ ; **assert**( $x \in \mathcal{A}_x$ ) where  $\mathcal{A}_x$  has initial state  $q_0$  and accepting states  $q_1$  and  $q_2$  with transitions  $(q_0, a, q_1)$  and  $(q_0, b, q_1)$ , there is no need to consider  $\langle a \rangle = \{(q_0, q_1)\}$  since  $z$  cannot take the value  $a$  without violating **assert**( $z \in b^*$ ).

Using this observation, assume we already know that  $z$ 's value must be accepted by  $\mathcal{A}_z^1, \dots, \mathcal{A}_z^m$ . Instead of building the Cayley Graph alone, we build a product of the Cayley Graph and  $\mathcal{A}_z^1, \dots, \mathcal{A}_z^m$  on the fly. This product has states  $(\langle w \rangle, q_1, \dots, q_m)$  for some  $w \in \Sigma^*$  and  $q_1, \dots, q_m$  states of  $\mathcal{A}_z^1, \dots, \mathcal{A}_z^m$  respectively. The only  $\langle w \rangle$  we need to consider are those such that  $(\langle w \rangle, q_1, \dots, q_m)$  is a (reachable) product state, and, moreover,  $q_1, \dots, q_m$  are accepting states of  $\mathcal{A}_z^1, \dots, \mathcal{A}_z^m$ .

This technique first speeds up the construction of the Cayley Graph by limiting which nodes are generated, and second, avoids values of  $Q_z$  which are guaranteed to be unsatisfying.

### 6.3 Extensibility

One may extend OSTRICH to include any string function with a recognisable pre-image *without having to worry about other parts of the solver*. We give an example of adding a new reverse function.

We have defined a Scala trait `PreOp`. To add a string function, one defines a new Scala object with this trait. This requires two methods described below. An example object is given in Figure 3.

The first method is `eval`, which implements the string function. It takes a sequence of strings represented as sequence of integers. For `reverse`, this method reverses the argument. For `replaceAll_a(x, y)`, the `eval` function would take a sequence of two arguments (the values of  $x$  and  $y$  respectively) and replace all  $a$  characters in  $x$  with the value of  $y$  to produce the result. The return value can be `None` if the function is not applicable to the given arguments.

The second method `apply` performs the pre-image computation. It takes two arguments: a sequence of constraints on the arguments (`argumentConstraints`), and a constraint on the result (`resultConstraint`). The result constraint is represented as an `Automaton` that accepts

```

object ReversePreOp extends PreOp {
  def apply(argumentConstraints : Seq[Seq[Automaton]], resultConstraint : Automaton)
    : (Iterator[Seq[Automaton]], Seq[Seq[Automaton]]) = {
    val revAut = AutomataUtils.reverse(resultConstraint)
    (Iterator(Seq(revAut)), List())
  }
  def eval(arguments : Seq[Seq[Int]]) : Option[Seq[Int]] = Some(arguments(0).reverse)
}

```

Figure 3: A `PreOp` for the reverse function.

the language for which we are computing  $f^{-1}$ . The argument constraints are represented as sequences of sequences of automata: for each argument of the function there will be one sequence of automata. These constraints give further information on what is known about the constraints on the arguments of the function. For example, if we are computing  $x := \text{reverse}(y)$  and elsewhere we have determined  $y$  must be accepted by both  $\mathcal{A}_1$  and  $\mathcal{A}_2$ , then the first (and only) element of the argument constraints will be the sequence  $\mathcal{A}_1, \mathcal{A}_2$ . It is not necessary to use these constraints, but they may help to optimise the pre-image computation (as in the case of `replaceAll` described above).

The return value of `apply` is a pair. The first element is the pre-image (a recognisable relation). It is represented as an iterator over sequences of automata, where each sequence corresponds to a tuple  $(\mathcal{A}_1, \dots, \mathcal{A}_n)$  of the relation. The second element is a list of the argument constraints used during the pre-image computation; this information is needed to compute correct conflict sets in Algorithm 1. If the argument constraints were not used to optimise the pre-image computation, this value can be an empty list. If the arguments were used, then those constraints which were used should be returned in the same format as the argument constraints.

For convenience, assume that we have already implemented a reversal operation on automata as `AutomataUtils.reverse`. A `PreOp` object for the reverse function is given in Figure 3. The `apply` method reverses the result constraint, and returns an iterator over this single automaton. The second component of the return value is an empty list since the argument constraints were not used. The `eval` method simply reverses its first (and only) argument.

To complete the addition of the function, the reverse function is registered in the OSTRICH string theory object. The function is then ready to be used in an SMT-LIB problem, e.g. by writing the assertion (`assert (= x (user_reverse y))`).

## 6.4 Experiments

We have compared OSTRICH with a number of existing solvers on a wide range of benchmarks. In particular, we compared OSTRICH with CVC4 1.6 [40], SLOTH [30], and Z3<sup>6</sup> configured to use the Z3-str3 string solver [9]. We considered several sets of benchmarks which are described in the next sub-section. The results are given in Section 6.4.2.

In [30] SLOTH was compared with S3P [54] where inconsistent behaviour was reported. We contacted the S3P authors who report that the current code is unsupported; moreover, S3P is being integrated with Z3. Hence, we do not compare with this tool.

<sup>6</sup>Github version 2aeb814f4e7ae8136ca5aceae4d939a0828794c8

### 6.4.1 Benchmarks

The first set of benchmarks we call `TRANSDUCER`. It combines the benchmark sets of Stranger [59] and the mutation XSS benchmarks of [42]. The first (sub-)set appeared in [30] and contains instances manually derived from PHP programs taken from the website of Stranger [59]. It contains 10 formulae (5 sat, 5 unsat) each testing for the absence of the vulnerability pattern `.*<script.*` in the program output. These formulae contain between 7 and 42 variables, with an average of 21. The number of atomic constraints ranges between 7 and 38 and averages 18. These examples use disjunction, conjunction, regular constraints, and concatenation, `replaceAll`. They also contain several one-way functional transducers (defined in `SMTLIB` in [30]) encoding functions such as `addslashes` and `trim` used by the programs. Note that transducers have been known for some time to be a good framework for specifying sanitisers and browser transductions (e.g., see the works by Minamide, Veanes, Saxena, and others [44, 31, 58, 22]), and a library of transducer specifications for such functions is available (e.g. see the language `BEK` [31]).

The second (sub-)set was used by [42, 30] and consists of 8 formulae taken from [42, 35]. These examples explore mutation XSS vulnerabilities in JavaScript programs. They contain between 9 and 12 variables, averaging 9.75, and 9-13 atomic constraints, with an average of 10.5. They use conjunctions, regular constraints, concatenation, `replaceAll`, and transducers providing functions such as `htmlEscape` and `escapeString`.

Our next set of benchmarks, `SLOG`, came from the `SLOG` tool [57] and consist of 3,392 instances. They are derived from the security analysis of real web applications and contain 1-211 string variables (average 6.5) and 1-182 atomic formula (average 5.8). We split these benchmarks into two sets `SLOG (REPLACE)` and `SLOG (REPLACEALL)`. Each use conjunction, disjunction, regular constraints, and concatenation. The set `SLOG (REPLACE)` contains 3,391 instances and uses `replace`. `SLOG (REPLACEALL)` contains 120 instances using the `replaceAll` operation.

Our next set of benchmarks `KALUZA` is the well-known set of *Kaluza* benchmarks [50] restricted to those instances which satisfy our semantic conditions (roughly  $\sim 80\%$  of the benchmarks). *Kaluza* contains concatenation, regular constraints, and length constraints, most of which admit regular monadic decomposition. There are 37,090 such benchmarks (28 032 sat).

We also considered the benchmark set of [20, 19]. This contains 42 hand-crafted benchmarks using regular constraints, concatenation, and `replaceAll` with variables in both argument positions. The benchmarks contain 3-7 string variables and 3-9 atomic constraints.

### 6.4.2 Results

We compared the tools on an AMD Opteron 2220 SE machine, running 64-bit Linux and Java 1.8, with the heap space of each job limited to 2 GB. We used a timeout of 240s for each *Kaluza* problem, and 600s for the other benchmarks. Figure 4 summarises our findings as cactus plots. For each benchmark set, we plot the time in seconds on a cubic-root scale against the number of benchmarks solved (individually) within that time. The extent of each line on the Time axis gives the maximum time in seconds required to solve any instance in the set. When a solver is not plotted it is because it was unable to analyse the benchmark set.

For the `TRANSDUCER` set, `OSTRICH` solved all benchmarks taking a maximum of 4s. `SLOTH` did not answer 2 instances and was slower on the rest. This set is not supported by `CVC4` or `Z3-str3`.

For the `SLOG (REPLACEALL)` set, `OSTRICH` solved all 120 instances within a few seconds, while `SLOTH` only solved 100. `CVC4` and `Z3-str3` were omitted as they do not support `replaceAll` constraints.

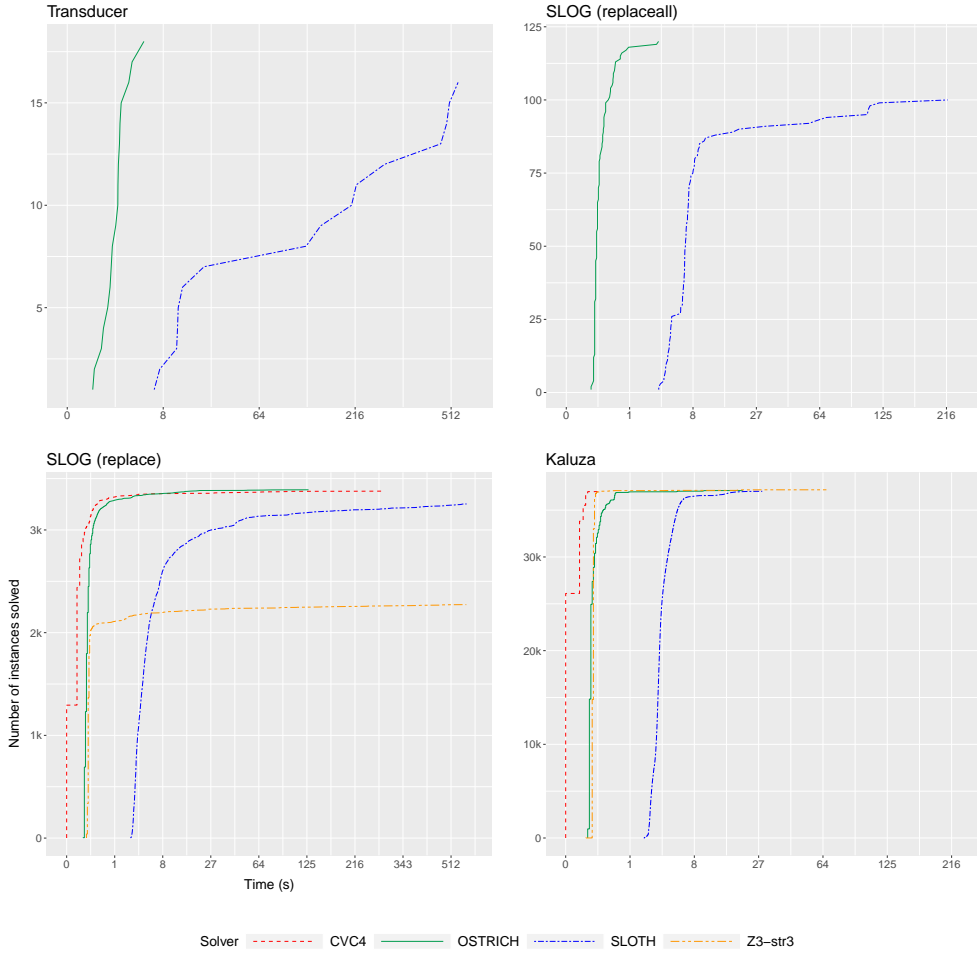


Figure 4: Comparison of solvers on several sets of benchmarks.

For the SLOG (REPLACE) set, OSTRICH was also able to solve all instances within the timeout. CVC4 was able to solve all but 13 of the benchmarks. Similarly, SLOTH was unable to solve 138 instances, while Z3-str3 could not solve 1,118. We note that Z3-str3 gave inconsistent results for 18 of these benchmarks, an issue that could not be conclusively resolved before submission..

For the KALUZA set, CVC4, Z3-str3, and OSTRICH were able to solve all instances. Since SLOTH does not support length constraints, it reported errors in 81 of these benchmarks. Otherwise all instances were solved within the timeout.

We were unable to install the tool of [20] for comparison with the benchmarks of [20, 19]. Since OSTRICH was the only available tool supporting variables in both arguments of `replaceAll`, we do not provide a plot. We note that the most difficult benchmark took OSTRICH 1.56s to answer, with the second hardest requiring 0.34s.

Overall, CVC4 was the fastest for the constraints it was able to answer, while OSTRICH was the only solver which answered all benchmark instances. However, the runtime differences are fractions of a second. In terms of completeness guarantees and the type of string constraints

supported, SLOTH is our nearest competitor, with the main difference being that OSTRICH supports variables in both argument positions of `replaceAll`, while SLOTH will only accept constant strings as the second argument. Our results show that OSTRICH outperforms SLOTH on all benchmark sets.

## 7 Conclusion

We proposed two general semantic conditions which together ensure the decidability of path feasibility with complex string operations including `replaceAll`, transducers, and concatenation. Our semantic conditions are satisfied by a wide range of complex string operations and subsume various existing string constraint languages (e.g. [42, 18]) and many current existing benchmarks (e.g. [50, 30, 59, 57, 42]). Based on the semantic conditions, we developed a conceptually simple and generic decision procedure with an extensible architecture that allow a user to easily incorporate a user-defined function. After providing theoretical evidence via computational complexity that these semantic conditions might be too general to provide an efficient decision procedure, we proposed two different solutions. We advocated the first solution (prohibit nondeterminism in string operations) whenever possible since it permits a highly effective optimisation of the solver based on a kind of distributivity property of regular constraints across string functions. In fact, the extra restriction imposed by this is satisfied by most (but not all) existing benchmarking examples. We developed a new string solver OSTRICH that implements the first solution and demonstrate its efficacy against other competitive solvers on most existing benchmarks.

### Acknowledgments

We are grateful to the anonymous referees for their constructive and detailed comments. T. Chen is supported by the Engineering and Physical Sciences Research Council under Grant No. EP/P00430X/1 and the Australian Research Council under Grant No. DP160101652, DP180100691. M. Hague is supported by the Engineering and Physical Sciences Research Council under Grant No. EP/K009907/1. A. Lin is supported by the European Research Council (ERC) under the European Union’s Horizon 2020 research and innovation programme (grant agreement no 759969). P. Rümmer is supported by the Swedish Research Council (VR) under grant 2014-5484, and by the Swedish Foundation for Strategic Research (SSF) under the project WebSec (Ref. RIT17-0011). Z. Wu is supported by the National Natural Science Foundation of China under Grant No. 61472474, 61572478, and 61872340, the INRIA-CAS joint research project “Verification, Interaction, and Proofs”.

## References

- [1] Parosh Aziz Abdulla, Mohamed Faouzi Atig, Yu-Fang Chen, Bui Phi Diep, Lukás Holík, Ahmed Rezine, and Philipp Rümmer. Flatten and conquer: a framework for efficient analysis of string constraints. In *Proceedings of the 38th ACM SIGPLAN Conference on Programming Language Design and Implementation, PLDI 2017, Barcelona, Spain, June 18-23, 2017*, pages 602–617, New York, NY, USA, 2017. ACM.
- [2] Parosh Aziz Abdulla, Mohamed Faouzi Atig, Yu-Fang Chen, Bui Phi Diep, Lukás Holík, Ahmed Rezine, and Philipp Rümmer. TRAU: SMT solver for string constraints. In *Formal Methods in Computer Aided Design, FMCAD 2018*, 2018. To appear.
- [3] Parosh Aziz Abdulla, Mohamed Faouzi Atig, Yu-Fang Chen, Lukás Holík, Ahmed Rezine, Philipp Rümmer, and Jari Stenman. String constraints for verification. In *Computer Aided Verification - 26th International Conference, CAV 2014*, pages 150–166. Springer, 2014.
- [4] Rajeev Alur and Jyotirmoy V. Deshmukh. Nondeterministic streaming string transducers. In *Automata, Languages and Programming - 38th International Colloquium, ICALP 2011, Zurich, Switzerland, July 4-8, 2011, Proceedings, Part II*, pages 1–20. Springer, 2011.
- [5] Christel Baier and Joost-Pieter Katoen. *Principles of Model Checking (Representation and Mind Series)*. The MIT Press, 2008.
- [6] Pablo Barceló, Diego Figueira, and Leonid Libkin. Graph logics with rational relations. *Logical Methods in Computer Science*, 9(3), 2013.
- [7] Clark W. Barrett, Roberto Sebastiani, Sanjit A. Seshia, and Cesare Tinelli. Satisfiability modulo theories. In *Handbook of Satisfiability*, pages 825–885. IOS Press, 2009.
- [8] Michael Benedikt, Leonid Libkin, Thomas Schwentick, and Luc Segoufin. Definable relations and first-order query languages over strings. *J. ACM*, 50(5):694–751, 2003.
- [9] Murphy Berzish, Vijay Ganesh, and Yunhui Zheng. Z3str3: A string solver with theory-aware heuristics. In *2017 Formal Methods in Computer Aided Design, FMCAD 2017, Vienna, Austria, October 2-6, 2017*, pages 55–59. IEEE, 2017.
- [10] Nikolaj Børner, Nikolai Tillmann, and Andrei Voronkov. Path feasibility analysis for string-manipulating programs. In *Tools and Algorithms for the Construction and Analysis of Systems, TACAS 2009*, pages 307–321. Springer, 2009.
- [11] Egon Börger, Erich Grädel, and Yuri Gurevich. *The Classical Decision Problem*. Perspectives in Mathematical Logic. Springer, 1997.
- [12] J Richard Büchi and Steven Senger. Definability in the existential theory of concatenation and undecidable extensions of this theory. In *The Collected Works of J. Richard Büchi*, pages 671–683. Springer, 1990.
- [13] Thierry Cachat and Igor Walukiewicz. The complexity of games on higher order pushdown automata. *CoRR*, abs/0705.0262, 2007.
- [14] Cristian Cadar, Daniel Dunbar, and Dawson Engler. Klee: Unassisted and automatic generation of high-coverage tests for complex systems programs. In *Proceedings of the 8th USENIX Conference on Operating Systems Design and Implementation, OSDI’08*, pages 209–224, Berkeley, CA, USA, 2008. USENIX Association.
- [15] Cristian Cadar, Vijay Ganesh, Peter M. Pawlowski, David L. Dill, and Dawson R. Engler. Exe: Automatically generating inputs of death. In *Proceedings of the 13th ACM Conference on Computer and Communications Security, CCS ’06*, pages 322–335, New York, NY, USA, 2006. ACM.
- [16] Cristian Cadar and Koushik Sen. Symbolic execution for software testing: Three decades later. *Commun. ACM*, 56(2):82–90, February 2013.
- [17] Olivier Carton, Christian Choffrut, and Serge Grigorieff. Decision problems among the main subfamilies of rational relations. *ITA*, 40(2):255–275, 2006.
- [18] Taolue Chen, Yan Chen, Matthew Hague, Anthony W. Lin, and Zhilin Wu. What is decidable about string constraints with the replaceall function. *PACMPL*, 2(POPL):3:1–3:29, 2018.

- [19] Yan Chen. Solving String Constraints with ReplaceAll Function. Master’s thesis, State Key Laboratory of Computer Science, Institute of Software, Chinese Academy of Sciences, China, 2018.
- [20] Yan Chen. Z3-replaceall. <https://github.com/TinyYan/z3-replaceAll>, 2018. Referred in Jan 2018.
- [21] Christian Choffrut. Relations over words and logic: A chronology. *Bulletin of the EATCS*, 89:159–163, 2006.
- [22] Loris D’Antoni and Margus Veanes. Static analysis of string encoders and decoders. In *Verification, Model Checking, and Abstract Interpretation, VMC’13*, pages 209–228. Springer, 2013.
- [23] Leonardo De Moura and Nikolaj Bjørner. Satisfiability modulo theories: introduction and applications. *Communications of the ACM*, 54(9):69–77, 2011.
- [24] J. Dénes. Connections between transformation semigroups and graphs. In *Theory of Graphs*. Gordon & Breach, 1967.
- [25] Volker Diekert. Makanin’s Algorithm. In M. Lothaire, editor, *Algebraic Combinatorics on Words*, volume 90 of *Encyclopedia of Mathematics and its Applications*, chapter 12, pages 387–442. Cambridge University Press, 2002.
- [26] Joost Engelfriet and Hendrik Jan Hoogeboom. MSO definable string transductions and two-way finite-state transducers. *ACM Trans. Comput. Log.*, 2(2):216–254, 2001.
- [27] Emmanuel Filiot, Olivier Gauwin, Pierre-Alain Reynier, and Frédéric Servais. From two-way to one-way finite state transducers. In *28th Annual ACM/IEEE Symposium on Logic in Computer Science, LICS 2013, New Orleans, LA, USA, June 25-28, 2013*, pages 468–477. IEEE Computer Society, 2013.
- [28] Vijay Ganesh, Mia Minnes, Armando Solar-Lezama, and Martin C. Rinard. Word equations with length constraints: What’s decidable? In *Hardware and Software: Verification and Testing - 8th International Haifa Verification Conference, HVC 2012, Haifa, Israel, November 6-8, 2012. Revised Selected Papers*, pages 209–226. Springer, 2012.
- [29] Patrice Godefroid, Nils Klarlund, and Koushik Sen. Dart: Directed automated random testing. *SIGPLAN Not.*, 40(6):213–223, June 2005.
- [30] Lukás Holík, Petr Janku, Anthony W. Lin, Philipp Rümmer, and Tomás Vojnar. String constraints with concatenation and transducers solved efficiently. *PACMPL*, 2(POPL):4:1–4:32, 2018.
- [31] Pieter Hooimeijer, Benjamin Livshits, David Molnar, Prateek Saxena, and Margus Veanes. Fast and precise sanitizer analysis with BEK. In *20th USENIX Security Symposium, San Francisco, CA, USA, August 8-12, 2011, Proceedings*. USENIX Association, 2011.
- [32] John E. Hopcroft and Jeffrey D. Ullman. *Introduction to Automata Theory, Languages and Computation*. Addison-Wesley, 1979.
- [33] Artur Jez. Recompression: A simple and powerful technique for word equations. *J. ACM*, 63(1):4:1–4:51, 2016.
- [34] Neil D. Jones. The expressive power of higher-order types or, life without cons. *Journal of Functional Programming*, 11(1):55–94, 2001.
- [35] Christoph Kern. Securing the tangled web. *Commun. ACM*, 57(9):38–47, 2014.
- [36] Adam Kiezun, Vijay Ganesh, Shay Artzi, Philip J. Guo, Pieter Hooimeijer, and Michael D. Ernst. HAMPI: A solver for word equations over strings, regular expressions, and context-free grammars. *ACM Trans. Softw. Eng. Methodol.*, 21(4):25, 2012.
- [37] James C. King. Symbolic execution and program testing. *Commun. ACM*, 19(7):385–394, 1976.
- [38] Dexter Kozen. *Automata and Computability*. Springer, 1997.
- [39] Daniel Kroening and Ofer Strichman. *Decision Procedures*. Springer, 2008.
- [40] Tianyi Liang, Andrew Reynolds, Cesare Tinelli, Clark Barrett, and Morgan Deters. A DPLL(T) theory solver for a theory of strings and regular expressions. In *Computer Aided Verification - 26th International Conference, CAV 2014*, pages 646–662. Springer, 2014.

- [41] Leonid Libkin. Variable independence for first-order definable constraints. *ACM Trans. Comput. Log.*, 4(4):431–451, 2003.
- [42] Anthony W. Lin and Pablo Barceló. String solving with word equations and transducers: Towards a logic for analysing mutation XSS. In *Proceedings of the 43rd Annual ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages*, POPL '16, pages 123–136. Springer, 2016.
- [43] K. L. McMillan. *Symbolic model checking*. Kluwer, 1993.
- [44] Yasuhiko Minamide. Static approximation of dynamically generated web pages. In *Proceedings of the 14th international conference on World Wide Web, WWW 2005*, pages 432–441. ACM, 2005.
- [45] Christophe Morvan. On rational graphs. In *Foundations of Software Science and Computation Structures, Third International Conference, FOSSACS 2000*, pages 252–266. Springer, 2000.
- [46] Robert Nieuwenhuis, Albert Oliveras, and Cesare Tinelli. Abstract DPLL and abstract DPLL modulo theories. In *Logic for Programming, Artificial Intelligence, and Reasoning, 11th International Conference, LPAR 2004*, volume 3452 of *LNCS*, pages 36–50. Springer, 2004.
- [47] Nicholas Pippenger. *Theories of Computability*. Cambridge University Press, 2010.
- [48] Wojciech Plandowski. Satisfiability of word equations with constants is in PSPACE. *J. ACM*, 51(3):483–496, 2004.
- [49] Philipp Rümmer. A constraint sequent calculus for first-order logic with linear integer arithmetic. In *Logic for Programming, Artificial Intelligence, and Reasoning, 15th International Conference, LPAR 2008, LNCS 5330*, pages 274–289. Springer, 2008.
- [50] Prateek Saxena, Devdatta Akhawe, Steve Hanna, Feng Mao, Stephen McCamant, and Dawn Song. A symbolic execution framework for javascript. In *31st IEEE Symposium on Security and Privacy, S&P 2010, 16-19 May 2010, Berkeley/Oakland, California, USA*, pages 513–528. IEEE, 2010.
- [51] Koushik Sen, Swaroop Kalasapur, Tasneem G. Brutch, and Simon Gibbs. Jalangi: a selective record-replay and dynamic analysis framework for javascript. In *Joint Meeting of the European Software Engineering Conference and the ACM SIGSOFT Symposium on the Foundations of Software Engineering, ESEC/FSE'13, Saint Petersburg, Russian Federation, August 18-26, 2013*, pages 488–498. ACM, 2013.
- [52] Koushik Sen, Darko Marinov, and Gul Agha. Cute: a concolic unit testing engine for c. In *Proceedings of the 10th European Software Engineering Conference held jointly with 13th ACM SIGSOFT International Symposium on Foundations of Software Engineering, 2005, Lisbon, Portugal, September 5-9, 2005, ESEC/SIGSOFT FSE 2005*, pages 263–272. ACM, 2005.
- [53] Minh-Thai Trinh, Duc-Hiep Chu, and Joxan Jaffar. S3: A symbolic string solver for vulnerability detection in web applications. In *Proceedings of the 2014 ACM SIGSAC Conference on Computer and Communications Security, CCS 2014*, pages 1232–1243. ACM, 2014.
- [54] Minh-Thai Trinh, Duc-Hiep Chu, and Joxan Jaffar. Progressive reasoning over recursively-defined strings. In *Computer Aided Verification - 28th International Conference, CAV 2016, Toronto, ON, Canada, July 17-23, 2016, Proceedings, Part I*, pages 218–240. Springer, 2016.
- [55] Andrew van der Stock, Brian Glas, Neil Smithline, and Torsten Gigler. OWASP Top 10 – 2017. [https://www.owasp.org/index.php/Top\\_10-2017\\_Top\\_10](https://www.owasp.org/index.php/Top_10-2017_Top_10), 2017. Referred January 2018.
- [56] Margus Veanes, Nikolaj Bjørner, Lev Nachmanson, and Sergey Bereg. Monadic decomposition. *J. ACM*, 64(2):14:1–14:28, 2017.
- [57] Hung-En Wang, Tzung-Lin Tsai, Chun-Han Lin, Fang Yu, and Jie-Hong R. Jiang. String analysis via automata manipulation with logic circuit representation. In *Computer Aided Verification - 28th International Conference, CAV 2016, Toronto, ON, Canada, July 17-23, 2016, Proceedings, Part I*, volume 9779 of *Lecture Notes in Computer Science*, pages 241–260. Springer, 2016.
- [58] Joel Weinberger, Prateek Saxena, Devdatta Akhawe, Matthew Finifter, Eui Chul Richard Shin, and Dawn Song. A systematic analysis of XSS sanitization in web application frameworks. In *Computer Security - ESORICS 2011 - 16th European Symposium on Research in Computer Security, Leuven, Belgium, September 12-14, 2011. Proceedings*, pages 150–171. Springer, 2011.



- [59] Fang Yu, Muath Alkhalaf, and Tevfik Bultan. Stranger: An automata-based string analysis tool for PHP. In *Tools and Algorithms for the Construction and Analysis of Systems, 16th International Conference, TACAS 2010*, pages 154–157. Springer, 2010. Benchmark can be found at <http://www.cs.ucsb.edu/~vlab/stranger/>.
- [60] Fang Yu, Muath Alkhalaf, Tevfik Bultan, and Oscar H. Ibarra. Automata-based symbolic string analysis for vulnerability detection. *Form. Methods Syst. Des.*, 44(1):44–70, 2014.
- [61] Bohdan Zelinka. Graphs of semigroups. *Časopis pro pěstování matematiky*, 106(4):407–408, 1981.
- [62] Yunhui Zheng, Vijay Ganesh, Sanu Subramanian, Omer Tripp, Julian Dolby, and Xiangyu Zhang. Effective search-space pruning for solvers of string equations, regular expressions and length constraints. In *Computer Aided Verification - 27th International Conference, CAV 2015, San Francisco, CA, USA, July 18-24, 2015, Proceedings, Part I*, pages 235–254. Springer, 2015.
- [63] Yunhui Zheng, Xiangyu Zhang, and Vijay Ganesh. Z3-str: a Z3-based string solver for web application analysis. In *Joint Meeting of the European Software Engineering Conference and the ACM SIGSOFT Symposium on the Foundations of Software Engineering, ESEC/FSE 2013, Saint Petersburg, Russian Federation, August 18-26, 2013*, pages 114–124. ACM, 2013.

# Appendix

“Decision Procedures for Path Feasibility of String-Manipulating Programs with Complex Operations”

## A Proof of Proposition 4.7: Hardness of SL with 2FTs+conc and SL with FTs+replaceAll

We first give a full definition of tiling problems before showing the result. We give the details here of the proof for SL with 2FTs+conc. The proof can easily be adapted to the case of FTs+replaceAll using the simulation described in Section 4.2.

### A.1 Tiling Problems

A *tiling problem* is a tuple  $(\Theta, H, V, t_I, t_F)$  where  $\Theta$  is a finite set of tiles,  $H \subseteq \Theta \times \Theta$  is a horizontal matching relation,  $V \subseteq \Theta \times \Theta$  is a vertical matching relation, and  $t_I, t_F \in \Theta$  are initial and final tiles respectively.

A solution to a tiling problem over a  $m$ -width corridor is a sequence

$$\begin{array}{c} t_1^1 \dots t_m^1 \\ t_1^2 \dots t_m^2 \\ \dots \\ t_1^h \dots t_m^h \end{array}$$

where  $t_1^1 = t_I$ ,  $t_m^h = t_F$ , and for all  $1 \leq i < m$  and  $1 \leq j \leq h$  we have  $(t_i^j, t_{i+1}^j) \in H$  and for all  $1 \leq i \leq m$  and  $1 \leq j < h$  we have  $(t_i^j, t_i^{j+1}) \in V$ . Note, we will assume that  $t_I$  and  $t_F$  can only appear at the beginning and end of the tiling respectively.

Tiling problems characterise many complexity classes [11]. In particular, we will use the following facts.

- For any  $m$ -space Turing machine, there exists a tiling problem of size polynomial in the size of the Turing machine, over a corridor of width  $m$ , that has a solution iff the  $m$ -space Turing machine has a terminating computation. In particular we will consider problems where the corridor width is  $2^{2^m}$  where the height of the stack of exponentials is  $n$ . E.g. when  $n$  is 0 the width is  $m$ , when  $n$  is 1 the width is  $2^m$ , when  $n$  is 2 the width is  $2^{2^m}$  and so on. Solving tiling problems of width  $2^{2^m}$  is complete for the same amount of space.
- There is a fixed  $(\Theta, H, V, t_I, t_F)$  such that for any width  $m$  there is a unique solution

$$\begin{array}{c} t_1^1 \dots t_m^1 \\ t_1^2 \dots t_m^2 \\ \dots \\ t_1^h \dots t_m^h \end{array}$$

and moreover  $h$  is exponential in  $m$ . One such example is a Turing machine where the tape contents represent a binary number. The Turing machine starts from a tape containing

only 0s and finishes with a tape containing only 1s by repeatedly incrementing the binary encoding on the tape. This Turing machine can be encoded as the required tiling problem.

## A.2 Large Numbers

The crux of the proof is encoding large numbers that can take values between 1 and  $n$ -fold exponential.

A linear-length binary number could be encoded simply as a sequence of bits

$$b_0 \dots b_m \in \{0, 1\}^m .$$

To aid with later constructions we will take a more oblique approach. Let  $(\Theta_1, H_1, V_1, t_I^1, t_F^1)$  be a copy of the fixed tiling problem from the previous section for which there is a unique solution, whose length must be exponential in the width. In the future, we will need several copies of this problem, hence the indexing here. Fix a width  $m$  and let  $\text{MAX}_1$  be the corresponding corridor length. A *level-1* number can encode values from 1 to  $\text{MAX}_1$ . In particular, for  $1 \leq i \leq \text{MAX}_1$  we define

$$[i]_1 = t_1^i \dots t_m^i$$

where  $t_1^i \dots t_m^i$  is the tiling of the  $i$ th row of the unique solution to the tiling problem.

A *level-2* number will be derived from tiling a corridor of width  $\text{MAX}_1$ , and thus the number of rows will be doubly-exponential. For this, we require another copy  $(\Theta_2, H_2, V_2, t_I^2, t_F^2)$  of the above tiling problem. Moreover, let  $\text{MAX}_2$  be the length of the solution for a corridor of width  $\text{MAX}_1$ . Then for any  $1 \leq i \leq \text{MAX}_2$  we define

$$[i]_2 = [1]_1 t_1^i [2]_1 t_2^i \dots [\text{MAX}_1]_1 t_{\text{MAX}_1}^i$$

where  $t_1^i \dots t_{\text{MAX}_1}^i$  is the tiling of the  $i$ th row of the unique solution to the tiling problem. That is, the encoding indexes each tile with it's column number, where the column number is represented as a level-1 number.

In general, a *level- $n$*  number is of length  $(n-1)$ -fold exponential and can encode numbers  $n$ -fold exponential in size. We use a copy  $(\Theta_n, H_n, V_n, t_I^n, t_F^n)$  of the above tiling problem and use a corridor of width  $\text{MAX}_{n-1}$ . We define  $\text{MAX}_n$  as the length of the unique solution to this problem. Then, for any  $1 \leq i \leq \text{MAX}_n$  we have

$$[i]_n = [1]_{(n-1)} t_1^i [2]_{(n-1)} t_2^i \dots [\text{MAX}_{(n-1)}]_{(n-1)} t_{\text{MAX}_{(n-1)}}^i$$

where  $t_1^i \dots t_{\text{MAX}_{n-1}}^i$  is the tiling of the  $i$ th row of the unique solution to the tiling problem.

## A.3 Recognising Large Numbers

We first define a useful program  $S_n(x)$  with a single input string  $x$  which can only be satisfied if  $x$  is of the following form, where  $\bowtie$ ,  $\oplus$ , and  $\#$  are auxiliary symbols.

$$\begin{aligned} S_n(x) \text{ is satisfiable} \\ \iff \\ x \in \left( ([1]_n (\bowtie [1]_n)^*) \oplus ([2]_n (\bowtie [2]_n)^*) \oplus \dots \oplus ([\text{MAX}_n]_n (\bowtie [\text{MAX}_n]_n)^*) \# \right)^* \end{aligned}$$

That is, the string must contain sequences of strings that count from 1 to  $\text{MAX}_n$ . This counting may stutter and repeat a number several times before moving to the next. A separator  $\bowtie$

indicates a stutter, while  $\oplus$  indicates that the next number must add one to the current number. Finally, a  $\#$  ends a sequence and may start again from  $[1]_n$ .

**Base case**  $n = 1$ . We define

$$S_1(x) = \begin{cases} y := T(x); \\ \mathbf{assert}(y \in \top) \end{cases}$$

where  $\top$  is a character output by  $T$  when  $x$  is correctly encoded. Otherwise  $T$  outputs  $\perp$ .

We describe how  $T$  operates. Because  $T$  is two-way, it may perform several passes of the input  $x$ . Recall that  $T$  requires  $x$  to contain a word of the form

$$(( [1]_1 (\bowtie [1]_1)^* ) \oplus ([2]_1 (\bowtie [2]_1)^* ) \oplus \dots \oplus ([\text{MAX}_1]_1 (\bowtie [\text{MAX}_1]_1)^* ) \# )^*$$

and each  $[i]_1$  is the  $i$ th row of the unique solution to the tiling problem of width  $m$ . The passes proceed as follows. If a pass fails, the transducer outputs  $\perp$  and terminates. If all passes succeed, the transducer outputs  $\top$  and terminates.

- During the first pass  $T$  verifies that the input is of the form

$$(\Theta_1^m (\{\bowtie, \oplus\} \Theta_1^m)^* \#)^* .$$

- During the second pass the transducer verifies that the first block of  $\Theta_1^m$ , and all blocks of  $\Theta_1^m$  immediately following a  $\#$  have  $t_I^1$  as the first tile. Simultaneously, it can verify that all blocks of  $\Theta_1^m$  immediately preceding a  $\#$  finish with the tile  $t_F^1$ . Moreover, it checks that  $t_I^1$  and  $t_F^1$  do not appear elsewhere.
- During the third pass  $T$  verifies the horizontal tiling relation. That is, every contiguous pair of tiles  $t, t'$  in  $x$  must be such that  $(t, t') \in H_1$ . This can easily be done by storing the last character read into the states of  $T$ .
- The vertical tiling relation and equality checks are verified using  $m$  more passes. During the  $j$ th pass, the  $j$ th column is tested. The transducer  $T$  stores in its state the tile in the  $j$ th column of the first block of  $\Theta_1^m$  or any block immediately following  $\#$ . (The transducer can count to  $m$  in its state.) It then moves to the  $j$ th column of the next block of  $\Theta_1^m$ , remembering whether the blocks were separated with  $\bowtie$ ,  $\oplus$ , or  $\#$ . If the separator was  $\bowtie$  the transducer checks that the  $j$ th tile of the current block matches the tile stored in the state (i.e. is equal to the preceding block). If the separator was  $\oplus$  the transducer checks that the  $j$ th tile of the current block is related by  $V_1$  to the stored tile. In this case the current  $j$ th tile is stored and the previously stored tile forgotten. Finally, if the separator was  $\#$  there is nothing to check. If any check fails, the pass will also fail.

If all passes succeed, we know that  $x$  contains a word where blocks separated by  $\bowtie$  are equal (since all positions are equal, as verified individually by the final  $m$  passes), blocks separated by  $\oplus$  satisfy  $V_1$  in all positions, the  $t_I^1$  tile appears at the start of all sequences separated by  $\#$  and each such sequence ends with  $t_F^1$ , and finally the horizontal tiling relation is satisfied at all times. Thus,  $x$  must be of the form

$$(( [1]_1 (\bowtie [1]_1)^* ) \oplus ([2]_1 (\bowtie [2]_1)^* ) \oplus \dots \oplus ([\text{MAX}_1]_1 (\bowtie [\text{MAX}_1]_1)^* ) \# )^*$$

as required.

**Inductive case  $n$ .** We define a program  $S_n(x)$  such that

$$S_n(x) \text{ is satisfiable} \\ \iff \\ x \in \left( ([1]_n (\bowtie [1]_n)^*) \oplus ([2]_n (\bowtie [2]_n)^*) \oplus \dots \oplus ([\text{MAX}_n]_n (\bowtie [\text{MAX}_n]_n)^*) \# \right)^* .$$

Assume, by induction, we have a program  $S_{n-1}(x)$  which already satisfies this property (for  $n-1$ ). We define

$$S_n(x) = \begin{cases} y = T(x); \\ S_{n-1}(y) \end{cases}$$

where  $T$  is a transducer that behaves as described below. Note, the reference to  $S_{n-1}(y)$  is not a procedure call, since these are not supported by our language. Instead, the procedure is inlined, with its input variable  $x$  replaced by  $y$  and other variables renamed to avoid clashes.

The transducer will perform several passes to make several checks. If a check fails it will halt and output a symbol  $\perp$ , which means that  $y$  can no longer satisfy  $S_{n-1}(y)$ . During normal execution  $T$  will make checks that rely on level- $(n-1)$  numbers appearing in the correct sequence or being equal. To ensure these properties hold,  $T$  will write these numbers to  $y$  and rely on these properties then being verified by  $S_{n-1}(y)$ . The passes behave as follows.

- During the first pass  $T$  verifies that  $x$  belongs to the regular language

$$\left( \left( \left( \left( (\Theta_1^m \Theta_2)^* \Theta_3 \right)^* \dots \right)^* \Theta_n \right)^* \left( \{ \bowtie, \oplus \} \left( \left( \left( (\Theta_1^m \Theta_2)^* \Theta_3 \right)^* \dots \right)^* \Theta_n \right)^* \# \right)^* \right)^* .$$

This can be done with a polynomial number of states.

- During the second pass  $T$  will verify that the first instance of  $\Theta_n$  appearing in the word or after a  $\#$  is  $t_I^n$ . Similarly, the final instance of any  $\Theta_n$  before any  $\#$  is  $t_F^n$ . Moreover, it checks that  $t_I^n$  and  $t_F^n$  do not appear elsewhere.
- During the third pass  $T$  will verify the horizontal tiling relation  $H_n$ . Each block (separated by  $\bowtie$ ,  $\oplus$ , or  $\#$ ) is checked in turn. There are two components to this.
  - The indexing of the tiles must be correct. That is, the first tile of the block must be indexed  $[1]_{n-1}$ , the second  $[2]_{n-1}$ , through to  $[\text{MAX}_{n-1}]_{n-1}$ . Thus,  $T$  copies directly the instance of  $\left( \left( (\Theta_1^m \Theta_2)^* \Theta_3 \right)^* \dots \right)^*$  preceding each  $\Theta_n$  to the output tape, followed immediately by  $\oplus$  as long as the character after  $\Theta_n$  is not a separator from  $\{ \bowtie, \oplus, \# \}$ . Otherwise, it is the end of the block and  $\#$  is written. Hence,  $S_{n-1}(y)$  will verify that the output for each block is  $[1]_{n-1} \oplus \dots \oplus [\text{MAX}_{n-1}]_{n-1}$  which enforces that the indexing of the tiles is correct.
  - Horizontally adjacent tiles must satisfy  $H_n$ . This is done by simply storing the last read tile from  $\Theta_n$  in the state of  $T$ . Then whenever a new tile from  $\Theta_n$  is seen without a separator  $\bowtie$ ,  $\oplus$ , or  $\#$ , then it can be checked against the previous tile and  $H_n$ .
- The transducer  $T$  then performs a non-deterministic number of passes to check the vertical tiling relation. We will use  $S_{n-1}(y)$  to ensure that  $T$  in fact performs  $\text{MAX}_{n-1}$  passes, the first checking the first column of the tiling over  $\Theta_n$ , the second checking the second column, and so on up to the  $\text{MAX}_{n-1}$ th column.

Note, we know from the previous pass that each row of the tiling is indexed correctly. In the sequel, let us use the term “session” to refer to the sequences of characters separated by #.

Each pass of  $T$  checks a single column (across all sessions). At the start of each session,  $T$  moves non-deterministically to the start of some block  $\left(\left(\left(\Theta_1^m \Theta_2\right)^* \Theta_3\right)^* \cdots\right)^* \Theta_n$  (without passing  $\bowtie$ ,  $\oplus$ , or  $\#$ ). It then copies the tiles from  $\left(\left(\left(\Theta_1^m \Theta_2\right)^* \Theta_3\right)^* \cdots\right)^*$  to  $y$  and saves the tile from  $\Theta_n$  in its state before moving to the next separator from  $\{\bowtie, \oplus, \#\}$ . In the case of  $\#$  nothing needs to be checked and  $T$  continues to the next session or finishes the pass if there are no more sessions. In the case of  $\bowtie$  or  $\oplus$  the transducer remembers this separator and moves non-deterministically to the start of some block (without passing another  $\bowtie$ ,  $\oplus$ , or  $\#$ ). It then writes  $\bowtie$  to  $y$  as it is intended that  $T$  choose the same column as before. This will be verified by  $S_{n-1}(y)$ . To aid with this  $T$  copies the tiles from  $\left(\left(\left(\Theta_1^m \Theta_2\right)^* \Theta_3\right)^* \cdots\right)^*$  to  $y$ . It can then check the tile from  $\Theta_n$ . If the remembered separator was  $\bowtie$  then this tile must match the saved one. If it was  $\oplus$  then this tile must be related by  $V_n$  to the saved one. If this succeeds,  $T$  stores the new tile and forgets the old and continues to the next separator to continue checking  $V_n$ .

At the end of the pass (checking a single column from all sessions) then  $T$  will either have failed and written  $\perp$  or written a sequence of level- $(n-1)$  numbers to  $y$  separated by  $\bowtie$ . That is  $[i_1]_{n-1} \bowtie \cdots \bowtie [i_\alpha]_{n-1}$  for some  $\alpha$ . Since, by induction,  $S_{n-1}(y)$  is correct, then the program can only be satisfied if  $T$  chose the same position in each row. That is  $i_1 = \cdots = i_\alpha$ . Thus, the vertical relation for the  $i_1$ th column has been verified.

At this point  $T$  can either write  $\#$  and terminate or perform another pass (non-deterministically). In the latter case, it outputs  $\oplus$ , moves back to the beginning of the tape, and starts again. Thus, after a number of passes,  $T$  will have written

$$\left([i_1^1]_{n-1} \bowtie \cdots \bowtie [i_{\alpha_1}^1]_{n-1}\right) \oplus \cdots \oplus \left([i_1^\beta]_{n-1} \bowtie \cdots \bowtie [i_{\alpha_\beta}^\beta]_{n-1}\right) \#$$

for some  $\beta, \alpha_1, \dots, \alpha_\beta$ . Since  $S_{n-1}(y)$  will only accept such sequences of the form

$$\left([1]_{n-1} (\bowtie [1]_{n-1})^*\right) \oplus \cdots \oplus \left([\text{MAX}_{n-1}]_{n-1} (\bowtie [\text{MAX}_{n-1}]_{n-1})^*\right) \#$$

we know that  $T$  must check each vertical column in turn, from 1 to  $\text{MAX}_{n-1}$ .

Thus, at the end of all passes, if  $T$  has not output  $\perp$  it has verified that  $x$  is a correct encoding of a solution to  $(\Theta_n, H_n, V_n, t_I^n, t_F^n)$ . That is, together with  $S_{n-1}(y)$  we know that the word is of the correct format, each row has a tile for each index and these indices appear in order, the horizontal relation is respected, and the vertical tiling relation is respected. If  $x$  is not a correct encoding then  $T$  will not be able to produce a  $y$  that satisfies  $S_{n-1}(y)$ .

## A.4 Reducing from a Tiling Problem

Now that we are able to encode large numbers, we can encode an  $n$ -EXPSpace-hard tiling problem as a satisfiability problem of  $\text{SL}[T]$  with two-way transducers. In fact, most of the technical work has been done.

Thus, fix a tiling problem  $(\Theta, H, V, t_I, t_F)$  that is  $n$ -EXPSpace-hard. In particular, we allow

a corridor  $\text{MAX}_n$  tiles wide. We use the program

$$S = \begin{cases} y = T(x); \\ S_n(y) \end{cases}$$

where  $T$  is defined exactly as in the inductive case of  $S_n(y)$  except the tiling problem used is  $(\Theta, H, V, t_I, t_F)$  rather than  $(\Theta_n, H_n, V_n, t_I^n, t_F^n)$ .

A satisfying tiling

$$\begin{array}{c} t_1^1 \cdots t_{\text{MAX}_n}^1 \\ \cdots \\ t_1^h \cdots t_{\text{MAX}_n}^h \end{array}$$

can be encoded

$$[1]_n t_1^1 \cdots [\text{MAX}_n]_n t_{\text{MAX}_n}^1 \oplus \cdots \oplus [1]_n t_1^n \cdots [\text{MAX}_n]_n t_{\text{MAX}_n}^n \#$$

which will satisfy  $S$  in the same way as a correct input to  $S_n(y)$ . To see this, note that

$$[1]_n t_1^i \cdots [\text{MAX}_n]_n t_{\text{MAX}_n}^i$$

acts like some  $[i]_{n+1}$ .

In the opposite direction, assume some input satisfying  $S$ . Arguing as in the encoding of large numbers, this input must be of the form

$$\left( (r_1 (\boxtimes r_1)^*) \oplus (r_2 (\boxtimes r_2)^*) \oplus \cdots \oplus (r_h (\boxtimes r_h)^*) \right) \#^*$$

where each  $r_i$  is a row of a correct solution to the tiling problem.

Thus, with  $n + 1$  transducers, we can encode a  $n$ -EXSPACE-hard problem.

## B Proof of Proposition 5.4

We start with a remark that, as mentioned the concatenation function  $\circ$  can be encoded by the `replaceAll` function (cf. [18] for details), so we shall not discuss  $\circ$  separately in the proof.

The following lemma is crucial for showing Proposition 5.4.

**Lemma B.1.** *Let  $(\mathcal{A}, \Omega)$  be a conjunctive FA. Then for each string function  $f$  in  $\text{SL}[\circ, \text{replaceAll}, \text{reverse}, \text{FFT}]$ , there is an algorithm that runs in  $(\ell_f(|f|, |(\mathcal{A}, \Omega)|))^{c_0}$  space (where  $c_0$  is a constant) which enumerates each disjunct of a conjunctive representation of  $\text{Pre}_{R_f}((\mathcal{A}, \Omega))$ , whose atom size is bounded by  $\ell_f(|f|, |(\mathcal{A}, \Omega)|)$ , where*

- if  $f$  is `replaceAlle` for a regular expression  $e$ , then  $|f| = |e|$  and  $\ell_f(i, j) = 2^{c_1 i^{c_2}} j$  for some constants  $c_1, c_2$ ,
- if  $f$  is `reverse`, then  $|f| = 1$  and  $\ell_f(i, j) = j$ ,
- if  $f$  is defined by an `FFT`  $T$ , then  $|f| = |T|$  and  $\ell_f(i, j) = ij$ .

*Proof.* Let  $\mathcal{A} = (Q, \delta), \Omega$  be a conjunctive FA.

For  $f = \text{replaceAll}_e$ , the result was shown in [18].

For the reverse function,  $\text{Pre}_{R_{\text{reverse}}}((\mathcal{A}, \Omega))$  is exactly the language defined by  $(\mathcal{A}^\pi, \Omega^\pi)$ , where  $\Omega^\pi = \{(q_2, q_1) \mid (q_1, q_2) \in \Omega\}$ .

If  $f$  is defined by an FFT  $T = (Q', q'_0, F', \delta')$ , then  $\text{Pre}_{R_T}(\mathcal{A}, \Omega)$  is conjunctively represented by  $((\mathcal{A}'', \Omega_{q'})_{q' \in F'}$ , where

- $\mathcal{A}'' = (Q'', \delta'')$ , with  $Q'' = Q' \times Q$ ,  $\delta''$  comprises the transitions  $((q'_1, q_1), a, (q'_2, q_2))$  such that there exists  $w \in \Sigma^*$  satisfying that  $(q'_1, a, w, q'_2) \in \delta'$  and  $q_1 \xrightarrow[\mathcal{A}]{w} q_2$ ,
- $\Omega_{q'} = \{((q'_0, q_1), (q', q_2)) \mid (q_1, q_2) \in \Omega\}$ .

Note that the language defined by  $((\mathcal{A}'', \Omega_{q'})_{q' \in F'}$  is  $\bigcup_{q' \in F'} \mathcal{L}(\mathcal{A}'', \Omega_{q'})$ . The size of each atom  $(\mathcal{A}'', \Omega_{q'})$  is  $|T||\mathcal{A}| = |f||\mathcal{A}|$ .  $\square$

*Proof of Proposition 5.4.* Let  $S$  be a program in  $\text{SL}[\circ, \text{replaceAll}, \text{reverse}, \text{FFT}]$ . For technical convenience, we consider the *dependency graph* of  $S$ , denoted by  $G_S = (V_S, E_S)$ , where  $V_S$  is the set of string variables in  $S$ , and  $E_S$  comprises the edges  $(y, x_j)$  for each assignment  $y := f(x_1, \dots, x_r)$  in  $S$ .

Recall that the decision procedure in the proof of Theorem 3.5 works by repeatedly removing the last assignment, say  $y := f(\vec{x})$ , and generating new assertions involving  $\vec{x}$  from the assertions of  $y$ . We adapt that decision procedure as follows:

- Replace FAs with conjunctive FAs and use the conjunctive representations of the pre-images of string operations.
- Before removing the assignments, a preprocessing is carried out for  $S$  as follows: For each assertion  $\text{assert}(R(\vec{x}))$  with  $\vec{x} = (x_1, \dots, x_r)$  in  $S$ , nondeterministically guess a disjunct of the conjunctive representation of  $R$ , say  $((\mathcal{A}_1, \Omega_1), \dots, (\mathcal{A}_r, \Omega_r))$ , and replace  $\text{assert}(R(\vec{x}))$  with the sequence of assertions  $\text{assert}(x_1 \in (\mathcal{A}_1, \Omega_1)); \dots; \text{assert}(x_r \in (\mathcal{A}_r, \Omega_r))$ . Note that after the preprocessing, each assertion is of the form  $\text{assert}(y \in (\mathcal{A}, \Omega))$  for a string variable  $y$  and a conjunctive FA  $(\mathcal{A}, \Omega)$ . Let  $S_0$  be the resulting program after preprocessing  $S$ .
- When removing each assignment  $y := f(\vec{x})$  with  $\vec{x} = (x_1, \dots, x_r)$ , for each conjunctive FA  $(\mathcal{A}, \Omega) \in \sigma$  (where  $\sigma$  is the collective constraints for  $y$ ), nondeterministically guess one disjunct of the pre-image of  $f$  under  $(\mathcal{A}, \Omega)$  (NB. here we neither compute the product of the conjunctive FAs from  $\sigma$ , nor compute an explicit representation of the pre-image), say  $((\mathcal{A}_1, \Omega_1), \dots, (\mathcal{A}_r, \Omega_r))$ , and insert the sequence of assertions  $\text{assert}(x_1 \in (\mathcal{A}_1, \Omega_1)); \dots; \text{assert}(x_r \in (\mathcal{A}_r, \Omega_r))$  to the program.

We then show that the resulting (nondeterministic) decision procedure *requires only exponential space*, which implies the EXPSPACE upper-bound via Savitch's theorem.

Let  $S'$  be the program obtained after removing  $y := f(\vec{x})$  and all assertions with conditions in  $\rho$ , and  $\sigma$  be the set of all conjunctive FAs in  $\rho$ . Then for each  $(\mathcal{A}, \Omega) \in \sigma$ , a disjunct of the conjunctive representation of  $\text{Pre}_{R_f}(\mathcal{A}, \Omega)$ , say  $((\mathcal{A}_1, \Omega_1), \dots, (\mathcal{A}_r, \Omega_r))$ , is guessed, moreover, for each  $j \in [r]$ , an assertion  $\text{assert}(x_j \in (\mathcal{A}_j, \Omega_j))$  is added. Let  $S''$  be the resulting program. We say that the assertion  $y \in (\mathcal{A}, \Omega)$  in  $S'$  *generates* the assertion  $x_j \in (\mathcal{A}_j, \Omega_j)$  in  $S''$ . One can easily extend this single-step generation relation to multiple steps by considering its transitive closure.

Let  $S_1$  be the resulting program after all the assignments are removed. Namely,  $S_1$  contains only assertions for input variables. By induction on the number of removed assignments, we can show that for each input variable  $y$  in  $S$ , each assertion  $x \in (\mathcal{A}, \Omega)$  in  $S_0$ , and each path  $\pi$  from  $x$  to  $y$  in  $G_S$ , the assertion  $x \in (\mathcal{A}, \Omega)$  generates *exactly one* assertion  $y \in (\mathcal{A}', \Omega')$  in  $S_1$ .



Since for each pair of variables  $(x, y)$  in  $G_S$ , there are at most exponentially many paths from  $x$  to  $y$ ,  $S_1$  contains at most exponentially many assertions for each input variable. Moreover, according to Lemma B.1, for each assertion  $y \in (\mathcal{A}', \Omega')$  in  $S_1$ , suppose that  $y \in (\mathcal{A}', \Omega')$  is generated by some assertion  $x \in (\mathcal{A}, \Omega)$  in  $S_0$ , then  $|(\mathcal{A}', \Omega')|$  is at most exponential in  $|(\mathcal{A}, \Omega)|$ . Therefore, we conclude that for each input variable  $y$ ,  $S_1$  contains at most exponentially many assertions for  $y$ , where each of them is of at most exponential size. It follows that the product FA of all the assertions for each input variable  $y$  in  $S_1$  is of doubly exponential size.

Since the last step of the decision procedure is to decide the nonemptiness of the intersection of all the assertions for each input variable  $y$  and nonemptiness of FAs can be solved in nondeterministic logarithmic space, we deduce that the last step of the decision procedure can be done in nondeterministic exponential space. We conclude that the aforementioned decision procedure is in nondeterministic exponential space.  $\square$

## C Proof of Proposition 5.5: Hardness of SL[replaceAll]

We show that the path feasibility problem for SL[replaceAll] is EXPSPACE-hard. In fact, this holds even when only single characters are replaced. To show the result, we will give a symbolic execution which “transforms” an automaton into exponentially many different automata. These exponentially many automata will be used to check the vertical tiling relation for a tiling problem with an exponentially wide corridor. Since such tiling problems are EXPSPACE-hard, the result follows.

After introducing the tiling problem, we will show the form of the symbolic execution without specifying the regular languages used. Starting from the end of the symbolic execution, we will work backwards, showing the effect that eliminating the `replaceAll` and string concatenations has on the regular languages. We will then show a simple example before giving the precise languages needed to obtain our result.

The reduction builds a constraint that is satisfiable only if a given variable  $x_0$  encodes a solution to a tiling problem. The solution will be encoded in the following form, for some  $h$ . Note, we use different symbols for each bit position of the binary encoding. We use

$$\#0_1 \dots 0_n t_1^1 0_1 \dots 1_n t_2^1 \dots 1_1 \dots 1_n t_\ell^1 \# \dots \#0_1 \dots 0_n t_1^h \dots 1_1 \dots 1_n t_\ell^h \#!$$

where  $t_j^i$  are tiles, preceded by a binary encoding of the column position of the tile. The  $\#$  character delimits each row and  $!$  delimits the ends of the encoding. It is a standard exercise to express that a string has the above form as the intersection of a polynomial number of polynomially sized automata. It is also straight-forward to check the horizontal tiling relation using a polynomially sized automaton (each contiguous pair of tiles needs to appear in the horizontal relation  $H$ ).

The difficulty lies in asserting that the vertical tiling relation  $V$  is respected. For a given position  $b_1 \dots b_n$ , it is easy to construct an automaton that checks the tiles in the column labelled  $b_1 \dots b_n$  respects  $V$ . The crux of our reduction is showing that, using only concatenation and `replaceall`, we can transform a single automaton constraint into an exponential number of checks, one for each position  $b_1 \dots b_n$ . Recall, concatenation can be expressed using `replaceAll`.


This process will be explained in full shortly, but first let us give a simple example of how we can obtain the required checks.

**Example C.1.** Let  $n = 2$  and  $V = \{(t_1, t_2), (t_2, t_1)\}$ .

Consider the constraint (which we will explain in the sequel)

$$\begin{aligned}
 y_1 &:= \text{replaceAll}_{0_1}(x_0, \$1^0); & z_1 &:= \text{replaceAll}_{1_1}(x_0, \$1^1); \\
 x_1 &:= y_1 \circ z_1; \\
 y_2 &:= \text{replaceAll}_{0_2}(x_1, \$2^0); & z_2 &:= \text{replaceAll}_{1_2}(x_1, \$2^1); \\
 x_2 &:= y_2 \circ z_2; \\
 x_2 &\in \mathcal{A}_V
 \end{aligned}$$

where  $\mathcal{A}_V$  is the automaton below. The purpose of this automaton will become clear later in the description.

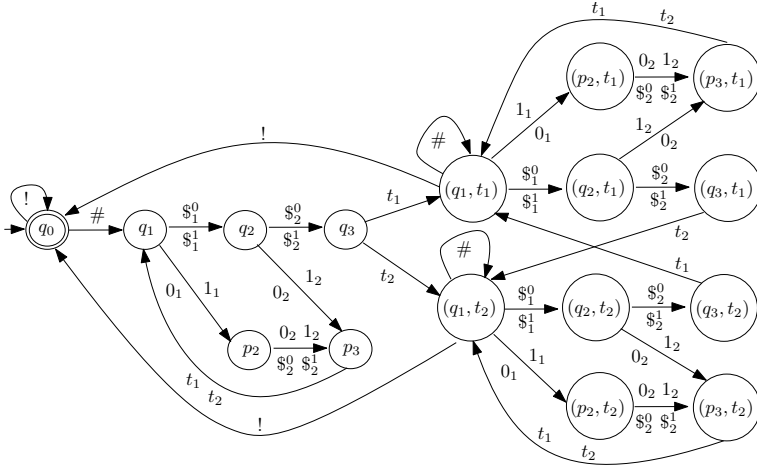

Let  $x_0$  take the value

$$! \# 0_1 0_2 t_1 0_1 1_2 t_1 1_1 0_2 t_2 1_1 1_2 t_2 \# 0_1 0_2 t_2 0_1 1_2 t_2 1_1 0_2 t_1 1_1 1_2 t_1 \# !.$$

That is, there are two rows in  $x_0$ , separated by #, and in each row,  $x_0$  counts from 00 to 11 in binary (marked with the bit indices 1,2). After the first pair of `replaceAll` operations and concatenation of  $y_1$  and  $z_1$ , the variable  $x_1$  must have the value

$$\begin{aligned}
 & ! \# \$1^0 0_2 t_1 \$1^0 1_2 t_1 1_1 0_2 t_2 1_1 1_2 t_2 \# \$1^0 0_2 t_2 \$1^0 1_2 t_2 1_1 0_2 t_1 1_1 1_2 t_1 \# ! \\
 & ! \# 0_1 0_2 t_1 0_1 1_2 t_1 \$1^1 0_2 t_2 \$1^1 1_2 t_2 \# 0_1 0_2 t_2 0_1 1_2 t_2 \$1^1 0_2 t_1 \$1^1 1_2 t_1 \# !
 \end{aligned}$$

After the next `replaceAll` operations and concatenation of  $y_2$  and  $z_2$ , the variable  $x_2$  has the value

$$\begin{aligned}
 & ! \# \$1^0 \$2^0 t_1 \$1^0 1_2 t_1 1_1 \$2^0 t_2 1_1 1_2 t_2 \# \$1^0 \$2^0 t_2 \$1^0 1_2 t_2 1_1 \$2^0 t_1 1_1 1_2 t_1 \# ! \\
 & ! \# 0_1 \$2^0 t_1 0_1 1_2 t_1 \$1^1 \$2^0 t_2 \$1^1 1_2 t_2 \# 0_1 \$2^0 t_2 0_1 1_2 t_2 \$1^1 \$2^0 t_1 \$1^1 1_2 t_1 \# ! \\
 & ! \# \$1^0 0_2 t_1 \$1^0 \$2^1 t_1 1_1 0_2 t_2 1_1 \$2^1 t_2 \# \$1^0 0_2 t_2 \$1^0 \$2^1 t_2 1_1 0_2 t_1 1_1 \$2^1 t_1 \# ! \\
 & ! \# 0_1 0_2 t_1 0_1 \$2^1 t_1 \$1^1 0_2 t_2 \$1^1 \$2^1 t_2 \# 0_1 0_2 t_2 0_1 \$2^1 t_2 \$1^1 0_2 t_1 \$1^1 \$2^1 t_1 \# !
 \end{aligned}$$

Notice that this value has four (altered) copies of the original value of  $x_0$  and this value enjoys the property that each copy of  $x_0$  contains the occurrences of exactly one of  $\$1^0 \$2^0$ ,  $\$1^1 \$2^0$ ,  $\$1^0 \$2^1$ ,  $\$1^1 \$2^1$ . In each copy of  $x_0$ , we have underlined the positions where the vertical tiling relation is checked. In particular, in the first copy, the vertical tiling relation is checked for the  $0_1 0_2$

position of  $x_0$ , witnessed by the run of  $\mathcal{A}_V$  on the first copy sketched below,

$$\begin{array}{ccccccc} q_0 & \xrightarrow{!} & q_0 & \xrightarrow{\#} & q_1 & \xrightarrow{\$1^0} & q_2 & \xrightarrow{\$2^0} & q_3 & \xrightarrow{t_1} & (q_1, t_1) & \dots & (p_3, t_1) & \xrightarrow{t_2} & (q_1, t_1) & \xrightarrow{\#} & (q_1, t_1) \\ & & & & \xrightarrow{\$1^0} & & \xrightarrow{\$2^0} & & \xrightarrow{t_2} & & \xrightarrow{\#} & & \xrightarrow{!} & & & & & \\ & & & & (q_2, t_1) & & (q_3, t_1) & & (q_1, t_2) & & \dots & & (q_1, t_2) & & & & & \end{array}$$

In the next copies, the vertical tiling relation is checked for the positions  $1_10_2$ ,  $0_11_2$ , and  $1_11_2$  in  $x_0$  respectively. Note that  $\mathcal{A}_V$  does not have to check that in each copy, the same position in each row is marked (which would need a state space exponential in  $n$ ). In particular, the occurrences of the subwords  $\$1^{b_1}\$2^{b_2}$  ( $b_1, b_2 \in \{0, 1\}$ ) are equal in each copy since the value of  $x_2$  resulting from the assignments already guarantees this.  $\square$

We now give the formal proof. Fix a tiling problem with tiles  $\Theta$ , initial and final tiles  $t_I$  and  $t_F$  respectively, horizontal and vertical tiling relations  $H$  and  $V$ , and a width  $\ell = 2^n$  for some  $n$ . We will create a symbolic execution in  $\text{SL}[\text{replaceAll}]$  which is path feasible iff the tiling problem has a solution.

In particular, we will require that a certain variable  $x_1$  can take a value

$$!\#0_1 \dots 0_n t_1^1 0_1 \dots 1_n t_2^1 \dots 1_1 \dots 1_n t_\ell^1 \# \dots \#0_1 \dots 0_n t_1^h \dots 1_1 \dots 1_n t_\ell^h \#!$$

where  $!, \#, 0_1, 1_1, \dots, 0_n, 1_n \notin \Theta$ . In particular, the string encodes a solution to the tiling problem, where each tile is preceded by a binary number of length  $n$  representing the number of the column in which it appears. Note, we have a different character for each bit position, e.g.  $0_2$  is a distinct character from  $0_3$ . The  $!$  will be used to mark the beginning and end of the string and  $\#$  is used to separate the rows of the solution.

To reach such a solution, we will use the symbolic execution to effectively generate an exponential number of languages. We can number these languages in binary, i.e.  $L_{0\dots 00}$  to  $L_{1\dots 11}$ . In addition to  $!, \#, 0_i$ , and  $1_i$ , we will also introduce characters of the form  $\$_{i,b}^{b'}$ . In language  $L_{b_1\dots b_n}$ , the character  $\$_{i,b}^{b'}$  will mean that if  $b_i = b$ , then match the character  $b' \in \{0_i, 1_i\}$ . This will become clearer when we show an example, but first we will give the symbolic execution needed to generate the languages.

## The symbolic execution

$$\begin{aligned}
\varphi &= \mathbf{assert}(x_1 \in L); \mathbf{assert}(x_1 \in L_H); \\
&\quad \mathbf{assert}(x_1 \in L_1); \dots; \mathbf{assert}(x_1 \in L_n); \\
\\
y_2^0 &:= \mathbf{replaceAll}_{0_1}(x_1, \$_{1,0}^0); \\
y_2^1 &:= \mathbf{replaceAll}_{1_1}(y_2^0, \$_{1,0}^1); \\
z_2^0 &:= \mathbf{replaceAll}_{0_1}(x_1, \$_{1,1}^0); \\
z_2^1 &:= \mathbf{replaceAll}_{1_1}(z_2^0, \$_{1,1}^1); \\
x_2 &:= y_2^1 \circ z_2^1; \\
\\
y_3^0 &:= \mathbf{replaceAll}_{0_2}(x_2, \$_{2,0}^0); \\
y_3^1 &:= \mathbf{replaceAll}_{1_2}(y_3^0, \$_{2,0}^1); \\
z_3^0 &:= \mathbf{replaceAll}_{0_2}(x_2, \$_{2,1}^0); \\
z_3^1 &:= \mathbf{replaceAll}_{1_2}(z_3^0, \$_{2,1}^1); \\
x_3 &:= y_3^1 \circ z_3^1; \\
\\
\dots & \\
y_n^0 &:= \mathbf{replaceAll}_{0_n}(x_{n-1}, \$_{n,0}^0); \\
y_n^1 &:= \mathbf{replaceAll}_{1_n}(y_n^0, \$_{n,0}^1); \\
z_n^0 &:= \mathbf{replaceAll}_{0_n}(x_{n-1}, \$_{n,1}^0); \\
z_n^1 &:= \mathbf{replaceAll}_{1_n}(z_n^0, \$_{n,1}^1); \\
x_n &:= y_n^1 \circ z_n^1; \\
\\
&\mathbf{assert}(x_n \in L_V)
\end{aligned}$$

The symbolic execution we will need to encode solutions to the tiling problem is put above. The regular constraints on  $x_1$  will enforce that any solution also gives a solution to the tiling problem if we do not enforce the vertical matching relation. To enforce the vertical matching relation we use the constraint on  $x_n$  at the end. Notice that each sequence of uses of `replaceAll` translates between  $\$_{i,b}^b$  and the values  $0_i$  and  $1_i$ , where the  $y$  variables handle the case where  $b$  is 0, and the  $z$  when  $b$  is 1. This process will be illuminated later with an example. Note,  $\circ$  can be expressed with `replaceAll` and hence is not directly needed.

### C.1 Unravelling the Constraint

We show how  $\varphi$  can lead to  $x_1$  having to be included in an exponential number of languages. To do this, we eliminate each use of `replaceAll` and  $\circ$  from the bottom-up. The process is illustrated in the forwards direction by the example in Section C.1. However, note, in Section C.1 we did not use the characters  $\$_{i,b}^b$  but a simpler version  $\$_{i,b}^b$ . After our explanation, we give a similar example for the backwards direction.

The first step is to eliminate  $x_n := y_n^1 \circ z_n^1$ . This is done by removing  $x_n := y_n^1 \circ z_n^1$  and replacing it with  $\mathbf{assert}(y_n^1 \in L'_0); \mathbf{assert}(z_n^1 \in L'_1)$  where  $L_V = L'_0 \circ L'_1$ . This can be done by taking an automaton  $\mathcal{A}$  such that  $L_V = \mathcal{L}(\mathcal{A})$  and guessing the state at the split between  $y_n^1$  and  $z_n^1$  in an accepting run over the value of  $x_n$ . This means that  $L'_0$  and  $L'_1$  can be represented by automata with the same states and transitions, but different initial and final states.

Next, we eliminate the `replaceAll` functions. This leads to  $\mathbf{assert}(x_{n-1} \in L_0)$ , where  $L_0$  is  $L'_0$  except all  $\$_{n,0}^b$  characters have been replaced by  $b_n$ . Similarly, we also have  $\mathbf{assert}(x_{n-1} \in L_1)$ , where  $L_1$  is  $L'_1$  except all  $\$_{n,1}^b$  characters have been replaced by  $b_n$ . Note that different  $\$_{n,b}^b$

characters have been replaced in  $L_0$  and  $L_1$ . The languages have begun to diverge.

We then eliminate  $x_{n-1} := y_{n-1}^1 \circ z_{n-1}^1$ . Thus  $L_0$  needs to be split into  $L'_{00}$  and  $L'_{10}$ . Similarly,  $L_1$  needs to be split into  $L'_{01}$  and  $L'_{11}$ . This results in the constraints

$$\mathbf{assert}(y_{n-1}^1 \in L'_{00}); \mathbf{assert}(y_{n-1}^1 \in L'_{01}); \mathbf{assert}(z_{n-1}^1 \in L'_{10}); \mathbf{assert}(z_{n-1}^1 \in L'_{11})$$

and after eliminating the next batch of `replaceAll` functions we have

$$\mathbf{assert}(y_{n-1}^1 \in L_{00}); \mathbf{assert}(y_{n-1}^1 \in L_{01}); \mathbf{assert}(z_{n-1}^1 \in L_{10}); \mathbf{assert}(z_{n-1}^1 \in L_{11}) .$$


By following this procedure, we eventually obtain the constraints

$$\mathbf{assert}(x_1 \in L_{0\dots 00}); \mathbf{assert}(x_1 \in L_{0\dots 01}); \dots; \mathbf{assert}(x_1 \in L_{1\dots 11}) .$$

Notice, furthermore, that  $L_{b_1\dots b_n}$  has all  $\$_{i,b_i}^0$  replaced by  $0_i$  and all  $\$_{i,b_i}^1$  replaced by  $1_i$  but all characters  $\$_{i,b'_i}^b$  where  $b'_i \neq b_i$  are unchanged.

## C.2 Controlling the Unravelling

We revisit the example from Section C.1 for the case of  $n = 3$  to show how we can use the unravelling to obtain automata which will be useful to our encoding. In this example, we will ignore the issue of initial and final states, and just show the effect on the automaton transition relation. Let  $n = 3$  and  $L_V$  be defined by the automaton below.

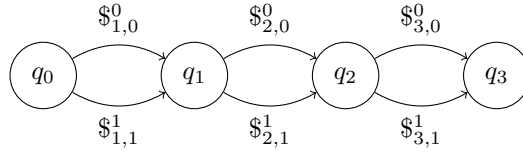


We initially have  $\mathbf{assert}(x_3 \in L_V)$ . We first eliminate  $x_3 := y_3^1 \circ z_3^1$  and then

$$\begin{aligned} y_3^0 &:= \text{replaceAll}_{0_3}(x_2, \$^0_{3,0}); \\ y_3^1 &:= \text{replaceAll}_{1_3}(y_3^0, \$^1_{3,0}); \\ z_3^0 &:= \text{replaceAll}_{0_3}(x_2, \$^0_{3,1}); \\ z_3^1 &:= \text{replaceAll}_{1_3}(z_3^0, \$^1_{3,1}) . \end{aligned}$$


Note, from  $L'_0$  we replace the  $\$^0_{3,0}$ - and  $\$^1_{3,0}$ -transitions (although the latter does not appear in  $\mathcal{A}$ ), while from  $L'_1$  we replace the  $\$^0_{3,1}$ - and  $\$^1_{3,1}$ -transitions. This leaves us with

$$\mathbf{assert}(x_2 \in L_0); \mathbf{assert}(\wedge x_2 \in L_1)$$

where  $L_0$  is given by

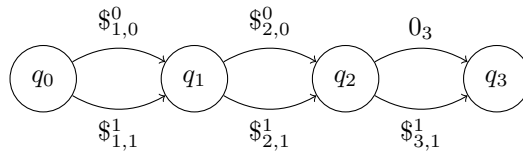


and  $L_1$  is given by

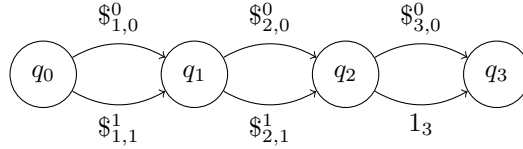

After completing the elimination process, we are left with

$$\mathbf{assert}(x_1 \in L_{000}); \dots; \mathbf{assert}(\wedge x_1 \in L_{111})$$

where, for example,  $L_{010}$  is given by

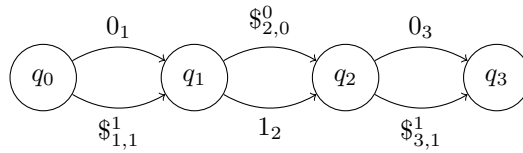

If we further insist that  $x_1$  contains only characters from  $\{0_1, 1_1, 1_2, 1_2, 1_3, 1_3\}$  then the only path from  $q_0$  to  $q_3$  is via the sequence  $0_1 1_2 0_3$ . Likewise, in  $L_{111}$  the only valid sequence will be  $1_1 1_2 1_3$ .

### C.3 Completing the Reduction

To finish the reduction, we have to instantiate  $\varphi$  by giving  $L, L_H, L_1, \dots, L_n$  and  $L_V$  where all languages but  $L_V$  are easily seen to be representable by automata whose size is polynomial in  $n$ .

1.  $L$  will enforce that  $x_1$  matches

$$!(\#(\{0_1, 1_1\} \dots \{0_n, 1_n\} \Theta)^* \#)!$$

That is, a sequence of delimited rows, each consisting of a sequence of alternating  $n$ -bit sequences and tiles; the beginning and end of the word is marked by  $!$ . Moreover,  $L$  will insist that the first tile seen is  $t_I$  and that the final tile seen is  $t_F$ , as required by the tiling problem.

2.  $L_H$  will enforce that any subsequence

$$tb_1 \dots b_n t'$$

where for all  $i$  we have  $b_i \in \{0_i, 1_i\}$  in the value of  $x_1$  is such that  $(t, t') \in H$ .


3. The languages  $L_1, \dots, L_n$  will together enforce the correct sequencing of bit values  $b_1 \dots b_n$ . That is, between each  $\#$  each sequence  $b_1 \dots b_n$  appears exactly once and in the correct order (i.e.  $0_1 \dots 0_{n-1} 0_n$  appears before  $0_1 \dots 0_{n-1} 1_n$  and so on up to  $1_1 \dots 1_{n-1} 1_n$ ). To do this, each  $L_i$  will check the following.

- (a) After each  $\#$  the first instance of  $\{0_i, 1_i\}$  is  $0_i$ .
- (b) Before each  $\#$  the last instance of  $\{0_i, 1_i\}$  is  $1_i$ .

- (c) For every  $0_i$  such that  $\#$  does not appear before the next occurrence of  $b_i \in \{0_i, 1_i\}$ , if the immediately succeeding characters are  $1_{i+1} \dots 1_n$  then  $b_i$  is  $1_i$ , otherwise  $b_i$  is  $0_i$ .
- (d) For every  $1_i$  such that  $\#$  does not appear before the next occurrence of  $b_i \in \{0_i, 1_i\}$ , if the immediately succeeding characters are  $1_{i+1} \dots 1_n$  then  $b_i$  is  $0_i$ , otherwise  $b_i$  is  $1_i$ .

Finally, we need to define  $L_V$ . As seen above,  $L_V$  will lead to an exponential number of languages  $L_{b_1 \dots b_n}$  inside which  $x_1$  will need to be contained. The role of  $L_{b_1 \dots b_n}$  will be to check that the  $b_1 \dots b_n$ th column of the tiling obeys the vertical matching relation. Each  $L_{b_1 \dots b_n}$  can be seen to be representable by a polynomially sized automaton that stores in its states the last tile seen after the sequence  $b_1 \dots b_n$ . Then, when the sequence next occurs, the new tile can be compared with the previous one. The automaton will proceed by storing the new tile and forgetting the old.


We will design an automaton for  $L_V$  which will lead to the generation of the correct automaton for each  $L_{b_1 \dots b_n}$ . We will use characters  $\$_{i,b}^{b'}$  as before to generate the required bit sequences in the transition labelling of the automaton representing  $L_{b_1 \dots b_n}$ .

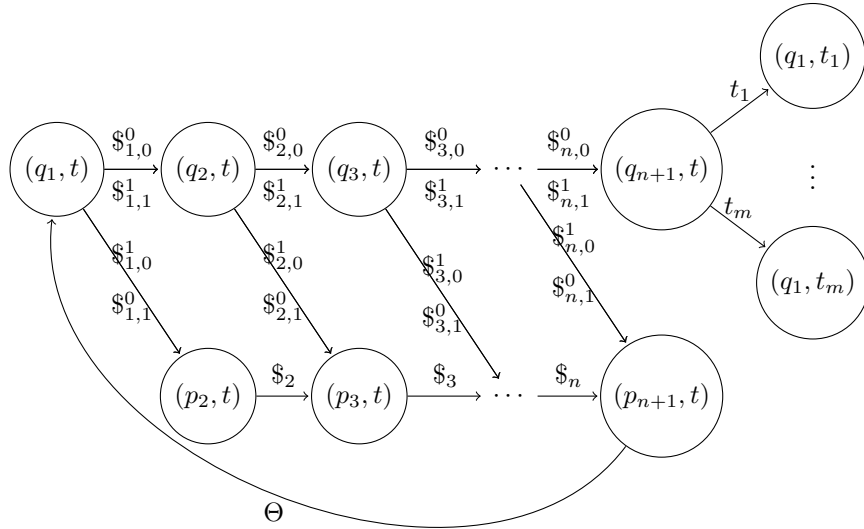

In addition, we also need to ensure that the elimination of the concatenations – which leads to a non-deterministic change in the initial and final states of the automata – does not disrupt the language accepted. For this we will use the  $!$  character, which marks the beginning and end of the value of  $x_1$ . The automaton for  $L_V$  will treat  $!$  as a kind of “reset” character, which takes the automaton back to a defined initial state, which will also be the accepting state.

Before giving the formal definition, we will give an extract of the automaton that will check for the sequence  $b_1 \dots b_n$  and check the tiling relation. Each state is of the form  $(q, t)$  where  $t$  is the previously saved tile. In the diagram,  $\$_i$  denotes the set of all characters  $\$_{i,b}^{b'}$  for all  $b, b' \in \{0, 1\}$ . I.e. the transition can read any of these characters. The top row of the automaton shows the run whilst the correct sequence is being read (and the tile needs to be checked), whilst the bottom is for all bit sequences that diverge from  $b_1 \dots b_n$  (another column is being read). From  $(q_n, t)$  the tiles  $t_1, \dots, t_m$  are all tiles such that  $(t, t_j) \in V$  for all  $j$ . The transitions from each  $(q_1, t_j)$  will be analogous to those from  $(q_1, t)$ .

To see the pattern of the automaton extract, we show how it would be instantiated for  $L_{0\dots 00}$  with all edges labelled by  $\mathbb{S}_{i,b}^{b'}$  removed.

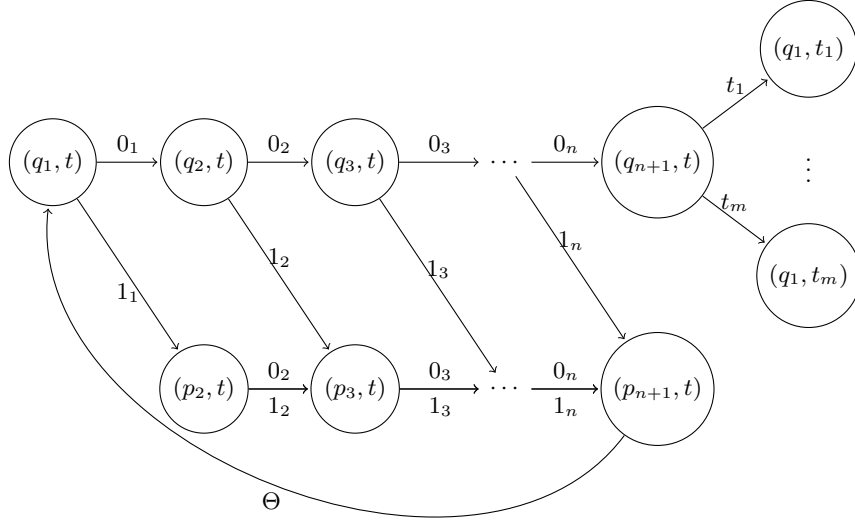

Hence, we are ready to define an automaton  $\mathcal{A}_V$  giving the language  $L_V$ . We give the definition first, and explanation below. We define

$$\mathcal{A}_V = (Q, \delta, q_0, F)$$

where

$$\begin{aligned} Q &= \{q_0, q_1, \dots, q_n, q_{n+1}, p_2, \dots, p_n, p_{n+1}\} \cup \\ &\quad \{(q_i, t) \mid 1 \leq i \leq n+1 \wedge t \in \Theta\} \cup \\ &\quad \{(p_i, t) \mid 2 \leq i \leq n+1 \wedge t \in \Theta\} \\ \delta &= \left\{ q \xrightarrow{!} q_0 \mid q \in Q \right\} \cup \\ &\quad \{q_0 \xrightarrow{\#} q_1\} \cup \\ &\quad \{(q_1, t) \xrightarrow{\#} (q_1, t) \mid t \in \Theta\} \cup \\ &\quad \left\{ q_i \xrightarrow{\mathbb{S}_{i,b}^{b'}} q_{i+1} \mid 1 \leq i \leq n \wedge b \in \{0, 1\} \right\} \cup \\ &\quad \left\{ (q_i, t) \xrightarrow{\mathbb{S}_{i,b}^{b'}} (q_{i+1}, t) \mid 1 \leq i \leq n \wedge b \in \{0, 1\} \right\} \cup \end{aligned}$$



$$\begin{aligned}
& \left\{ q_i \xrightarrow{\mathbb{S}_{i,b}^{b'}} p_{i+1} \mid 1 \leq i \leq n \wedge b \neq b' \in \{0,1\} \right\} \cup \\
& \left\{ (q_i, t) \xrightarrow{\mathbb{S}_{i,b}^{b'}} (p_{i+1}, t) \mid 1 \leq i \leq n \wedge b \neq b' \in \{0,1\} \right\} \cup \\
& \left\{ p_i \xrightarrow{\mathbb{S}_{i,b}^{b'}} p_{i+1} \mid 2 \leq i \leq n \wedge b, b' \in \{0,1\} \right\} \cup \\
& \left\{ (p_i, t) \xrightarrow{\mathbb{S}_{i,b}^{b'}} (p_{i+1}, t) \mid 2 \leq i \leq n \wedge b, b' \in \{0,1\} \right\} \cup \\
& \left\{ q_{n+1} \xrightarrow{t} (q_1, t) \mid t \in \Theta \right\} \cup \\
& \left\{ (q_{n+1}, t) \xrightarrow{t'} (q_1, t') \mid (t, t') \in V \right\} \cup \\
& \left\{ (p_{n+1}, t) \xrightarrow{t'} (q_1, t) \mid t, t' \in \Theta \right\} \\
F &= \{q_0\}
\end{aligned}$$

The first set of transitions in  $\delta$  are the reset transitions. From all states (including  $q_0$ ) a  $!$  will bring the automaton back to its initial state. Since we enforce separately that the value of  $x_0$  begins and ends with  $!$ , it will remain true through the concatenations and `replaceAll` operations that the value of  $x_i$  still begins and ends with  $!$ . Thus, the only final state that can occur on a solution to the string constraints is  $q_0$  and the initial state is immaterial.

Next, we define the transitions over  $\#$  which simply track the beginning of a new row. Since we enforce separately that the input is of the correct format, we can simply use a self-loop on  $(q_1, t)$  to pass over  $\#$  – it will only be used once.

The next transitions read  $\mathbb{S}_{i,b}^b$  characters. This means that in  $L_{b_1 \dots b_n}$  we are reading the value  $b = b_i$  at position  $i$ . Thus, this is part of the sequence of bits identifying the column  $L_{b_1 \dots b_n}$  is checking. Thus, we continue reading the sequence of bits in the  $q$  states.

Conversely, we next deal with the case when  $\mathbb{S}_{i,b}^{b'}$  with  $b \neq b'$  is being read. That is, we are reading a column that is not the  $b_1 \dots b_n$ th and hence we simply skip over it by using the  $p$  states.

Finally, we read the tiles. If we are in state  $q_n$  then we are reading the  $b_1 \dots b_n$ th column, but this is the first row (after a reset) and thus there is no matching relation to verify. If we are in state  $(q_{n+1}, t)$  then we are reading the  $b_1 \dots b_n$ th column, but this is not the first row and we have to verify the matching relation. Wherefrom, there is only a transition reading  $t'$  if  $(t, t') \in V$ . The tile  $t'$  is then saved for comparison with the next tile.

Otherwise, if we are in a state  $p_{n+1}$  or  $(p_{n+1}, t)$  then we are not in the correct column and there is nothing to verify. In this case we simply skip over the tile and continue.

## C.4 Completing the Proof

Given a tiling problem over a corridor of width  $2^n$ , we have given a (polynomially sized in  $n$ ) `SL[replaceAll]` constraint  $\varphi$  using languages  $L, L_V, L_H, L_1, \dots, L_n$  (representable by automata polynomially sized in  $n$ ) such that  $\varphi$  is satisfiable iff the variable  $x_1$  takes on a value

$$! \# 0_1 \dots 0_n t_1^1 0_1 \dots 1_n t_2^1 \dots 1_1 \dots 1_n t_\ell^1 \# \dots \# 0_1 \dots 0_n t_1^h \dots 1_1 \dots 1_n t_\ell^h \#!$$

such that

$$\# t_1^1 \dots t_\ell^1 \# t_1^2 \dots t_\ell^2 \# \dots \# t_1^h \dots t_\ell^h \#$$

is a solution to the tiling problem. Since such a tiling problem is  $2^n$ -SPACE-hard, we have shown EXPSPACE-hardness of the satisfiability problem for  $\text{SL}[\text{replaceAll}]$ . Moreover, this holds even in the single-letter case.

## D Proof of Theorem 5.9

*Proof.* The proof follows the same line as that of Theorem 5.6. The decision procedure consists of four steps, where the first two steps are the same as those in the proof of Theorem 5.6.

The third step is adapted by applying the following additional transformation to length assertions: When splitting each variable  $x$  into multiple fresh variables, say,  $x_1 \dots x_k$ , replace all occurrences of  $|x|$  (resp.  $|x|_a$ ) in length assertions by  $\sum_{1 \leq i \leq k} |x_i|$  (resp.  $\sum_{1 \leq i \leq k} |x_i|_a$ ).

The fourth step is adapted by applying the following additional transformation to length assertions: For each variable  $x \in X$ , if  $x^{(r)}$  occurs in the assignments of  $S_4$ , then replace each occurrence of  $|x|$  (resp.  $|x|_a$ ) with  $|x^{(r)}|$  (resp.  $|x^{(r)}|_a$ ), otherwise, replace each occurrence of  $|x^{(r)}|$  (resp.  $|x^{(r)}|_a$ ) with  $|x|$  (resp.  $|x|_a$ ).

It follows that we obtain a symbolic execution of polynomial size that contains only FTs, regular constraints and length assertions. The EXPSPACE upper bound follows from [42, Theorem 12].  $\square$