ReDecode Framework for Iterative Improvement in Paraphrase Generation

Milan Aggarwal milaggar@adobe.com

Nupur Kumari nupkumar@adobe.com Ayush Bansal abansal 1008@gmail.com

Balaji Krishnamurthy kbalaji@adobe.com

Abstract

Generating paraphrases, that is, different variations of a sentence conveying the same meaning, is an important yet challenging task in NLP. Automatically generating paraphrases has its utility in many NLP tasks like question answering. information retrieval, conversational systems to name a few. In this paper, we introduce iterative refinement of generated paraphrases within VAE based generation framework. Current sequence generation models lack the capability to (1) make improvements once the sentence is generated; (2) rectify errors made while decoding. We propose a technique to iteratively refine the output using multiple decoders, each one attending on the output sentence generated by the previous decoder. We improve current state of the art results significantly - with over 9% and 28% absolute increase in ME-TEOR scores on Quora question pairs and MSCOCO datasets respectively. We also show qualitatively through examples that our re-decoding approach generates better paraphrases compared to a single decoder by rectifying errors and making improvements in paraphrase structure, inducing variations and introducing new but semantically coherent information.

Introduction

Paraphrases refer to texts which express the same meaning in different ways. For example, "Can time travel ever be possible?" and "Is time travel a possibility?" are paraphrases of each other. Human conversations typically involve a high level of paraphrasing to express similar intent, but comprehending such sentences as semantically similar and generating them is a difficult task for a machine. Automatic paraphrase generation is an important task in NLP that has practical significance in many text-to-text generation tasks such as question answering, conversational systems, information retrieval, summarization, etc. Knowledge-based QA systems are highly sensitive to the way a question is asked. Using paraphrases of the asked question while ranking answers in the knowledge base improves the system performance (Dong et al. 2017). Paraphrasing also fosters incorporating variations in domain specific conversational bots which have a fixed set of responses to prevent them from being repetitive. In the task of query reformulation, paraphrasing has direct utility, e.g. in search engines, paraphrase generation module can be used for recommending different possible

variations of the user query or directly show the search results after incorporating the variations as part of the search process. In the case of end-to-end conversational systems, training data can be augmented with paraphrases of available dialogues which helps in improving semantic understanding capability of the system.

Early paraphrase generation systems used handcrafted rule-based systems (McKeown 1983), relied on automatic extraction of paraphrase patterns from available parallel corpus data (Barzilay and Lee 2003) or used knowledge base like word-net for paraphrase generation (Bolshakov and Gelbukh 2004). Statistical machine translation tools have also been applied for paraphrase generation (Quirk, Brockett, and Dolan 2004). These approaches are limited because of their methodology and don't generalize well.

Recent advances in deep neural network based models for sequence generation has advanced state of the art in various NLP tasks such as machine translation (Bahdanau, Cho, and Bengio 2014) and question answering (Yin et al. 2015). For the task of paraphrase generation, Prakash et al. (2016) for the first time explored sequence-to-sequence (Seq2Seq) (Sutskever, Vinyals, and Le 2014) based neural network model and proposed an improved variant of the model - a stacked LSTM Seq2Seq network with residual connections.

In this paper, we present a framework for automatic paraphrase generation which is based on variational autoencoder (VAE)(Kingma and Welling 2013). VAE is used extensively for generative tasks in image domain and has been experimented with in text domain (Bowman et al. 2015) as well; the model usually consists of LSTM RNN (Sundermeyer, Schlüter, and Ney 2012) as encoder and decoder (VAE-LSTM), for processing sequential input. Unlike the traditional reconstruction task of VAE, paraphrasing involves generating outputs which are different in their expression but have same semantic meaning. To achieve this objective, Gupta et al. (2017) introduced a supervised variant (VAE-S) of VAE-LSTM where decoder is conditioned on the vector representation of input sentence obtained through another RNN, instead of only depending on latent representation. Our approach is based on the supervised generative sequence modeling through VAE where supervision is obtained through decoder attending over the hidden states of an LSTM RNN that encodes the input sentence.

In this work, we introduce a methodology for iterative im-

provement of output using the VAE-S framework as compared to previous sequence generation models that decode output sequence only once. This concept is inspired from the idea that given a crude paraphrase and the original sentence, the model should be able to generate a better quality paraphrase in the next iteration by rectifying errors and identifying regions of improvement; similar to what humans can do. We achieve the task of iterative improvement by having multiple decoders in the model and each decoder, except the first one, attends on the output of previous decoder for supervision. We establish the effectiveness of this approach for the domain of paraphrase generation by showing significant improvements in the scores of standard metrics on benchmark paraphrase datasets over state of the art. Our approach is applicable to any other domain which involves sequence generation such as conversational systems, question answering etc. However we do not explore its capabilities in other domains in this paper. Our contributions in this paper can be listed as:

- We introduce an iterative improvement framework for the output using multiple decoders under VAE based generative model. The first decoder is conditioned on the input sentence encoding whereas further decoders are conditioned on the outputs generated by preceding decoders.
- We improve the existing state of the art in paraphrase generation task by a significant margin using our above mentioned approach.

Related Work

Paraphrase generation has been modeled as a Seq2Seq learning problem from the input sentence to the target paraphrase. The first Seq2Seq neural network based approach for this was proposed by Prakash et al. (2016) which was a stacked LSTM RNN model with residual connections. The authors compared it with other variants of Seq2Seq model which included attention and bidirectional LSTM unit. Cao et al. (2017) introduced a Seq2Seq model fusing two decoders, one of them is copying decoder and the other is a restricted generative decoder inspired from the human way of paraphrasing that principally involves copying or rewriting. Gupta et al. (2017) introduced VAE based model for paraphrase generation. VAE as introduced by Kingma and Welling (2013) is a generative deep neural network model that maps the input to latent variables and decodes the latent variable to reconstruct the data. VAE is ideal for generating new data as it explicitly learns a probability distribution on the latent code from which a sample is used for decoding. Gupta et al. (2017) condition the decoder on input sentence and use reference paraphrase along with input sentence as input for generating latent code to obtain better quality paraphrases.

There has also been some work on improving paraphrase generation models inspired from machine translation. It has been shown that paraphrase pairs obtained using backtranslated texts from bilingual machine translation corpora has data quality at par with manually-written English paraphrase pairs (Wieting, Mallinson, and Gimpel 2017). There has been work done in syntactically controlled paraphrase

generation as well where parse tree template of paraphrase to be generated is also given as input (Iyyer et al. 2018).

Our work in paraphrase generation is similar to the approach of Gupta et al. (2017) in that our model is also based on VAE. The main difference lies in our methodology to iteratively improve the decoded output and use attention mechanism to condition the decoder on input sentence while training. We also introduce a specific loss term to promote generation of varied paraphrases of a given sentence.

Methodology

In this section, we explain our model architecture, which is based on VAE. We first give a brief overview of VAE and then explain our framework in detail.

Variational Autoencoder

Variational Autoencoder as introduced by Kingma and Welling (2013) is a generative model that learns a posterior distribution over latent variables for generating output. Input data x is mapped to a latent code z from which x can be reconstructed back. It differs from traditional auto-encoders in the sense that instead of learning a deterministic mapping function to latent code z = f(x), it learns a posterior distribution $p_{\phi}(z|x)$ from the data starting with a prior $p_{\theta}(z)$. The posterior distribution is usually taken to be $N(\mu, \Sigma)$ and prior distribution as N(0, I) to facilitate stochastic back propagation based training. The encoder can be a neural network with a feed forward layer at the end to estimate μ and Σ from x. z is sampled from the normal distribution $N(\mu, \Sigma)$ and passed to the decoder as input. The decoder which is also a neural network learns the probability distribution $p_{\theta}(x|z)$ to reconstruct input data from latent code. The network is trained by maximizing the following objective function:

$$L(x) = E_{p_{\phi}(z|x)}[log \ p_{\theta}(x|z)] - D_{KL}(q_{\phi}(z|x)||q_{\theta}(z)) \ (1)$$

 ϕ and θ are the parameters of encoder and decoder respectively; D_{KL} stands for KL divergence. The objective function maximizes the log likelihood of reconstructed data from the posterior and at the same time reduces the KL divergence between the prior and posterior distribution of latent code z. This objective is a valid lower bound on the true log likelihood of data as shown by the authors, therefore maximizing it ensures that the total log likelihood of data is maximized. The first term in equation 1 is maximized by minimizing the cross entropy error over the training dataset.

Since VAE learns the probability distribution $p_{\theta}(x|z)$, it is ideal for generative modeling tasks. For sequence generation task in text, Bowman et al. (2015) proposed RNN based variational autoencoder model. Both the encoder and decoder are LSTM RNN with a feed forward layer at the end of encoder to estimate μ and Σ . They introduce techniques like KL cost annealing and word dropout in decoder for efficient learning. Gupta et al. (2017) improved upon this model in a supervised setting of paraphrase generation by conditioning decoder on input sentence encoding computed by a separate encoder and using z at every time step of decoding as input. From now on we use VAE-S (S stands for supervision) to denote this model.

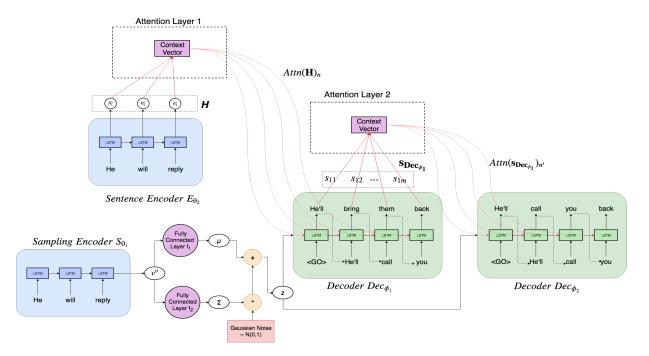


Figure 1: Architecture diagram of iterative approach for the case of two decoders (i=2). S_{θ_1} processes the input sentence and its final output is used to obtain the mean and variance vectors μ and Σ through fully connected layer f_1 and f_2 respectively which are used to sample z. E_{θ_2} produces output vectors $\{h_{oi}^d\}$ as it processes the input sentence word by word. First decoder Dec_{ϕ_1} attends on these output vectors, takes z as input and outputs the paraphrase using standard Seq2Seq technique. Decoder Dec_{ϕ_2} attends on the softmax vectors $\{s_{1j}\}$ produced by Dec_{ϕ_1} and generates the final output. The dotted connections in the decoders across different time steps show that output generated at time t is passed as input at time t+1 during inference while inputs are pre-determined during training as per teacher forcing technique (Williams and Zipser 1989).

In our model as well, z is concatenated with the word encoding as input to decoder (as in standard Seq2Seq technique) and decoder is conditioned on input sentence. Since paraphrase generation is subtly different from sentence reconstruction, using z alone may not result in good paraphrases. We condition the decoder on the inputs using well known Attention Mechanism (Luong, Pham, and Manning 2015) while generating the paraphrases to enable the model to learn phrase level semantics. Attention Mechanism has been widely used in sequence tasks such as Recognizing Text Entailment (RTE) (Rocktäschel et al. 2015), Machine Translation (MT) (Vaswani et al. 2017) etc.

We explain our attention based ReDecode model architecture in the next section.

Model Architecture

Training data consists of sentence $x_o: \{x_o^o, x_1^o, ... x_n^o\}$ and its expected paraphrase $x_p: \{x_0^p, x_1^p, ... x_m^o\}$. Input to the model is a sequence of vector encodings of $\{x_i^o\}$ represented as $\{e_i^o\}$ which we take as pre-trained Glove (Pennington, Socher, and Manning 2014) vector embeddings instead of training word vectors from the scratch. The architecture diagram of our model is as shown in figure 1. It consists of a Sampling Encoder (S_{θ_1}) , Sentence Encoder (E_{θ_2}) and sequence of decoders $\{Dec_{\phi_i}\}$; θ_1 , θ_2 and ϕ_i are parameters of the model respectively. Below we explain each module

and training strategy in detail.

Sampling Encoder : S_{θ_1} is used to encode the original sentence for sampling the latent vector z. As shown in figure 1, it consists of a single layer LSTM RNN that sequentially processes the word embeddings $\{e_i^o\}$ of words $\{x_i^o\}$ in the original sentence and creates the vector representation v^o of sentence. v_o is then passed through two separate fully connected layers f_1 and f_2 to estimate mean (μ) and variance(Σ). Final latent code z is sampled from $N(\mu, \Sigma)$ distribution.

Sentence Encoder : E_{θ_2} computes a vector representation of the input sentence used for generating the output paraphrase in the decoding stage. It is a two layer stacked LSTM unit which sequentially processes the input sentence and generates a set of hidden vectors $H = h_1^o, h_2^o, ..., h_n^o$ corresponding to each time step of the input sequence. These hidden vectors are attended upon by the decoder. In attention mechanism, given a sequence of vectors $\{m_i\}$, attributed as memory \mathbf{M} with vectors arranged along the columns, the decoder LSTM learns a context vector derived using weighted sum of columns of \mathbf{M} as a function of its input and hidden state at time step j and uses it for generating the output. The decoder learns to identify and focus on specific parts of the memory while generating the words.

Iterative Decoder : In the decoding stage, we propose to use multiple decoders $Dec_{\phi_1}, Dec_{\phi_2}, ..., Dec_{\phi_n}$ to generate the output iteratively. While training, the input to each decoder is z sampled using S_{θ_1} concatenated with encoding e_i^p of x_i^p at each time step. During inference, the generated word is given as input to the next step of decoding as in standard Seq2Seq paradigm. Each decoder is a two layer stacked LSTM unit followed by a projection layer which outputs a likelihood distribution over the vocabulary. In addition, decoder Dec_{ϕ_i} attends on the softmax vectors generated by $Dec_{\phi_{i-1}}$ whereas Dec_{ϕ_1} attends over the outputs $\{h_i^o\}$ generated by Sentence Encoder E_{θ_2} . More formally we iteratively generate a sequence of paraphrases $\{\mathbf{p_1}, \mathbf{p_2}, ..., \mathbf{p_n}\}$ such that,

$$\mathbf{p_1} = Dec_{\phi_1}(z, \mathbf{Attn}(\mathbf{H})) \tag{2}$$

$$\mathbf{p_i} = Dec_{\phi_i}(z, \mathbf{Attn}(\{\mathbf{s_{Dec_{\phi_i}}}_1\})) for \ i = 2, ..., n \quad (3)$$

where $\mathbf{p_i}$ is a sequence of words in the paraphrase generated by Dec_{ϕ_i} , \mathbf{H} is set of outputs $\{h^o_j\}$ generated by the Sentence Encoder E_{θ_2} , $\{\mathbf{s_{Dec}}_{\phi_{i-1}}\}$ are the softmax vectors generated by the previous decoder $(Dec_{\phi_{i-1}})$ and $\mathbf{Attn}(\{\mathbf{s_{Dec}}_{\phi_{i-1}}\})$ are the context vectors obtained by attending over the softmax vectors.

As shown in experimental results section, Dec_{ϕ_i} (i>1) iteratively improves the output generated by $Dec_{\phi_{i-1}}$. In single decoder model, the output at time-step t is decided based on the outputs at time-steps less than t. In case of multiple decoders, Dec_{ϕ_i} (i>1) has the information about complete paraphrase generated by $Dec_{\phi_{i-1}}$. We hypothesize that further decoders have prior notion of output to be generated at every time step; this enables them to rectify errors, modify the structure and introduce useful variations.

Training Technique Training objective of our model is similar to the VAE objective function equation 1. To increase the log likelihood of generated paraphrase from all decoders the average of cross entropy (CE) of each decoder output compared to target paraphrase is minimized along with KLD loss. Thus our loss function is:

$$loss_{VAE-ITERDEC} = Mean(CE(Dec_{\phi_i})) + D_{KL}(q_{\theta_1}(z|x)||q(z))$$
(4)

Also in order to induce variations in the generated paraphrases, we conduct training by sampling three different latent vectors z_1, z_2, z_3 and generating the corresponding outputs o_1, o_2, o_3 . This is done by adding different Gaussian noises to mean and variance vectors obtained corresponding to the input sentence and feeding them to the decoder. We take the final state of the decoder $\{c_i^d\}$ after generating output $\{o_i\}$ as the representation of the corresponding output sentence and minimize pairwise cosine similarity between them by adding the following to the loss function:

$$loss_{MultiSample} = \sum_{i,j=1; i < j}^{3} CS(c_i^d, c_j^d)$$
 (5)

where *CS* denotes cosine similarity. The objective is to tune the model in a way such that different noises added to the mean and variance vector while sampling z results in diverse and different paraphrases while being coherent with the input sentence. We now discuss different experiments conducted for different model variations discussed above.

Experiments

Datasets

We present a qualitative and quantitative discussion of the results on two different datasets - Quora question pairs and MSCOCO - across different model variations. Quora dataset¹ comprises of questions asked by the users of the platform and consists of question pairs which are potential paraphrases of each other, as denoted by a binary 1-0 value provided against each pair. We use the pairs with value 1 and discard the remaining ones. MSCOCO² dataset comprises of about 200k labeled images with each image annotated with 5 captions which are potential paraphrases. We use 2014 release of the dataset which provided separate train and validation splits in order to compare our results with previous baselines and work on paraphrase generation. We randomly select 4 captions out of 5 for each image and randomly divide them into 2 input-paraphrase sentence pairs. Before feeding the sentences to the model for training and inference, we preprocess them by removing punctuations and include only the pairs where both the input sentence and its paraphrase have length ≤ 15 . Sentences having length less than 15 are padded appropriately using a separate pad token. The number of sentence pairs on which the model is trained and validated after preprocessing is summarized in table 1.

 Table 1: Dataset Statistics

 Dataset
 # Training Samples
 # Testing Samples

 Quora
 87116
 18773

 MSCOCO
 149438
 73221

Implementation Details

To train our model, we use pre-trained 300 dimensional Glove embeddings³ to represent the input words in a sentence and keep them non-trainable. The encoder LSTM in S_{θ_1} is a single layer LSTM with 600 units. The dimension of mean and variance vectors is kept at 1100 through all the experiments with a batch size of 32 and learning rate of 5×10^{-4} . E_{θ_2} and $\{Dec_{\phi_i}\}$ are two layer stacked LSTM cells with the number of units in LSTM cell fixed at 600. We have used Adam optimizer (Kingma and Ba 2014) for training our model parameters. This configuration is common across different experimental settings.

¹https://data.quora.com/First-Quora-Dataset-Release-Question-Pairs

²http://cocodataset.org/#download

³https://nlp.stanford.edu/projects/glove/

Table 2: METEOR, BLEU and TER scores for different models on test sets of Quora and MSCOCO

Approach	Quora			MSCOCO		
	METEOR	BLEU	TER	METEOR	BLEU	TER
Residual LSTM (Prakash et al. 2016)	NA	NA	NA	27.0	37.0	51.6
VAE-SVG (Gupta et al. 2017)	32.0	37.1	40.8	30.9	41.3	40.8
VAE-S	22.75	16.55	73.63	12.11	4.44	88.94
VAE-REF	21.85	14.86	67.12	10.9	3.36	84.2
VAE-VAR	25.5	19.92	70.01	12.38	4.7	88.73
VAE-ITERDEC2	39.07	54.19	32.5	57.44	84.64	7.2
VAE-ITERVAR	39.71	54.95	30.45	59.88	87.71	5.8
VAE-ITERDEC3	41.95	61.23	26.86	53.01	77.84	11.85

Baseline and Evaluation Measures

We compare our model with VAE-SVG model (Gupta et al. 2017) which is current state of the art on benchmark datasets and Residual LSTM model (Prakash et al. 2016). We directly cite the scores as reported in the respective papers. In our work, we do not train the word embedding as done in (Gupta et al. 2017). To make a fair comparison, we also implemented and trained VAE-SVG model in the same setting. We denote this model as VAE-REF.

For quantitative evaluation of our model, we calculate scores on well known evaluations metrics in the domain of machine translation⁴: METEOR (Lavie and Agarwal 2007), BLEU (Papineni et al. 2002) and Translation Edit Rate (TER)(Snover et al. 2006). These scores have been shown to correlate well with human judgment. Madnani, Tetreault, and Chodorow (2012) show that these measures perform well for the task of paraphrase recognition also. BLEU score is based on weighted n-gram precision scores of the reference paraphrase with candidate paraphrase. METEOR uses stemming and synonymy detection as well while computing precision and recall. TER measures the edit distance between reference and candidate sentence, so lower the TER better the score.

Results

In order to evaluate our approach, we experimented with following variations of the model: (1) Basic VAE based generative model (VAE-S), (2) VAE-S with reference paraphrase as an additional input (VAE-REF), (3) VAE with attention and MultiSample loss (VAE-VAR), (4) VAE with Iterative decoding having 2 decoders and attention (VAE-ITERDEC2), (5) VAE model comprising of MultiSample loss and 2 decoders with attention (VAE-ITERVAR), and (6) VAE with 3 decoders and attention (VAE-ITERDEC3). Results for each of these models have been summarized in table 2 for both Quora and MSCOCO datasets. We report all our results and improvements in absolute points.

Quora As we can see our proposed iterative decoding mechanism improves the score by a huge margin as compared to baseline VAE-S. The improved scores are better


Table 3: Few examples of paraphrases generated by our VAE-ITER DEC2 model on Quora dataset

VAE-ITERDEC2 model on Quora dataset				
Input	what are the top universities for computer			
	science in the world			
Decoder 1	what are the best universities for computer			
	science in the world			
Decoder 2	what are the best computer science colleges			
Expected	what are the best computer science schools			
Input	which is best time for exercise			
Decoder 1	what is best time exercise			
Decoder 2	when is the best time to exercise			
Expected	when is the best time to workout			
Input	what can substitute red wine in cooking			
Decoder 1	what are the best sides in cooking			
Decoder 2	what is a good substitute for red wine in			
	cooking			
Expected	what is a good replacement for red wine in			
	cooking			
Input	how do i start an export company or llc in			
	new york city			
Decoder 1	how do i start preparing for donations in			
	new york			
Decoder 2	how do i start new llc capital company in			
	new york			
Expected	how do i start an import/export llc in new			
_	york city			

than any other previous work done in paraphrase generation - with near 7% and 17% absolute increase in METEOR and BLEU scores respectively compared to the previous best scores (Gupta et al. 2017) - thus establishing a new state of the art in this task. Our TER score is also 8.3% less than the previously established best score. Table 3 shows a comparison between paraphrases generated by the first decoder and the improvements made by the second decoder on a few example sentences.

In some cases, as in first example in table 3, the output generated by the second decoder resembles the expected paraphrase more than the paraphrase generated by the first decoder which leads to a better score - the first decoder just replaces the word 'top' in the input sentence with 'best' while the second decoder changes the sentence structure by

⁴We used the software available at https://github.com/jhclark/multeval






Figure 2: Attention visualization examples from Quora dataset demonstrating parts of paraphrase generated by first decoder (x-axis) on which decoder 2 attends while generating its output (y-axis). Input to the model was - 'what can substitute red wine in cooking' (left) and 'how do i start an export company or llc in new york city' (right). It can be seen that second decoder corrects the output of the first one by attending on incorrect words while replacing them with a better phrase.


introducing the phrase 'best computer science' which also matches with the expected paraphrase. Another observation is that many times the second decoder makes the generated paraphrase correct and semantically more similar to the input sentence than the output of the first decoder like in the third and last example in table 3. Figure 2 shows attention heatmaps demonstrating the phrases in the output of the first decoder where the second decoder focuses while generating the paraphrase. For the last example in table 3 it can be seen in figure 2 (right) that the second decoder attends on 'start preparing for donations' while replacing it with 'start new llc'. Similarly for the third example in table 3 the second decoder generates 'good substitute' while attending on 'best sides' - as can be seen in figure 2 (left). Thus the second decoder is focusing on mistakes in the previous output to make a guided decision while generating output.

On adding the MultiSample loss to VAE-ITERDEC2 model, TER reduces by 2%. We also extended the VAE-ITERDEC2 model (without MultiSample loss) by using an additional decoder resulting in 3 decoders which further boosted up the METEOR score to 41.95%, BLEU to 61.23% and reduced TER to 26.86%.

MSCOCO Our VAE-ITERDEC2 model provides significant improvements on this dataset outperforming previously best approaches on all three metrics with 57.44% METEOR score, 84.64% BLEU and 7.2% TER. This is an improvement of over 26.5%, 43.3% and reduction of 33.6% in METEOR, BLEU and TER respectively compared to the previous state of the art. Contrary to Quora, however, VAE-ITERDEC3 attains slightly less score compared to VAE-ITERDEC2 in terms of these metrics which shows that addition of the third decoder does not necessarily lead to better results. But using the second decoder significantly improves the results. Thus it still needs to be

Table 4: Few examples of paraphrases generated by our

VAE-ITERDEC2 model on MSCOCO dataset				
Input	a group of motorcyclists are driving down			
	the city street			
Decoder 1	a group of people that are sitting on a street			
Decoder 2	a group of motorcycles drive down a city			
	street			
Expected	a group of motorcycles drive down a city			
	street			
Input	a man sits with a traditionally decorated			
	cow			
Decoder 1	a man is sitting on a large grill in a			
	restaurant			
Decoder 2	an equestrian man in armor costume sitting			
	with a decorated cow			
Expected	an indian man in religious attire sitting with			
	a decorated cow			
Input	a beautiful dessert waiting to be shared by			
	two people			
Decoder 1	a table with three plates of food and a fork			
Decoder 2	there is a piece of cake on a plate with			
	flowers on it			
Expected	there is a piece of cake on a plate with			
	decorations on it			
Input	a home office with laptop printer scanner			
	and extra monitor			
Decoder 1	a desk with a laptop and a mouse			
Decoder 2	office setting with office equipment on desk			
	top			
Expected	office space with office equipment on desk			
	top			






Figure 3: Attention visualization examples from MSCOCO dataset demonstrating parts of paraphrase generated by first decoder (x-axis) on which decoder 2 attends while generating its output (y-axis). Input to the model was - 'a group of motorcyclists are driving down the city street' (left) and 'a beautiful dessert waiting to be shared by two people' (right).

Table 5: Comparison of METEOR, BLEU and TER scores of output of decoder 1 with - expected paraphrase and output of decoder 2 - in VAE-ITERDEC2 model on test sets of Quora and MSCOCO

Comparison of decoder 1 output	Quora			MSCOCO		
	METEOR	BLEU	TER	METEOR	BLEU	TER
with expected paraphrase	27.09	22.12	67.12	15.15	8.09	79.52
with decoder 2 output	26.2	23.19	68.52	14.99	8.02	79.65

explored what is the optimal number of decoders needed for a dataset or if it can be decided dynamically. Adding MultiSample loss to VAE-ITERDEC2 gives best results giving a METEOR score of 59.88%, BLEU 87.71% and TER 5.8%. Few example paraphrases generated by VAE-ITERDEC2 on MSCOCO have been shown in table 4.

In the first example, first decoder generates a paraphrase which has little relevance with respect to the input, however, the second decoder corrects it by replacing 'group of people that are sitting' with 'group of motorcycles drive down' as can be seen in the attention map also in figure 3 (left). In the third example in table 4 first decoder uses a generic term 'food' as a replacement for 'desert' while the second decoder introduces the word 'cake' while attending on 'food' as can be seen in the attention visualization in figure 3 (right). It also introduces 'with flowers on it' to represent the notion of 'beautiful dessert' in the original sentence. Similarly in the last example in the table, the paraphrase generated by the second decoder includes 'office setting', making it coherent with the input while its structure resembles the expected paraphrase.

To compare the outputs generated by the two decoders in VAE-ITERDEC2 model, we computed the metric scores of decoder 1 output with - expected paraphrase and decoder 2 output as shown in table 5. METEOR score with expected paraphrase is sufficiently low compared to VAE-ITERDEC2 scores in table 2. This implies that the second decoder significantly improves the METEOR scores over the first decoder. The same observation holds for BLEU and TER.

Comparing decoder 1 output with decoder 2 outputs, we get a high TER which suggests second decoder generates sufficiently different outputs from the first one.

Conclusion

In this paper, we have proposed attention based ReDecode framework for iterative refinement of generated paraphrases using VAE based Seq2Seq model. It comprises of a sequence of decoders which generate paraphrases turn by turn. Given a decoder, it attends on the output generated by the preceding decoder and modifies it by rectifying errors and introducing semantically coherent phrases, while generating its output. Quantitatively, it improves the previous best scores on standard metrics and benchmark datasets, establishing a new state of the art in this task.

We experimented with maximum three decoders using our ReDecode framework. On Quora dataset, using three decoders improved the scores over two decoders model contrary to MSCOCO. Determining the optimal number of decoders, which can be dataset dependent, remains future work. Furthermore, the proposed architecture is generic and might be beneficial in other sequence generation tasks such as machine translation.

References

Bahdanau, D.; Cho, K.; and Bengio, Y. 2014. Neural machine translation by jointly learning to align and translate. *arXiv preprint arXiv:1409.0473*.

- Barzilay, R., and Lee, L. 2003. Learning to paraphrase: an unsupervised approach using multiple-sequence alignment. In *Proceedings of the 2003 Conference of the North American Chapter of the Association for Computational Linguistics on Human Language Technology-Volume 1*, 16–23. Association for Computational Linguistics.
- Bolshakov, I. A., and Gelbukh, A. 2004. Synonymous paraphrasing using wordnet and internet. In *International Conference on Application of Natural Language to Information Systems*, 312–323. Springer.
- Bowman, S. R.; Vilnis, L.; Vinyals, O.; Dai, A. M.; Jozefowicz, R.; and Bengio, S. 2015. Generating sentences from a continuous space. *arXiv* preprint arXiv:1511.06349.
- Cao, Z.; Luo, C.; Li, W.; and Li, S. 2017. Joint copying and restricted generation for paraphrase. In *AAAI*, 3152–3158.
- Dong, L.; Mallinson, J.; Reddy, S.; and Lapata, M. 2017. Learning to paraphrase for question answering. *arXiv* preprint arXiv:1708.06022.
- Gupta, A.; Agarwal, A.; Singh, P.; and Rai, P. 2017. A deep generative framework for paraphrase generation. *arXiv* preprint arXiv:1709.05074.
- Iyyer, M.; Wieting, J.; Gimpel, K.; and Zettlemoyer, L. 2018. Adversarial example generation with syntactically controlled paraphrase networks. *arXiv preprint arXiv:1804.06059*.
- Kingma, D. P., and Ba, J. 2014. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*.
- Kingma, D. P., and Welling, M. 2013. Auto-encoding variational bayes. *arXiv preprint arXiv:1312.6114*.
- Lavie, A., and Agarwal, A. 2007. Meteor: An automatic metric for mt evaluation with high levels of correlation with human judgments. In *Proceedings of the Second Workshop on Statistical Machine Translation*, 228–231. Association for Computational Linguistics.
- Luong, M.-T.; Pham, H.; and Manning, C. D. 2015. Effective approaches to attention-based neural machine translation. *arXiv preprint arXiv:1508.04025*.
- Madnani, N.; Tetreault, J.; and Chodorow, M. 2012. Reexamining machine translation metrics for paraphrase identification. In *Proceedings of the 2012 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, 182– 190. Association for Computational Linguistics.
- McKeown, K. R. 1983. Paraphrasing questions using given and new information. *Computational Linguistics* 9(1):1–10.
- Papineni, K.; Roukos, S.; Ward, T.; and Zhu, W.-J. 2002. Bleu: a method for automatic evaluation of machine translation. In *Proceedings of the 40th annual meeting on association for computational linguistics*, 311–318. Association for Computational Linguistics.
- Pennington, J.; Socher, R.; and Manning, C. 2014. Glove: Global vectors for word representation. In *Proceedings of the 2014 conference on empirical methods in natural language processing (EMNLP)*, 1532–1543.
- Prakash, A.; Hasan, S. A.; Lee, K.; Datla, V.; Qadir, A.;

- Liu, J.; and Farri, O. 2016. Neural paraphrase generation with stacked residual lstm networks. *arXiv preprint arXiv:1610.03098*.
- Quirk, C.; Brockett, C.; and Dolan, B. 2004. Monolingual machine translation for paraphrase generation. Association for Computational Linguistics.
- Rocktäschel, T.; Grefenstette, E.; Hermann, K. M.; Kočiskỳ, T.; and Blunsom, P. 2015. Reasoning about entailment with neural attention. *arXiv preprint arXiv:1509.06664*.
- Snover, M.; Dorr, B.; Schwartz, R.; Micciulla, L.; and Makhoul, J. 2006. A study of translation edit rate with targeted human annotation. In *Proceedings of association for machine translation in the Americas*, volume 200.
- Sundermeyer, M.; Schlüter, R.; and Ney, H. 2012. Lstm neural networks for language modeling. In *Thirteenth annual conference of the international speech communication association*.
- Sutskever, I.; Vinyals, O.; and Le, Q. V. 2014. Sequence to sequence learning with neural networks. In *Advances in neural information processing systems*, 3104–3112.
- Vaswani, A.; Shazeer, N.; Parmar, N.; Uszkoreit, J.; Jones, L.; Gomez, A. N.; Kaiser, Ł.; and Polosukhin, I. 2017. Attention is all you need. In *Advances in Neural Information Processing Systems*, 5998–6008.
- Wieting, J.; Mallinson, J.; and Gimpel, K. 2017. Learning paraphrastic sentence embeddings from back-translated bitext. *arXiv preprint arXiv:1706.01847*.
- Williams, R. J., and Zipser, D. 1989. A learning algorithm for continually running fully recurrent neural networks. *Neural computation* 1(2):270–280.
- Yin, J.; Jiang, X.; Lu, Z.; Shang, L.; Li, H.; and Li, X. 2015. Neural generative question answering. *arXiv preprint arXiv:1512.01337*.