

On an enhancement of RNA probing data using Information Theory

Thomas J. X. Li^a, Christian M. Reidys^{a,b,*}

^a*Biocomplexity Institute & Initiative, University of Virginia, 995 Research Park Blvd,
Charlottesville, VA, 22911*

^b*Department of Mathematics, University of Virginia, 141 Cabell Dr, Charlottesville, VA
22903*

Abstract

Identifying the secondary structure of an RNA is crucial for understanding its diverse regulatory functions. This paper focuses on how to enhance target identification in a Boltzmann ensemble of structures via chemical probing data. We employ an information-theoretic approach to solve the problem, via considering a variant of the Rényi-Ulam game. Our framework is centered around the ensemble tree, a hierarchical bi-partition of the input ensemble, that is constructed by recursively querying about whether or not a base pair of maximum information entropy is contained in the target. These queries are answered via relating local with global probing data, employing the modularity in RNA secondary structures. We present that leaves of the tree are comprised of sub-samples exhibiting a distinguished structure with high probability. In particular, for a Boltzmann ensemble incorporating probing data, which is well established in the literature, the probability of our framework correctly identifying the target in the leaf is greater than 90%.

Keywords: RNA structure, chemical probing, Rényi-Ulam game, information theory

2000 MSC: 94A15, 68P30, 92E10, 92B05

1. Introduction

Computational methods for RNA secondary structure prediction have played an important role in unveiling the various regulatory functions of RNA. In the past four decades, these approaches have evolved from predicting a single minimum free energy (MFE) structure (Waterman, 1978; Zuker and Sankoff, 1984) to Boltzmann sampling an ensemble of possible structures (McCaskill, 1990;

*Corresponding author

Email addresses: j19gx@virginia.edu (Thomas J. X. Li), duck@santafe.edu (Christian M. Reidys)

Ding and Lawrence, 2003). Despite its success in a wide range of small RNAs, these thermodynamics-based predictions are by no means perfect.

In parallel, experiments by means of chemical and enzymatic probing have become a frequently used technology to elucidate RNA structure (Stern et al., 1988; Merino et al., 2005; Deigan et al., 2009). These probing methods use chemical reagents to bind unpaired nucleotides and yield reactivities at nucleotide resolution. To some extent, these reactivities provide information concerning single-stranded or double-stranded RNA regions. Recent advances focus on the development of thermodynamics-based computational tools that incorporate such experimental data (Deigan et al., 2009; Washietl et al., 2012; Zarringhalam et al., 2012).

While the use of probing data has significantly improved the prediction accuracy of *in silico* structure prediction for several classes of RNAs (Lorenz et al., 2011), these methods have not solved the folding problem for large RNA systems, such as long non-coding RNAs (lncRNAs, typically 200–20k bases). The reason is that the footprinting data does not identify base pairing partners of a given nucleotide. In particular, probing data alone cannot distinguish short-range and long-range base pairings. For long RNAs, the existence of the latter, however, has been shown experimentally (Lai et al., 2018) as well as theoretically (Li and Reidys, 2018; Li et al., 2019). Thus, even combined with experimental data, there are still numerous RNA folds consistent with the probing data.

We assume that the ensemble of possible structures is in thermodynamic equilibrium, i.e. a Boltzmann ensemble. For many classes of RNAs, it is also reasonable to assume that the sequence folds into a unique structure, the *target*, which is contained in the ensemble. Hence, the problem of structure prediction gives rise to the following challenge:

How to enhance target identification in a Boltzmann ensemble of structures?
(1)

In this paper, we employ an information-theoretic approach in order to solve Problem 1, via considering a variant of the Rényi-Ulam game. Our framework is centered around the *ensemble tree*, a hierarchical bi-partition of the input ensemble, whose leaves are comprised of sub-samples exhibiting a distinguished structure with high probability. Specifically, the ensemble tree is constructed by recursively querying about whether or not a base pair of maximum information entropy is contained in the target. We prove that the query of maximum entropy base pair splits the ensemble into two even parts and in addition provides maximum reduction in the entropy of the ensemble. These questions can be answered in the affirmative, since the sequence is assumed to a single target. They are answered via relating additional probing data with the initial one, employing the modularity in RNA secondary structures. By this means, we identify the correct path in the ensemble tree from the root to the leaf.

The key result of this paper is that the probability of the ensemble tree correctly identifying the target in the leaf is greater than 90%, for the Boltzmann ensembles incorporating probing data from sequences of length 300, see

Section 4.2. To demonstrate the result, we take into consideration three components. Firstly, we utilize a q -Boltzmann sampler with signature distance filtration, which is well suited for Boltzmann ensembles subjected to the probing data constraint (Deigan et al., 2009; Zarringhalam et al., 2012), see Section 2.2. Secondly, we consider the error rates arisen from answering the queries via probing data in Section 3.1. We show that these error rates can be significantly reduced via repeated queries in Section 4.2. Thirdly, we prove that the leaf with low information entropy contains a distinguished structure, see Section 4.1. We present that, once in the correct leaf, the probability the distinguished structure being identical to the target is almost always correct.

To summarize, the key points of our approach are:

1. our method starts with a Boltzmann sample and derives a sub-sample that contains the target with high probability,
2. the derivation is facilitated by means of the ensemble tree, and the identification of the correct path from root to leaf, is obtained by a variant of the Rényi-Ulam game,
3. the answers to the respective queries are inferred from chemical probing, by relating additional probing data to initial one using modularity.

This paper is organized as follows: in Section 2, we introduce the main elements of our framework: the Rényi-Ulam game, the Boltzmann ensemble, base-pair queries and the ensemble tree. In Section 3, we demonstrate how to integrate additional probing data with the initial ones allowing to answer the queries, thereby identifying the correct path. In Section 4, we analyze the ensemble tree and present that our approach identifies the target reliably and efficiently. Finally, we integrate and discuss our results in Section 5.

2. Some background

2.1. The Rényi-Ulam game

We now approach Problem 1 via the Rényi-Ulam game, a two-person game, played by a questioner (Q) and an oracle, (O). Initially O thinks of an integer, Z , between one and one million and Q’s objective is to identify Z , asking yes-no questions. O is allowed to lie at a rate specific to yes and no, respectively.

The Rényi-Ulam game has been extensively studied since the early works by Rényi (1961); Ulam (1976), and has various applications such as adaptive error-correcting codes in the context of noisy communication (Shannon, 1948; Berlekamp, 1968). Depending on the respective application scenario, numerous variants of the Rényi-Ulam game have been considered, specifying the format of admissible queries or the way O lies (Pelc, 1989; Spencer, 1992).

In what follows, we shall play the following version of the game: O holds a set of *bit strings* $y_1 y_2 \dots y_l$ of finite length l , not every bit string being equally likely selected and the queries have to following format: “Is the i th-bit of the bit string equal to 1?”, i.e. Q executes *bit query*. O’s lies occur at *random*, are *independent* and *context-dependent*. Specifically, O lies with probability

e_0 and e_1 in case of the truthful answer being "No" and "Yes", respectively. The particular cases $e_0 = 0$ and $e_1 = 0$ have been studied in the context of *half-lies* (Rivest et al., 1980).

The majority of studies on the Rényi-Ulam game to date is *combinatorial*. That is, they stipulated the number of lies (or half-lies) being *a priori* known and focused on finding optimal searching strategies which uses a minimum number of queries to identify the target in all cases (Rivest et al., 1980; Spencer, 1992).

Within the framework of this paper, we study two distinctly different manifestations of the oracle. The first is embodied as an indicator random variable, whose distribution is derived from a modularity analysis on RNA MFE-structures, see Section 3.1, and the second recruits experimental data, see Section 3.2. In both manifestations, erroneous responses arise intrinsically at random: either as a result of the distribution of the r.v. or intrinsic errors of experimental data.

By construction, this rules out a unique winning strategy for Q: instead, we consider the *average fidelity* or accuracy to identify the target utilizing a *sub-optimal* number of queries. We shall propose an entropy-based strategy: at any point a query is selected relative to the subset of bit strings coinciding with the target in all previously identified positions, that maximizes the uncertainty reduction on the subset, see Section 2.4.

2.2. The Boltzmann ensemble

At a given point in time, an RNA sequence, \mathbf{x} , assumes a fixed secondary structure, by establishing base pairings. Over time, however, \mathbf{x} assumes a plethora of RNA secondary structures appearing at specific rates, see Appendix A for details and context on RNA. These exist in an equilibrium ensemble expressed by the partition function (McCaskill, 1990) of \mathbf{x} .

More formally, the *structure ensemble*, Ω of \mathbf{x} is a discrete probability space over the set of all secondary structures, equipped with the probability $p(s)$ of \mathbf{x} folding into s . We shall assume that the ensemble of structures is in thermodynamic equilibrium, the distribution of these structures being described as a Boltzmann distribution. The *Boltzmann probability*, $p(s)$, of the structure s is a function of the *free energy* $E(s)$ of the sequence \mathbf{x} folding into s , computed via the Turner energy model (Mathews et al., 1999, 2004), see Appendix B for details. The Boltzmann probability $p(s)$ is expressed as the Boltzmann factor $\exp(-E(s)/RT)$, normalized by the *partition function*, $Z = \sum_{s \in \Omega} \exp(-E(s)/RT)$, i.e.

$$p(s) = \frac{\exp(-E(s)/RT)}{Z},$$

where R denotes the universal gas constant and T is the absolute temperature. The Boltzmann distribution facilitates the computation of the partition function Z for each substructure. The partition function algorithm (McCaskill, 1990) for secondary structures computes Z and, in particular, the base pairing probabilities based on the free energies for each structure within the structure ensemble Ω .




Figure 1: The greyscale diagram of 1024 Boltzmann sampled structures of a random RNA sequence via ViennaRNA (Lorenz et al., 2011).

Let $p_{i,j}$ denote the probability of a base pairing between nucleotides i and j in the ensemble Ω . Clearly, $p_{i,j}$ can be computed as the sum of probabilities of all secondary structures that contain (i,j) , that is,

$$p_{i,j} = \sum_{s \in \Omega} p(s) \delta_{i,j}(s),$$

where $\delta_{i,j}(s)$ denotes the occurrence of the base pair (i,j) in s .

The thermodynamics-based partition function has been extended to incorporate chemical probing data to generate a Boltzmann ensemble, Ω_{probe} . These approaches (Deigan et al., 2009; Washietl et al., 2012; Zarringhalam et al., 2012) transform structure probing data into a pseudo energy term, $\Delta G(s)$, which reflects how well the structure agrees with the probing data. The Turner free energy is then evaluated by adding the pseudo energy term to the loop-based energy, i.e., $E_{\text{probe}}(s) = E(s) + \Delta G(s)$. The corresponding equilibrium ensemble, Ω_{probe} , is distorted in favor of structures that are consistent with probing data, see Appendix C.

In Appendix D, we utilize the 0-1 signature, which is suited for probing data, and quantify the discrepancy between the Boltzmann ensemble and the target via the signature distance d_{sn} . We present that the average distance for an unrestricted ensemble Ω is $0.21n$, while the distance for an ensemble Ω_{probe} incorporating probing data is reduced to $0.03n$. This motivates us to define a q -Boltzmann ensemble, Ω^q , which consists of structures having signature distance to the target s at most qn , i.e., $\Omega^q = \{s' | d_{sn}(s', s) \leq qn\}$. In particular, we present that the ensemble Ω_{probe} has an average normalized signature distance similar to a q -ensemble having $q = 0.05$. In this paper we discuss unrestricted and restricted Boltzmann ensembles, Ω and Ω^q .

We shall employ *greyscale diagrams* in order to visualize a sample of secondary structures by superimposing them in one diagram, visualizing the base pairing probabilities. A greyscale diagram displays each base pair (i,j) as an arc with greyscale $1 - p_{i,j}$, where greyscale 0 represents black and 1 represents white, see Fig. 1.

Instead of computing the entire ensemble, we shall consider sub-samples Ω' consisting of N secondary structures with multiplicities of \mathbf{x} and refer to Ω' as the *sample*. For sufficiently large N (typically of around size 10^3 , see Ding and Lawrence (2003)), Ω' provides a good approximation of the Boltzmann ensemble Ω .

A sample Ω' is a multiset of cardinality N and for each structure s in Ω' , its *multiplicity*, $f(s)$, counts the frequency of s appearing in Ω' . Thus in the

context of Ω' , $p(s)$ is given by the s -multiplicity divided by N , $p(s) = f(s)/N$. The base pairing probability $p_{i,j}$ has its Ω' -analogue $f(i,j)/N$, where $f(i,j)$ denotes the frequency of the base pair (i,j) appearing in Ω' . We shall develop our framework in the context of the structure ensemble Ω , and only reference the sample Ω' , in case the results are particular to Ω' .

2.3. The bit queries

Any structure over n nucleotides is considered as a bit string of dimension $\binom{n}{2}$, stipulating (1) a structure is completely determined by the set of base pairs it contains and (2) any position can pair with any other position, except of itself.

The bit query now determines a single bit, i.e. whether or not the base pair (i,j) is present in the target, stipulating that a unique target is assumed by the sequence in question. The target is also assumed to have the Boltzmann probability as it appears in the ensemble. We therefore associate the query about the target with a random variable, $X_{i,j}$, defined on the ensemble, via questioning the presence of (i,j) in each structure. By construction, the distribution of $X_{i,j}$ is given by the base pairing probability $\mathbb{P}(X_{i,j}(s) = 1) = p_{i,j}$.

Any base pair, (i,j) , has an *entropy*, defined by the information entropy of $X_{i,j}$, i.e.

$$H(X_{i,j}) = -p_{i,j} \log_2 p_{i,j} - (1 - p_{i,j}) \log_2 (1 - p_{i,j}),$$

where the units of H are in bits. The entropy $H(X_{i,j})$ measures the uncertainty of the base pair (i,j) in Ω . When a base pair (i,j) is certain to either exist or not, its entropy $H(X_{i,j})$ is 0. However, in case $p_{i,j}$ is closer to 1/2, $H(X_{i,j})$ becomes larger.

The r.v. $X_{i,j}$ partitions the space Ω into two disjoint sub-spaces Ω_0 and Ω_1 , where $\Omega_k = \{s \in \Omega : X_{i,j}(s) = k\}$ ($k = 0, 1$), and the induced distributions are given by

$$p_0(s) = \frac{p(s)}{1 - p_{i,j}} \quad \text{for } s \in \Omega_0, \quad p_1(s) = \frac{p(s)}{p_{i,j}} \quad \text{for } s \in \Omega_1.$$

Intuitively, $H(X_{i,j})$ quantifies the average bits of information we would expect to gain about the ensemble when querying a base pair (i,j) . This motivates us to consider the *maximum entropy base pairs*, the base pair (i_0, j_0) having maximum entropy among all base pairs in Ω , i.e.

$$(i_0, j_0) = \underset{(i,j)}{\operatorname{argmax}} H(X_{i,j}).$$

As we shall prove in Section 4.1, X_{i_0, j_0} produces maximally balanced splits.

2.4. The ensemble tree

Equipped with the notion of ensemble and bit query (i.e. the respective maximum entropy base pairs), we proceed by describing our strategy to identify the target structure as specified in Problem 1. The first step consists in having a closer look at the space of ensemble reductions.

Each split obtained by partitioning the ensemble Ω using r.v. $X_{i,j}$, can in turn be bipartitioned itself via any of its maximum entropy base pairs. This recursive splitting induces the *ensemble tree*, $T(\Omega)$, whose vertices are sub-samples and in which its k -th layer represents a partition of the original ensemble into 2^k blocks. $T(\Omega)$, is a rooted binary tree, in which each branch represents a $X_{i,j}$ -induced split of the parent into its two children.

Formally the process halts if either the resulting sub-spaces are all *homogeneous*, i.e. their structural entropy is 0, which means that they contain only copies of one structure, or it reaches a predefined maximum level L . In our case we set the maximum level to be $L = 11$, that is, the height of the ensemble tree is at most 10. The procedure is described as follows:

1. start with the ensemble Ω .
2. for each space $\Omega_{\mathbf{k}}$ with $H(\Omega_{\mathbf{k}}) > 0$, where \mathbf{k} is a sequence of 0s and 1s having length at most $L - 1 = 10$, compute:
 - select the maximum entropy base pair $X_{i_{\mathbf{k}},j_{\mathbf{k}}}$ of $\Omega_{\mathbf{k}}$ as the feature, i.e.
$$X_{i_{\mathbf{k}},j_{\mathbf{k}}} = \operatorname{argmax}_{(i,j) \text{ in } \Omega_{\mathbf{k}}} H(X_{i,j}).$$
 - split $\Omega_{\mathbf{k}}$ into sub-spaces $\Omega_{\mathbf{k}0}$ and $\Omega_{\mathbf{k}1}$ using the feature $X_{i_{\mathbf{k}},j_{\mathbf{k}}}$, that is, $\Omega_{\mathbf{k}l} = \{s \in \Omega_{\mathbf{k}} : X_{i_{\mathbf{k}},j_{\mathbf{k}}}(s) = l\}$ for $l = 0, 1$,
3. repeat Step 2 until all new sub-spaces either have structural entropy 0 or reach the maximum level 11.

Algorithm 1 Ensemble Tree

```

1: procedure  $T(\Omega)$ 
2:    $\mathbf{k} \leftarrow \{\}$ 
3:    $\Omega_{\mathbf{k}} \leftarrow \Omega$ 
4:   repeat
5:      $X_{i_{\mathbf{k}},j_{\mathbf{k}}} \leftarrow \operatorname{argmax}_{(i,j) \text{ in } \Omega_{\mathbf{k}}} H(X_{i,j})$ 
6:      $\Omega_{\mathbf{k}l} \leftarrow \{s \in \Omega_{\mathbf{k}} : X_{i_{\mathbf{k}},j_{\mathbf{k}}}(s) = l\}$  for  $l = 0, 1$ 
7:     Append 0 or 1 to  $\mathbf{k}$ 
8:   until  $H(\Omega_{\mathbf{k}}) = 0$  or  $|\mathbf{k}| = 10$ 
9:   return  $\{\Omega_{\mathbf{k}}\}$ 

```

In Fig. 2 we display an ensemble tree.

3. Path identification

Given the ensemble tree, we shall construct a path recursively starting from the root to identify the leaf that contains the target. We shall do so by successive bit queries about maximum entropy base pairs, see Fig. 2.

As mentioned before, we employ two manifestations of the oracle, one using modularity based on RNA-folding, see Section 3.1, and the other determining the existence of base pairs by experimental means (Section 3.2).

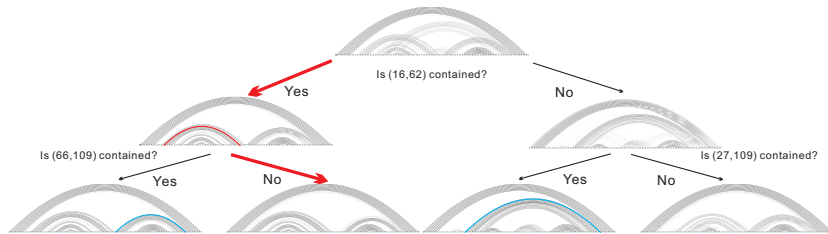


Figure 2: An ensemble tree having maximum level 3. A path from the root to a leaf is identified in color red.

3.1. The oracle via modularity and RNA folding

Here we shall employ *modularity* of RNA structures, i.e. the loops, which constitute the additive building blocks for the free energy have only marginal dependencies. This can intuitively be understood by observing that any two loops can only intersect in at most two nucleotides, see Appendix B.

Let us introduce the notion of embedding and extraction of a contiguous subsequence or fragment

$$\begin{aligned} \epsilon_{i,j}((x_1, \dots, x_j), (y_1, \dots, y_m)) &= (y_1, \dots, y_{i-1}, x_1, \dots, x_j, y_{i+1}, \dots, y_m) \\ \xi_{i,j}(x_1, \dots, x_n) &= ((x_i, \dots, x_j), (x_1, \dots, x_{i-1}, x_{j+1}, \dots, x_n)). \end{aligned}$$

By construction, we have $\epsilon_{i,j} \circ \xi_{i,j} = \text{id}$ and a contiguous subsequence or fragment of an RNA sequence is called *modular* if it being extracted folds into the same arc configuration as it does embedded in the sequence.

Next we show how to employ probing data to reliably answer whether or not a particular (maximum entropy) arc is contained in the target structure. Structural modularity implies that if this arc can indeed be found in the target structure, then a comparative analysis of the probing data of the entire sequence with those of the extracted sequence, as well as the remainder, concatenated at the cut points will exhibit distinctive similarity. Modularity is a decisive discriminant, if, in contrast, random fragments do not exhibit such similarity.

To quantify to what extent modularity can discriminate base pairs, we perform computational experiments on random sequences via splittings. For each sequence, we consider its MFE structure s computed via ViennaRNA (Lorenz et al., 2011). Given two positions i and j , we cut the entire sequence \mathbf{x} into two fragments, $\mathbf{x}_{i,j}$ and the remainder $\bar{\mathbf{x}}_{i,j}$, i.e., $\xi_{i,j}(\mathbf{x}) = (\mathbf{x}_{i,j}, \bar{\mathbf{x}}_{i,j})$. Subsequently, the two fragments $\mathbf{x}_{i,j}$ and $\bar{\mathbf{x}}_{i,j}$ refold into their MFE structures $s_{i,j}$ and $\bar{s}_{i,j}$, respectively, which are combined into a structure $\epsilon_{i,j}(s_{i,j}, \bar{s}_{i,j})$. If bases i and j are paired in s , such a splitting is referred to as *modular* and the resulting structure is denoted by s' . Otherwise, it is called *random*, with the output structure s'' . We proceed by computing the base-pair and signature distance from the MFE s to the structures s' or s'' . The base-pair distance is one of the most frequently used metrics to quantify the similarity of two different structures viewed as bit strings Zuker (1989); Agius et al. (2010), the signature distance measures the

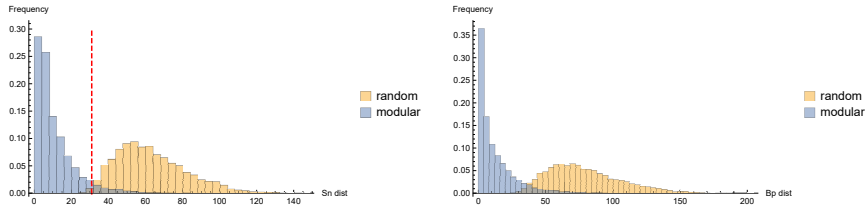


Figure 3: The distributions of the signature distances (LHS) $d_{\text{sn}}(s, s')$, $d_{\text{sn}}(s, s'')$ and the base-pair distances (RHS) $d_{\text{bp}}(s, s')$, $d_{\text{bp}}(s, s'')$ obtained from modular splitting (blue) and random splitting (orange). We generated 8000 random sequences \mathbf{x} of length 500 and computed their structures s (MFE), s' (modular), s'' (random) via ViennaRNA (Lorenz et al., 2011). The red dashed line (left) denotes “threshold distance”, 31 (see main text).

similarity between their signatures, which is well suited within the context of the probing profiles, see Appendix A.

Fig. 3 (LHS) compares the distribution of the signature distances $d_{\text{sn}}(s, s')$ and $d_{\text{sn}}(s, s'')$ obtained from modular and random splittings, respectively. The structures induced by modular splitting have much more similar probing signatures to their MFE structures, than those induced by random splitting. The situation is analogous for base-pair distances, see Fig. 3 (RHS). Since these distances measure structural similarity, the data also indicates that, when i and j form a base pair, the fragment $\mathbf{x}_{i,j}$ is more likely to fold into the same configuration as it does being embedded, i.e. $\mathbf{x}_{i,j}$ is modular.

The data displayed in Fig. 3 suggests the threshold distance, θ , for signatures, by which we distinguish modular from random. In order to quantify the accuracy of this classification, we consider the resulting false discovery rate (FDR) and false omission rate (FOR).¹ In our Rényi-Ulam game variation, the expected values of FDR and FOR are the error rates e_1 and e_0 in case the truthful answer being yes and no, respectively. Fig. 4 displays the error rates e_0 and e_1 as functions of θ . For $\theta = 31$, we compute $e_0 \approx 0.052$ and $e_1 \approx 0.007$, i.e. we have an error rate of 0.052 for rejecting and an error rate of 0.007 for confirming a base pair.

3.2. The oracle via experimental data

The identification of base pairs is a fundamental and longstanding problem in RNA biology (Hajdin et al., 2013; Weeks, 2015). In Appendix E, we sum-

¹

$$\text{FDR} = \frac{\text{FP}}{\text{TP} + \text{FP}}, \quad \text{FOR} = \frac{\text{FN}}{\text{TN} + \text{FN}},$$

where TP (true positive) is the number of correctly identified base pairs, FP (false positive) is the number of incorrectly predicted pairs that do not exist in the accepted structure, TN (true negative) is the number of pairs of bases that are correctly identified as unpaired and FN (false negative) is the number of base pairs in the accepted RNA structure that are incorrectly predicted as unpaired.

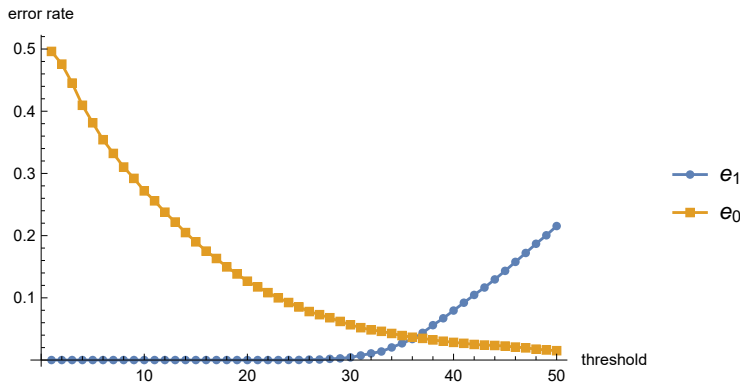


Figure 4: The error rates e_0 and e_1 as a function of the threshold θ . We use the same sequences and structures as described in Fig. 3.

marize state-of-the-art experimental approaches that provide reliable solutions to the problem, and in particular detail two methods, both of which utilize chemical probing (Mustoe et al., 2019; Cheng et al., 2017) and recover duplexes with a false discovery rate less than 0.05.

Successive queries recursively split a given ensemble of structures. This induced sequence of splits can be embedded in a binary tree, and be viewed as a path from the root to a leaf. We shall discuss this tree in detail in the next section.

4. The ensemble tree

Given an input sample Ω , we construct the ensemble tree $T(\Omega)$ having maximum level $L = 11$, recursively computing the maximum entropy base pairs as described in Algorithm 1. In this section, we shall analyze the entropy of leaves in order to quantify the existence of a distinguished structure and to identify the target.

4.1. Entropy

To quantify the uncertainty of an ensemble, we define the *structural entropy* of an ensemble, Ω , of an RNA sequence, \mathbf{x} , as the Shannon entropy

$$H(\Omega) = - \sum_{s \in \Omega} p(s) \log_2 p(s),$$

the units of H being bits. The sum is taken over all secondary structures s of \mathbf{x} , and $p(s)$ denotes the Boltzmann probability of the structure s in the ensemble Ω . The notion of structural entropy is originated in thermodynamics and is usually regarded as a measure of disorder, or randomness of an ensemble (Sükösd et al., 2013; Garcia-Martin and Clote, 2015).

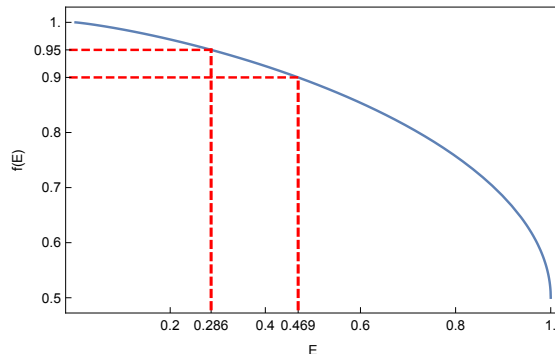


Figure 5: A sample with structural entropy E contains a distinguished structure having probability at least $f(E)$.

Given a sample Ω' of size N , the structural entropy has the upper bound $\log_2 N$, that is, $H(\Omega')$ reaches its maximum when all sampled structures are different. Throughout the paper, we assume $N = 1024$ and therefore $H(\Omega') \leq 10$.

Proposition 1. *Let Ω' be a sample having structural entropy E , where $0 \leq E \leq 1$. Then there exists one structure in Ω' having probability at least $f(E)$, where $f(E)$ is the solution of the equation*

$$-p \log_2 p - (1 - p) \log_2 (1 - p) = E$$

satisfying $0.5 \leq p \leq 1$. In particular, we have $f(1) = 0.5$, $f(0.469) \approx 0.9$ and $f(0.286) \approx 0.95$, see Fig. 5.

Proposition 1 implies that a sample with small structural entropy contains a distinguished structure and a proof is given in Appendix F. We refer to a sample having a distinguished structure of probability at least λ as being λ -distinguished.

Next we quantify the reduction of a bit query on an ensemble. Recall that the associated r.v. $X_{i,j}$ of a base pair (i, j) partitions the sample Ω into two disjoint sub-samples Ω_0 and Ω_1 , where $\Omega_k = \{s \in \Omega : X_{i,j}(s) = k\}$ ($k = 0, 1$).

The *conditional entropy*, $H(\Omega|X_{i,j})$, represents the expected value of the entropies of the conditional distributions on Ω , averaged over the conditioning r.v. $X_{i,j}$ and can be computed by

$$H(\Omega|X_{i,j}) = (1 - p_{i,j})H(\Omega_0) + p_{i,j}H(\Omega_1).$$

Then the *entropy reduction* $R(\Omega, X_{i,j})$ of $X_{i,j}$ on Ω is the difference between the *a priori* Shannon entropy $H(\Omega)$ and the conditional entropy $H(\Omega|X_{i,j})$, i.e.

$$R(\Omega, X_{i,j}) = H(\Omega) - H(\Omega|X_{i,j}).$$

The entropy reduction quantifies the average change in information entropy from an ensemble in which we cannot tell whether or not a certain structure contains (i, j) , to its bipartition where one of its two blocks consists of structures that contain (i, j) and the other being its complement.

Proposition 2. *The entropy reduction $R(\Omega, X_{i,j})$ of $X_{i,j}$ is given by the entropy $H(X_{i,j})$ of $X_{i,j}$, i.e.*

$$R(\Omega, X_{i,j}) = H(X_{i,j}). \quad (2)$$

Proposition 2 queries a Bernoulli random variable inducing a split, reducing its average conditional entropy exactly by the entropy of the random variable itself. In the context of the Rényi-Ulam game, Q asks a question that helps to maximally reduce the space of possibilities. A proof of Proposition 2 is presented in Appendix G.

The next observation shows that querying maximum entropy base pairs, induces a best possible balanced split of the ensemble.

Proposition 3. *Suppose that $X_{i,j}$ induces a partition of the ensemble Ω into sub-samples $\Omega_0^{i,j}$ and $\Omega_1^{i,j}$. Let (i_0, j_0) be a maximum entropy base pair of Ω . Then we have*

(1) (i_0, j_0) minimizes the difference of the probabilities of the two sub-samples,

$$|\mathbb{P}(\Omega_0^{i_0, j_0}) - \mathbb{P}(\Omega_1^{i_0, j_0})| \leq |\mathbb{P}(\Omega_0^{i,j}) - \mathbb{P}(\Omega_1^{i,j})|,$$

for any (i, j) .

(2) (i_0, j_0) maximizes the entropy reduction $R(\Omega, X_{i,j})$ of $X_{i,j}$ on Ω ,

$$R(\Omega, X_{i_0, j_0}) \geq R(\Omega, X_{i,j}),$$

for any (i, j) .

Proposition 3 first shows that the bit query about the maximum entropy base pair X_{i_0, j_0} partitions the ensemble as balanced as possible, i.e. into sub-samples having the minimum difference of their probabilities. It furthermore establishes that the splits have minimum average structural entropy (or uncertainty), since X_{i_0, j_0} provides the maximum entropy reduction on the ensemble. Thus the query about (i_0, j_0) is the most informative among all bit queries.

Finally we quantify the average entropy of sub-samples, Ω_t , on the t -th level of the ensemble tree, and establish the existence of a distinguished structure. The analysis of entropies depends of course on the way the samples are being constructed. To this end, we construct the ensemble tree for two types of samples, one being unrestricted samples of random sequences, Ω , and the other utilizing q -Boltzmann sampling that incorporates the signature of the target, Ω^q , see Section 2.2.

For unrestricted Boltzmann samples, the structural entropy $H(\Omega_t)$ of sub-samples on the t -th level decreases, as the level t increases, see Fig. 6. In particular, the average entropy $H(\Omega_{11})$ of leaf samples is 0.328 and 0.147, for

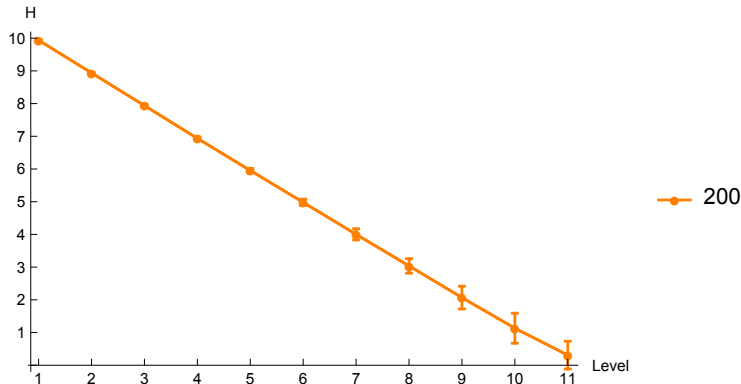


Figure 6: The average entropy of sub-samples $H(\Omega_t)$ on the t -th level. We randomly generate 10^3 sequences of length 200, and sample 2^{10} structures together with a target structure s for each sequence.

sequences having 200 and 300 nucleotides, respectively. Proposition 1 guarantees that the leaf Ω_{11} is 0.90-distinguished, i.e. containing a distinguished structure with ratio at least 0.90, and 0.95-distinguished for sequences of length 300.

For q -Boltzmann samples Ω^q of structures having signature distance to the target s at most qn , the small entropy of the leaf and the high ratio of the distinguished structure are robust over a range of q -values, see Fig. 7. We also observe that, for longer sequences, the entropy is smaller, and therefore the ratio of the distinguished structure is higher.

4.2. Target Identification

Any leaf of the ensemble tree exhibiting a structural entropy less than one, contains, by Proposition 1, a distinguished structure. Successive queries produce a unique, distinguished leaf, Ω^* which, with high probability, contains structures that are compatible with the queries. Let s^* be the distinguished structure in Ω^* , and s denote the target.

In this section, we shall analyze this probability, $\mathbb{P}(s \in \Omega^*)$, as well as $\mathbb{P}(s^* = s)$ and $\mathbb{P}(s^* = s \mid s \in \Omega^*)$, see Table 1. For the path identification to the leaf Ω^* , we consider the error rates $e_0 = 0.05$ and $e_1 = 0.01$ computed in Section 3.1.

As detailed in Section 3.1, these probabilities depend on the error rates e_0 and e_1 , and since these errors occur independently, we derive $\mathbb{P}(s \in \Omega^*) = (1 - e_0)^{l_0}(1 - e_1)^{l_1}$, where l_0 and l_1 denote the number of No-/Yes-answers to queried base pairs along the path, respectively. Fig. 8 displays the distribution of l_1 . We observe that l_1 has a mean around 5, i.e., the probabilities of queried base pairs being confirmed and being rejected are roughly equal. For $l_0 = l_1 = 5$, we have a theoretical estimate $\mathbb{P}(s \in \Omega^*) \approx 0.736$. In Fig. 9 we present that $\mathbb{P}(s \in \Omega^*)$ decreases as the error rate e_0 increases, for fixed $e_1 = 0.01$.

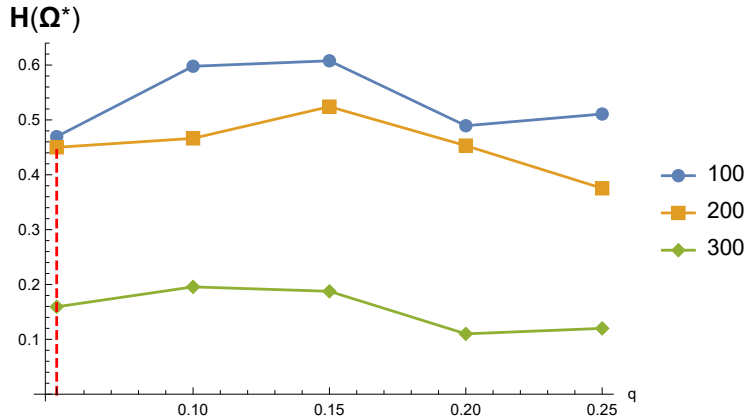


Figure 7: The structural entropy $H(\Omega_{11}^q)$ of the leaf sub-samples for different q -values. We randomly generate 10^3 sequences of length 100, 200 and 300. For each sequence, we then generate a q -Boltzmann sample Ω^q of 2^{10} structures together with a target s . The red dashed line denotes q -samples having $q = 0.05$, which is tantamount to Boltzmann samples Ω_{probe} incorporating the probing data via pseudo-energies.

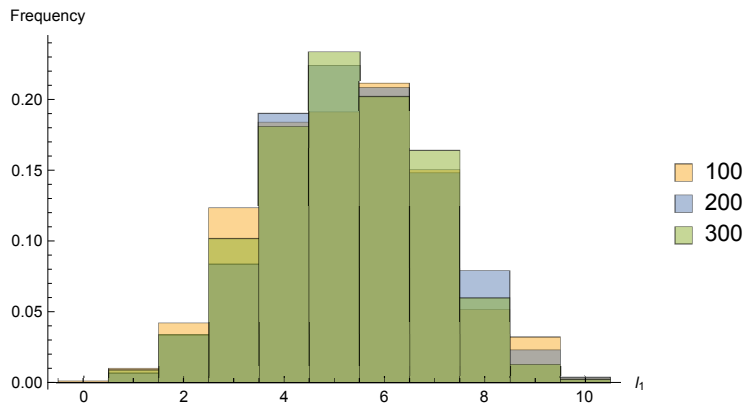


Figure 8: The distributions of l_1 , the number of queried base pairs on the path that are confirmed by the target structure. We generate unrestricted Boltzmann samples for random sequences of different lengths.

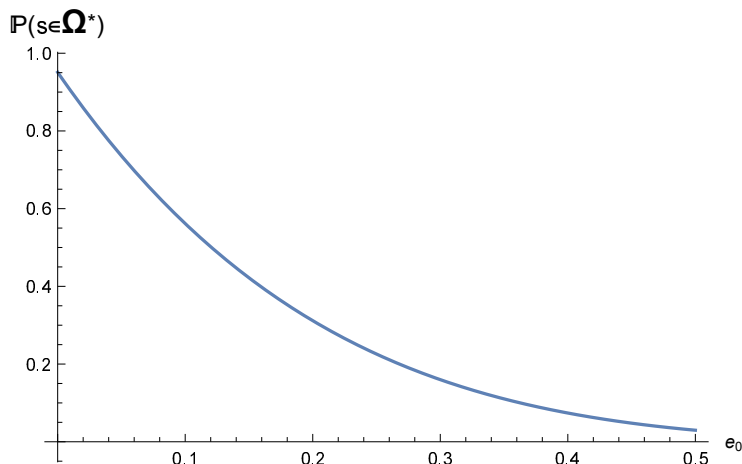


Figure 9: The probability $\mathbb{P}(s \in \Omega^*)$ as a function of the error rate e_0 , for fixed $e_1 = 0.01$ and $l_0 = l_1 = 5$.

For (unrestricted) Boltzmann samples generated from random sequences, we present the probability $\mathbb{P}(s \in \Omega^*)$ of the leaf containing the target is greater than 74%, which agrees with the above theoretical estimate. Note that this amounts to having no probing data as a constraint for the sampled structures, a worst case scenario, so to speak.

Table 1: Key observables.

Quantity	Description
$\mathbb{P}(s \in \Omega^*)$	the probability of the target being in the leaf
$\mathbb{P}(s^* = s)$	the probability of the distinguished structure being identical to the target
$\mathbb{P}(s^* = s \mid s \in \Omega^*)$	the probability of correctly identifying the target, given that it is in the leaf

Furthermore, the probability that the distinguished structure is identical to the target is approximately unchanged, see Table 2. $\mathbb{P}(s^* = s \mid s \in \Omega^*)$ indicates, that once we are in the correct leaf, the chance of correctly identifying the target increases to 94% for sequences of length 300. Accordingly, the key factor is the correct identification of the leaf Ω^* .

For q -Boltzmann samples Ω^q filtered by signature distance $\leq qn$ we observe the following: the probability $\mathbb{P}(s \in \Omega^*)$ of the leaf to contain the target is greater than 70% is robust over a range of q -values, see Fig. 10. As expected, as q increases, the probability of the target being in the correct leaf decreases, due to the fact that the q -samples become less constraint by the probing data.

In particular, we observe that, for $q = 0.05$ and sequences of length 300, the probability of the ensemble tree correctly identifying the target in the leaf is greater than 90%, see Fig. 10 (red dashed line). As the Boltzmann ensembles

Table 2: Target identification: we randomly generate 10^3 sequences of length n and Boltzmann sample 2^{10} structures together with a target structure s for each sequence. We display mean and standard deviation.

	$n = 100$	$n = 200$	$n = 300$
$\mathbb{P}(s \in \Omega^*)$	0.768 ± 0.178	0.742 ± 0.192	0.751 ± 0.187
$\mathbb{P}(s^* = s)$	0.669 ± 0.222	0.646 ± 0.229	0.706 ± 0.208
$\mathbb{P}(s^* = s \mid s \in \Omega^*)$	0.871 ± 0.288	0.871 ± 0.309	0.940 ± 0.277

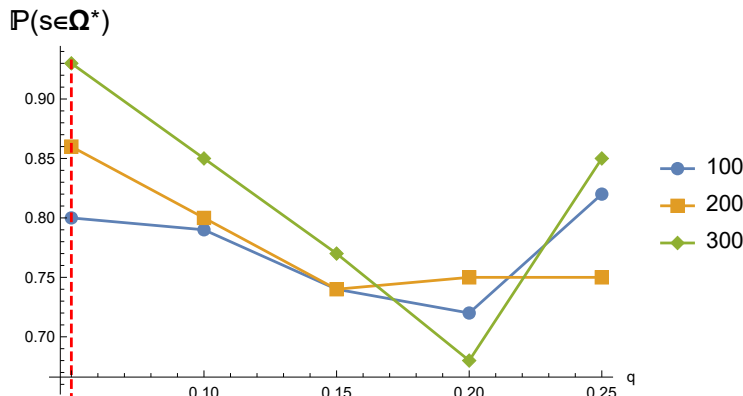


Figure 10: The probability $\mathbb{P}(s \in \Omega^*)$ of being in the correct leaf for different q -values. We use the same sequences and q -Boltzmann samples as described in Fig. 7. The red dashed line denotes q -samples having $q = 0.05$, which is tantamount to Boltzmann samples Ω_{probe} incorporating the probing data via pseudo-energies.

incorporation of probing data via pseudo-energies result in a q -value of 0.05, this translates into $\mathbb{P}(s \in \Omega^*) \geq 90\%$ for such ensembles generated by such restricted Boltzmann samplers for sequences of length 300.

We demonstrate that the ensemble tree localizing the target with high fidelity is robust, across samples of sequences having various lengths and different signature filtration q . Fig. 11 (LHS) shows that the ensemble tree for longer sequences has a higher chance of identifying the target. Once we are in the correct leaf, the chance of correctly distinguishing the target significantly increases, from around 75% to over 94% in the case of sequences having 200 nucleotides, see Fig. 11 (RHS).

As mentioned above, the key is the correct identification of the leaf containing the target, and its distinguished structure to coincide with the latter. These events are quantified via $\mathbb{P}(s \in \Omega^*)$ and $\mathbb{P}(s^* = s)$, which depend on the error rates e_0 and e_1 .

These error rates can be reduced by asking the same query repeatedly. In our Rényi-Ulam game, repeating the same query is tantamount to performing the same experiment multiple times. It is reasonable to assume that experiments are

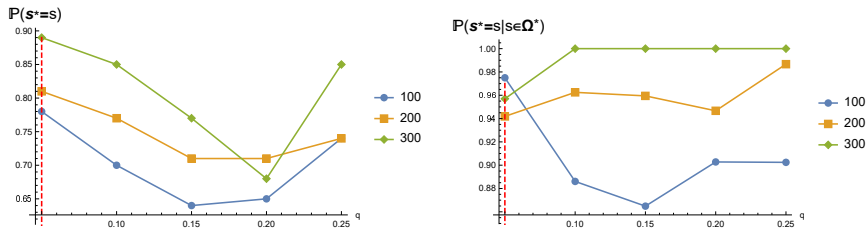


Figure 11: The probabilities $\mathbb{P}(s^* = s)$ (LHS) and $\mathbb{P}(s^* = s | s \in \Omega^*)$ (RHS) of correctly identifying the target, either in general or conditioning on being in the correct leaf. We use the same sequences and q -Boltzmann samples as described in Fig. 7. The red dashed line denotes q -samples having $q = 0.05$, which is tantamount to Boltzmann samples Ω_{probe} incorporating the probing data via pseudo-energies.

performed independently and thus errors occur randomly. Intuitively, repeated experiments reduce errors originated from the noisy nature of experimental data. Utilizing Bayesian analysis, we show that, if we get the same answer to the query twice, the error rates would become significantly smaller, for example, $e_0^{[2]} = 0.003$ and $e_1^{[2]} = 0.00005$, see Appendix H.

In principle, we can reduce the error rates by repeating the same query k times. The error rates would approach to 0 as k grows to infinity. In this case, $\mathbb{P}(s \in \Omega^*) \approx 1$, i.e. the leaf always contains the target. The fidelity of the distinguished structure $\mathbb{P}(s^* = s)$ increases from 70% to 94% for sequences of length 300.

5. Discussion

In this paper we propose to enhance the method of identifying the target structure based on RNA probing data. To facilitate this we introduce the framework of ensemble trees in which a sample derived from the partition function of structures is recursively split via queries using information theory. Each query is answered based on either RNA folding data in combination with chemical probing, employing modularity of RNA structures, see Section 3.1 or, alternatively, directly using experimental methods (Mustoe et al., 2019; Cheng et al., 2017). The former type of inference can be viewed as a kind of localization of probing data, relating local to global data by means of structural modularity. We show that within this framework it is possible to identify the target with high fidelity and that this identification requires a small number of base pairs to be queried. In particular we present that, for the Boltzmann ensembles incorporating probing data via pseudo-energies, the probability of the ensemble tree identifying the correct leaf that contains the target is greater than 90%, see Section 4.2.

In our framework, the key factor is the correct identification of the leaf that contains the target. Fig. 12 displays the average base-pair distances $d_{\text{bp}}(s, \Omega_t)$

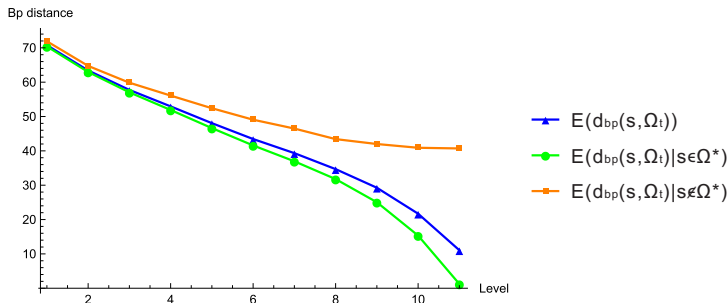


Figure 12: The average base-pair distance $d_{\text{bp}}(s, \Omega_t)$ between the target s and the sub-sample Ω_t on the path. The expectation is taken over all ensemble trees (blue), the set of ensemble trees in which the leaf containing the target is identified (green) and its complement (orange). The computation is based on the Boltzmann samples of sequences of length 300.

² between the target structure s and the t -th sub-sample Ω_t on the path. We contrast three scenarios, first the expectation being taken over all ensemble trees (blue), the set of ensemble trees in which the leaf containing the target is identified (green) and its complement (orange). We here present that the correct identification of the leaf containing the target significantly reduces the distance between the target and the sub-samples.

Our framework is based on two assumptions. The first is sampling from the Boltzmann ensemble of structures. This assumption is important, as for an arbitrary sample, the leaf of the ensemble tree does not always contain a distinguished structure. By quantifying the distinguished structure via the flow of entropies of sub-samples on the path, we contrast three classes of samples, the first being a Boltzmann sample (B-sample), the second a uniform sample (U-sample) and the third an E-sample³, see Fig. 13. We present that, in a Boltzmann sample, the entropies of sub-samples on the t -th level decrease much more sharply than those in the latter two classes, see Fig. 13 (LHS). In particular, the latter two produce leaves exhibiting an average entropy greater than 1, i.e. not containing a distinguished structure. As proved in Proposition 2, the entropy reduction equals to the entropy of the queried base pair. Fig. 13 (RHS) explains the reason for the significant reduction, that is, the maximum entropy base pairs in Boltzmann samples have entropy close to 1 on each level, implying that the bit queries split the ensemble roughly in half each time. The latter two types of samples do not exhibit this phenomenon.

The second assumption is that the target is contained in the sample. This assumption can be validated by generating samples of larger size, and checking whether or not the distinguished structure is reproducible.

²Here $d_{\text{bp}}(s, \Omega) = \sum_{s' \in \Omega} p(s') d_{\text{bp}}(s, s')$.

³consisting of N different structures with the uniform distribution, each structure containing only one base pair.

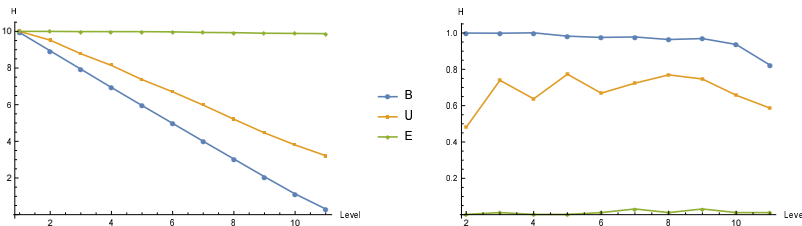


Figure 13: The average entropy of sub-samples $H(\Omega_t)$ (LHS) and queried base pairs $H(X_t)$ (RHS) on the t -th level of the ensemble tree. We contrast the ensemble trees obtained from a Boltzmann sample (B, blue), a uniform sample (U, orange), or an E-sample (E, green), which is comprised of 2^{10} distinct structures, each containing only one base pair. For the former two types of samples, we randomly generate 10^3 sequences of length 200. For each sequence, we sample 2^{10} structures together with a target structure s , according to the Boltzmann or uniform distributions.

Accordingly, the probability and entropy of a base pair is calculated in the context of the entire ensemble, and thus the ensemble tree together with maximum entropy base pairs. Garcia-Martin and Clote (2015) show that the structural entropy of the entire Boltzmann ensemble is asymptotically linear in n , i.e. $H(\Omega_{\text{entire}}) \approx 0.07n$. Since each queried base pair reduces the entropy by approximately 1 and the reduction is additive by construction, the ensemble tree would require approximately $0.07n$ queries to identify a leaf that has entropy smaller than 1 and contains a distinguished structure.

Equipped with the ensemble tree and chemical probing, our framework provides a fragmentation process combining "local" probing profiles with the "global" one via modularity. For each queried base pair, our fragmentation subsequently splits the sequence, and determines the presence of base pairs via comparing probing profiles (Section 3.1). Fig. 14 demonstrates the workflow of the fragmentation process, see Appendix I. Novikova et al. (2013) developed a different fragmentation method for determining the secondary structure of lncRNAs. Their approach applies chemical probing of the entire RNA, followed by probing of certain overlapping fragments, see Fig. 15. Regions of each fragment exhibiting similar probing profiles are folded independently, and combined in order to obtain the entire structure. At a fundamental level, our fragmentation is different from their approach in that we allow bases from two non-contiguous fragments to pair. Their approach prohibits long-range pairs, such as connecting fragments 3 and 5 in Fig. 15. As a consequence, our method is well suited to deal with the long-range base pairings, whose existence has been shown experimentally (Lai et al., 2018) as well as theoretically (Li and Reidys, 2018; Li et al., 2019).

For a sample of RNA pseudoknotted structures, the ensemble tree in our framework can still be computed. However, the structure modularity no longer holds in the pseudoknot case. The reason is that a pseudoknot loop could intersect in more than one base pair with other loops, see Fig. B.16 (RHS). The fragmentation with respect to a base pair involved in a pseudoknot could affect

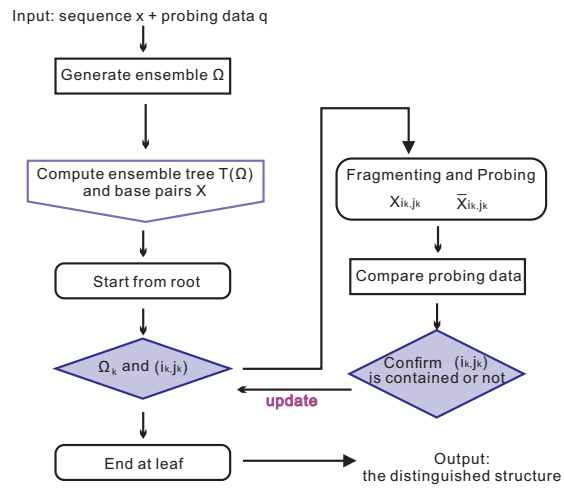


Figure 14: The workflow diagram of our fragmentation process.

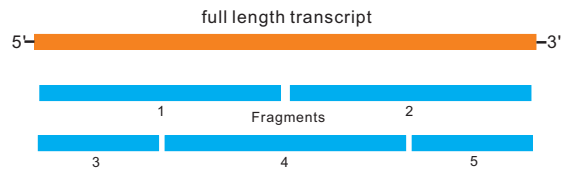


Figure 15: The fragmentation by Novikova et al. (2013).

several loops, each contributing to the free energy. The change of loop-based energy could lead to splits folding into a different configuration compared to the full transcript. Nevertheless, it would be interesting to find out other experimental methods to facilitate our framework for RNA pseudoknotted structures.

ACKNOWLEDGMENTS We want to thank Christopher Barrett for stimulating discussions and the staff of the Biocomplexity Institute & Initiative at University of Virginia for their great support. We would like to thank Dr. Kevin Weeks for pointing out their recent work (Mustoe et al., 2019). Many thanks to Qijun He, Fenix Huang, Andrei Bura, Ricky Chen, and Reza Rezazadegan for discussions.

AUTHOR DISCLOSURE STATEMENT

The authors declare that no competing financial interests exist.

Appendix A. RNA secondary structures

Most computational approaches of RNA structure prediction reduce to a class of coarse grained structures, i.e. the RNA secondary structures (Waterman, 1978, 1979; Smith and Waterman, 1978; Howell et al., 1980; Penner and Waterman, 1993). These are contact structures via abstracting from the actual spatial arrangement of nucleotides. An RNA secondary structure can be represented as a *diagram*, a labeled graph over the vertex set $\{1, \dots, n\}$ whose vertices are arranged in a horizontal line and arcs are drawn in the upper half-plane. Clearly, vertices correspond to nucleotides in the primary sequence and arcs correspond to the Watson-Crick **A-U**, **C-G** and wobble **U-G** base pairs. Two arcs (i_1, j_1) and (i_2, j_2) form a pseudoknot if they cross, i.e. the nucleotides appear in the order $i_1 < i_2 < j_1 < j_2$ in the primary sequence. An RNA *secondary structure* is a diagram without pseudoknots.

We define two distances for comparing two structures, the base-pair and signature distances.

The base-pair distance utilizes a representation of a secondary structure s as a bit string $\mathbf{b}(s) = b_1 b_2 \dots b_l$, where l denotes the number of all possible base pairs, and b_k is a bit. Given the arc set E equipped with the lexicographic order, we define $b_k = 1$ if s contains the k -th base pair in E , otherwise $b_k = 0$. The *base-pair distance* $d_{\text{bp}}(s, s')$ between two structures s and s' is the Hamming distance between their corresponding bit strings $\mathbf{b}(s)$ and $\mathbf{b}(s')$.

The 0-1 *signature* (or simply signature) of a structure s , is a vector $\mathbf{q}(s) = (q_1, q_2, \dots, q_n)$, where $q_k = 1$ when the k -th base is unpaired in s , otherwise $q_k = 0$. The *signature distance* $d_{\text{sn}}(s, s')$ between two structures s and s' is defined as the Hamming distance between their corresponding 0-1 signatures $\mathbf{q}(s)$ and $\mathbf{q}(s')$. By construction, the 0-1 signature of a secondary structure mimics its probing signals, and the signature distance measures the similarity between the probing profiles of two structures. By observing that each bit corresponds to two base-pairing end, we derive $d_{\text{sn}}(s, s') \leq 2d_{\text{bp}}(s, s')$ for any s and s' .

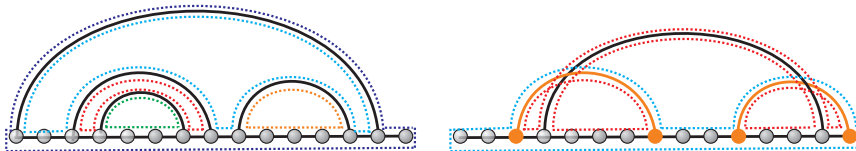


Figure B.16: The loop-based decomposition of a secondary structure (LHS) and a pseudoknot (RHS). LHS: two adjacent loops intersect at one base pair. RHS: two pseudoknot loops meet at two base pairs (orange).

Appendix B. Energy model

Computational prediction of RNA secondary structures is mainly driven by loop-based energy models (Mathews et al., 1999, 2004). The key assumption of these approaches is that the free energy $E(s)$ of an RNA secondary structure s , is estimated by the sum of energy contributions $E(L)$ from its individual loops L , $E(s) = \sum_L E(L)$.

According to thermodynamics, the free energy reflects not only the overall stability of the structure, but also its probability appearing in thermodynamic equilibrium. This leads to the Boltzmann sampling (Ding and Lawrence, 2003; Lorenz et al., 2011) of secondary structure based on their equilibrium probabilities, whose computation can be facilitated by the partition function (McCaskill, 1990).

In this model, the energy contribution of a base pair depends on the two adjacent loops that intersect at the base pair, see Fig. B.16 (LHS). Note that, in a pseudoknot, since two adjacent loops may intersect at several base pairs, and thus the energy contribution of a base pair could affect several loops, see Fig. B.16 (RHS).

Appendix C. Chemical probing

The basic idea of RNA structure probing is that chemical probes react differently with paired or unpaired nucleotides. More reactive regions of the RNA are likely to be single stranded and less reactive regions are likely to be base paired. Thus every nucleotide in a folded RNA sequence can be assigned a reactivity score, which depends on the type of chemical or enzymatic footprinting experiments and the strength of the reactivity. It is rarely of absolute certainty, whether or not a specific position is unpaired, or paired; instead, the method produces a probability. The probing data thus produce a vector of probabilities. Several competing methods have been developed to convert the footprinting data for each nucleotide into a probability. Probing data has been further incorporated into RNA folding algorithms by adding a pseudo-energy term, $\Delta G(s)$, to the free energy (Deigan et al., 2009; Washietl et al., 2012; Zarringhalam et al., 2012), i.e.

$$E_{\text{probe}}(s) = E(s) + \Delta G(s).$$

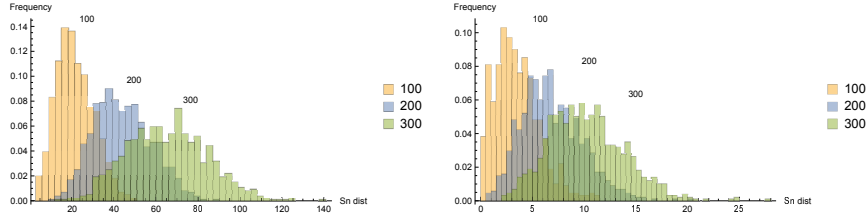


Figure D.17: The distributions of the signature distances $d_{\text{sn}}(s, \Omega)$ and $d_{\text{sn}}(s, \Omega_{\text{probe}})$ between the target s and two types of Boltzmann ensembles. LHS utilizes unrestricted samples Ω of structures, and RHS uses samples Ω_{probe} incorporating the signature of the target structure s .

This term engages in the folding process as follows: while positions where structure prediction and experiment data agree with each other are rewarded by a negative pseudo-energy, mismatching locations receive a penalty by way of a positive term. This is tantamount to shifting the partition function in such a way that the equilibrium distribution of structures in Ω_{probe} favors those that agree with the data.

Appendix D. q -Boltzmann sampler

Here we incorporate the signature of a target via restricted Boltzmann sampling structures with the signature distance filtration.

We first analyze the signature distances in two classes of Boltzmann samples, one being unrestricted, Ω , and the other being restricted Ω_{probe} that incorporates the signature of the target via pseudo-energies.

For both types of samples, the distribution of the signature distance between the target s and the ensemble is approximately normal, Fig. D.17. The means and variances of the normalized signature distance are shown in Table D.3. It shows that, while the average signature distance between the target and the unrestricted sampled structure is around $0.21n$, integrating the signature of the target reduces the distance to $0.03n$. This indicates that the incorporation of the signature improves the accuracy of the Boltzmann sampler identifying the target.

The above analysis motivates us to introduce a q -Boltzmann sampler for structures with signature distance filtration. For any fraction $q \in (0, 1)$, let Ω^q denote the restricted Boltzmann ensemble of structures having signature distance to the target at most $q \cdot n$, i.e., $\Omega^q = \{s' | d_{\text{sn}}(s', s) \leq q \cdot n\}$. The enhanced Boltzmann sampling can be implemented by partition function (McCaskill, 1990) and stochastic backtracking technique (Ding and Lawrence, 2003), with the augmentation via an additional index recording the signature distance. A complete description of the new sampler will be provided in a future publication. The constraint on the signature distance changes the equilibrium distribution of structures via eliminating those that are inconsistent with signature over certain ratio q . Table D.3 shows the means and variances of the normalized signature

Table D.3: The means and variances of the normalized signature distances between the target s and the Boltzmann samples Ω , Ω_{probe} or Ω^q . For Ω and Ω_{probe} , we utilize the same Boltzmann samples as described in Fig. D.17. Values following the \pm symbols are the standard deviation of the sampling errors.

	$n = 100$	$n = 200$	$n = 300$
$d_{\text{sn}}(s, \Omega)/n$	0.214 ± 0.088	0.219 ± 0.068	0.217 ± 0.063
$d_{\text{sn}}(s, \Omega_{\text{probe}})/n$	0.035 ± 0.021	0.034 ± 0.015	0.034 ± 0.012
$d_{\text{sn}}(s, \Omega^{0.05})/n$	0.031 ± 0.008	0.038 ± 0.012	0.037 ± 0.018
$d_{\text{sn}}(s, \Omega^{0.1})/n$	0.074 ± 0.014	0.080 ± 0.015	0.087 ± 0.010
$d_{\text{sn}}(s, \Omega^{0.15})/n$	0.098 ± 0.021	0.116 ± 0.018	0.123 ± 0.011
$d_{\text{sn}}(s, \Omega^{0.20})/n$	0.127 ± 0.034	0.144 ± 0.027	0.157 ± 0.020
$d_{\text{sn}}(s, \Omega^{0.25})/n$	0.144 ± 0.043	0.167 ± 0.038	0.180 ± 0.029

distance for Ω^q . In particular, we observe that Boltzmann samples Ω_{probe} incorporating the probing data via pseudo-energies behave similarly as q -samples having $q = 0.05$.

Appendix E. State-of-the-art experimental approaches

Determination of base pairs is a fundamental and longstanding problem in RNA biology. A large variety of experimental approaches have been developed to provide reliable solutions to the problem, such as X-ray crystallography, nuclear magnetic resonance (NMR), cryogenic electron microscopy (cryo-EM), chemical and enzymatic probing, cross-linking (Shi, 2014; Bothe et al., 2011; Bai et al., 2015; Weeks, 2015). Each method has certain strengths and limitations. In particular, chemical probing, as one of the most widely accepted experiments, allows to detect RNA duplexes *in vitro* and *in vivo*, and has been combined with high-throughput sequencing to facilitate large-scale analysis on lncRNAs (Weeks, 2015). Thus, in the following, we focus on determining the queried base pairs via chemical probing.

Chemical probing data is *one-dimensional*, i.e. it does not specify base pairing partners. Thus probing data itself does not directly detect base pairings, and any structure information can only be *inferred* based on compatibility with probing data. Two strategies of structural inference have been developed, correlation analysis and mutate-and-map. Mustoe et al. (2019) introduce PAIR-MaP, which utilizes mutational profiling as a sequencing approach and correlation analysis on profiles. The authors claim that PAIR-MaP provides around 0.90 accuracy of structure modeling (on average, sensitivity 0.96 and false discovery rate 0.03). Cheng et al. (2017) introduce M2-seq, a mutate-and-map approach combined with next generation sequencing, which recovers duplexes with a low false discovery rate (< 0.05).

Appendix F. Structural entropy

Proposition 4. *Let Ω' be a sample of size N and $s \in \Omega'$ be a structure having probability p_0 . Then the structural entropy of Ω' is bounded by*

$$H_{\min}(p_0) \leq H(\Omega') \leq H_{\max}(p_0),$$

where

$$\begin{aligned} H_{\min}(p_0) &= -p_0 \log_2 p_0 - (1 - p_0) \log_2 (1 - p_0), \\ H_{\max}(p_0) &= -p_0 \log_2 p_0 + (1 - p_0) \log_2 N. \end{aligned}$$

Proof 1. *By construction, the multiplicity of s in Ω' is given by $p_0^N = \lfloor p_0 N \rfloor$. Since the function $-x \log_2 x$ is for $x > 0$ concave, the structural entropy is maximal in case of all remaining $N - p_0^N$ structures being distinct, i.e. each occurs with probability $(1 - p_0)/(N - p_0^N) = 1/N$. Therefore*

$$\begin{aligned} H_{\max}(p_0) &= -p_0 \log_2 p_0 - \sum_{N - p_0^N} \frac{1}{N} \log_2 \frac{1}{N} \\ &= -p_0 \log_2 p_0 + (1 - p_0) \log_2 N. \end{aligned}$$

On the other hand, the minimum is achieved when all remaining structures are the same. Thus $H_{\min}(p_0) = -p_0 \log_2 p_0 - (1 - p_0) \log_2 (1 - p_0)$.

Now we prove Proposition 1.

Proof 2 (Proof of Proposition 1). *Let s_0 be the structure having the highest probability p_0 in Ω' . By Proposition 4, we have*

$$H_{\min}(p_0) \leq E. \tag{F.1}$$

Inspection of the graph of $H_{\min}(p)$ as a function of p , we conclude, that for $E < 1$, two solutions of the equation $H_{\min}(p) = E$ exist, one being for $f(E) > 0.5$ and the other for $g(E) < 0.5$, see Fig. F.18. In case of $E = 1$, we have the unique solution, $f(E) = g(E) = 0.5$. Since $H_{\min}(p)$ is monotone over $[0, 0.5]$ and $[0.5, 1]$, inequality (F.1) implies

$$p_0 \geq f(E) \quad \text{or} \quad p_0 \leq g(E).$$

We shall proceed by excluding $p_0 \leq g(E)$. A contradiction, suppose that $p_0 < 0.5$ and that structures in Ω' are arranged in descending order according to their probabilities p_i for $i = 0, 1, \dots, k$. Since each structure in Ω' has probability smaller than 0.5, the sample Ω' contains at least three different structures, i.e. $k \geq 2$. By construction, we have $p_i \leq p_0 < 0.5$. Now we consider the following

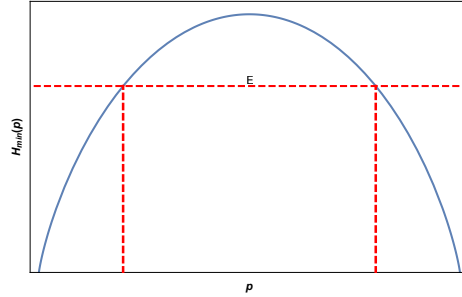


Figure F.18: The graph of $H_{\min}(p)$ as a function of p .

optimization problem

$$\begin{aligned} \min_{p_i} \quad & \sum_{i=0}^k p_i \log_2 p_i \\ \text{s.t.} \quad & \sum_{i=0}^k p_i = 1 \\ & 0 \leq p_k \leq p_{k-1} \leq \dots \leq p_0 \leq 0.5. \end{aligned}$$

We inspect that the multivariate function $\sum_{i=0}^k p_i \log_2 p_i$ reaches its minimum 1 only for $p_0 = p_1 = 0.5$ and $p_i = 0$ for $i \geq 2$. In the case of $p_0 < 0.5$, the minimum cannot be reached and we arrive at some $E > 1$, in contradiction to our assumption $E \leq 1$. Therefore $p_0 \geq f(E)$ is the only possible scenario, i.e., Ω' contains a distinguished structure with probability at least $f(E)$.

Appendix G. Information theory

As the Boltzmann ensemble is a particular type of discrete probability spaces, the information-theoretic results on the ensemble trees will be stated in the more general setup. Let $\Omega = (\mathcal{S}, \mathcal{P}(\mathcal{S}), p)$ be a discrete probability space consisting of the sample space \mathcal{S} , its power set $\mathcal{P}(\mathcal{S})$ as the σ -algebra and the probability measure p . The *Shannon entropy* of Ω is given by

$$H(\Omega) = - \sum_{s \in \mathcal{S}} p(s) \log_2 p(s),$$

where the units of H are in bits.

A *feature* X is a discrete random variable defined on Ω . Assume that X has a finite number of values x_1, x_2, \dots, x_k . Set $q_i = \mathbb{P}(X = x_i)$. The *Shannon entropy* $H(X)$ of the feature X is given by

$$H(X) = - \sum_i q_i \log_2 q_i.$$

In particular, the values of X define a partition of \mathcal{S} into disjoint subsets $\mathcal{S}_i = \{s \in \mathcal{S} : X(s) = x_i\}$, for $1 \leq i \leq k$. This further induces k spaces $\Omega_i = (\mathcal{S}_i, \mathcal{P}(\mathcal{S}_i), p_i)$, where the induced distribution is given by

$$p_i(s) = \frac{p(s)}{q_i} \quad \text{for } s \in \mathcal{S}_i,$$

and q_i denotes the probability of X having value x_i and is given by

$$q_i = \mathbb{P}(X = x_i) = \sum_{s \in \mathcal{S}_i} p(s).$$

Let $H(\Omega|X)$ denote the *conditional entropy* of Ω given the value of feature X . The entropy $H(\Omega|X)$ gives the expected value of the entropies of the conditional distributions on Ω , averaged over the conditioning feature X and can be computed by

$$H(\Omega|X) = \sum_i q_i H(\Omega_i).$$

Then the *entropy reduction* $R(\Omega, X)$ of Ω for feature X is the difference between the *a priori* Shannon entropy $H(\Omega)$ and the conditional entropy $H(\Omega|X)$, i.e.

$$R(\Omega, X) = H(\Omega) - H(\Omega|X).$$

The entropy reduction indicates the change on average in information entropy from a prior state to a state that takes some information as given.

Now we prove Propositions 2 and 3.

Proof 3 (Proof of Proposition 2).

$$\begin{aligned} H(\Omega|X) &= \sum_i q_i H(\Omega_i) \\ &= - \sum_i q_i \sum_{s \in \mathcal{S}_i} p_i(s) \log_2 p_i(s) \\ &= - \sum_i q_i \sum_{s \in \mathcal{S}_i} \frac{p(s)}{q_i} \log_2 \frac{p(s)}{q_i} \\ &= - \sum_i \sum_{s \in \mathcal{S}_i} p(s) (\log_2 p(s) - \log_2 q_i) \\ &= - \sum_i \sum_{s \in \mathcal{S}_i} p(s) \log_2 p(s) + \sum_i \log_2 q_i \sum_{s \in \mathcal{S}_i} p(s) \\ &= - \sum_{s \in \mathcal{S}} p(s) \log_2 p(s) + \sum_i q_i \log_2 q_i \\ &= H(\Omega) - H(X). \end{aligned}$$

Therefore eq. (2) follows.

Proof 4 (Proof of Proposition 3). *By definition,*

$$\mathbb{P}(\Omega_1^{i,j}) = \sum_{s \in \Omega_1^{i,j}} p(s) = \mathbb{P}(X_{i,j}(s) = 1) = p_{i,j}.$$

Similarly, we have $\mathbb{P}(\Omega_0^{i,j}) = 1 - p_{i,j}$. Thus $|\mathbb{P}(\Omega_0^{i,j}) - \mathbb{P}(\Omega_1^{i,j})| = |1 - 2p_{i,j}|$ is strictly decreasing on $p_{i,j} \in [0, 1/2]$ and strictly increasing on $[1/2, 1]$. Meanwhile, the function $H(X_{i,j}) = -p_{i,j} \log_2 p_{i,j} - (1 - p_{i,j}) \log_2 (1 - p_{i,j})$ is strictly increasing on $p_{i,j} \in [0, 1/2]$ and symmetric with respect to $p_{i,j} = 1/2$. Therefore, $|\mathbb{P}(\Omega_0^{i,j}) - \mathbb{P}(\Omega_1^{i,j})|$ reaches its minimum when $H(X_{i,j})$ has the maximum value, that is, X_{i_0, j_0} .

Assertion (2) follows directly from Proposition 2.

Given two features X_1 and X_2 , we can partition Ω either first by X_1 and subsequently by X_2 , or first by X_2 and then by X_1 , or just by a pair of features (X_1, X_2) . In the following, we will show that all three approaches provide the same entropy reduction of Ω .

Before the proof, we define some notations. The joint probability distribution of a pair of features (X_1, X_2) is given by $q_{i_1, i_2} = \mathbb{P}(X_1 = x_{i_1}^{(1)}, X_2 = x_{i_2}^{(2)})$, and the marginal probability distributions are given by $q_{i_1}^{(1)} = \mathbb{P}(X_1 = x_{i_1}^{(1)})$ and $q_{i_2}^{(2)} = \mathbb{P}(X_2 = x_{i_2}^{(2)})$. Clearly, $\sum_{i_1} q_{i_1, i_2} = q_{i_2}^{(2)}$ and $\sum_{i_2} q_{i_1, i_2} = q_{i_1}^{(1)}$. The joint entropy $H(X_1, X_2)$ of a pair (X_1, X_2) is defined as

$$H(X_1, X_2) = - \sum_{i_1} \sum_{i_2} q_{i_1, i_2} \log_2 q_{i_1, i_2}.$$

The conditional entropy $H(X_2|X_1)$ of a feature X_2 given X_1 is defined as the expected value of the entropies of the conditional distributions X_2 , averaged over the conditioning feature X_1 , i.e.

$$H(X_2|X_1) = \sum_{i_1} \mathbb{P}(X_1 = x_{i_1}^{(1)}) H(X_2|X_1 = x_{i_1}^{(1)}).$$

Proposition 5 (Chain rule, Cover and Thomas (2006)).

$$H(X_1, X_2) = H(X_1) + H(X_2|X_1). \quad (\text{G.1})$$

Proposition 6. *Let $R(\Omega, X_1, X_2)$ denote the entropy reduction of Ω first by the feature X_1 and then by the feature X_2 , and $R(\Omega, (X_1, X_2))$ denote the entropy reduction of Ω by a pair of features (X_1, X_2) . Then*

$$R(\Omega, X_1, X_2) = R(\Omega, (X_1, X_2)). \quad (\text{G.2})$$

Proof 5. *By Proposition 2, we have*

$$\begin{aligned} R(\Omega, X_1) &= H(X_1), \\ R(\Omega, (X_1, X_2)) &= H(X_1, X_2). \end{aligned}$$

Let Ω_{i_1} denote the spaces obtained by partitioning Ω via X_1 , i.e. $\Omega_{i_1} = (\mathcal{S}_{i_1}, \mathcal{P}(\mathcal{S}_{i_1}), p_{i_1})$, where $\mathcal{S}_{i_1} = \{s \in \mathcal{S} : X_1(s) = x_{i_1}^{(1)}\}$, and

$$p_{i_1}(s) = \frac{p(s)}{q_{i_1}^{(1)}}, \quad \text{for } s \in \mathcal{S}_{i_1},$$

where $q_{i_1}^{(1)} = \mathbb{P}(X_1 = x_{i_1}^{(1)})$. Then the space Ω_{i_1} is further partitioned into Ω_{i_1, i_2} via X_2 . That is, $\Omega_{i_1, i_2} = (\mathcal{S}_{i_1, i_2}, \mathcal{P}(\mathcal{S}_{i_1, i_2}), p_{i_1, i_2})$, where $\mathcal{S}_{i_1, i_2} = \{s \in \mathcal{S}_{i_1} : X_2(s) = x_{i_2}^{(2)}\}$, and

$$p_{i_1, i_2}(s) = \frac{p_{i_1}(s)}{\mathbb{P}(X_2 = x_{i_2}^{(2)} | X_1 = x_{i_1}^{(1)})} = \frac{\frac{p(s)}{q_{i_1}^{(1)}}}{\frac{q_{i_1, i_2}^{(1)}}{q_{i_1}^{(1)}}} = \frac{p(s)}{q_{i_1, i_2}}, \quad \text{for } s \in \mathcal{S}_{i_1, i_2}.$$

The entropy reduction $R(\Omega, X_1, X_2)$ is given by the difference between the a priori Shannon entropy $H(\Omega)$ and the conditional entropy $H((\Omega | X_1) | X_2)$, which is the expected value of the entropies of Ω_{i_1, i_2} , weighted by the probability $\mathbb{P}(s \in \mathcal{S}_{i_1, i_2}) = \mathbb{P}(X_2 = x_{i_2}^{(2)}, X_1 = x_{i_1}^{(1)}) = q_{i_1, i_2}$. In view of Proposition 2, we derive

$$\begin{aligned} R(\Omega, X_1, X_2) &= H(\Omega) - H((\Omega | X_1) | X_2) \\ &= H(\Omega) - \sum_{i_1, i_2} \mathbb{P}(s \in \mathcal{S}_{i_1, i_2}) H(\Omega_{i_1, i_2}) \\ &= H(\Omega) + \sum_{i_1, i_2} \mathbb{P}(s \in \mathcal{S}_{i_1, i_2}) \sum_{s \in \mathcal{S}_{i_1, i_2}} p_{i_1, i_2}(s) \log_2 p_{i_1, i_2}(s) \\ &= H(\Omega) + \sum_{i_1, i_2} q_{i_1, i_2} \sum_{s \in \mathcal{S}_{i_1, i_2}} \frac{p(s)}{q_{i_1, i_2}} \log_2 \frac{p(s)}{q_{i_1, i_2}} \\ &= H(\Omega) + \sum_{i_1, i_2} \sum_{s \in \mathcal{S}_{i_1, i_2}} p(s) \log_2 p(s) - \sum_{i_1, i_2} \sum_{s \in \mathcal{S}_{i_1, i_2}} p(s) \log_2 q_{i_1, i_2} \\ &= H(\Omega) + \sum_{s \in \mathcal{S}} p(s) \log_2 p(s) - \sum_{i_1, i_2} \log_2 q_{i_1, i_2} \sum_{s \in \mathcal{S}_{i_1, i_2}} p(s) \\ &= H(\Omega) - H(\Omega) - \sum_{i_1, i_2} q_{i_1, i_2} \log_2 q_{i_1, i_2} \\ &= H(X_1, X_2) \\ &= R(\Omega, (X_1, X_2)). \end{aligned}$$

Eq. (G.2) follows.

The maximum entropy of an arbitrary feature is achieved when all its outcomes occur with equal probability, and this maximum value is proportional to the logarithm of the number of possible outcomes to the base 2. Thus Proposition 2 implies that the more possible outcomes a feature has, the higher entropy reduction it could possibly lead to.

Meanwhile, a feature with an arbitrary number of outcomes can be viewed as a combination of *binary features*, the ones with two possible outcomes. Even though the entropy of the combination of two features is greater than each of them, Proposition 6 shows that partitioning the space subsequently by two features has the same entropy reduction as partitioning by their combination. Therefore, instead of considering features with outcomes as many as possible, we focus on binary features.

Appendix H. Query repeats

Here we assess the improvement of the error rates by repeating the same query twice. Let Y (or N) denote the event of the queried base pair existing (or not) in the target structure. Let y (or n) denote the event of the experiment confirming (or rejecting) the base pair. Let nn denote the event of two independent experiments both rejecting the base pair. Similarly, we have yy and yn . Utilizing the same sequences and structures as described in Fig. 3, we estimate the conditional probabilities $\mathbb{P}(n|N) \approx 0.993$ and $\mathbb{P}(n|Y) \approx 0.055$. The *prior probability* $\mathbb{P}(Y)$ can be computed via the expected number l_1 of confirmed queried base pairs on the path, divided by the number of queries in each sample. Fig. 8 displays the distribution of l_1 having mean around 5. Thus we adopt $\mathbb{P}(Y) = \mathbb{P}(N) = 0.5$. By Bayes' theorem, we calculate the *posterior*

$$\mathbb{P}(N|nn) = \frac{\mathbb{P}(nn|N)\mathbb{P}(N)}{\mathbb{P}(nn)} = \frac{\mathbb{P}(n|N)^2\mathbb{P}(N)}{\mathbb{P}(n|N)^2\mathbb{P}(N) + \mathbb{P}(n|Y)^2\mathbb{P}(Y)},$$

where $\mathbb{P}(nn) = \mathbb{P}(nn|N)\mathbb{P}(N) + \mathbb{P}(nn|Y)\mathbb{P}(Y)$. Since two experiments can be assumed to conditionally independent given Y and also given N , we have $\mathbb{P}(nn|N) = \mathbb{P}(n|N)^2$ and $\mathbb{P}(nn|Y) = \mathbb{P}(n|Y)^2$. Similarly, we compute $\mathbb{P}(Y|nn)$, $\mathbb{P}(Y|yy)$ and $\mathbb{P}(Y|yn)$ etc, see Table H.4. It demonstrates that, if we get the same answer to the query twice, the error rates would become significantly smaller, for example, $e_0^{[2]} = 0.003$ and $e_1^{[2]} = 0.00005$. In the case of mixed answers ny or yn , its probability $\mathbb{P}(ny) = 0.0292$, i.e., it rarely happens. We would recommend a third experiment and take the majority of three answers when getting two mixed answers.

In principle, we can extend to reducing the error rates by repeating the same query k times. The above Bayesian argument is then generalized to sequential updating on the error rates from e_0 to $e_0^{[k]}$. We can show that $e_0^{[k]}$ and $e_1^{[k]}$ approach to 0, as k grows to infinity. In this case, the reliability of the leaf space $\mathbb{P}(s \in \Omega_{11})$ is 1, i.e. the leaf always contain the target. The fidelity of the distinguished structure $\mathbb{P}(s^* = s)$ increases from 70% to 94% for sequences of length 300. To sum up, asking the same query a constant number of times significantly improves the fidelity of the leaf and the distinguished structure.

Appendix I. A new fragmentation

Here we present a novel fragmentation process, guided by the base-pair queries of the ensemble tree inferred from the restricted Boltzmann sample

Table H.4: The posterior probabilities after two experiments. We use the same sequences and structures as described in Fig. 3.

Outcome of two experiments	Y	N
nn	$\mathbb{P}(Y nn) = 0.003$	$\mathbb{P}(N nn) = 0.997$
yy	$\mathbb{P}(Y yy) = 0.99995$	$\mathbb{P}(N yy) = 0.00005$
ny or yn	$\mathbb{P}(Y ny) = 0.881$	$\mathbb{P}(N ny) = 0.119$

incorporating chemical probing. Given the maximum entropy base pair, (i, j) , extraction splits the sequence into two fragments, one being the extracted fragment $\mathbf{x}_{i,j}$ and the other, $\bar{\mathbf{x}}_{i,j}$, i.e. $\xi_{i,j}(\mathbf{x}) = (\mathbf{x}_{i,j}, \bar{\mathbf{x}}_{i,j})$. We perform probing experiments on these two segments, and obtain the reactive probabilities $\mathbf{q}_{i,j}$ and $\bar{\mathbf{q}}_{i,j}$, respectively. Let \mathbf{q} be the reactive probability for the entire sequence, and \mathbf{q}' be the embedding of $\mathbf{q}_{i,j}$ into $\bar{\mathbf{q}}_{i,j}$, i.e. $\mathbf{q}' = \epsilon_{i,j}(\mathbf{q}_{i,j}, \bar{\mathbf{q}}_{i,j})$. As shown in Section 3.1, if the Hamming distance $d(\mathbf{q}, \mathbf{q}')$ is smaller than threshold θ , then the probing profiles are similar, i.e. two bases i and j are paired. Otherwise, they are unpaired in the target structure.

The fragmentation procedure can be summarized as follows:

1. a probing experiment for the entire sequence is performed and the reactive probability \mathbf{q} is obtained,
2. a Boltzmann sample Ω_{probe} of N structures, consistent with the probing data \mathbf{q} is computed,
3. the ensemble tree $T(\Omega)$ containing the sub-spaces $\Omega_{\mathbf{k}}$ and the corresponding maximum entropy base pairs $X_{i_{\mathbf{k}}, j_{\mathbf{k}}}$ is constructed,
4. starting with Ω we recursively answer the queries, determining thereby a path through the ensemble tree from the root to a leaf.
5. once in a leaf, Proposition 1 guarantees the existence of a distinctive structure which we stipulate to be the target structure.

References

- Agius, P., Bennett, K.P., Zuker, M., 2010. Comparing RNA secondary structures using a relaxed base-pair score. *RNA* 16, 865–878.
- Bai, X.c., McMullan, G., Scheres, S.H.W., 2015. How cryo-EM is revolutionizing structural biology. *Trends in Biochemical Sciences* 40, 49–57.
- Berlekamp, E.R., 1968. Block coding for the binary symmetric channel with noiseless, delayless feedback, in: Mann, H.B. (Ed.), *Error correcting codes: proceedings of a symposium*, Wiley, New York. pp. 61–88.
- Bothe, J.R., Nikolova, E.N., Eichhorn, C.D., Chugh, J., Hansen, A.L., Al-Hashimi, H.M., 2011. Characterizing RNA dynamics at atomic resolution using solution-state NMR spectroscopy. *Nature Methods* 8, 919–931.

- Cheng, C.Y., Kladwang, W., Yesselman, J.D., Das, R., 2017. RNA structure inference through chemical mapping after accidental or intentional mutations. *Proceedings of the National Academy of Sciences* 114, 9876–9881.
- Cover, T.M., Thomas, J.A., 2006. *Elements of Information Theory* (Wiley Series in Telecommunications and Signal Processing). Wiley-Interscience.
- Deigan, K.E., Li, T.W., Mathews, D.H., Weeks, K.M., 2009. Accurate SHAPE-directed RNA structure determination. *Proceedings of the National Academy of Sciences* 106, 97–102.
- Ding, Y., Lawrence, C.E., 2003. A statistical sampling algorithm for RNA secondary structure prediction. *Nucleic Acids Research* 31, 7280–7301.
- Garcia-Martin, J.A., Clote, P., 2015. RNA thermodynamic structural entropy. *PLOS ONE* 10, e0137859.
- Hajdin, C.E., Bellaousov, S., Huggins, W., Leonard, C.W., Mathews, D.H., Weeks, K.M., 2013. Accurate SHAPE-directed RNA secondary structure modeling, including pseudoknots. *Proceedings of the National Academy of Sciences* 110, 5498–5503.
- Howell, J., Smith, T., Waterman, M., 1980. Computation of Generating Functions for Biological Molecules. *SIAM J. Appl. Math.* 39, 119–133.
- Lai, W.J.C., Kayedkhordeh, M., Cornell, E.V., Farah, E., Bellaousov, S., Rietmeijer, R., Salsi, E., Mathews, D.H., Ermolenko, D.N., 2018. mRNAs and lncRNAs intrinsically form secondary structures with short end-to-end distances. *Nature Communications* 9.
- Li, T.J.X., Burris, C.S., Reidys, C.M., 2019. The block spectrum of RNA pseudoknot structures. *Journal of Mathematical Biology* 79, 791–822.
- Li, T.J.X., Reidys, C.M., 2018. The Rainbow Spectrum of RNA Secondary Structures. *Bull. Math. Biol.* 80, 1514–1538.
- Lorenz, R., Bernhart, S., Höner zu Siederdisen, C., Tafer, H., Flamm, C., Stadler, P., Hofacker, I., 2011. ViennaRNA Package 2.0. *Algorithms Mol. Biol.* 6, 26.
- Mathews, D., Sabina, J., Zuker, M., Turner, D., 1999. Expanded sequence dependence of thermo-dynamic parameters improves prediction of RNA secondary structure. *J. Mol. Biol.* 288, 911–940.
- Mathews, D.H., Disney, M.D., Childs, J.L., Schroeder, S.J., Zuker, M., Turner, D.H., 2004. Incorporating chemical modification constraints into a dynamic programming algorithm for prediction of RNA secondary structure. *Proceedings of the National Academy of Sciences of the United States of America* 101, 7287–7292.

- McCaskill, J., 1990. The equilibrium partition function and base pair binding probabilities for RNA secondary structure. *Biopolymers* 29, 1105–1119.
- Merino, E.J., Wilkinson, K.A., Coughlan, J.L., Weeks, K.M., 2005. RNA structure analysis at single nucleotide resolution by selective 2'-hydroxyl acylation and primer extension (SHAPE). *Journal of the American Chemical Society* 127, 4223–4231.
- Mustoe, A.M., Lama, N., Irving, P.S., Olson, S.W., Weeks, K.M., 2019. RNA base pairing complexity in living cells visualized by correlated chemical probing. *bioRxiv* , 596353.
- Novikova, I.V., Dharap, A., Hennelly, S.P., Sanbonmatsu, K.Y., 2013. 3s: Shotgun secondary structure determination of long non-coding RNAs. *Methods* 63, 170–177.
- Pelc, A., 1989. Searching with known error probability. *Theoretical Computer Science* 63, 185–202.
- Penner, R., Waterman, M., 1993. Spaces of RNA secondary structures. *Adv. Math.* 217, 31–49.
- Rényi, A., 1961. On a problem of information theory. *MTA Mat. Kut. Int. Kozl.* 6, 505–516.
- Rivest, R.L., Meyer, A.R., Kleitman, D.J., Winklmann, K., Spencer, J., 1980. Coping with errors in binary search procedures. *Journal of Computer and System Sciences* 20, 396–404.
- Shannon, C.E., 1948. A mathematical theory of communication. *The Bell System Technical Journal* 27, 379–423.
- Shi, Y., 2014. A glimpse of structural biology through x-ray crystallography. *Cell* 159, 995–1014.
- Smith, T.F., Waterman, M.S., 1978. RNA secondary structure. *Math. Biol.* 42, 31–49.
- Spencer, J., 1992. Ulam's searching game with a fixed number of lies. *Theoretical Computer Science* 95, 307–321.
- Stern, S., Moazed, D., Noller, H.F., 1988. Structural analysis of RNA using chemical and enzymatic probing monitored by primer extension, in: *Methods in Enzymology*. Academic Press. volume 164 of *Ribosomes*, pp. 481–489.
- Sükösd, Z., Knudsen, B., Anderson, J.W., Novák, A., Kjems, J., Pedersen, C.N., 2013. Characterising RNA secondary structure space using information entropy. *BMC Bioinformatics* 14, S22.
- Ulam, S., 1976. *Adventures of a Mathematician*. Scribner, New York.

- Washietl, S., Hofacker, I.L., Stadler, P.F., Kellis, M., 2012. RNA folding with soft constraints: reconciliation of probing data and thermodynamic secondary structure prediction. *Nucleic Acids Research* 40, 4261–4272.
- Waterman, M., 1978. Secondary structure of single-stranded nucleic acids, in: Rota, G.C. (Ed.), *Studies on foundations and combinatorics, Advances in mathematics supplementary studies*, Academic Press N.Y.. pp. 167–212.
- Waterman, M., 1979. Combinatorics of RNA Hairpins and Cloverleaves. *Stud. Appl. Math.* 60, 91–98.
- Weeks, K.M., 2015. Review toward all RNA structures, concisely. *Biopolymers* 103, 438–448.
- Zarringhalam, K., Meyer, M.M., Dotu, I., Chuang, J.H., Clote, P., 2012. Integrating chemical footprinting data into RNA secondary structure prediction. *PLOS ONE* 7, e45160.
- Zuker, M., 1989. On finding all suboptimal foldings of an RNA molecule. *Science* 244, 48–52.
- Zuker, M., Sankoff, D., 1984. RNA secondary structures and their prediction. *Bulletin of Mathematical Biology* 46, 591–621.