

Review of Single-cell RNA-seq Data Clustering for Cell Type Identification and Characterization

Shixiong Zhang^a, Xiangtao Li^a, Qiuzhen Lin^a and Ka-Chun Wong^{a,*}

^aDepartment of Computer Science, City University of Hong Kong, Kowloon Tong, Hong Kong SAR.

ARTICLE INFO

Keywords:

Single-cell RNA-seq
Clustering
Cell types
Identification
Characterization
Review

ABSTRACT

In recent years, the advances in single-cell RNA-seq techniques have enabled us to perform large-scale transcriptomic profiling at single-cell resolution in a high-throughput manner. Unsupervised learning such as data clustering has become the central component to identify and characterize novel cell types and gene expression patterns.

In this study, we review the existing single-cell RNA-seq data clustering methods with critical insights into the related advantages and limitations. In addition, we also review the upstream single-cell RNA-seq data processing techniques such as quality control, normalization, and dimension reduction. We conduct performance comparison experiments to evaluate several popular single-cell RNA-seq clustering approaches on two single-cell transcriptomic datasets.

1. Introduction

With the unabated progress in high-throughput sequencing technologies, single-cell RNA-seq has become a powerful approach to simultaneously measure cell-to-cell expression variability of thousands or even hundreds of thousands of genes (Grün et al., 2015; Shapiro et al., 2013) at single cell resolution. Such high-throughput transcriptomic profiling can capture the gene transcriptional activities to reveal cell identities and functions (Kiselev et al., 2019; Patel et al., 2014) and discover cell types (Shalek et al., 2014; Xu and Su, 2015; Zeisel et al., 2015) or even rare cell types (van Unen et al., 2017; Jiang et al., 2016a; Grün et al., 2015). Hence, one of the most common goals of those single-cell studies is to identify cell subpopulations under different contexts (Yang et al., 2017). The gene expression patterns of those subpopulations help us distinguish various cell types and functions, identifying different cell types.

Diverse computational approaches based on data clustering have emerged to interpret and understand single-cell RNA-seq data (Jiang et al., 2016a; Lin et al., 2017b; Yang et al., 2017; Wolf et al., 2018; Zheng et al., 2019). The advances in single-cell clustering has also initiated the development of multiple atlas projects such as Mouse Cell Atlas (Han et al., 2018), Aging Drosophila Brain Atlas (Davie et al., 2018), and Human Cell Atlas (Rozenblatt-Rosen et al., 2017). However, several technical challenges are still involved in single-cell RNA-seq clustering. Low-quality cells/genes, amplification biases, and other confounding factors can affect the downstream clustering performance. In addition, given the whole transcriptome range of RNA-seq the curse of dimensionality should be expected (Andrews and Hemberg, 2018). Thus the data preprocessing steps including quality control, normalization, and dimensional reduction have become necessary before downstream inter-

pretation. In addition, the tissue heterogeneity can also affect the single-cell RNA-seq clustering performance to detect rare cell types (van Unen et al., 2017; Jiang et al., 2016a; Grün et al., 2015).

In this study, we review the recently developed computational clustering approaches for understanding and interpreting single-cell RNA-seq data. We also review the upstream single-cell RNA-seq data preprocessing steps such as quality control, row/column normalization, and dimension reduction before clustering is performed. Four roughly-classified categories of single-cell RNA-seq clustering methods and its application are discussed in terms of the strengths and limitations, including k -means clustering, hierarchical clustering, community-detection-based clustering, and density-based clustering. Figure 1 depicts the workflow of single cell RNA-seq data clustering by data processing (quality control, normalization, and dimension reduction) and clustering methods. The strengths and limitations are discussed in following sections to guide selection of different tools. In addition, we conduct several experiments on single-cell RNA-seq datasets to evaluate and compare those clustering methods.

2. Data preprocessing

Given the technical variations and noises, data preprocessing is essential for unsupervised cluster analysis on single-cell RNA-seq data. Quality control is performed to remove the low-quality transcriptomic profile due to capture inefficiency; the single-cell RNA-seq reads should be normalized to remove any amplification bias, sample variation, and other technical confounding factors; dimensional reduction is conducted to project the high-dimensional single-cell RNA-seq data into low-dimensional space. Those upstream steps could have substantial impacts on downstream tasks. Therefore, a myriad of tools have been developed to address the above issues.

*Corresponding author.

✉ sxzhang7-c@my.cityu.edu.hk (S. Zhang); lxt314@nenu.edu.cn (X. Li); qiuzhlin@szu.edu.cn (Q. Lin); kc.w@cityu.edu.hk (K. Wong)
ORCID(s):

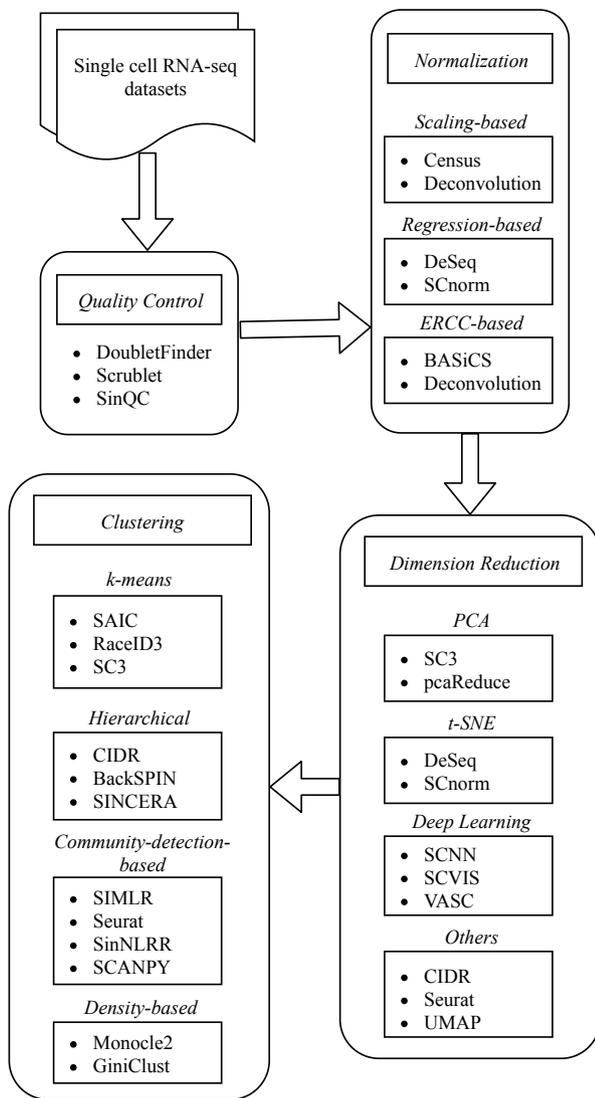


Figure 1: Workflow of single cell RNA-seq data clustering.

2.1. Quality control

Quality control (QC) aims to removing the unreliable cells or genes and other possible missing values for downstream interpretation (Kiselev et al., 2019). The technical reason for the presence of a large number of cells/genes can be attributed to the doublets with two or more cells suspended in one droplet; on the contrary, a small number of transcripts/genes may result from capture inefficiency (e.g., cell death, cell breakage, and a high fraction of mitochondrial counts) (Grün and van Oudenaarden, 2015; Lun et al., 2016b). In this section, we review several state-of-the-art or methods in assessing the raw reads and expression matrices of single-cell RNA-seq data. DoubletFinder (McGinnis et al., 2019) identifies doublets using gene expression features that significantly improves differential expression analysis performance. Scrublet avoids the need for expert knowledge or cell clustering by simulating multiplets from the data and building a nearest neighbor classifier (Wolock et al., 2019). SinQC (Jiang et al., 2016b)

enables us to detect poor data quality, e.g. low mapped reads, a high fraction of mitochondrial counts or low library complexity.

2.2. Normalization

Technical artifacts or experimental noises (e.g. batch effect, insufficient counts, and zero inflation) of high-throughput transcriptomic sequencing may result in differences in expression measurements between samples (e.g. genes) (Cole et al., 2019). Several studies have revealed that those obvious differences can have a large impact on clustering (Haghverdi et al., 2018; Butler et al., 2018; Finak et al., 2015; Kharchenko et al., 2014). Therefore, normalization is essential for adjusting the differences in expression levels across different samples, replicates, or even batches.

The state-of-the-arts normalization methods have been developed for addressing those issues. We review three kinds of normalization methods as follow: 1) Scaling methods. Lun et al. (2016a) proposed a strategy to normalize single-cell RNA-seq data with zero counts. Census (Qiu et al., 2017a) converts conventional per-cell measures of relative expression values to transcript counts without the need for any spike-in standard or unique molecular identifiers, eliminating much of the apparent technical variability in single-cell experiments; 2) Regression-based methods. DESeq proposed by Anders and Huber (2010) adopts local regression to link the variance and mean of negative binomial distribution over the observed counts, resulting in balanced differentially expressed genes. SCnorm (Bacher et al., 2017) uses quantile regression to estimate the dependence of transcript expression on sequencing depth and scale factors to provide normalized expression estimates; 3) Methods based on spike-in External RNA Control Cortium (ERCC). Ding et al. (2015) presented a normalization tool to remove technical noises and compute for the true gene expression levels based on spike-in ERCC. BASiCS (Vallejos et al., 2015) can identify and remove the high and low levels of technical noises (counts). In addition to the above methods, the very simple and commonly used method is to transform read counts using logarithm with a pseudocount such as one (Xu and Su, 2015; Lin et al., 2017b; Butler et al., 2018).

However, those normalization methods also suffer from limitations caused by the diverse assumptions and experimental protocols. The scaling methods cannot account for individual batch effects; the regression-based methods are sensitive to batch effects; ERCC-based methods are not suitable for endogenous and spiked-in transcripts (Risso et al., 2014; Vallejos et al., 2017; Cole et al., 2019).

2.3. Dimension reduction

Recent advances in single-cell RNA-seq have contributed to measure large-scale expression datasets with hundreds of thousands of genes while it also brings both opportunities and challenges in data analysis. Such high-dimensional gene expression data is unprecedentedly rich and should be well-explored. However, the past clustering methods may be unable to process and interpret such large-scale data. Hence, it is necessary to project the high-dimensional data

to a lower-dimensional space using dimension reduction that can improve and refine the clustering results. In this section, we review several commonly used dimension reduction methods including principal component analysis, t-distributed stochastic neighbor embedding algorithm, deep learning models, and others.

2.3.1. PCA

Principal Component Analysis (PCA) is a typical linear projection method that projects a set of possibly correlated variables into a set of linearly orthogonal variables (principal components). Due to its conceptual simplicity and efficiency, PCA has been widely used in single-cell RNA-seq processing (Jiang et al., 2016a; Buettner et al., 2015; Shalek et al., 2014; Usoskin et al., 2015; zurauskiene and Yau, 2016; Kiselev et al., 2017). Notably, SC3 (Kiselev et al., 2017) applied PCA to transform the distance matrices as the input of consensus clustering; Shalek et al. (2014) used PCA for single-cell RNA-seq data spanning several experimental conditions. In addition, some extended and improved PCA-based methods have been developed including *pcaReduce* (zurauskiene and Yau, 2016) which applied PCA iteratively to provide low-dimensional principal component representations; Usoskin et al. (2015) proposed an unbiased iterative PCA-based process to identify distinct large-scale expression data patterns. However, PCA cannot capture the nonlinear relationships between cells because of the high levels of dropout and noise (Kiselev et al., 2019).

2.3.2. t-SNE

t-distributed Stochastic Neighbor Embedding (t-SNE) is the most commonly used nonlinear dimension reduction method which can uncover the relationships between cells. t-SNE converts data point similarity into probability and minimizes Kullback-Leibler divergence by gradient descent until convergence. In single-cell RNA-seq data analysis, t-SNE has become a cornerstone of dimension reduction and visualization for high-dimensional single-cell RNA-seq data (Linderman et al., 2019; Lin et al., 2017b; Butler et al., 2018; Haghverdi et al., 2018; Ntranos et al., 2016; Prabhakaran et al., 2016; Zeisel et al., 2015; Zhang et al., 2018; Li et al., 2017). Especially, Linderman et al. (2019) developed a fast interpolation-based t-SNE that dramatically accelerates the processing and visualization of rare cell populations for large datasets. Nonetheless, the limitations of t-SNE include the loss function is non-convex which can lead to different local optimality; the parameters in t-SNE are required to be tuned.

2.3.3. Deep learning models

In recent years, deep learning models (neural networks and variational auto-encoders) have shown superior performance in interpenetrating complex high-dimensional data. SCNN (Lin et al., 2017a) tested various neural networks architectures and incorporated prior biological knowledge to obtain the reduced dimension representation of single cell expression data. SCVIS (Ding et al., 2018) and VASC (Wang and Gu, 2018) are both based on variational auto-encoders which can capture nonlinear relationships between

cells and visualize the low-dimensional embedding in single-cell gene expression data. Up to now, those methods demonstrated superior ability of interpretation and compatibility on high-dimensional single-cell RNA-seq data.

2.3.4. Other methods

In addition, there are also other dimensional reduction methods such as CIDR (Lin et al., 2017b) applied principal coordinate analysis that preserves the distance information in low-dimension space from its high-dimension space; Seurat (Butler et al., 2018) is a toolkit for analysis of single cell RNA sequencing data and provides many dimension reduction methods such as PCA and t-SNE. Uniform Manifold Approximation and Projection (UMAP) (McInnes et al., 2018) is a widely used technique for dimension reduction. UMAP provides increased speed and better preservation of data global structure for high dimensional datasets. It has been verified that it outperforms t-SNE (Becht et al., 2019).

3. Clustering methods for single-cell RNA-seq

Diverse types of clustering methods have been developed for detecting cell types from single-cell RNA-seq data. Those methods can be roughly classified into four categories including *k*-means clustering, hierarchical clustering, community-detection-based clustering, and density-based clustering. We review several computational applications of those clustering methods with their strengths and limitations. Table 1 illustrates the overview of the state-of-the-arts clustering methods on single-cell RNA-seq data.

3.1. *k*-means clustering

k-means clustering is the most popular clustering approach, which iteratively finds a predefined number of *k* cluster centers (centroids) by minimizing the sum of the squared Euclidean distance between each cell and its closest centroid. In addition, it is suitable for large datasets since it can scale linearly with the number of data points (Lloyd, 1982).

Several clustering tools based on *k*-means have been developed for interpreting single-cell RNA-seq data. SAIC (Yang et al., 2017) utilized an iterative *k*-means clustering to identify the optimal subset of signature genes that separate single cells into distinct clusters. *pcaReduce* (zurauskiene and Yau, 2016) is a hierarchical clustering method while it relies on *k*-means results as the initial clusters. RaceID (Grün et al., 2015) applied *k*-means to unravel the heterogeneity of rare intestinal cell types (Tibshirani et al., 2001).

However, *k*-means clustering is an greedy algorithm that may fail to find its global optimum; the predefined number of clusters *k* can affect the clustering results; and another disadvantage is its sensitivity to outliers since it tends to identify globular clusters, resulting in the failures in detecting of rare cell types.

To overcome the above drawbacks, SC3 (Kiselev et al., 2017) integrated individual *k*-means clustering results with different initial conditions as the consensus clusters. RaceID2

Table 1

Overview of the state-of-the-arts clustering methods on single-cell RNA-seq data.

Method	Type	Open Source	Web Sever	Strengths	Limitations
SAIC (Yang et al., 2017)	<i>k</i> -means	✓	×	Low complexity; Scalable to large data	Sensitive to outliers; No estimation of number of clusters
RaceID (Grün et al., 2015), RaceID2 (Grün et al., 2016), RaceID3 (Herman et al., 2018)	<i>k</i> -means	✓	×	Sensitive to rare cell types; Estimation of number of clusters	Not suitable for no rare cell types
pcaReduce (zurauskiene and Yau, 2016)	<i>k</i> -means/hierarchical	✓	×	Hierarchy solutions	Not stable
SC3 (Kiselev et al., 2017)	<i>k</i> -means/hierarchical	✓	×	High accuracy; Estimation of number of clusters	High complexity; Not scalable to large data
CIDR (Lin et al., 2017b)	Hierarchical	✓	×	Sensitive to Dropout	High complexity
BackSPIN (Zeisel et al., 2015)	Hierarchical	✓	×	Simultaneously cluster genes and cells	High complexity
SNN-Clip (Xu and Su, 2015)	Cliques	✓	×	Provide estimation of number of clusters	Non-scalable
SIMLR (Wang et al., 2017)	Spectral	✓	×	Suitable for data with heterogeneity and noise	No estimation of number of clusters
SinNLRR (Zheng et al., 2019)	Spectral	✓	×	Suitable for noise data	No estimation of number of clusters
SCANPY (Wolf et al., 2018)	Louvain	✓	×	Low complexity Scalable to large data	May not find small community
Seurat (Satija et al., 2015)	Louvain	✓	×	Low complexity Scalable to large data	May not find small community
GiniClust (Jiang et al., 2016a)	Density-based	✓	×	Available for detection of rare cell types	Not sensitive to large clusters

(Grün et al., 2016) replaced the *k*-means clustering with *k*-medoids clustering that use 1-pearson's correlation instead of Euclidean distance as the clustering distance metric. RaceID3 (Herman et al., 2018), as the advanced version of RaceID2 added feature selection and introduced random forest to reclassify *k*-means clustering results.

3.2. Hierarchical clustering

Hierarchical clustering is another widely used clustering algorithm on single-cell RNA-seq data. There are two types of hierarchical strategies including: 1) agglomerative clustering, the individual cells are progressively merged into clusters according to distance measures; 2) divisive clustering, each cluster is split into small groups recursively until individual data level. These two strategies build a hierarchical structure among the cells/genes and enable the improvement in finding rare cell types as small clusters. Hierarchical clustering does not require pre-determining the number of clusters and make assumptions for the distributions of single-cell RNA-seq data. Hence, many single-cell RNA-seq clustering methods have adopted it as part of the computational component.

CIDR (Lin et al., 2017b) integrates both dimension reduction and clustering based on hierarchical clustering into single-cell RNA-seq analysis and uses implicit imputation process for dropout effects; it provides a stable estimation of pairwise cells distances. BackSPIN (Zeisel

et al., 2015) developed a biclustering method based on divisive hierarchical clustering and sorting points into neighborhoods (SPIN) (Tsafrir et al., 2005) to simultaneously cluster genes and cells. The number of splits need to be set manually in BackSPIN. Although intensive splits can improve the clustering resolution, it is prone to over-partition. pcaReduce (zurauskiene and Yau, 2016) is an agglomerative hierarchical clustering approach with PCA which provides clustering results in a hierarchical. SINCERA (Guo et al., 2015) as a simple pipeline adopted hierarchical clustering with centered Pearson's correlation and average linkage method to identify cell types.

The agglomerative hierarchical clustering has a time complexity of $\mathcal{O}(N^3)$ while divisive clustering is $\mathcal{O}(2^N)$. Although hierarchical clustering can reveal the hierarchical relations among cells/genes and does not require setting the number of clusters, it has high time complexity.

3.3. Community-detection-based clustering

Given the limitations of *k*-means and hierarchical clustering methods in large-scale datasets, community-detection-based clustering has been increasingly popular recently. Community detection is crucial in sociology, biology, and other systems that can be represented as graphs with nodes and edges. For single-cell RNA-seq data, nodes refer to cells and edge weights are represented by cell-cell pairwise distances. The idea of graph-based clustering is to delete the

branch with maximum weights (cell-cell pairwise distances) in a dense graph (cell relationship network). There are three commonly used approaches for community-detection-based (graph-based) clustering including clique algorithm, spectral clustering, and Louvain algorithm (Blondel et al., 2008).

A clique is a set of points fully connected to each other in a graph and represents a cluster (community). Although finding cliques in a graph is NP-complete, some studies have been conducted to address it such as heuristic optimization. SNN-Clip (Xu and Su, 2015) was proposed to leverage the concept of shared nearest neighbor to calculate cell similarity (Zhang et al., 2009) for finding all quasi-cliques since the shared nearest neighbor graph is sparse. SNN-Clip does not require specifying the number of clusters manually while it is non-scalable and the resultant clusters are not stable.

Spectral clustering is a widely used clustering method recently. It is designed to be adaptive to data distribution by relying on the eigenvalues of cell similarity matrix. Nonetheless, the spectral clustering's time complexity is $\mathcal{O}(N^3)$. SIMLR (Wang et al., 2017) is an analytic framework for dimension reduction, clustering, and visualization of single-cell RNA-seq data. It is a method specifically designed at single-cell RNA-seq. SIMLR combines spectral clustering with multiple kernel similarity measures for clustering expression data generated from cross-platform and cross-condition experiments. In addition, SIMLR has an advantage in processing large-scale datasets with heavy noises. SinNLR (Zheng et al., 2019) was proposed to impose a non-negative and low rank structure on cell similarity matrix and then applied spectral clustering to detect cell types. However, the spectral clustering requires users to set the number of clusters in the data.

Louvain (Blondel et al., 2008) is the most popular community detection algorithm and widely used to single-cell RNA-seq data. The time complexity of Louvain is $\mathcal{O}(N \log(N))$ which is lower than other community-detection-based algorithms. SCANPY (Wolf et al., 2018) is a scalable toolkit for single-cell RNA-seq analysis and its clustering section is based on Louvain algorithm. SCANPY has advantages in scaling its computation with the number of cells (over one million). Seurat (Satija et al., 2015) also applied Louvain algorithm to cluster the cell types for the mapping of cellular localization.

3.4. Density-based clustering

Density-based clustering methods separate data space into highly dense clusters. It can learn clusters with arbitrary shapes and identify noises (outliers). The most popular density-based clustering algorithm is DBSCAN (Ester et al., 1996). DBSCAN does not need to predetermine the number of clusters and its time complexity is $\mathcal{O}(N \log(N))$. However, DBSCAN requires user to set two parameters including ϵ (eps) and the minimum number of points required to form a dense region (minPts) (Ester et al., 1996) that will affect its clustering results. Jiang et al. (2016a) developed GiniClust,

detecting rare cell types from single-cell gene expression data and its clustering method is based on DBSCAN. GiniClust is effective in finding rare cell types since it can be adaptively adjusted to set a lower ϵ . However, such a design may lead to unreasonable large cell clusters. Monocle2 (Qiu et al., 2017b) also applied DBSCAN to identify the differential expressed genes between cells.

4. Experimental evaluations for clustering methods

In this section, we conduct independent experiments to evaluate several widely used single-cell RNA-seq clustering methods. Those clustering methods contain RaceID3 (Herman et al., 2018), Monocle2 (Qiu et al., 2017b), SIMLR (Wang et al., 2017), Seurat (Satija et al., 2015), SC3 (Kiselev et al., 2017), and CIDR (Lin et al., 2017b). We applied six single-cell RNA-seq clustering methods on two different droplet-based transcriptomic datasets (GSE84133 and GSE65525) with cell types annotations. For the evaluation and comparison, we introduce two commonly used metrics including Adjusted Rand index, Running Time, and Homogeneity Score to measure the clustering performance and efficiency respectively. The parameter setting of the cluster methods on both datasets are tabulated in Table 2. In particular, we would like to note that most of parameters were chosen based on the default setting given by individual methods.

4.1. Evaluation metrics for clustering

Since the single-cell RNA-seq clustering is an unsupervised learning task in most studies, three common metrics Adjusted Rand index, Running Time, and Homogeneity Score are introduced for the evaluation.

Adjusted Rand index (ARI) proposed by Hubert and Arabie (1985) can be used to measure the similarity between the clustering results of interest and the true clustering. However, ARI is widely applied as the metric of single-cell RNA-seq clustering only when the cell-labels are available (Kiselev et al., 2017; Ntranos et al., 2016; Lin et al., 2017b; Aibar et al., 2017; Xu and Su, 2015). Given a set of n cells and two clusterings ($X = \{X_1, X_2, \dots, X_s\}$ partitioned by clustering method and $Y = \{Y_1, Y_2, \dots, Y_r\}$ partitioned by annotated cell types) of these cells, the overlap between the two clusterings can be summarized in a contingency table with s rows and r columns. The ARI is defined as below.

$$ARI = \frac{\sum_{ij} \binom{n_{ij}}{2} - [\sum_i \binom{a_i}{2} \sum_j \binom{b_j}{2}] / \binom{n}{2}}{\frac{1}{2} [\sum_i \binom{a_i}{2} + \sum_j \binom{b_j}{2}] - [\sum_i \binom{a_i}{2} \sum_j \binom{b_j}{2}] / \binom{n}{2}} \quad (1)$$

where $n_{ij} = |X_i \cap Y_j|$ denotes the values from the contingency table; $a_i = \sum_j n_{ij}$ and $b_j = \sum_i n_{ij}$ represent the i th row sums and j th column sums of the contingency table, respectively; and $\binom{\cdot}{\cdot}$ denotes a binomial coefficient. $ARI = 1$ indicates a perfect overlap between clusters X and Y , while $ARI = 0$ indicates random clustering.

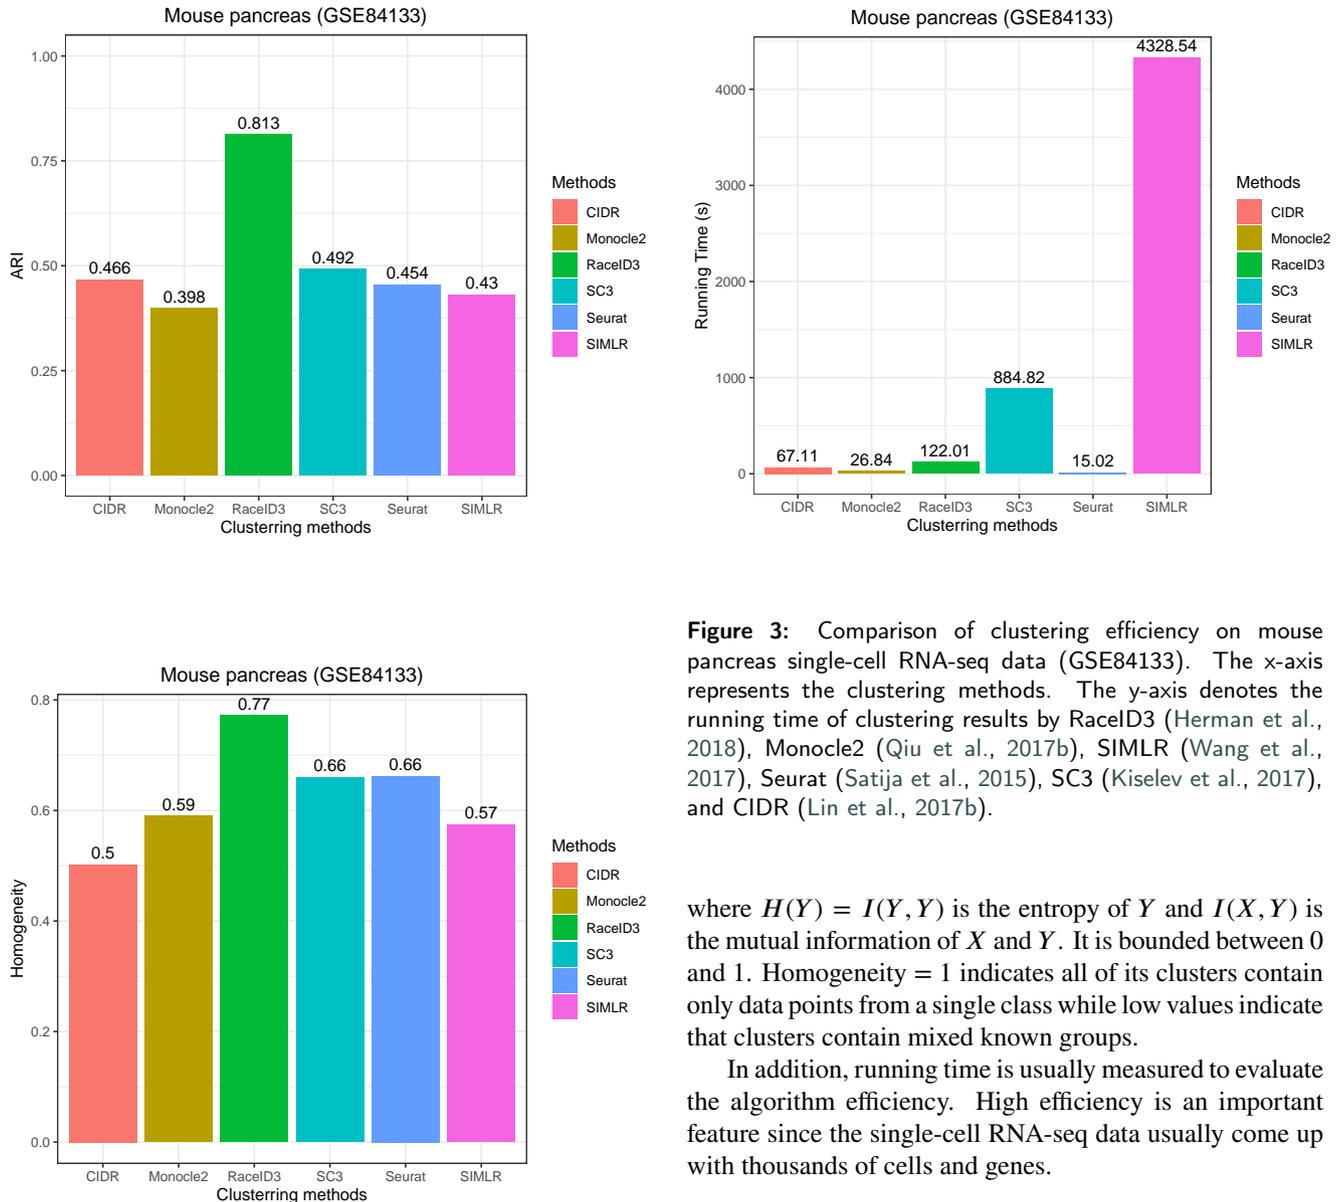


Figure 2: Comparison of clustering performance on mouse pancreas single-cell RNA-seq data (GSE84133). The x-axis represents the clustering methods. The y-axis denotes the ARI or homogeneity scores of clustering results by RaceID3 (Herman et al., 2018), Monocle2 (Qiu et al., 2017b), SIMLR (Wang et al., 2017), Seurat (Satija et al., 2015), SC3 (Kiselev et al., 2017), and CIDR (Lin et al., 2017b).

Homogeneity Score (Rosenberg and Hirschberg, 2007) evaluates the performance of clustering results with regards to the ground truth. It is defined as:

$$\text{Homogeneity} = \frac{I(X, Y)}{H(Y)} \quad (2)$$

Figure 3: Comparison of clustering efficiency on mouse pancreas single-cell RNA-seq data (GSE84133). The x-axis represents the clustering methods. The y-axis denotes the running time of clustering results by RaceID3 (Herman et al., 2018), Monocle2 (Qiu et al., 2017b), SIMLR (Wang et al., 2017), Seurat (Satija et al., 2015), SC3 (Kiselev et al., 2017), and CIDR (Lin et al., 2017b).

where $H(Y) = I(Y, Y)$ is the entropy of Y and $I(X, Y)$ is the mutual information of X and Y . It is bounded between 0 and 1. Homogeneity = 1 indicates all of its clusters contain only data points from a single class while low values indicate that clusters contain mixed known groups.

In addition, running time is usually measured to evaluate the algorithm efficiency. High efficiency is an important feature since the single-cell RNA-seq data usually come up with thousands of cells and genes.

4.2. Performance on mouse pancreas single-cell RNA-seq dataset (GSE84133)

In mouse pancreas single-cell RNA-seq dataset (GSE84133) (Baron et al., 2016), there are 1,886 cells in 13 cell types after the exclusion of hybrid cells. GSE84133 has 14,878 genes. Figure 2 and 3 shows the ARI, homogeneity scores, and running time of RaceID3, Monocle2, SIMLR, Seurat, SC3, and CIDR on GSE84133 for performance comparison. The results show that RaceID3 exhibit the best ARI (=0.813) and homogeneity (=0.77) performance among the six methods. The ARI of other methods does not exceed 0.500. SIMLR is a time-consuming method and it took 1.20 hours to conduct the clustering task. However, CIDR can only identify seven cell types from GSE84133 since it belongs to hierarchical clustering and is unable to predetermine the number of clusters. SC3, SIMLR, and Monocle2 cannot provide an accurate estimation of the cluster count and it has to be determined manually. Seurat, Monocle2, and RaceID3

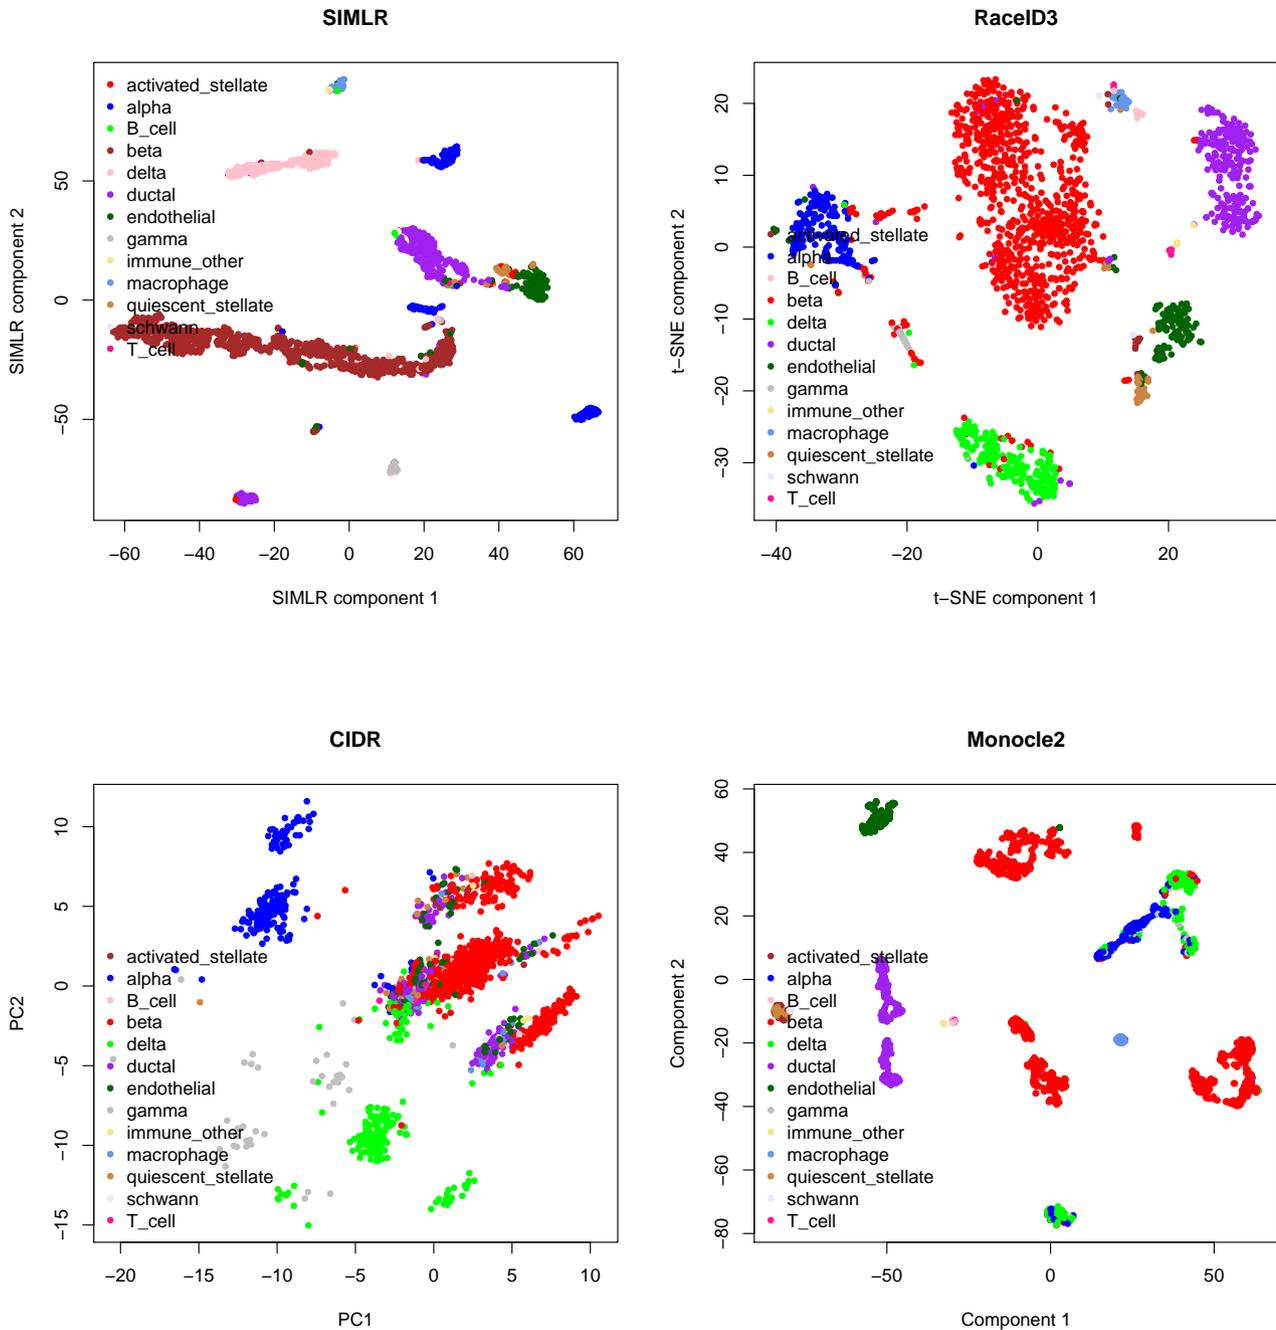


Figure 4: Visualization of clustering performance on mouse pancreas single-cell RNA-seq data (GSE84133) from SIMLR (Wang et al., 2017), RaceID3 (Herman et al., 2018), CIDR (Lin et al., 2017b), and Monocle2 (Qiu et al., 2017b).

require user to adjust multiple parameters to achieve the best clustering performance that affected the user friendliness. Figure 4 illustrates the clustering performance of SIMLR, RaceID3, CIDR, and Monocle2 on GSE84133. The visualization results are directly obtained from their R packages. Figure 5 displays the clustering results from SC3. Since SC3 belongs to hierarchical clustering, the clustering result is illustrated in heatmap and it is set to show the 13 cell types.

4.3. Performance on mouse embryonic stem single-cell RNA-seq dataset (GSE65525)

In mouse embryonic stem single-cell RNA-seq large-scale dataset (GSE65525) (Klein et al., 2015), there are 2717 cells in four annotated cell types. GSE65525 has 24,175 genes. Figure 6 and 7 depict the ARI, homogeneity scores, and running time of RaceID3, Monocle2, SIMLR, Seurat, SC3, and CIDR on GSE65525 for performance comparison. The results show that Seurat exhibits the

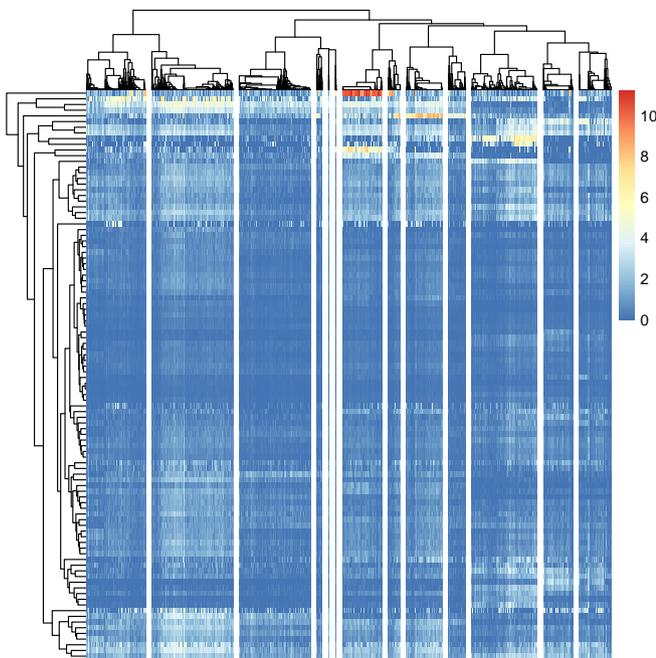


Figure 5: Visualization of clustering performance on mouse pancreas single-cell RNA-seq data (GSE84133) from SC3 (Kiselev et al., 2017). The x-axis represents cells. The y-axis denotes genes.

best ARI ($=0.829$) performance among the six methods, while its homogeneity score (homogeneity $=0.75$) is lower than SC3 (homogeneity $=0.9$). The ARI of SC3 (0.812) also exceeds 0.80 and it achieve higher homogeneity than others. Hence, SC3 exhibits robust clustering performance on large datasets with a reasonable sacrifice on efficiency. The ARI and homogeneity scores of Monocle2, SIMLR, RaceID3, SC3, and CIDR showed different degrees of accuracy. RaceID achieved the worst ARI ($=0.284$) and homogeneity score (homogeneity $=0.38$) across six methods on GSE65525. SIMLR has been run for 85 minutes which took far more than other five methods. Hence, the results show that RaceID3 may not be suitable to large-scale single-cell RNA-seq datasets. Figure 8 illustrates the clustering performance of SIMLR, RaceID, CIDR, and Monocle2 on GSE65525. The visualization results are directly obtained from their R packages. Results from Figure 8 show that all methods result in different degrees of undesirable overlaps between clusters. Figure 9 displays the clustering results of SC3 on GSE65525 and it shows the four correct cell types.

5. Discussions and conclusions

Single-cell RNA-seq data analysis is a crucial component in whole-transcriptome studies. In particular, data clustering is the central component of single-cell RNA-seq analysis. Clustering results can affect the performance of downstream analysis including identifying rare or new cell types, gene expression patterns that are predictive of cellular states, and functional implications of stochastic transcription. There are several related studies for the performance

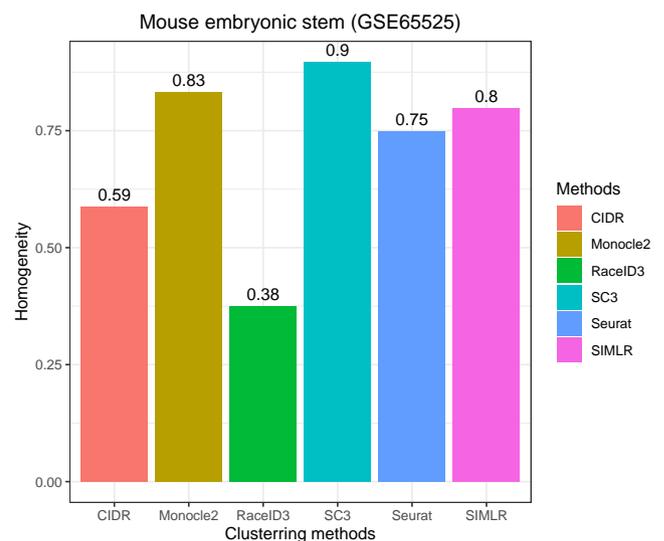
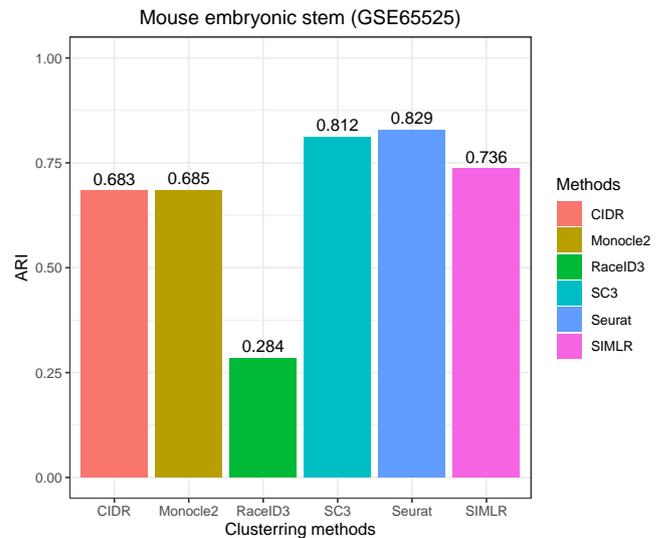


Figure 6: Comparison of clustering performance on mouse embryonic stem single-cell RNA-seq data (GSE65525). The x-axis represents the clustering methods. The y-axis denotes the ARI or homogeneity scores of clustering results across RaceID3 (Herman et al., 2018), Monocle2 (Qiu et al., 2017b), SIMLR (Wang et al., 2017), Seurat (Satija et al., 2015), SC3 (Kiselev et al., 2017), and CIDR (Lin et al., 2017b).

evaluation of clustering methods on single-cell RNA-seq data (Duò et al., 2018; Freytag et al., 2018). Those studies focused on assessing the methods for clustering single-cell RNA-seq data, while the data preprocessing steps may not be included in the respective discussion section, although it could have significantly influences on the downstream clustering performance. Therefore, in this study, we reviewed

Table 2

Parameter setting of clustering methods on GSE65525 (GSE84133).

Methods (Version)	Limitations
RaceID3 (0.1.6) (Herman et al., 2018)	mintotal = 100, minexpr = 5, minnumber = 1, maxexpr = 500, downsample = FALSE dsn = 1, rseed = 17000, clustnr = 20, bootnr = 50 metric = "pearson", do.gap = TRUE, SE.factor = .25, B.gap = 50, cln=0, rseed = 18000
SC3 (1.14.0) (Kiselev et al., 2017)	ks = 4 (13), biology = FALSE, rand_seed = sample(1:10000,1)
CIDR (0.1.5) (Lin et al., 2017b)	min1 = 3, min2 = 8, N = 2000, alpha = 0.1, fast = TRUE
SIMLR (1.12.0) (Wang et al., 2017)	c = 4 (13), normalize = TRUE, k = 10, if.impute = FALSE, cores.ratio = 1
Seurat (3.1.1) (Satija et al., 2015)	normalization.method = "LogNormalize", scale.factor = 100, npcs = 100 vars.to.regress = "percent.mt", ndims.print = 1:5, nfeatures.print = 5 reduction = "pca", dims = 1:75, nn.eps = 0.5, resolution = 1
Monocle2 (2.14.0) (Qiu et al., 2017b)	max_components = 3, num_dim = 10, reduction_method = 'tSNE', verbose = T, check_duplicates = F, num_clusters = 4 (13)

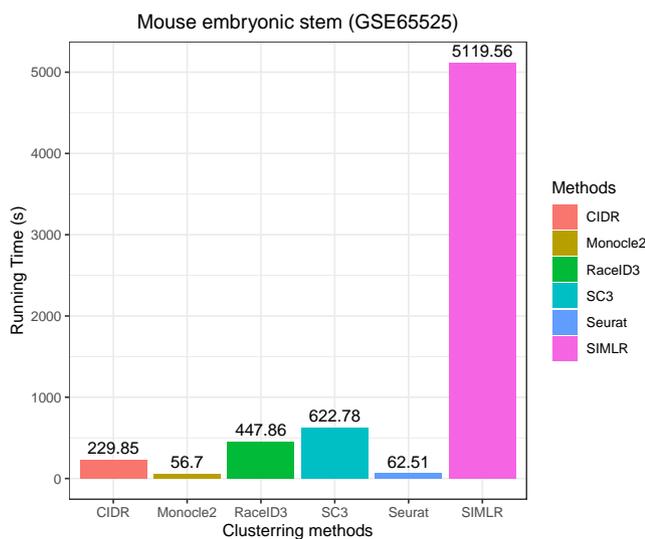


Figure 7: Comparison of clustering efficiency on mouse embryonic stem single-cell RNA-seq data (GSE65525). The x-axis represents the clustering methods. The y-axis denotes the running time of clustering results across RaceID3 (Herman et al., 2018), Monocle2 (Qiu et al., 2017b), SIMLR (Wang et al., 2017), Seurat (Satija et al., 2015), SC3 (Kiselev et al., 2017), and CIDR (Lin et al., 2017b).

several clustering methods. In addition, the upstream RNA-seq data preprocessing steps have also been reviewed since those steps can significantly affect the downstream clustering performance. Lastly, our performance comparison experiments have also been conducted, revealing independent insights into the state-of-the-arts methods without any conflict of interest.

Those clustering methods show expected performance

on single-cell RNA-seq data. However, those clustering methods have its drawbacks; for instance, *k*-means clustering require users to determine the number of clusters and is sensitive to outliers; hierarchical clustering has high complexity and may be unsuitable to large-scale single-cell RNA-seq data; community-detection-based clustering cannot provide the estimation of number of clusters and is unsuitable for small communities; density-based clustering has advantages in detecting rare cell types with a sacrifice on large cluster performance.

In addition to those limitations, there are still some technical challenges in single-cell RNA-seq clustering. With the advanced development of single-cell RNA-seq techniques, the single-cell datasets are growing to be extremely high-dimensional and sparse. Although some methods can deal with those data in a time span of hours such as SIMLR, visualization of those data is still a challenge. Moreover, the low dimensionality of expression profiles implies intensive gene co-expression signature that may inspire us to develop new clustering methods on low-dimensional data to interpret cell types (Crow and Gillis, 2018). Advanced data integration and analysis approaches are needed for both basic research and clinical studies in the coming years.

Ethics approval and consent to participate

Not applicable.

Conflict of Interest

The authors declare no competing interests.

References

- Aibar, S., González-Blas, C.B., Moerman, T., Huynh-Thu, V.A., Imrichova, H., Hulselmans, G., Rambow, F., Marine, J.C., Geurts, P., Aerts, J., van den Oord, J., Atak, Z.K., Wouters, J., Aerts, S., 2017. SCENIC: single-cell regulatory network inference and clustering. *Nature Methods* 14, 1083–1086.
- Anders, S., Huber, W., 2010. Differential expression analysis for sequence count data. *Genome Biology* 11, R106.

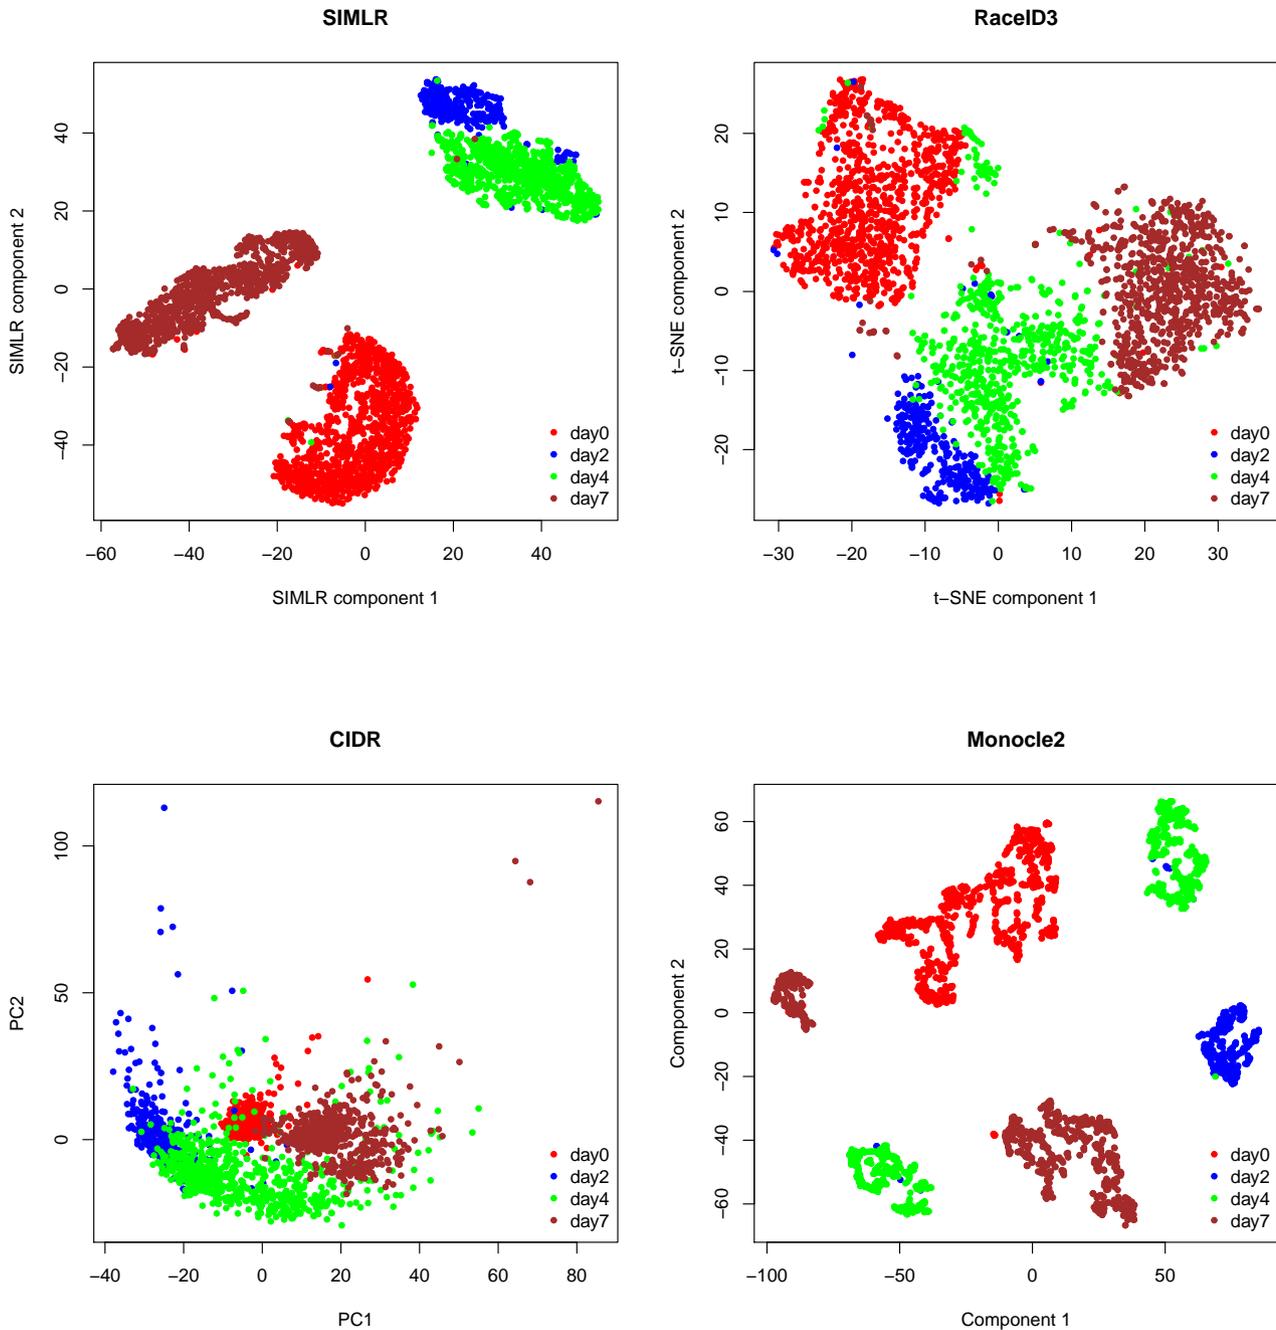


Figure 8: Visualization of clustering performance on mouse embryonic stem single-cell RNA-seq large-scale dataset(GSE65525) by SIMLR (Wang et al., 2017), RaceID3 (Herman et al., 2018), CIDR (Lin et al., 2017b), and Monocle2 (Qiu et al., 2017b).

Andrews, T.S., Hemberg, M., 2018. Identifying cell populations with scRNASeq. *Molecular Aspects of Medicine* 59, 114–122.

Bacher, R., Chu, L.F., Leng, N., Gasch, A.P., Thomson, J.A., Stewart, R.M., Newton, M., Kendziorski, C., 2017. SCnorm: robust normalization of single-cell RNA-seq data. *Nature Methods* 14, 584–586.

Baron, M., Veres, A., Wolock, S.L., Faust, A.L., Gaujoux, R., Vetere, A., Ryu, J.H., Wagner, B.K., Shen-Orr, S.S., Klein, A.M., Melton, D.A., Yanai, I., 2016. A Single-Cell Transcriptomic Map of the Human and Mouse Pancreas Reveals Inter- and Intra-cell Population Structure. *Cell Systems* 3, 346–360.

Becht, E., McInnes, L., Healy, J., Dutertre, C.A., Kwok, I.W., Ng, L.G., Ginhoux, F., Newell, E.W., 2019. Dimensionality reduction for visualizing single-cell data using UMAP. *Nature Biotechnology* 37, 38–47.

Blondel, V.D., Guillaume, J.L., Lambiotte, R., Lefebvre, E., 2008. Fast unfolding of communities in large networks. *Journal of Statistical Mechanics: Theory and Experiment* 2008, P10008.

Buettner, F., Natarajan, K.N., Casale, F.P., Proserpio, V., Scialdone, A., Theis, F.J., Teichmann, S.A., Marioni, J.C., Stegle, O., 2015. Computational analysis of cell-to-cell heterogeneity in single-cell RNA-

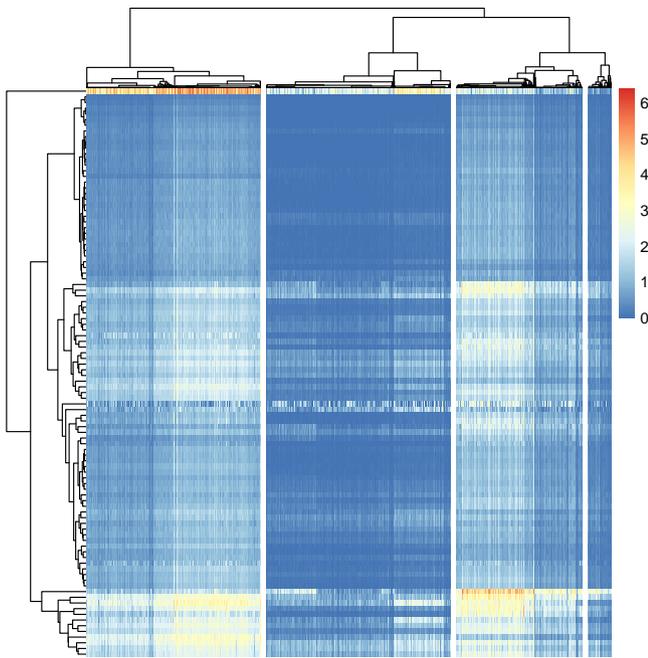


Figure 9: Visualization of clustering performance on mouse embryonic stem single-cell RNA-seq data (GSE65525) from SC3 (Kiselev et al., 2017). The x-axis represents cells. The y-axis denotes genes.

- sequencing data reveals hidden subpopulations of cells. *Nature Biotechnology* 33, 155–160.
- Butler, A., Hoffman, P., Smibert, P., Papalexi, E., Satija, R., 2018. Integrating single-cell transcriptomic data across different conditions, technologies, and species. *Nature Biotechnology* 36, 411–420.
- Cole, M.B., Risso, D., Wagner, A., DeTomaso, D., Ngai, J., Purdom, E., Dudoit, S., Yosef, N., 2019. Performance Assessment and Selection of Normalization Procedures for Single-Cell RNA-Seq. *Cell Systems* 8, 315–328.
- Crow, M., Gillis, J., 2018. Co-expression in Single-Cell Analysis: Saving Grace or Original Sin? *Trends in genetics* : TIG 34, 823–831.
- Davie, K., Janssens, J., Koldere, D., De Waegeneer, M., Pech, U., Kreft, A., Aibar, S., Makhzami, S., Christiaens, V., Bravo Gonzalez-Blas, C., Poovathingal, S., Hulselmans, G., Spanier, K.I., Moerman, T., Vanspauwen, B., Geurs, S., Voet, T., Lammertyn, J., Thienpont, B., Liu, S., Konstantinides, N., Fiers, M., Verstreken, P., Aerts, S., 2018. A Single-Cell Transcriptome Atlas of the Aging *Drosophila* Brain. *Cell* 174, 982–998.
- Ding, B., Zheng, L., Zhu, Y., Li, N., Jia, H., Ai, R., Wildberg, A., Wang, W., 2015. Normalization and noise reduction for single cell RNA-seq experiments. *Bioinformatics* 31, 2225–2227.
- Ding, J., Condon, A., Shah, S.P., 2018. Interpretable dimensionality reduction of single cell transcriptome data with deep generative models. *Nature Communications* 9, 2002.
- Duò, A., Robinson, M.D., Soneson, C., 2018. A systematic performance evaluation of clustering methods for single-cell RNA-seq data. *F1000Research* 7, 1141.
- Ester, M., Kriegl, H.P., Sander, J., Xu, X., 1996. A density-based algorithm for discovering clusters a density-based algorithm for discovering clusters in large spatial databases with noise, in: *Proceedings of the Second International Conference on Knowledge Discovery and Data Mining*, AAAI Press. pp. 226–231.
- Finak, G., McDavid, A., Yajima, M., Deng, J., Gersuk, V., Shalek, A.K., Slichter, C.K., Miller, H.W., McElrath, M.J., Prlic, M., Linsley, P.S., Gottardo, R., 2015. MAST: a flexible statistical framework for assessing transcriptional changes and characterizing heterogeneity in single-cell RNA sequencing data. *Genome Biology* 16, 278.
- Freytag, S., Tian, L., Lönnstedt, I., Ng, M., Bahlo, M., 2018. Comparison of clustering tools in R for medium-sized 10x Genomics single-cell RNA-sequencing data. *F1000Research* 7, 1297.
- Grün, D., Lyubimova, A., Kester, L., Wiebrands, K., Basak, O., Sasaki, N., Clevers, H., van Oudenaarden, A., 2015. Single-cell messenger RNA sequencing reveals rare intestinal cell types. *Nature* 525, 251–255.
- Grün, D., Muraro, M.J., Boisset, J.C., Wiebrands, K., Lyubimova, A., Dharmadhikari, G., van den Born, M., van Es, J., Jansen, E., Clevers, H., de Koning, E.J., van Oudenaarden, A., 2016. De Novo Prediction of Stem Cell Identity using Single-Cell Transcriptome Data. *Cell Stem Cell* 19, 266–277.
- Grün, D., van Oudenaarden, A., 2015. Design and Analysis of Single-Cell Sequencing Experiments. *Cell* 163, 799–810.
- Guo, M., Wang, H., Potter, S.S., Whittsett, J.A., Xu, Y., 2015. SINCERA: A Pipeline for Single-Cell RNA-Seq Profiling Analysis. *PLOS Computational Biology* 11, e1004575.
- Haghverdi, L., Lun, A.T.L., Morgan, M.D., Marioni, J.C., 2018. Batch effects in single-cell RNA-sequencing data are corrected by matching mutual nearest neighbors. *Nature Biotechnology* 36, 421–427.
- Han, X., Wang, R., Zhou, Y., Fei, L., Sun, H., Lai, S., Saadatpour, A., Zhou, Z., Chen, H., Ye, F., Huang, D., Xu, Y., Huang, W., Jiang, M., Jiang, X., Mao, J., Chen, Y., Lu, C., Xie, J., Fang, Q., Wang, Y., Yue, R., Li, T., Huang, H., Orkin, S.H., Yuan, G.C., Chen, M., Guo, G., 2018. Mapping the Mouse Cell Atlas by Microwell-Seq. *Cell* 172, 1091–1107.
- Herman, J.S., Sagar, Grün, D., 2018. FateID infers cell fate bias in multipotent progenitors from single-cell RNA-seq data. *Nature Methods* 15, 379–386.
- Hubert, L., Arabie, P., 1985. Comparing partitions. *Journal of Classification* 2, 193–218.
- Jiang, L., Chen, H., Pinello, L., Yuan, G.C., 2016a. GiniClust: detecting rare cell types from single-cell gene expression data with Gini index. *Genome Biology* 17, 144.
- Jiang, P., Thomson, J.A., Stewart, R., 2016b. Quality control of single-cell RNA-seq by SinQC. *Bioinformatics* 32, 2514–2516.
- Kharchenko, P.V., Silberstein, L., Scadden, D.T., 2014. Bayesian approach to single-cell differential expression analysis. *Nature Methods* 11, 740–742.
- Kiselev, V.Y., Andrews, T.S., Hemberg, M., 2019. Challenges in unsupervised clustering of single-cell RNA-seq data. *Nature Reviews Genetics* 20, 273–282.
- Kiselev, V.Y., Kirschner, K., Schaub, M.T., Andrews, T., Yiu, A., Chandra, T., Natarajan, K.N., Reik, W., Barahona, M., Green, A.R., Hemberg, M., 2017. SC3: consensus clustering of single-cell RNA-seq data. *Nature Methods* 14, 483–486.
- Klein, A.M., Mazutis, L., Akartuna, I., Tallapragada, N., Veres, A., Li, V., Peshkin, L., Weitz, D.A., Kirschner, M.W., 2015. Droplet barcoding for single-cell transcriptomics applied to embryonic stem cells. *Cell* 161, 1187–1201.
- Li, H., Courtois, E.T., Sengupta, D., Tan, Y., Chen, K.H., Goh, J.J.L., Kong, S.L., Chua, C., Hon, L.K., Tan, W.S., Wong, M., Choi, P.J., Wee, L.J.K., Hillmer, A.M., Tan, I.B., Robson, P., Prabhakar, S., 2017. Reference component analysis of single-cell transcriptomes elucidates cellular heterogeneity in human colorectal tumors. *Nature Genetics* 49, 708–718.
- Lin, C., Jain, S., Kim, H., Bar-Joseph, Z., 2017a. Using neural networks for reducing the dimensions of single-cell RNA-Seq data. *Nucleic Acids Research* 45, e156–e156.
- Lin, P., Troup, M., Ho, J.W.K., 2017b. CIDR: Ultrafast and accurate clustering through imputation for single-cell RNA-seq data. *Genome Biology* 18, 59.
- Linderman, G.C., Rachh, M., Hoskins, J.G., Steinerberger, S., Kluger, Y., 2019. Fast interpolation-based t-SNE for improved visualization of single-cell RNA-seq data. *Nature Methods* 16, 243–245.
- Lloyd, S., 1982. Least squares quantization in PCM. *IEEE Transactions on Information Theory* 28, 129–137.
- Lun, A.T., Bach, K., Marioni, J.C., 2016a. Pooling across cells to normalize single-cell RNA sequencing data with many zero counts. *Genome*

- Biology 17, 75.
- Lun, A.T., McCarthy, D.J., Marioni, J.C., 2016b. A step-by-step workflow for low-level analysis of single-cell RNA-seq data. *F1000Research* 5, 2122.
- McGinnis, C.S., Murrow, L.M., Gartner, Z.J., 2019. DoubletFinder: Doublet Detection in Single-Cell RNA Sequencing Data Using Artificial Nearest Neighbors. *Cell Systems* 8, 329–337.
- McInnes, L., Healy, J., Saul, N., Großberger, L., 2018. UMAP: Uniform Manifold Approximation and Projection. *Journal of Open Source Software* doi:10.21105/joss.00861.
- Ntranos, V., Kamath, G.M., Zhang, J.M., Pachter, L., Tse, D.N., 2016. Fast and accurate single-cell RNA-seq analysis by clustering of transcript-compatibility counts. *Genome Biology* 17, 112.
- Patel, A.P., Tirosh, I., Trombetta, J.J., Shalek, A.K., Gillespie, S.M., Wakimoto, H., Cahill, D.P., Nahed, B.V., Curry, W.T., Martuza, R.L., Louis, D.N., Rozenblatt-Rosen, O., Suvà, M.L., Regev, A., Bernstein, B.E., 2014. Single-cell RNA-seq highlights intratumoral heterogeneity in primary glioblastoma. *Science (New York, N.Y.)* 344, 1396–401.
- Prabhakaran, S., Azizi, E., Carr, A., Peřáček, D., 2016. Dirichlet process mixture model for correcting technical variation in single-cell gene expression data, in: Balcan, M.F., Weinberger, K.Q. (Eds.), *Proceedings of The 33rd International Conference on Machine Learning*, PMLR, New York, New York, USA. pp. 1070–1079.
- Qiu, X., Hill, A., Packer, J., Lin, D., Ma, Y.A., Trapnell, C., 2017a. Single-cell mRNA quantification and differential analysis with Censur. *Nature Methods* 14, 309–315.
- Qiu, X., Mao, Q., Tang, Y., Wang, L., Chawla, R., Pliner, H.A., Trapnell, C., 2017b. Reversed graph embedding resolves complex single-cell trajectories. *Nature Methods* 14, 979–982.
- Risso, D., Ngai, J., Speed, T.P., Dudoit, S., 2014. Normalization of RNA-seq data using factor analysis of control genes or samples. *Nature Biotechnology* 32, 896–902.
- Rosenberg, A., Hirschberg, J., 2007. V-Measure: A conditional entropy-based external cluster evaluation measure. *Proceedings of the 2007 joint conference on empirical methods in natural language processing and computational natural language learning (EMNLP-CoNLL)*, 410–420.
- Rozenblatt-Rosen, O., Stubbington, M.J.T., Regev, A., Teichmann, S.A., 2017. The Human Cell Atlas: from vision to reality. *Nature* 550, 451–453.
- Satija, R., Farrell, J.A., Gennert, D., Schier, A.F., Regev, A., 2015. Spatial reconstruction of single-cell gene expression data. *Nature Biotechnology* 33, 495–502.
- Shalek, A.K., Satija, R., Shuga, J., Trombetta, J.J., Gennert, D., Lu, D., Chen, P., Gertner, R.S., Gaublomme, J.T., Yosef, N., Schwartz, S., Fowler, B., Weaver, S., Wang, J., Wang, X., Ding, R., Raychowdhury, R., Friedman, N., Hachohen, N., Park, H., May, A.P., Regev, A., 2014. Single-cell RNA-seq reveals dynamic paracrine control of cellular variation. *Nature* 510, 363–369.
- Shapiro, E., Biezuner, T., Linnarsson, S., 2013. Single-cell sequencing-based technologies will revolutionize whole-organism science. *Nature Reviews Genetics* 14, 618–630.
- Tibshirani, R., Walther, G., Hastie, T., 2001. Estimating the number of clusters in a data set via the gap statistic. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)* 63, 411–423.
- Tsafir, D., Tsafir, I., Ein-Dor, L., Zuk, O., Notterman, D., Domany, E., 2005. Sorting points into neighborhoods (SPIN): data analysis and visualization by ordering distance matrices. *Bioinformatics* 21, 2301–2308.
- van Unen, V., Höllt, T., Pezzotti, N., Li, N., Reinders, M.J.T., Eisemann, E., Koning, F., Vilanova, A., Lelieveldt, B.P.F., 2017. Visual analysis of mass cytometry data by hierarchical stochastic neighbour embedding reveals rare cell types. *Nature Communications* 8, 1740.
- Usoskin, D., Furlan, A., Islam, S., Abdo, H., Lönnerberg, P., Lou, D., Hjerling-Leffler, J., Haeggström, J., Kharchenko, O., Kharchenko, P.V., Linnarsson, S., Ernfors, P., 2015. Unbiased classification of sensory neuron types by large-scale single-cell RNA sequencing. *Nature Neuroscience* 18, 145–153.
- Vallejos, C.A., Marioni, J.C., Richardson, S., 2015. BASICS: Bayesian Analysis of Single-Cell Sequencing Data. *PLOS Computational Biology* 11, e1004333.
- Vallejos, C.A., Risso, D., Scialdone, A., Dudoit, S., Marioni, J.C., 2017. Normalizing single-cell RNA sequencing data: challenges and opportunities. *Nature Methods* 14, 565–571.
- Wang, B., Zhu, J., Pierson, E., Ramazzotti, D., Batzoglou, S., 2017. Visualization and analysis of single-cell RNA-seq data by kernel-based similarity learning. *Nature Methods* 14, 414–416.
- Wang, D., Gu, J., 2018. VASC: Dimension Reduction and Visualization of Single-cell RNA-seq Data by Deep Variational Autoencoder. *Genomics, Proteomics & Bioinformatics* 16, 320–331.
- Wolf, F.A., Angerer, P., Theis, F.J., 2018. SCANPY: large-scale single-cell gene expression data analysis. *Genome Biology* 19, 15.
- Wolock, S.L., Lopez, R., Klein, A.M., 2019. Scrublet: Computational Identification of Cell Doublets in Single-Cell Transcriptomic Data. *Cell Systems* 8, 281–291.
- Xu, C., Su, Z., 2015. Identification of cell types from single-cell transcriptomes using a novel clustering method. *Bioinformatics* 31, 1974–1980.
- Yang, L., Liu, J., Lu, Q., Riggs, A.D., Wu, X., 2017. SAIC: an iterative clustering approach for analysis of single cell RNA-seq data. *BMC Genomics* 18, 689.
- Zeisel, A., Muñoz-Manchado, A.B., Codeluppi, S., Lönnerberg, P., La Manno, G., Juréus, A., Marques, S., Munguba, H., He, L., Betscholtz, C., Rolny, C., Castelo-Branco, G., Hjerling-Leffler, J., Linnarsson, S., 2015. Cell types in the mouse cortex and hippocampus revealed by single-cell RNA-seq. *Science* 347, 1138–42.
- Zhang, J.M., Fan, J., Fan, H.C., Rosenfeld, D., Tse, D.N., 2018. An interpretable framework for clustering single-cell RNA-Seq datasets. *BMC Bioinformatics* 19, 93.
- Zhang, S., Xu, M., Li, S., Su, Z., 2009. Genome-wide de novo prediction of cis-regulatory binding sites in prokaryotes. *Nucleic Acids Research* 37, e72–e72.
- Zheng, R., Li, M., Liang, Z., Wu, F.X., Pan, Y., Wang, J., 2019. SinNLR: a robust subspace clustering method for cell type detection by non-negative and low-rank representation. *Bioinformatics*.
- zuraskiene, J., Yau, C., 2016. pcaReduce: hierarchical clustering of single cell transcriptional profiles. *BMC Bioinformatics* 17, 140.