

Network-Based Prediction of the 2019-nCoV Epidemic Outbreak in the Chinese Province Hubei

Bastian Prasse*, Massimo A. Achterberg*, Long Ma* and Piet Van Mieghem*

Delft University of Technology
February 12, 2020

Abstract

At the moment of writing (12 February, 2020), the future evolution of the 2019-nCoV virus is unclear. Predictions of the further course of the epidemic are decisive to deploy targeted disease control measures. We consider a network-based model to describe the 2019-nCoV epidemic in the Hubei province. The network is composed of the cities in Hubei and their interactions (e.g., traffic flow). However, the precise interactions between cities is unknown and must be inferred from observing the epidemic. We propose a network-based method to predict the future prevalence of the 2019-nCoV virus in every city. Our results indicate that network-based modelling is beneficial for an accurate forecast of the epidemic outbreak.

1 Introduction

In December 2019, the novel coronavirus 2019-nCoV emerged in the Chinese city Wuhan [1]. Individuals that are infected by the 2019-nCoV virus suffer from the Novel Coronavirus Pneumonia (NCP). Contrary to initial observations [2], the 2019-nCoV virus does spread from person to person as confirmed in [3]. On February 12, 2020, there were more than 45,000 confirmed infections, and more than 1000 people died [4, 5, 6]. Assessing the further spread of the 2019-nCoV epidemic poses a major public health concern.

Many studies aim to estimate the basic reproduction number R_0 of the 2019-nCoV epidemic [7, 8, 9, 10, 11, 12, 13, 14, 15]. The basic reproduction number R_0 is a crucial quantity to evaluate the hostility of a virus [16, 17]. The basic reproduction number R_0 is defined [18] as “The expected number of secondary cases produced, in a completely susceptible population, by a typical infective individual during its entire period of infectiousness”. The greater the basic reproduction R_0 , the more individuals are infected in the long-term endemic state of the virus. If $R_0 < 1$, then the virus dies out. The estimates for the basic reproduction number R_0 of the 2019-nCoV epidemic range from $R_0 = 2.0$ to $R_0 = 3.77$.

The basic reproduction number R_0 only coarsely assesses the quantitative behaviour of the epidemic. To obtain a more detailed picture of the epidemic, the development of epidemic outbreak

*Faculty of Electrical Engineering, Mathematics and Computer Science, P.O Box 5031, 2600 GA Delft, The Netherlands; *email*: {b.prasse, m.a.achterberg, l.ma-2, p.f.a.vanmieghem}@tudelft.nl

prediction methods is focal. A diverse body of research considers the prediction of general epidemics. For instance, prediction methods are based on Kalman filtering [19], Bayesian model averaging [20], basic regression [21] and kernel density estimation [22]. Recent work focussed on the dependency of population flow and the viral spread [23, 24, 25, 26]. As shown by Pei *et al.* [27], the spread of influenza can be more accurately predicted by taking the population flow between cities into account. Read *et al.* [14] predicted the 2019-nCoV epidemic by using the Official Aviation Guide (OAG) Traffic Analyser dataset. Additionally to the OAG dataset, Wu *et al.* [15] used the Tencent database to predict the 2019-nCoV viral spread.

The population flow clearly has an impact on the evolution of an epidemic. However, the exact population flow is unknown, and epidemic prediction methods must account for inaccuracies of population flow data. In this work, we consider the most extreme case by assuming no prior knowledge of the population flow. To forecast the 2019-nCoV epidemic, we design a network-based prediction method that estimates the interactions between cities as an intermediate step. On February 9th, 2020, approximately 70% of the global 2019-nCoV infections are located in the Chinese province Hubei. Thus, we focus on the 2019-nCoV epidemic in Hubei. Our goal is to predict the 2019-nCoV outbreak for every city in Hubei. Section 2 introduces the available data on the 2019-nCoV virus in Hubei. The epidemic model is proposed in Section 3, and the prediction method is outlined in Section 4. The prediction accuracy is evaluated on past data in Section 5.

2 Data on the 2019-nCoV Epidemic Outbreak in Hubei

The time series of reported infections in Hubei forms the basis for the epidemic outbreak prediction. Hubei is divided into 17 cities (more precisely, prefecture-level divisions) and contains the city Wuhan, as illustrated by Figure 1. We do not consider the city Shennongjia, since the number of infections in Shennongjia is small. We denote the number of considered cities by $N = 16$. The number of newly reported infections for each city in Hubei is openly accessible via the website of the Hubei Province Health Committee [28]. The data is updated daily and follows the standard time offset of UTC+08:00. Except for Wuhan, the total number of reported infections is small before January 21, 2020. Hence, we consider the 2019-nCoV epidemic outbreak starting from January 21. We denote the discrete time by $k \in \mathbb{N}$. The difference of time k to $k + 1$ equals one day, and the initial time $k = 1$ corresponds to January 21, 2020. The website [28] states the number of reported infections $N_{\text{rep},i}[k]$ at every time k in every city $i = 1, \dots, N$. We obtain the population size p_i of each city i from the Hubei Statistical Yearbook [29]. The reported fraction of infected individuals in city i at time k follows as $\mathcal{I}_{\text{rep},i}[k] = N_{\text{rep},i}[k]/p_i$. Appendix A states the population size p_i and the complete time series of the number of infections $N_{\text{rep},i}[k]$ for each city in Hubei.

3 Modelling the 2019-nCoV Epidemic between Cities

We model the spread of the 2019-nCoV virus by the SIR-model: At any discrete time k , every individual is in either one of the compartments *susceptible* (healthy), *infectious* or *removed*. Susceptible individuals can get infectious due to contact with infectious individuals. Due to hospitalisation, quarantine measures or death, infectious individuals become removed individuals, which cannot infect

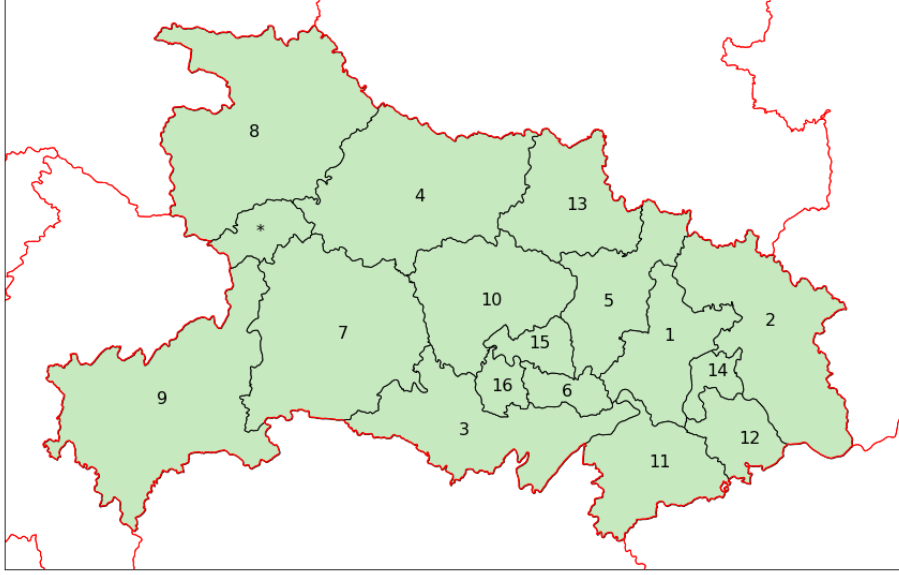


Figure 1: The 17 cities (prefecture-level divisions) of the Chinese province Hubei. The names of the cities are stated in Appendix A. We do not consider the city Shennongjia in this work, which is marked with a star (*).

susceptible individuals any longer. For every city i , we denote the 3×1 *viral state* vector at time k by $v_i[k] = (\mathcal{S}_i[k], \mathcal{I}_i[k], \mathcal{R}_i[k])^T$. The components $\mathcal{S}_i[k]$, $\mathcal{I}_i[k]$, and $\mathcal{R}_i[k]$ denote the fraction of susceptible, infectious, and removed individuals, respectively. Thus, it holds that $\mathcal{S}_i[k] + \mathcal{I}_i[k] + \mathcal{R}_i[k] = 1$ for every city i at every time k . The discrete-time SIR model¹ is defined as follows.

Definition 1 (SIR Epidemic Model [30, 31]). *The viral state $v_i[k] = (\mathcal{S}_i[k], \mathcal{I}_i[k], \mathcal{R}_i[k])^T$ of every city i evolves in discrete time $k = 1, 2, \dots$ according to*

$$\mathcal{I}_i[k + 1] = (1 - \delta_i)\mathcal{I}_i[k] + (1 - \mathcal{I}_i[k] - \mathcal{R}_i[k]) \sum_{j=1}^N \beta_{ij}\mathcal{I}_j[k] \quad (1)$$

$$\mathcal{R}_i[k + 1] = \mathcal{R}_i[k] + \delta_i\mathcal{I}_i[k],$$

and the fraction of susceptible individuals follows as

$$\mathcal{S}_i[k] = 1 - \mathcal{I}_i[k] - \mathcal{R}_i[k].$$

Here, β_{ij} denotes the infection probability from city j to city i , and δ_i denotes the curing probability of city i .

¹The discrete-time SIR epidemic model (1) follows from applying Euler's method to the continuous-time mean-field SIR model of Youssef and Scoglio [30].

The SIR model (1) assumes that the spreading parameters δ_i , β_{ij} do not change over time k . The curing probability δ_i quantifies the capacity of individuals in city i to cure from the virus. The infection probability β_{ij} specifies the number of contacts of individuals in city j with individuals in city i . We emphasise that $\beta_{ii} \neq 0$ since individuals within one city i do interact with each other. The *contact network* between cities in Hubei is given by the $N \times N$ matrix

$$B = \begin{pmatrix} \beta_{11} & \beta_{12} & \dots & \beta_{1N} \\ \vdots & \vdots & \ddots & \vdots \\ \beta_{N1} & \beta_{N2} & \dots & \beta_{NN} \end{pmatrix},$$

whose elements are probabilities $0 \leq \beta_{ij} \leq 1$. Neither the curing probabilities δ_i nor the infection probabilities β_{ij} are known for the 2019-nCoV epidemic. Potentially, it is possible to state bounds or estimates for the spreading parameters δ_i and β_{ij} by making use of the people flow or geographical distances between the respective cities. Nevertheless, there would remain an uncertainty regarding the precise value of the spreading parameters δ_i and β_{ij} . In this work, we consider the most extreme case: there is no a priori knowledge on the curing probabilities δ_i nor the infection probabilities β_{ij} . In Section 4, we develop an inference method to estimate the spreading parameters δ_i and β_{ij} from observing the epidemic.

4 Network-Based Approach for Epidemic Outbreak Prediction

We propose a network-based method to predict the outbreak of 2019-nCoV virus, which consists of three steps. First, we preprocess the raw data of the confirmed number of infected individuals in Subsection 4.1 to obtain an SIR time series $v_i[1], v_i[2], \dots$ of the viral state for every city i . Second, based on the time series $v_i[1], v_i[2], \dots$, we obtain estimates $\hat{\delta}_i$ and $\hat{\beta}_{ij}$ of the unknown spreading parameters δ_i and β_{ij} in Subsection 4.2. Third, the estimates $\hat{\delta}_i$ and $\hat{\beta}_{ij}$ result in an SIR model (1), which we iterate for future times k to predict the evolution of the 2019-Cov virus. Subsection 4.1 and Subsection 4.2 give an outline of the first two steps of the prediction method. We refer the reader to Appendix B for a detailed description of the prediction method.

4.1 Data Preprocessing

We denote the number of observations by n , which equals the number of days since January 21, 2020. Our goal is to obtain an SIR viral state vector $v_i[k] = (\mathcal{S}_i[k], \mathcal{I}_i[k], \mathcal{R}_i[k])^T$ for every city i at any time $k = 1, \dots, n$ based on the data described in Section 2. The fraction of susceptible individuals follows as $\mathcal{S}_i[k] = 1 - \mathcal{I}_i[k] - \mathcal{R}_i[k]$ at any time $k \geq 1$. Thus, it suffices to determine the fraction of infectious individuals $\mathcal{I}_i[k]$ and recovered individuals $\mathcal{R}_i[k]$. The fraction of infectious individuals $\mathcal{I}_i[k]$ follows² from the reported fraction of infections $\mathcal{I}_{\text{rep},i}[k]$ described in Section 2. We emphasise that the reported fraction of infections $\mathcal{I}_{\text{rep},i}[k]$ only lower-bounds the true fraction of infected individuals $\mathcal{I}_i[k]$ for two reasons. First, not all infectious individuals are aware that they are infected. Second, the

²The measurement data in Section 2 is the number $N_{\text{rep},i}[k]$ of individuals that are *detected* to be infected by 2019-nCoV. Upon detection of the infection, the respective individuals are hospitalised and, hence, not infectious any more to individuals outside of the hospital. We consider the reported fraction of infections $\mathcal{I}_{\text{rep},i}[k]$ as an *approximation* for the number of infectious individuals $\mathcal{I}_i[k]$.

diagnosing capacities in the hospitals are limited, particularly when the number of infections increases rapidly. Hence, not all infectious individuals that arrive at a hospital can be reported timely.

We do not know the fraction of removed individuals $\mathcal{R}_i[k]$. At the initial time $k = 1$, it is realistic to assume that $\mathcal{R}_i[1] = 0$ holds for every city i . At any time $k \geq 2$, the removed individuals $\mathcal{R}_i[k]$ could be obtained from (1), if the curing probability δ_i were known. However, we do not know the curing probability δ_i . Hence, we consider 50 equidistant candidate values for the curing probability δ_i , ranging from $\delta_{\min} = 0.01$ to $\delta_{\max} = 1$. We define the set of candidate values as $\Omega = \{\delta_{\min}, \dots, \delta_{\max}\}$. For every candidate value $\delta_i \in \Omega$, the fraction of removed individuals $\mathcal{R}_i[k]$ follows from (1) at all times $k \geq 2$. Thus, we obtain 50 potential sequences $\mathcal{R}_i[1], \dots, \mathcal{R}_i[n]$, each of which corresponding to one candidate value $\delta_i \in \Omega$. We estimate the curing probability δ_i , and hence implicitly the sequence $\mathcal{R}_i[1], \dots, \mathcal{R}_i[n]$, as the element in Ω that resulted in the best fit of the SIR model (1) to the measured number of infections.

The raw time series $\mathcal{I}_{\text{rep},i}[1], \dots, \mathcal{I}_{\text{rep},i}[n]$ exhibits erratic fluctuations. There is a single outlier³ in city $i = 1$ (Wuhan) at time $k = 17$ (January 28, 2020), which we replace by $\mathcal{I}_{\text{rep},1}[17] = (\mathcal{I}_{\text{rep},1}[16] + \mathcal{I}_{\text{rep},1}[18])/2$. To reduce the fluctuations, we apply a moving average, provided by the Matlab command `smoothdata`, to the time series $\mathcal{I}_{\text{rep},i}[1], \dots, \mathcal{I}_{\text{rep},i}[n]$ of every city i . The preprocessed time series $\mathcal{I}_i[1], \dots, \mathcal{I}_i[n]$ equals the output of `smoothdata`.

4.2 Network Inference

For every city i , the curing probability δ_i is estimated as one of the candidate values in Ω , as outlined in Subsection 4.1. The remaining task is to estimate the infection probabilities β_{ij} . The goal of *network inference* [33, 34, 35, 36] is to estimate the matrix of infection probabilities B from the SIR viral state observations $v_i[1], \dots, v_i[n]$. The matrix B can be interpreted as a weighted adjacency matrix. We adapt a network inference approach⁴ [38, 31], which is based on formulating a set of linear equations and the *least absolute shrinkage and selection operator* (LASSO) [39, 40]. The crucial observation from the SIR governing equations (1) is that β_{ij} appears linearly, whereas the state variables \mathcal{S}_i , \mathcal{I}_i and \mathcal{R}_i do not. From (1), the infection probabilities β_{ij} satisfy

$$V_i = F_i \begin{pmatrix} \beta_{i1} \\ \vdots \\ \beta_{iN} \end{pmatrix} \quad (2)$$

for all cities $i = 1, \dots, N$. Here, the $(n - 1) \times 1$ vector V_i and the $(n - 1) \times N$ matrix F_i are given by

$$V_i = \begin{pmatrix} \mathcal{I}_i[2] - (1 - \delta_i)\mathcal{I}_i[1] \\ \vdots \\ \mathcal{I}_i[n] - (1 - \delta_i)\mathcal{I}_i[n - 1] \end{pmatrix} \quad (3)$$

³Potentially, the outlier is due to the increase in the maximum number of individuals that can be diagnosed in Wuhan, from 200 to 2000 individuals per day as of January 27th [32].

⁴The network inference approach [31] is also applicable to general compartmental epidemic models [37], such as the Susceptible-Exposed-Infected-Removed (SEIR) epidemic model.

and

$$F_i = \begin{pmatrix} \mathcal{S}_i[1]\mathcal{I}_1[1] & \dots & \mathcal{S}_i[1]\mathcal{I}_N[1] \\ \vdots & \ddots & \vdots \\ \mathcal{S}_i[n-1]\mathcal{I}_1[n-1] & \dots & \mathcal{S}_i[n-1]\mathcal{I}_N[n-1] \end{pmatrix}. \quad (4)$$

If the SIR model (1) were an exact description of the evolution of the coronavirus, then the linear system (2) would hold with equality. However, the viral state vector $v_i[k]$ in city i does not exactly follow the SIR model (1). Instead, the evolution of the viral state vector $v_i[k]$ is described by

$$v_i[k+1] = f_{\text{SIR}}(v_1[k], \dots, v_N[k]) + w_i[k],$$

where the 3×1 vector $f_{\text{SIR}}(v_1[k], \dots, v_N[k])$ denotes the right-hand sides of the SIR model (1), and the 3×1 vector $w_i[k]$ denotes the unknown *model error* of city i at time k . Due to the model errors $w_i[k]$, the linear system (2) only holds approximately. Thus, we resort to estimating the infection probabilities β_{ij} by minimising the deviation of the left side and the right side of (2). We reconstruct the network by the LASSO [39, 40] as follows:

$$\begin{aligned} \min_{\beta_{i1}, \dots, \beta_{iN}} & \left\| V_i - F_i \begin{pmatrix} \beta_{i1} \\ \vdots \\ \beta_{iN} \end{pmatrix} \right\|_2^2 + \rho_i \sum_{j=1, j \neq i}^N \beta_{ij} \\ \text{s.t.} & \quad 0 \leq \beta_{ij} \leq 1, \quad j = 1, \dots, N. \end{aligned} \quad (5)$$

The first term in the objective function of (5) measures the deviation of the left side and the right side of (2). The sum in the objective of (5) is an ℓ_1 -norm regularisation term which avoids overfitting. We choose to not penalise the self-infection probability β_{ii} , since we expect the infections among individuals within the same city i to be dominant. The regularisation parameter $\rho_i > 0$ is set by cross-validation. The LASSO network inference (5) allows for the incorporation of a priori knowledge of the contact network B by adding further constraints to the infection probabilities β_{ij} . We emphasise that an accurate prediction of an SIR epidemic outbreak does not require an accurate network inference [31].

5 Evaluation of the Prediction Accuracy

The accuracy of the network-based prediction method in Section 4 is evaluated by comparison to a simple prediction method. Qualitatively, the virus spread in many epidemiological model follows a sigmoid function, see also [42]. A particular sigmoid function is obtained by logistic regression. As a comparison to the method in Section 4, we apply logistic regression on the reported fractions $\mathcal{I}_{\text{rep},i}[1], \dots, \mathcal{I}_{\text{rep},i}[n]$ of infection individuals, *independently* for each city i in Hubei. Logistic regression is advantageous because a logistic function is a closed-form expression, and its parameters can be determined by non-linear regression. Moreover, the logistic function is an approximation to the exact solution of some epidemiological models and population growth models [41, 42, 43]. For further details regarding logistic regression, we refer the reader to Appendix C.

We denote the cumulative fraction of infections at time k by

$$\mathcal{I}_{\text{cs},i}[k] = \sum_{\tau=1}^k \mathcal{I}_i[\tau].$$

At the time of writing, the data is available from January 21 until February 11, 2020. To evaluate the prediction accuracy, we remove the data for a fixed number of days, say m , prior to February 11. The prediction model is determined upon the data from 21 January up to 11 - m February, 2020. Then, we predict the course of the disease up to February 11, and the number of omitted days m is equal to the number of prediction days. The course of the disease is shown in Figure 2 for the removal of: (a) $m = 1$ day, (b) $m = 2$ days, (c) $m = 3$ days and (d) $m = 4$ days.

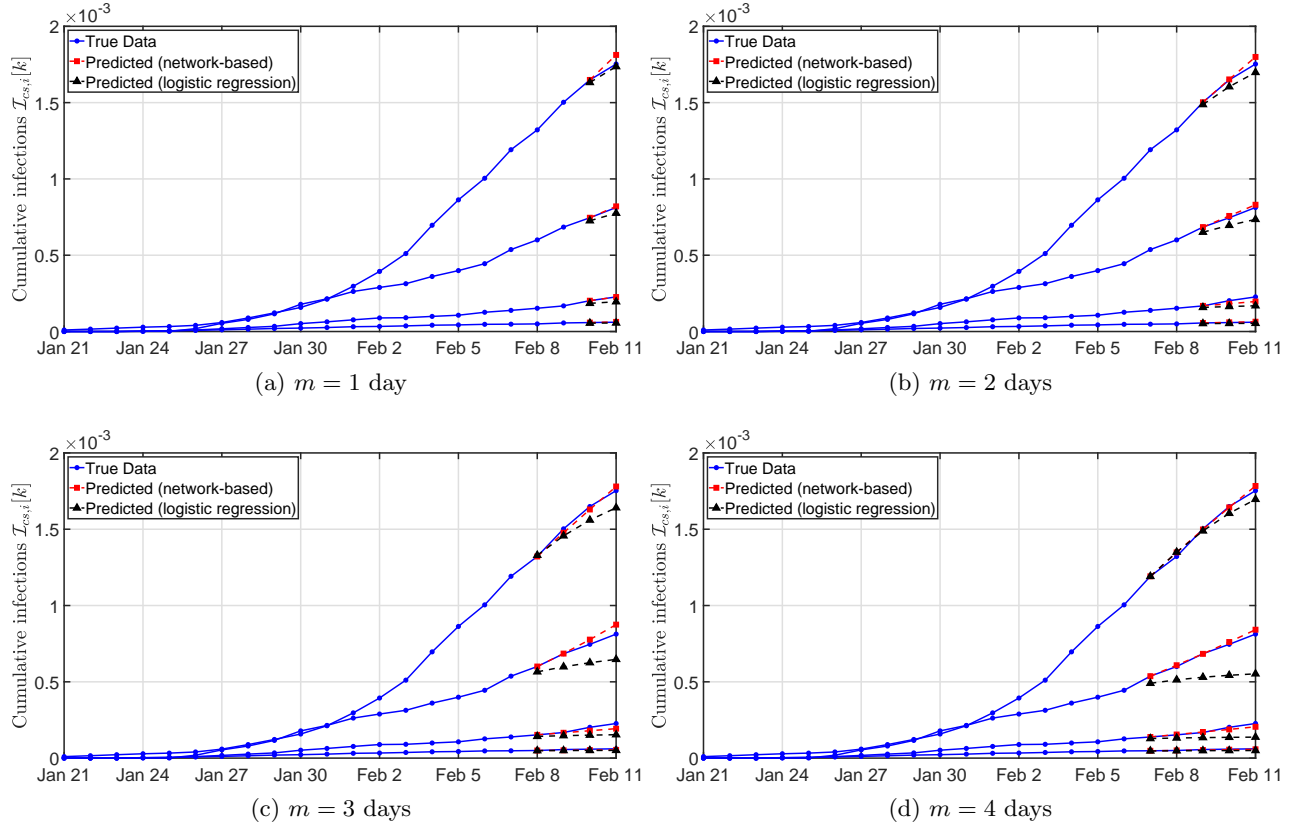


Figure 2: The prediction of the 2019-nCoV outbreak in Hubei by the network-based prediction method (5) and by simple logistic regression. For clarity, only four of the $N = 16$ cities are depicted. Each subfigure is obtained by omitting a number $m = 1, 2, 3, 4$ of days prior to February 11, 2020, and subsequently predicting the same number of days ahead in time. The omitted number of data points is equal to: (a) $m = 1$ day, (b) $m = 2$ days, (c) $m = 3$ days and (d) $m = 4$ days. The first prediction data point, for instance February 10 in subfigure (a), coincides with the last day that has been observed.

For most predictions shown in Figure 2, the logistic curve appears to underestimate the true fraction of infected individuals, whereas the network-based method seems to overestimate the true value. The logistic curve is therefore a lower bound prediction for the real fraction of infected individuals.

The prediction accuracy decreases if the prediction time is increased, which we quantify by the Mean Absolute Percentage Error (MAPE)

$$e[k] = \frac{1}{N} \sum_{i=1}^N \frac{|\hat{\mathcal{I}}_{cs,i}[k] - \mathcal{I}_{cs,i}[k]|}{\mathcal{I}_{cs,i}[k]},$$

at any time k . Here, $\hat{\mathcal{I}}_{cs,i}[k]$ denotes the predicted cumulative fraction of individuals of city i at time k . Figure 3 depicts the MAPE prediction error for the data shown in Figure 2. Two observations are worth mentioning. First, as expected, the prediction error increases when predicting more days ahead. Second, the network-based method always provides more accurate predictions than the logistic regression.

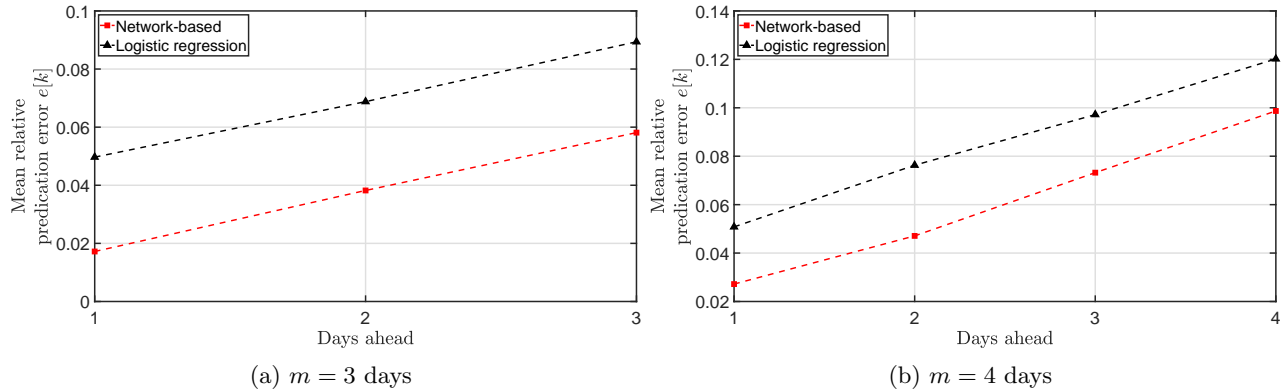


Figure 3: The accuracy of both prediction methods to forecast the 2019-nCoV outbreak in Hubei. Each subfigure is obtained by omitting a number of days prior to February 11, and subsequently predicting the same number of days ahead in time. The removed data points equal to $m = 3$ days (a) and $m = 4$ days (b).

Figure 4 illustrates the prediction accuracy versus the time that the epidemic outbreak has been observed. As the epidemic evolves, the prediction accuracy increases.

Finally, we consider the prediction of the fraction of infected individuals for the next five days. We stress that, as shown in Figure 2 and Figure 4, the prediction might be inaccurate for more than four days ahead. The predicted number of infected individuals for each city i is shown in Table 1.

6 Conclusions

We applied a network-based SIR epidemic model to predict the outbreak of the 2019-nCoV virus for each city in the Chinese province Hubei. The epidemic model allows to explicitly specify the interactions of individuals of different cities, for instance by using traffic patterns between cities. However, the precise interactions between cities is unknown and must be inferred from observing the evolution of the epidemic.

We proposed a network-based prediction method, which estimates the interactions between cities as an intermediate step. We did not assume any prior knowledge on the interactions between cities. The prediction method is evaluated on past data of the 2019-nCoV outbreak in Hubei. Our results indicate that a network-based modelling approach may yield more accurate predictions than modelling the epidemic for each city independently. We believe that the prediction method can be further improved, e.g., by using traffic flow patterns as prior knowledge.

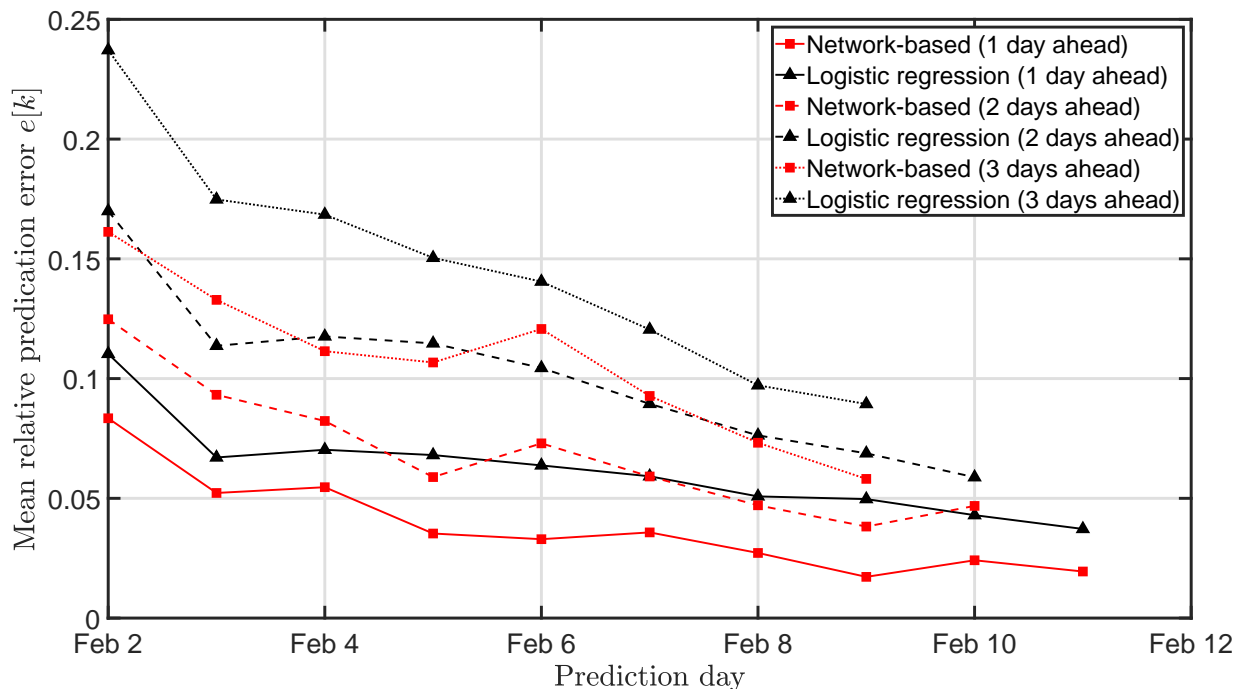


Figure 4: The accuracy of both prediction methods for the 2019-nCoV outbreak versus the date until the data is available. The solid lines correspond to a 1-day ahead prediction of the fraction of infected individuals. Dashed lines correspond to a 2-days ahead prediction, and the dotted lines corresponds to 3-days ahead.

Acknowledgements

We are grateful to Fenghua Wang for helping with collecting the data. Long Ma is grateful for the support from the China Scholarship Council.

References

- [1] V. J. Munster, M. Koopmans, N. van Doremalen, D. van Riel, and E. de Wit, “A novel coronavirus emerging in China-key questions for impact assessment,” *New England Journal of Medicine*, 2020.
- [2] Z. J. Cheng and J. Shan, “2019 novel coronavirus: Where we are and what we know,” *preprints.org*, 2020.
- [3] J. F.-W. Chan, S. Yuan, K.-H. Kok, K. K.-W. To, H. Chu, J. Yang, F. Xing, J. Liu, C. C.-Y. Yip, R. W.-S. Poon *et al.*, “A familial cluster of pneumonia associated with the 2019 novel coronavirus indicating person-to-person transmission: a study of a family cluster,” *The Lancet*, 2020.
- [4] www.who.int/emergencies/diseases/novel-coronavirus-2019/situation-reports
- [5] www.ecdc.europa.eu/en/geographical-distribution-2019-nCoV-cases
- [6] www.cdc.gov/coronavirus/2019-nCoV/index.html

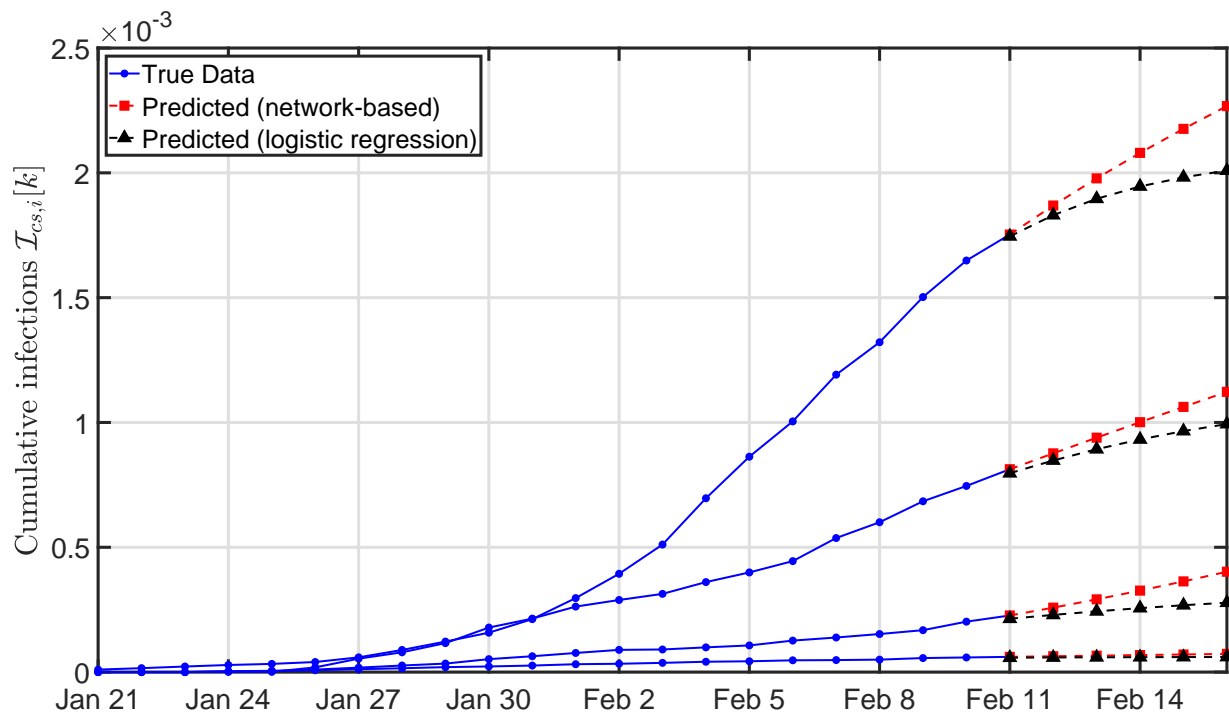


Figure 5: The predicted number of infected individuals for 4 cities in Hubei by both methods for the coming 5 days. The first prediction data point (February 11, 2020) coincides with the last day that has been observed. We selected 4 of the $N = 16$ cities to avoid overlapping curves. The predicted number of infected individuals for the network inference method is presented in Table 1.

- [7] S. Zhao, Q. Lin, J. Ran, S. S. Musa, G. Yang, W. Wang, Y. Lou, D. Gao, L. Yang, D. He *et al.*, “Preliminary estimation of the basic reproduction number of novel coronavirus (2019-nCoV) in China, from 2019 to 2020: A data-driven analysis in the early phase of the outbreak,” *International Journal of Infectious Diseases*, 2020.
- [8] M. Majumder and K. D. Mandl, “Early transmissibility assessment of a novel coronavirus in Wuhan, China (January 23, 2020),” *SSRN*, 2020.
- [9] Q. Li, X. Guan, P. Wu, X. Wang, L. Zhou, Y. Tong, R. Ren, K. S. Leung, E. H. Lau, J. Y. Wong *et al.*, “Early transmission dynamics in Wuhan, China, of novel coronavirus-infected pneumonia,” *New England Journal of Medicine*, 2020.
- [10] Y. Yang, Q. Lu, M. Liu, Y. Wang, A. Zhang, N. Jalali, N. Dean, I. Longini, M. E. Halloran, B. Xu, X. Zhang, L. Wang, W. Liu, and L. Fang, “Epidemiological and clinical features of the 2019 novel coronavirus outbreak in China,” *medRxiv*, 2020.
- [11] N. Imai, A. Cori, I. Dorigatti, M. Baguelin, C. A. Donnelly, S. Riley, and N. M. Ferguson, “Report 3: Transmissibility of 2019-nCoV,” *Reference Source*, 2019.
- [12] T. Liu, J. Hu, M. Kang, L. Lin, H. Zhong, J. Xiao, G. He, T. Song, Q. Huang, Z. Rong *et al.*, “Transmission dynamics of 2019 novel coronavirus (2019-nCoV),” *bioRxiv*, 2020.

Identifier i	City	Feb 12	Feb 13	Feb 14	Feb 15	Feb 16
1	Wuhan	19826	20981	22064	23084	24052
2	Huanggang	2465	2530	2596	2662	2728
3	Jingzhou	1145	1177	1209	1240	1271
4	Xiangyang	1119	1149	1179	1209	1239
5	Xiaogan	2855	2954	3049	3142	3232
6	Xiantao	483	507	530	554	577
7	Yichang	804	825	847	870	894
8	Shiyan	560	581	601	620	639
9	Enshi	211	219	227	235	242
10	Jingmen	717	736	755	774	792
11	Xianning	534	543	552	561	570
12	Huangshi	906	935	962	988	1014
13	Suizhou	1164	1198	1230	1262	1295
14	Ezhou	928	995	1061	1126	1189
15	Tianmen	334	376	422	469	519
16	Qianjiang	93	96	98	101	104

Table 1: The cumulative number of infected individuals predicted by the network-based method for each city in Hubei.

- [13] J. Riou and C. L. Althaus, “Pattern of early human-to-human transmission of Wuhan 2019-nCoV,” *bioRxiv*, 2020.
- [14] J. M. Read, J. R. Bridgen, D. A. Cummings, A. Ho, and C. P. Jewell, “Novel coronavirus 2019-nCoV: early estimation of epidemiological parameters and epidemic predictions,” *medRxiv*, 2020.
- [15] J. T. Wu, K. Leung, and G. M. Leung, “Nowcasting and forecasting the potential domestic and international spread of the 2019-nCoV outbreak originating in Wuhan, China: a modelling study,” *The Lancet*, 2020.
- [16] H. W. Hethcote, “The mathematics of infectious diseases,” *SIAM review*, vol. 42, no. 4, pp. 599–653, 2000.
- [17] J. A. P. Heesterbeek, “A brief history of R_0 and a recipe for its calculation,” *Acta biotheoretica*, vol. 50, no. 3, pp. 189–204, 2002.
- [18] O. Diekmann, J. A. P. Heesterbeek, and J. A. Metz, “On the definition and the computation of the basic reproduction ratio R_0 in models for infectious diseases in heterogeneous populations,” *Journal of mathematical biology*, vol. 28, no. 4, pp. 365–382, 1990.
- [19] W. Yang, A. Karspeck, and J. Shaman, “Comparison of filtering methods for the modeling and retrospective forecasting of influenza epidemics,” *PLoS computational biology*, vol. 10, no. 4, 2014.

- [20] T. K. Yamana, S. Kandula, and J. Shaman, “Individual versus superensemble forecasts of seasonal influenza outbreaks in the United States,” *PLoS computational biology*, vol. 13, no. 11, p. e1005801, 2017.
- [21] L. C. Brooks, D. C. Farrow, S. Hyun, R. J. Tibshirani, and R. Rosenfeld, “epiforecast: Tools for forecasting semi-regular seasonal epidemic curves and similar time series,” *GitHub repository*, 2015.
- [22] E. L. Ray and N. G. Reich, “Prediction of infectious disease epidemics via weighted density ensembles,” *PLoS computational biology*, vol. 14, no. 2, p. e1005910, 2018.
- [23] V. Colizza, A. Barrat, M. Barthélemy, and A. Vespignani, “The role of the airline transportation network in the prediction and predictability of global epidemics,” *Proceedings of the National Academy of Sciences*, vol. 103, no. 7, pp. 2015–2020, 2006.
- [24] D. Balcan, V. Colizza, B. Gonçalves, H. Hu, J. J. Ramasco, and A. Vespignani, “Multiscale mobility networks and the spatial spreading of infectious diseases,” *Proceedings of the National Academy of Sciences*, vol. 106, no. 51, pp. 21 484–21 489, 2009.
- [25] V. Belik, T. Geisel, and D. Brockmann, “Natural human mobility patterns and spatial spread of infectious diseases,” *Physical Review X*, vol. 1, no. 1, p. 011001, 2011.
- [26] D. Brockmann and D. Helbing, “The hidden geometry of complex, network-driven contagion phenomena,” *Science*, vol. 342, no. 6164, pp. 1337–1342, 2013.
- [27] S. Pei, S. Kandula, W. Yang, and J. Shaman, “Forecasting the spatial transmission of influenza in the United States,” *Proceedings of the National Academy of Sciences*, vol. 115, no. 11, pp. 2752–2757, 2018.
- [28] <http://www.hubei.gov.cn/>
- [29] T. Li and X. Xu, *Hubei Statistical Yearbook*. China Statistics Press, 2016.
- [30] M. Youssef and C. Scoglio, “An individual-based approach to SIR epidemics in contact networks,” *Journal of Theoretical Biology*, vol. 283, no. 1, pp. 136–144, 2011.
- [31] B. Prasse and P. Van Mieghem, “Network reconstruction and prediction of epidemic outbreaks for general group-based compartmental epidemic models,” *Submitted*, 2019.
- [32] <https://m.chinanews.com/wap/detail/zw/sh/2020/01-28/9071697.shtml>
- [33] L. Ma, Q. Liu, and P. Van Mieghem, “Inferring network properties based on the epidemic prevalence,” *Applied Network Science*, vol. 4, no. 1, p. 93, 2019.
- [34] F. Di Lauro, J.-C. Croix, M. Dashti, L. Berthouze, and I. Kiss, “Network inference from population-level observation of epidemics,” *arXiv preprint arXiv:1906.10966*, 2019.
- [35] M. Timme and J. Casadiego, “Revealing networks from dynamics: an introduction,” *Journal of Physics A: Mathematical and Theoretical*, vol. 47, no. 34, p. 343001, 2014.

- [36] W.-X. Wang, Y.-C. Lai, and C. Grebogi, “Data based identification and prediction of nonlinear and complex dynamical systems,” *Physics Reports*, vol. 644, pp. 1–76, 2016.
- [37] F. D. Sahneh, C. Scoglio, and P. Van Mieghem, “Generalized epidemic mean-field model for spreading processes over multilayer complex networks,” *IEEE/ACM Transactions on Networking (TON)*, vol. 21, no. 5, pp. 1609–1620, 2013.
- [38] B. Prasse and P. Van Mieghem, “Network reconstruction and prediction of epidemic outbreaks for NIMFA processes,” *arXiv preprint arXiv:1811.06741*, 2018.
- [39] R. Tibshirani, “Regression shrinkage and selection via the lasso,” *Journal of the Royal Statistical Society. Series B (Methodological)*, pp. 267–288, 1996.
- [40] T. Hastie, R. Tibshirani, and M. Wainwright, *Statistical learning with sparsity: the lasso and generalizations*. CRC press, 2015.
- [41] P.-F. Verhulst, “Notice sur la loi que la population suit dans son accroissement,” *Corresp. Math. Phys.*, vol. 10, pp. 113–126, 1838.
- [42] P. Van Mieghem, “Universality of the SIS prevalence in networks,” *arXiv preprint arXiv:1612.01386*, 2016.
- [43] B. Prasse and P. Van Mieghem, “Time-dependent solution of the NIMFA equations around the epidemic threshold,” *Submitted*, 2019.
- [44] S.-J. Kim, K. Koh, M. Lustig, S. Boyd, and D. Gorinevsky, “An interior-point method for large-scale l_1 -regularized least squares,” *IEEE journal of selected topics in signal processing*, vol. 1, no. 4, pp. 606–617, 2007.

A Details on the Data of the 2019-nCoV Epidemic Outbreak

Table 2 shows the cities of the province Hubei and the respective population size p_i for every city i . The time series of the reported number of infections $N_{\text{rep},i}[k]$ is stated in Table 3.

B Details of the Prediction Method

Algorithm 1 describes the prediction method, which was outlined in Section 4, in pseudocode⁵. In line 4, the Matlab command `smoothdata` is called to remove erratic fluctuations of the raw data $\mathcal{I}_{\text{rep},i}[k]$. We denote the $N \times 1$ infection state vector by $\mathcal{I}[k] = (\mathcal{I}_1[k], \dots, \mathcal{I}_N[k])^T$ at any time k . The loop starting in line 8 iterates over all candidate values of the curing probability δ_i which are in the set Ω . Algorithm 1 calls the network inference method, which is stated in pseudocode by Algorithm 2. For a fixed curing probability δ_i , the network inference in line 12 returns an estimate

⁵The Matlab code is available upon request to the authors.

Identifier i	City	Population p_i
1	Wuhan	10,607,700
2	Huanggang	6,291,000
3	Jingzhou	5,705,900
4	Xiangyang	5,614,000
5	Xiaogan	4,878,000
6	Xiantao	1,155,000
7	Yichang	4,115,000
8	Shiyan	3,383,000
9	Enshi (autonomous prefecture)	3,327,000
10	Jingmen	2,896,300
11	Xianning	2,507,000
12	Huangshi	2,458,000
13	Suizhou	2,190,800
14	Ezhou	1,059,500
15	Tianmen	1,292,000
16	Qianjiang	958,000

Table 2: Cities (prefecture-level divisions) in the province Hubei, China. We do not consider the city Shennongjia in this work, since the number of infections with the 2019-nCoV in Shennongjia is very small.

for the infection probabilities $\beta_{i1}(\delta_i), \dots, \beta_{iN}(\delta_i)$. Furthermore, the network inference returns the mean squared error $\text{MSE}(\delta_i)$, which corresponds to the first term in the objective of (5). The smaller the mean squared error $\text{MSE}(\delta_i)$, the better the fit of the SIR model (1) to the data $\mathcal{I}_i[1], \dots, \mathcal{I}_i[n]$. In line 14, the final estimate $\hat{\delta}_i$ for the curing probability is obtained as the minimiser of the mean squared error $\text{MSE}(\delta_i)$. The estimate $\hat{\delta}_i$ determines the final estimates $\hat{\beta}_{i1}, \dots, \hat{\beta}_{iN}$ for the infection probabilities in line 15. From line 17 to line 27, the SIR model (1) is iterated, which results in the predicted fraction of infections $\hat{\mathcal{I}}_i[n+1], \dots, \hat{\mathcal{I}}_i[n+n_{\text{pred}}]$ for all cities i .

To determine the regularisation parameter ρ_i in the LASSO (5), we consider 100 candidate values specified by the set $\Theta_i = \{\rho_{\min,i}, \dots, \rho_{\max,i}\}$. In line 4 of Algorithm 2, the maximum value is set to $\rho_{\max,i} = 2\|F_i^T V_i\|_\infty$. If $\rho_i > \rho_{\max,i}$, then [44] the solution to the LASSO (5) is $\beta_{ij} = 0$ for all cities j . For every value of the regularisation parameter $\rho_i \in \Theta_i$, we compute the mean squared error $\text{MSE}(\delta_i, \rho_i)$ by 3-fold cross-validation [40]. For every fold, the rows of the matrix F_i and the vector V_i are divided into a training set $F_{i,\text{train}}, V_{i,\text{train}}$ and a validation set $F_{i,\text{val}}, V_{i,\text{val}}$. We compute the solution $\beta_{i1}, \dots, \beta_{iN}$ to the LASSO (5) on the training set of every fold $F_{i,\text{train}}, V_{i,\text{train}}$. The mean squared error $\text{MSE}(\delta_i, \rho_i)$ then equals

$$\left\| V_{i,\text{val}} - F_{i,\text{val}} \begin{pmatrix} \beta_{i1} \\ \vdots \\ \beta_{iN} \end{pmatrix} \right\|_2^2,$$

averaged over all folds. Finally, we set the regularisation parameter ρ_i to the minimiser of $\text{MSE}(\delta_i, \rho_i)$.

City	21-1	22-1	23-1	24-1	25-1	26-1	27-1	28-1	29-1	30-1	31-1	1-2	2-2	3-2	4-2	5-2	6-2	7-2	8-2	9-2	10-2	11-2
Wuhan	105	62	70	65	46	80	892	315	356	378	576	894	1033	1242	1967	1766	1501	1985	1378	1921	1552	1104
Huanggang	0	0	0	64	58	32	59	111	172	77	153	276	244	176	223	162	90	144	96	115	80	66
Jingzhou	0	6	2	2	23	14	24	30	50	70	66	46	166	114	100	88	84	56	56	48	30	35
Xiangyang	0	0	0	0	2	34	34	61	32	123	61	94	107	84	103	52	51	69	55	57	44	25
Xiaogan	0	0	22	4	29	45	73	101	125	142	87	121	169	202	342	424	255	172	123	105	101	109
Xiaotao	0	0	2	8	1	1	15	5	23	35	7	43	29	19	37	40	42	52	20	37	22	22
Yichang	0	0	1	0	19	11	20	12	54	50	109	77	39	60	44	67	47	23	71	45	23	12
Shiyan	0	0	1	4	15	20	25	23	31	31	27	35	44	35	27	35	42	43	29	14	24	31
Enshi	0	0	0	11	6	8	13	13	15	9	12	18	6	12	15	6	13	3	6	21	8	8
Jingmen	0	1	0	20	17	52	24	28	49	36	24	78	16	55	22	86	45	35	41	12	15	40
Xianning	0	0	0	0	43	21	27	21	18	36	40	40	50	52	36	15	44	33	17	14	8	10
Huangshi	0	0	0	0	31	5	17	33	27	55	41	43	82	71	104	57	69	68	50	52	30	39
Suizhou	0	0	0	5	31	16	18	46	27	85	76	80	74	183	65	128	81	38	31	65	46	34
Ezhou	0	0	0	1	0	19	37	27	39	66	38	51	28	26	50	41	48	98	67	89	65	71
Tianmen	0	0	0	3	2	8	10	11	10	23	15	17	16	2	11	10	25	16	18	20	44	32
Shennongjia	0	0	0	0	0	0	1	2	2	2	0	0	0	3	0	0	0	0	0	0	0	0
Qianjiang	0	0	0	0	0	5	2	1	2	2	15	8	0	9	10	10	10	6	2	3	5	0

Table 3: The time series of the reported number of infections $N_{\text{rep},i}[k]$ for every city i .

Algorithm 1 Epidemic outbreak prediction

- 1: **Input:** reported fraction of infections $\mathcal{I}_{\text{rep},i}[1], \dots, \mathcal{I}_{\text{rep},i}[n]$ for all cities i ; prediction time n_{pred}
2: **Output:** predicted fraction of infections $\hat{\mathcal{I}}_i[n+1], \dots, \hat{\mathcal{I}}_i[n+n_{\text{pred}}]$ for all cities i

Step 1 – Data preprocessing

- 3: $\mathcal{I}_{\text{rep},1}[17] \leftarrow (\mathcal{I}_{\text{rep},1}[16] + \mathcal{I}_{\text{rep},1}[18])/2$
4: $\mathcal{I}_i[1], \dots, \mathcal{I}_i[n] \leftarrow \text{smoothdata}(\mathcal{I}_{\text{rep},i}[1], \dots, \mathcal{I}_{\text{rep},i}[n])$ for all $i = 1, \dots, N$
5: $\mathcal{I}[k] \leftarrow (\mathcal{I}_1[k], \dots, \mathcal{I}_N[k])^T$ for all $k = 1, \dots, n$

Step 2 – Network inference

- 6: **for** $i = 1, \dots, N$ **do**
7: $\mathcal{R}_i[1] \leftarrow 0$
8: **for** $\delta_i \in \Omega$ **do**
9: $\mathcal{R}_i[k] \leftarrow \mathcal{R}_i[k-1] + \delta_i \mathcal{I}_i[k-1]$ for all $k = 2, \dots, n$
10: $\mathcal{S}_i[k] \leftarrow 1 - \mathcal{I}_i[k] - \mathcal{R}_i[k]$ for all $k = 1, \dots, n$
11: $v_i[k] \leftarrow (\mathcal{S}_i[k], \mathcal{I}_i[k], \mathcal{R}_i[k])^T$ for all $k = 1, \dots, n$
12: $(\beta_{i1}(\delta_i), \dots, \beta_{iN}(\delta_i), \text{MSE}(\delta_i)) \leftarrow \text{Network inference}(\delta_i, v_i[1], \dots, v_i[n], \mathcal{I}[1], \dots, \mathcal{I}[n])$
13: **end for**
14: $\hat{\delta}_i \leftarrow \underset{\delta_i \in \Omega}{\text{argmin}} \text{MSE}(\delta_i)$
15: $(\hat{\beta}_{i1}, \dots, \hat{\beta}_{iN}) \leftarrow \beta_{i1}(\hat{\delta}_i), \dots, \beta_{iN}(\hat{\delta}_i)$
16: **end for**

Step 3 – Iterating SIR model

- 17: **for** $i = 1, \dots, N$ **do**
18: $\hat{\mathcal{I}}_i[n] \leftarrow \mathcal{I}_i[n]$
19: $\hat{\mathcal{R}}_i[1] \leftarrow 0$
20: $\hat{\mathcal{R}}_i[k] \leftarrow \hat{\mathcal{R}}_i[k-1] + \hat{\delta}_i \mathcal{I}_i[k-1]$ for all $k = 2, \dots, n$
21: **end for**
22: **for** $k = n+1, \dots, n+n_{\text{pred}}$ **do**
23: **for** $i = 1, \dots, N$ **do**
24: $\hat{\mathcal{I}}_i[k] \leftarrow (1 - \hat{\delta}_i) \hat{\mathcal{I}}_i[k-1] + (1 - \hat{\mathcal{I}}_i[k-1] - \hat{\mathcal{R}}_i[k-1]) \sum_{j=1}^N \hat{\beta}_{ij} \hat{\mathcal{I}}_j[k-1]$
25: $\hat{\mathcal{R}}_i[k] \leftarrow \hat{\mathcal{R}}_i[k-1] + \hat{\delta}_i \hat{\mathcal{I}}_i[k-1]$
26: **end for**
27: **end for**
-

The final estimate $\beta_{i1}(\delta_i), \dots, \beta_{iN}(\delta_i)$ for the infection probabilities is obtained by solving the LASSO (5) on the whole matrix F_i and vector V_i . To solve the LASSO (5) numerically, we make use of the Matlab command `quadprog`.

Algorithm 2 Network inference

- 1: **Input:** curing probability δ_i ; viral state $v_i[k]$ for $k = 1, \dots, n$; infection state vector $\mathcal{I}[k]$ for $k = 1, \dots, n$
 - 2: **Output:** infection probability estimates $\beta_{i1}(\delta_i), \dots, \beta_{iN}(\delta_i)$; mean squared error $\text{MSE}(\delta_i)$
 - 3: Compute V_i and F_i by (3) and (4)
 - 4: $\rho_{\max,i} \leftarrow 2\|F_i^T V_i\|_\infty$
 - 5: $\rho_{\min,i} \leftarrow 10^{-4}\rho_{\max,i}$
 - 6: $\Theta_i \leftarrow 100$ logarithmically equidistant values from $\rho_{\min,i}$ to $\rho_{\max,i}$
 - 7: **for** $\rho_i \in \Theta_i$ **do**
 - 8: estimate $\text{MSE}(\delta_i, \rho_i)$ by 3-fold cross-validation on F_i, V_i and solving (5) on the respective training set
 - 9: **end for**
 - 10: $\rho_{\text{opt},i} \leftarrow \underset{\rho_i \in \Theta_i}{\text{argmin}} \text{MSE}(\delta_i, \rho_i)$
 - 11: $(\beta_{i1}(\delta_i), \dots, \beta_{iN}(\delta_i)) \leftarrow$ the solution to (5) on the whole data set F_i, V_i for $\rho_i = \rho_{\text{opt},i}$
 - 12: $\text{MSE}(\delta_i) \leftarrow \text{MSE}(\delta_i, \rho_{\text{opt},i})$
-

C Logistic Regression

A logistic curve is given by the following equation

$$y(t) = \frac{y_\infty}{1 + e^{-K(t-t_0)}}. \quad (6)$$

In our formulation, $y(t)$ is the time-dependent fraction of infectious individuals, t is the time in days, where January 21 serves as initial condition ($t = 0$), y_∞ is the fraction of infected individuals when time approaches infinity, K is the logistic growth rate and t_0 indicates the inflection point of the logistic equation. For each city in Hubei, we have applied the Matlab command `lsqcurvefit` to fit the reported cumulative fraction

$$\mathcal{I}_{\text{rep,cs},i}[k] = \sum_{\tau=1}^k \mathcal{I}_{\text{rep},i}[\tau]$$

of infected individual to equation (6).