

A Heterogeneous Dynamical Graph Neural Networks Approach to Quantify Scientific Impact

Fan Zhou¹, Xovee Xu¹, Ce Li¹, Goce Trajcevski², Ting Zhong¹ and Kunpeng Zhang³

¹University of Electronic Science and Technology of China, Chengdu, China

²Iowa State University, IA, USA

³University of Maryland, College park, MD, USA

fan.zhou@uestc.edu.cn, xovee@live.com, ce.lc@outlook.com, gocet25@iastate.edu, zhongting@uestc.edu.cn, kpzhang@umd.edu

Abstract

Quantifying and predicting the long-term impact of scientific writings or individual scholars has important implications for many policy decisions, such as funding proposal evaluation and identifying emerging research fields. In this work, we propose an approach based on Heterogeneous Dynamical Graph Neural Network (HDGNN) to explicitly model and predict the cumulative impact of papers and authors. HDGNN extends heterogeneous GNNs by incorporating temporally evolving characteristics and capturing both structural properties of attributed graph and the growing sequence of citation behavior. HDGNN is significantly different from previous models in its capability of modeling the node impact in a dynamic manner while taking into account the complex relations among nodes. Experiments conducted on a real citation dataset demonstrate its superior performance of predicting the impact of both papers and authors.

1 Introduction

The pace of growth of the body of scientific research has been rapidly increasing in recent years. For example, the number of records in DBLP¹ has increased from 2,486,800 in 2013, to 4,893,893 in 2019; according to the AI index report 2019², the number of peer-reviewed AI publications has increased by 300% between 1998-2018. Quantifying the impact of the publications, as well as individual scholars/authors is an important task in many domains of societal and scientific relevance. For example, funding agencies and research institutes need to deeply understand the current research development – e.g., discovering frontier ideas, identifying breakthrough topics and productive scholars, seeking well-fitted scientists for defined projects, hiring high-quality faculties [Fortunato *et al.*, 2018] – for improved policy/decision making. The availability of various scientific databases, such as Web of Science, Google Scholar, DBLP and U.S. Patent, provides an unprecedented opportunity to explore the career of scientists and the dynamic evolving process of paper dissemination. However,

scientific impacts of scholars and papers can be affected by a variety of factors. For example, a productive researcher may publish a number of papers every year, but the impact of her/his publications may vary significantly [Sinatra *et al.*, 2016]. Also, some scientific findings may receive a burst of attention immediately, while others may take decades since their original publication date [Ke *et al.*, 2015].

Existing works: Quantifying and foreseeing the (impact of) scientific diffusion have been scrutinized by generations of researchers since [Price, 1965]. Earlier efforts [Yan *et al.*, 2011; Acuna *et al.*, 2012; Wang *et al.*, 2013] primarily focused on extracting indicative features and discovering latent mechanisms that drive the accumulation of citations. Features of scholars such as the number of publications, the *h*-index, years since the first publication were used to forecast the future *h*-index in [Acuna *et al.*, 2012]. Factors such as topical authority and publication venue that may increase citations were used to predict the scientific impact in [Dong *et al.*, 2016]. Despite certain merits, the previous works are limited on the impact predictability due to the confluence of different and sometimes controversial factors [Clauset *et al.*, 2017; Ke *et al.*, 2015], and the difficulty of generalizing the knowledge from one discipline to another. Meanwhile, some implicit but important factors are not fully leveraged in a scientific way, such as academic authority that amplifies author/paper exposure and facilitates grants funding. Another line of work predicts the propagation of scientific impact from the perspective of stochastic information dynamics, relying on various pattern-recognition based models (e.g., Hawkes process and Poisson process) [Shen *et al.*, 2014; Cao *et al.*, 2017]. These methods are theoretically solid and demonstrated their advancement, particularly for interpretability, but they require longer sequences of observations and are unable to fully leverage the complex interactions among authors and papers for impacts prediction.

Recent applications of deep neural networks on graph-based data have inspired numerous models for capturing temporal and sequential process of information diffusion, including scientific impact. DeepCas [Li *et al.*, 2017] is a graph-embedding based popularity prediction model, learning the representation of cascade graphs with DeepWalk [Perozzi *et al.*, 2014] and the diffusion process via recurrent neural networks [Chung *et al.*, 2014]. CasCN [Chen *et al.*, 2019] exploits the structure of each information cascade by

¹<https://dblp.uni-trier.de/statistics/recordsindblp>

²<https://hai.stanford.edu/ai-index/2019>

a dynamic graph convolutional network (GCN) [Kipf and Welling, 2017], and predicts the size of cascades while taking the directionality of cascades and time decay effects into consideration. As a multi-task learning framework, it simultaneously predicts the information popularity at the macro-level and the user participation in re-posting at the micro-level. However, these approaches deal with representation learning of homogeneous graphs, which limits their capability of exploiting the information associated with node attributes and complex relations among heterogeneous nodes. Thus, incorporating meaningful relations among nodes into the information diffusion remains one of the unaddressed issues in existing methods, which also motivates our present work.

Present work: In this paper, we propose a Heterogeneous Dynamical Graph Neural Networks (HDGNN)-based approach to study the dynamic evolving process of scientific impact while capturing rich semantics embedded in bibliographic graphs. HDGNN bridges the gap between dynamical GNNs [Trivedi *et al.*, 2019; Manessi *et al.*, 2020] and heterogeneous information network (HIN) embedding [Zhang *et al.*, 2019a; Lu *et al.*, 2019; Shi *et al.*, 2018], which have largely been studied independently in the prior works. HDGNN learns academic graph representation with a heterogeneous GNN that aggregates neighboring features of nodes with a newly designed weighted contextualized node selection strategy and temporal-attentive representation network, while preserving the unevenly distributed scientific impact of nodes. It also captures the dynamic evolution of nodes and the temporal dependencies among authors/papers, by encoding temporal cascading information into node representations which, in turn, sheds light on the underlying mechanism that accumulates the impact for both authors and papers.

Our main contribution is two-fold: (1) We study scientific impact quantification problem from the view of heterogeneous graph learning compared to prevalent homogeneous graph/cascade learning models [Li *et al.*, 2017; Chen *et al.*, 2019], which allows us to capture complex and rich interactions among different types of nodes. (2) We extend heterogeneous graph learning with a temporal horizon, enabling us to address the dynamic prediction problem – compared to existing HIN embedding works, which mainly focus on graph representation learning and/or several relevant *static* tasks such as link prediction and node classification [Zhang *et al.*, 2019a; Lu *et al.*, 2019].

2 Preliminaries

We now introduce the necessary background and formally define our problem settings.

Consider *papers* and *authors* as two independent sets of entities, denoted as P and A , respectively. For each paper p , $p.t$ indicates the time since its first publication. For each author a , $a.t$ represents how many years this author has been publishing papers. Let t_r be the reference time and t_p be the prediction time, c_p^t be the number of citations of paper p at time $p.t$, and c_a^t the number of citations of author a at time $a.t$. The scientific impact predictions for papers and authors can be defined as regression problems as follows:

Problem 1 (Scientific impact prediction for papers). *Given*

N papers $\{p_i\}_{i \in N}$, for each paper p_i and its associated observations at time $p.t_r$, we aim to predict its total number of citations $c_{p_i}^{t_p}$ at prediction time $p.t_p$, i.e., how many times this paper has been cited since publication.

Problem 2 (Scientific impact prediction for authors). *Given* M authors $\{a_i\}_{i \in M}$, for each author a_i and its associated observations at time $a.t_r$, we aim to predict its total number of citations $c_{a_i}^{t_p}$ at prediction time $a.t_p$, i.e., how many times this author has been cited since her first publication.

Given the above we build an academic heterogeneous graph $\mathcal{G} = (\mathcal{V}, \mathcal{E}, \mathcal{A}, \mathcal{R}, \mathcal{C}_{\mathcal{V}})$, where \mathcal{V} denotes the set of nodes and \mathcal{E} is the set of weighted and directed edges indicating node relations. For each node in \mathcal{V} , it is associated with a node type in \mathcal{A} (we consider $|\mathcal{A}| = 3$ types of nodes: paper, author, and venue). Edges in \mathcal{E} are described by 7 different types defined in \mathcal{R} : author *writes* paper, author *collaborates with* author, author *publishes in* venue, author *cites* paper, paper *is published in* venue, paper *cites* paper, and paper *cites* author(s). Additionally, node features are represented by $\mathcal{C}_{\mathcal{V}}$, including content of papers, profiles of authors, etc.

Suppose we have N papers and M authors. During an observation window each paper or author can be cited by other papers/authors. Then, the sequence of citations can be represented as $[(p_j, t_j)]_j (t_j \leq t_r)$, i.e., cascades. Given the exact number of citations c^{t_p} at prediction time t_p for a particular paper/author, the scientific impact prediction problem can be solved by optimizing the mean square error loss between predicted number of citations \hat{c}^{t_p} and the true number c^{t_p} .

3 Methodology: HDGNN

We now present our proposed model HDGNN, which consists of two main building blocks: (i) heterogeneous representation learning via Graph Neural Networks (GNNs); and (ii) temporal paper sequence modeling and author aggregating via Recurrent Neural Networks (RNNs). For simplicity, here we use *scientific impact prediction for papers* as an illustrative scenario, with a note that the results can be easily generalized to the scenario of *scientific impact prediction for authors* (we show the prediction results for both settings in Section 4).

3.1 Heterogeneous Graph Representation

The first part of HDGNN is to learn representation of nodes in \mathcal{G} . Specifically, for a paper node p , author node a , and venue node v – given heterogeneous neighbors in a non-Euclidean graph structure – we learn a low-dimensional node embedding $E(p/a/v)$ via a mapping function $f : p/a/v \rightarrow E(p/a/v) \in \mathbb{R}^{d_E}$ and the embedding preserves neighboring proximity. Towards that, we borrow the idea of random walk with restart [Tong *et al.*, 2006] and a deep neural network architecture [LeCun *et al.*, 2015] from [Zhang *et al.*, 2019a] to model the heterogeneous graph representation learning.

Heterogeneous neighboring node sampling. Given a node n (paper/author/venue) in graph \mathcal{G} , the distribution of its neighboring nodes may be highly skewed, i.e., some nodes connect to a large number of other nodes (e.g., those highly

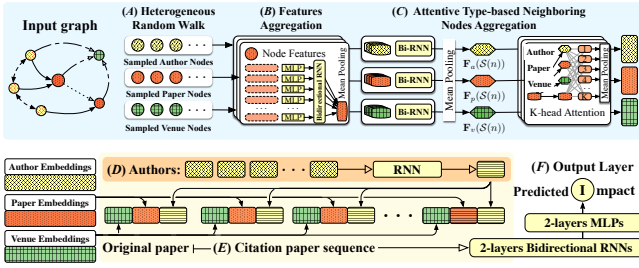


Figure 1: The overall architecture of HDGNN: (A): Walk heterogeneous nodes by using a weighted contextualized node selection strategy based on random walk with restart; (B) and (C): Aggregating node features and heterogeneous neighbors of nodes with bidirectional RNNs and multi-head attention mechanism; (D): Multiple author aggregation; (E): Sequential citation aggregation; (F): Scientific impact predictor with RNNs and MLPs.

cited papers/authors) while most of them only have a few neighbors, greatly following the heavy-tailed distribution of citations [Fortunato *et al.*, 2018]. High impact journals, productive authors, or influential papers, often have higher degrees compared to other majorities. To accommodate this factor into our model, we design a weighted contextualized node selection strategy based on random walk, which is more suitable for capturing scientific impact and imbalanced distribution of nodes in the heterogeneous academic graph. Specifically, for each current step, a given node n either returns to the previous node with probability q , or jumps to the next neighbor node with probability $1 - q$. Let $\mathcal{N}(n)$ be the set of n 's neighbors. Then the node n has a probability $1 - q$ to select one of its neighbors $\mathcal{N}(n)$ based on node types \mathcal{A} , edge types \mathcal{R} , and node/edge characteristics. Specifically, the probability to walk to the next node m from n is:

$$\Pr(m|\mathcal{N}(n), \mathcal{G}) = \begin{cases} (1 - q)\alpha D^\alpha(m), & \text{if } \mathcal{A}_m \text{ is paper} \\ (1 - q)\beta D^\beta(m), & \text{if } \mathcal{A}_m \text{ is author} \\ (1 - q)\gamma D^\gamma(m), & \text{if } \mathcal{A}_m \text{ is venue} \end{cases} \quad (1)$$

where $D^\alpha(*)$, $D^\beta(*)$, $D^\gamma(*)$ are influence functions measuring node influence from various factors, e.g., arrival time, node degrees, pagerank scores, and similarities, according to the node type \mathcal{A}_m or edge type \mathcal{R}_e .

Through running random walks iteratively, we can sample a fixed number of nodes for each node type in \mathcal{A} , resulting in three sets denoted as: $\mathcal{S}(p)$, $\mathcal{S}(a)$, and $\mathcal{S}(v)$, respectively. Note that we consider edge directions, weights, and node degrees when sampling representative heterogeneous neighbors.

Aggregating node features. After sampling the neighbors for each node, we utilize Bidirectional Gated Recurrent Units (Bi-GRUs) [Chung *et al.*, 2014] to model the dependencies among the nodes' content features. Assuming that there are k content features for one specific type of nodes, the feature aggregation can be formalized as:

$$\mathbf{F}(n) = \frac{1}{k} \sum_{i=1}^k \left(\overrightarrow{\text{GRU}}(\mathbf{h}_n^i) \parallel \overleftarrow{\text{GRU}}(\mathbf{h}_n^i) \right), \quad (2)$$

$$\mathbf{h}_n^i = \text{MLP}(\mathbf{C}_n^i), \text{ for } i = 1, 2, \dots, k \quad (3)$$

where $\mathbf{F}(n) \in \mathbb{R}^{d_n}$ is the aggregated embedding of node n computed by mean pooling; \parallel denotes the concatenation operation; \mathbf{C}_n are k heterogeneous node content features and $\mathbf{h}_n^i \in \mathbb{R}^{d_h}$ is the output of the Multi-Layer Perceptron (MLP). In practical applications, various content features can be used here to enhance the model learning ability – e.g., meta-data and the text of papers (title, abstract, main body), illustrations/figures historical publications of authors/venues, profiles and honors of authors.

Aggregating heterogeneous neighbors. After aggregating node content features, for each node n in the graph \mathcal{G} we have its corresponding aggregated features $\mathbf{F}(n)$. Then we are ready to use a type-based RNN to aggregate embeddings of the neighbors in $\mathcal{S}(n)$. For each node type in \mathcal{A} (in our case the paper/author/venue), $\mathcal{S}_{p/a/v}(n)$ is the homogeneous type-specific neighboring set of node n and $\text{RNN}_{p/a/v}$ is a type-specific aggregator. More specifically, HDGNN utilizes another Bi-GRU for modeling n 's neighbors:

$$\mathbf{F}_{\mathcal{A}_n}(\mathcal{S}_{\mathcal{A}_n}(n)) = \frac{\sum_{i=1}^{|\mathcal{S}_{\mathcal{A}_n}(n)|} \left(\overrightarrow{\text{GRU}}(\mathbf{F}(i)) \parallel \overleftarrow{\text{GRU}}(\mathbf{F}(i)) \right)}{|\mathcal{S}_{\mathcal{A}_n}(n)|}, \quad (4)$$

for $i = 1, 2, \dots, |\mathcal{S}_{\mathcal{A}_n}(n)|$

where $\mathbf{F}_{\mathcal{A}_n}(\mathcal{S}(n)) \in \mathbb{R}^{d_s}$ is the output embedding from the homogeneous neighboring set $\mathcal{S}_{\mathcal{A}_n}(n)$, and d_s is the dimension of aggregated neighboring embeddings of node n .

In HDGNN we use deterministic neural networks, bidirectional RNN, and mean pooling as aggregators of node's content along with node's neighbors. Alternatively, other types of aggregators, e.g., last hidden state of RNNs, CNNs, max pooling, can be used (cf. [Zhang *et al.*, 2019a; Hamilton *et al.*, 2017]).

Multi-head attention for type-based neighbors. With each of the type-based neighboring aggregators in hand, we are able to combine them using multi-head attention mechanism [Veličković *et al.*, 2018]:

$$\alpha_i = \frac{\exp(\text{LeakyReLU}(u^T [\mathbf{F}(n) \parallel \mathbf{F}_i^S]))}{\sum_{j \in \mathcal{S}'(n)} \exp(\text{LeakyReLU}(u^T [\mathbf{F}(n) \parallel \mathbf{F}_j^S]))},$$

$$\mathcal{S}'(n) = \mathbf{F}(n) \cup \{\mathbf{F}_j^S\}_{j \in \mathcal{S}(n)},$$

$$E(n) = \frac{1}{K} \sum_{i=K} \sum_{\mathbf{F}_i(n) \in \mathcal{S}'(n)} \alpha_i \mathbf{F}_i(n) \quad (5)$$

where $E(n) \in \mathbb{R}^{d_E}$ is the learned embedding of node n , LeakyReLU is the activation function, \parallel denotes the concatenation operation, u is the attention parameter, and K is the number of attention heads. Here, $\mathbf{F}(n)$ and $\mathbf{F}_j^S = \mathbf{F}_{\mathcal{A}_j}(\mathcal{S}_{\mathcal{A}_j})$ are computed by Eq. (2) and Eq. (4), respectively.

3.2 Citation Cascading and Author Aggregation

The second part of HDGNN is to model the cascading behavior of the papers/authors. Here we consider each paper p as an independent entity. Recall that $p.t_0$ is the publication time of p , $p.t_r$ is the reference time, $\{(p_j, t_j)\}_j$ is the set of citation papers of p published at time t_j during the observation window $[p.t_0, p.t_r](t_j \leq p.t_r)$. Since we already

obtained embeddings of the papers $E(p)$, authors $E(a)$, and venues $E(v)$ (cf. Eq. (5)), we now separately model authors of a paper and the paper itself by feeding them into RNNs.

Multi-author aggregation layer. Note that each citing paper p_j of a given/original paper p , may contain multiple authors (in our dataset the mean number of authors per paper is 3.438 and the max is 25). We sequentially pipeline the author embeddings into a GRU and then use the last hidden state $\mathbf{h}_{p_j}^a$ as the representation of p_j 's authors.

Sequential citation aggregation layer. After author aggregation, for each paper p_j , we have its own embedding $E(p_j)$, the corresponding venue embedding $E(v_j)$, and the aggregated author embeddings $E(\mathbf{a}_j) = \mathbf{h}_{p_j}^a$. We then use a two-layer Bi-GRU to sequentially aggregate the citing papers ordered by their publishing time t_j , where each citing paper p_j is modeled as the combination of paper, authors, and venue. The rationale is that we expect to capture temporal dependencies among citing papers, which, as we will show in the experiments, is superior to other aggregators such as sum or max pooling [Hamilton *et al.*, 2017]. The overall architecture of the citation aggregation can be formalized as:

$$\begin{aligned} \mathbf{E}(p_j) &= (E(p_j) || E(\mathbf{a}_j) || E(v_j)), \\ \mathbf{h}_j^1 &= (\overrightarrow{\text{GRU}}(\mathbf{E}(p_j)) || \overleftarrow{\text{GRU}}(\mathbf{E}(p_j))), \\ \mathbf{h}_j^2 &= (\overrightarrow{\text{GRU}}(\mathbf{h}_i^1) || \overleftarrow{\text{GRU}}(\mathbf{h}_i^1)) \end{aligned} \quad (6)$$

where $\mathbf{h}_j^2 \in \mathbb{R}^{d_{h^2}}$ is the j -th hidden state of the second layer of Bi-GRU. Here we concatenate the last hidden state of Bi-GRU as the final output representation of paper, and then make use of it to predict the scientific impact of p .

Output and model training. The output of HDGNN is the predicted citation number $c_p^{t_p}$ of a paper p . We use a two-layer of MLPs with GeLU activation [Hendrycks and Gimpel, 2016]. The training losses of graph representation and impact prediction are respectively defined as:

$$\mathcal{L}_1(\Theta_1) = \arg \max_{\Theta_1} \prod_{n \in \mathcal{V}} \prod_{\mathcal{A}_n} \prod_{n_c \in \mathcal{N}_c} \Pr(n_c | n; \Theta_1), \quad (7)$$

$$\mathcal{L}_2(\Theta_2) = \frac{1}{N_T} \sum_{i=1}^{N_T} (\hat{c}_{p_i}^{t_p} - c_{p_i}^{t_p})^2 \quad (8)$$

where $\mathcal{N}_c(n)$ is the type-based neighboring set of node n , $\Pr(n_c | n; \Theta_1)$ is the conditional probability, N_T is the number of training samples, and $\hat{c}_{p_i}^{t_p}$ is the predicted number of citations of paper p_i at time t_p .

As for scientific impact prediction for scholars, the general training process is similar, except that Eq. (8) is alternatively defined as: $\mathcal{L}_2(\Theta_2) = \frac{1}{M_T} \sum_{i=1}^{M_T} (\hat{c}_{a_i}^{t_p} - c_{a_i}^{t_p})^2$, where $\hat{c}_{a_i}^{t_p}$ is the predicted number of citations for author a_i .

4 Experiments

We evaluate HDGNN and several baselines on two scientific impact predictions – paper and author citations, respectively.

Dataset. The evaluations were performed on American Physical Society (APS) dataset³. The APS dataset contains over 422K academic papers on 17 venues and 54M citations among papers between 1893 and 2017. The constructed heterogeneous graph of APS contains 616,316 papers, 430,950 authors, and 17 venues. For edges we have: author *writes* paper (2.9M), author *collaborates with* author (2.8M), author *publishes in* venue (0.6M), author *cites* paper (20.5M), paper *cites* paper (7.3M), paper *cites* author (4.8M), paper *is published in* venue (0.6M). For papers (authors) in the dataset, we select 20 years as the prediction time $p.t_p$ ($a.t_p$). Thus, we only consider the papers published before 1997, to ensure that each paper has at least 20 years to grow its citations count. In the same way, selected authors are required to start their research career no later than 1997. We set reference time to 2 years and we note that papers/authors whose citations are less than 10 during the observation window are filtered out. The settings of prediction for authors are as the same as that for papers. After the preprocessing, we have a total of 11,475 papers and 14,318 authors. We use 50% of them for training, 25% for validation and the rest 25% for testing. Figure 2 shows the statistics of APS dataset.

Baselines. The baselines used for comparison include feature-oriented models, graph embedding models, graph neural networks, as well as the state-of-the-art information cascade popularity prediction models.

- **Uniform** – for all papers/authors, we always predict their impact as a fixed number, uniformly searched from the minimum $\log c_{p/a}^{t_p}$ to maximum $\log c_{p/a}^{t_p}$ with a step of 0.001.
- **Feature** – we extract features into a linear regression model: observed citations $c_{p/a}^{t_r}$, mean arrival time, and degrees of nodes. We use observed citation $c_{p/a}^{t_r}$ (i.e., Feature- c^{t_r}) as a simple baseline.
- **DeepCas** [Li *et al.*, 2017] – is a deep learning based prediction model utilizing DeepWalk for graph embedding and RNNs for cascade modeling and predicting.
- **DeepHawkes** [Cao *et al.*, 2017] – makes use of Hawkes point processes and neural networks for cascade prediction.
- **CasCN** [Chen *et al.*, 2019] – utilizes GCN [Kipf and Welling, 2017] and LSTM to model the structural and temporal information of cascades.

Variants of HDGNN. In order to compare other graph representation frameworks with our proposed HDGNN, we select following 10 models to replace the first part of HDGNN as variants, including homogeneous or heterogeneous methods, skip-gram based or matrix factorization based methods: **DeepWalk** [Perozzi *et al.*, 2014], **LINE** [Tang *et al.*, 2015], **Metapath2Vec** [Dong *et al.*, 2017], **ProNE** [Zhang *et al.*, 2019b], together with graph neural network **GraphSAGE** [Hamilton *et al.*, 2017] and **HetGNN** [Zhang *et al.*, 2019a]. Besides, we substitute the RNN aggregator with max pooling or sum pooling as two additional variants, denoted as **HDGNN-MaxP** and **HDGNN-SumP**. To evaluate the impact of author/venue embeddings, we separately remove the author part or venue part in Eq. (6) as **HDGNN-NoAuthor** and **HDGNN-NoVenue**.

³<https://journals.aps.org/datasets>

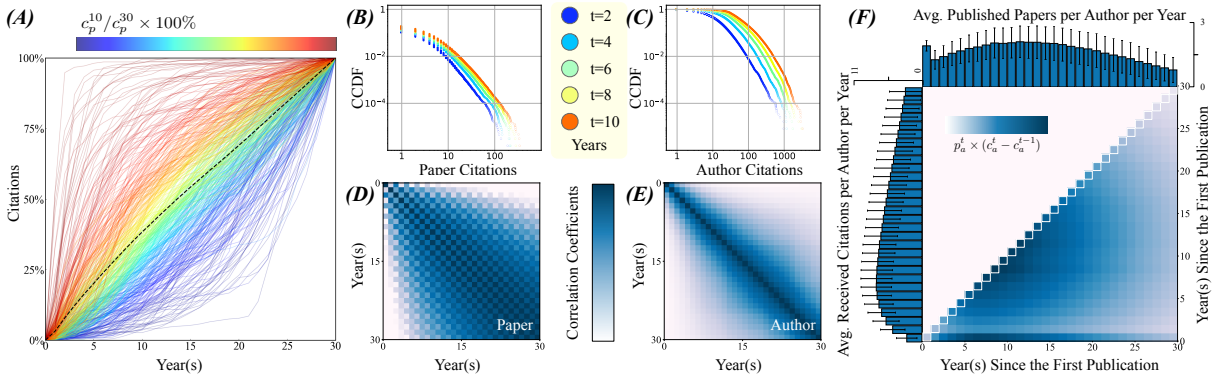


Figure 2: Dataset statistics: (A): 509 papers with more than 200 citations after 30 years since publication before 1987. Lines represent normalized citation growth trends, line colors indicate citation rank of papers at the tenth year, i.e., $c_p^{10}/c_p^{30} \times 100\%$; dashed line denote the mean values. (B) and (C): Complementary cumulative distribution function (CCDF) of paper citations and author citations over 30 years, respectively. The (i, j) block in heatmap represents the correlation between i -th year's and j -th year's cumulative citations for all papers/authors. (D) and (E): Pearson correlation coefficients of paper citations and author citations over 30 years, respectively. The (i, j) block in heatmap represents the correlation between i -th year's and j -th year's cumulative citations for all papers/authors. (F): The value of the i -th diagonal block of the heatmap is $p_a^i \times (c_a^i - c_a^{i-1})$, i.e., the average number of papers each author published at the i -th year multiplied by the average number of citations each author received at the i -th year; Top histogram: average published papers per author per year, Left histogram: average citations authors received per year (errorbars are standard deviations).

Model	Papers		Authors	
	MSLE	ACC	MSLE	ACC
Uniform	0.588	49.70%	1.102	36.37%
Feature- c^{t_r}	0.401	58.35%	0.939	39.16%
Feature	0.361	58.77%	0.832	40.19%
DeepCas	0.349	58.22%	0.787	41.45%
DeepHawkes	0.328	59.91%	0.725	42.38%
CasCN	0.310	61.71%	0.692	44.03%
DeepWalk	0.288	68.89%	0.627	49.09%
LINE	0.281	68.70%	0.614	47.88%
Metapath2Vec	0.294	66.38%	0.642	49.72%
GraphSAGE	0.309	64.97%	0.675	48.46%
HetGNN	0.292	65.79%	0.607	51.06%
ProNE	0.297	66.60%	0.635	47.65%
HDGNN-MaxP	0.358	64.22%	0.810	42.71%
HDGNN-SumP	0.280	69.90%	0.749	44.10%
HDGNN-NoAuthor	0.279	69.05%	0.605	50.00%
HDGNN-NoVenue	0.290	67.10%	0.651	48.26%
HDGNN	0.268	69.77%	0.590	51.62%

Table 1: Performance comparison: prediction for papers/authors. Bold: t -test compared to the best baseline ($p < 0.005$).

Metrics. We use two widely used evaluation metrics [Zhao *et al.*, 2015; Shen *et al.*, 2014; Cao *et al.*, 2017], i.e., mean square logarithmic error (MSLE) and accuracy (ACC):

- MSLE: $\frac{1}{N_t} \sum_{i=1}^{N_t} (\log \hat{c}_{p_i/a_i}^{t_p} - \log c_{p_i/a_i}^{t_p})^2$;
 - ACC: $\frac{1}{N_t} \sum_{i=1}^{N_t} \mathbf{1}(0.5 * c_{p_i/a_i}^{t_p} \leq \hat{c}_{p_i/a_i}^{t_p} \leq 1.5 * c_{p_i/a_i}^{t_p})$;
- where $\mathbf{1}(\cdot)$ is the indicator function, N_t is the test sample size.

Experimental settings. For all graph representation baselines, we set the embedding dimension to 128. Random walk restart probability q is 0.5, walk length is 30, and number of walks for each node equals to 5. For type specific parameters $D^\alpha(*), D^\beta(*), D^\gamma(*),$ we use node in-

degree and edge weights as a proxy of node influence. For HDGNN and its variants, the learning rate is chosen from $\{1, 10^{-1}, \dots, 10^{-5}\}$, and the node embedding size is 128. The length of citation sequence of all methods (whether RNN, LSTM or GRU) is set to 100 – i.e., the max number of citation sequence. For papers/authors whose length is more than 100, we only select their first 100 citations (as for author sequence, the length of RNN is set to 6). The units are set to 128 and 64 in two-layer Bi-RNNs, and to 64 and 32 in two-layer MLPs. For feature aggregation RNNs, we use paper title embeddings pre-trained via BERT [Devlin *et al.*, 2019], and node embeddings pre-trained via DeepWalk. All the other hyper-parameters of baselines are set to their default values. Performance results are reported with early stopping on validation loss of 10 epoch patience. The source code of HDGNN is released at <https://github.com/Xovee/hdgenn>.

Prediction performance. We show the performance of all the models in Table 1, and we observe that:

- (1) HDGNN outperforms all the other methods in both paper and author impact prediction. This result demonstrates the effectiveness of learning interactions among heterogeneous nodes with the proposed heterogeneous information aggregation, which can be further verified by the fact that both feature-based models and homogeneous cascade prediction methods do not show comparable performance. Previous popularity prediction methods, e.g., DeepCas, DeepHawkes and CasCN, do not distinguish the type of nodes and therefore fail to model their complex and meaningful interactions.
- (2) Author impact prediction is much harder than that of papers. As shown in (B)-(E) in Figure 2, the citation number of authors is higher than that of papers by orders of magnitude, as well as the coefficients of correlation between observed and future citations. In fact, in settings of two year observation, the proportion of average observed citations c_p^2 to c_p^{20} is about 9.1% for authors. In contrast, the proportion for papers is 34.6% (cf. (A) in Figure 2), which explains why prediction

for authors’ impact is more difficult – i.e., largely due to insufficient observations and enormous variability in scholars’ productivity [Clauset *et al.*, 2017] (cf. **(F)** in Figure 2). In addition, paper citation is strongly correlated to the factors such as the citations a paper has gained and the importance of publication venue (e.g., journal impact factor), which can be easily modeled in the graph with node attributes. In contrast, scholars’ impact is far more unstable due to implicit factors such as funding scheme, tenure, gender issues – all of which need to be quantified with external high-resolution data repositories.

Ablation study. We now investigate the effect of important modules in HDGNN. Firstly, the information aggregation mechanism used in HDGNN is better than other graph embedding techniques including two heterogeneous network embedding methods, i.e., Metapath2Vec and HetGNN – because of the more complex relations considered in our model and the benefit of considering temporal dependencies between citation sequences and/or author sequences. For example, HDGNN models 7 types of relations among nodes, whereas HetGNN, in contrast, only considers 3 edge types.

Additionally, the publication venue plays a vital role in predicting the impact of an author or a paper. This is demonstrated by the significant performance degradation after removing venue embedding in Eq. (6). Authorship, surprisingly, is less important than the journal that a paper published in, though masking the authorship information may slightly degrade the prediction performance. As for aggregation choices, both max pooling and sum pooling are inferior to the RNN aggregator used in HDGNN, due to their lack of sequential dependencies, which are important for evolving trend prediction.

Qualitative analysis. Figure 3 shows the prediction results on 8 representative journals – the lower the MSLE and/or the higher the accuracy, the better performance. The performance of HDGNN varies significantly on different publication venues – this is natural since venue is a strong indicator for future impact accumulation. In addition, we found that the prediction accuracy is affected by the citation distribution of papers in a journal. For example, the standard deviation of 20 year citations of papers (i.e., c_p^{20}) on Rev. Mode. Phys. is very high (255.02), whereas the value on Phys. Rev. is significantly less (43.24). This discrepancy also reveals why prediction of papers on Rev. Mode. Phys. is more difficult.

Figure 4 plots the latent space learned in HDGNN, where we can observe clear clustering phenomena of author/paper embeddings from **(A)** and **(C)**. It appears that papers published in the same journal tend to cluster together, which also indicates publication venue is an important indicator for scientific impact prediction. In addition, we also visualize a “crowd effect” of high impact papers/authors, as shown in **(B)** and **(D)**. This also implies strong correlations among high impact scholars and papers, e.g., high impact scholars prefer to cite papers from other high impact authors/papers. In other words, there indeed exists a positive feedback loop between high impact papers/scholars. Another interesting result can be visualized is the gradually decaying color of the paper/author citations, implying that heavy-tailed distribution

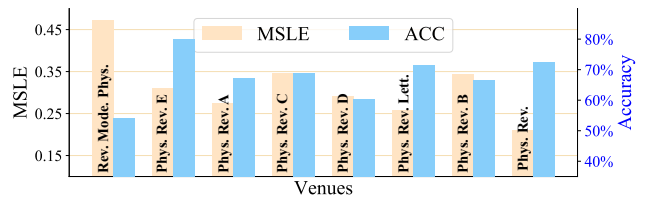


Figure 3: Performance of HDGNN on 8 representative venues.

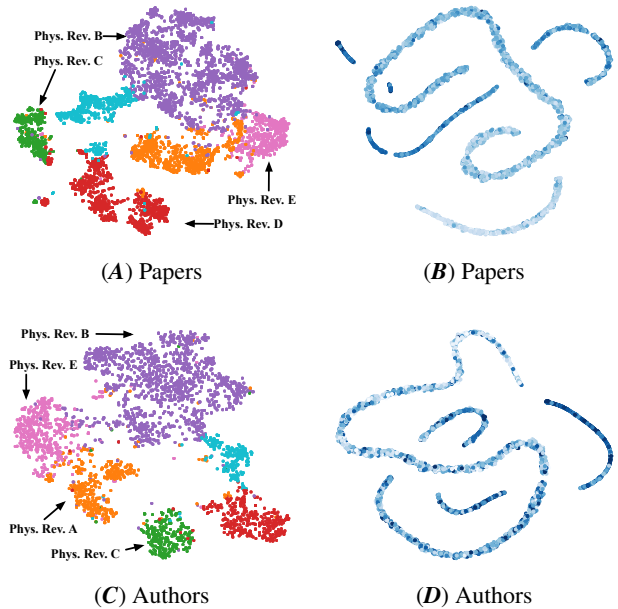


Figure 4: Plot latent space of 6 venues after mapping to 2D with t-SNE (best viewed in color). **(A)** and **(C)** show paper/author embeddings retrieved from the heterogeneous graph representation (i.e., $E(n)$, cf. Section 3.1) – colors are specified by venues; **(B)** and **(D)** plot paper/author citation embeddings from the prediction layer (i.e., h^2 , cf. Section 3.2) – colors are specified by magnitude of citations.

of scientific impact is successfully (to some extent at least) encoded in our model. It could also explain why our dynamic heterogeneous neighboring aggregation with weighted contextualized node selection strategy substantially outperforms other homogeneous and heterogeneous graph embeddings.

5 Conclusion

We introduced the HDGNN approach for effectively quantifying and predicting the scientific impact of scholars and research publications, by bridging the dynamic processes of impact evolution and complex nodes interactions. We presented an efficient network sampling method with the consideration of rich node relations and a temporally attentive neighbor aggregation network to model the complex and accumulating dynamic processes of scientific impact. Evaluations on a real-world scientific dataset demonstrated the superior performance HDGNN in comparison to several state-of-the-art baselines. Future work will investigate the impact of cross-institutional collaboration on citations.

Acknowledgments

This work was supported by National Natural Science Foundation of China (Grant No.61602097, 61472064, U19B2028 and 61772117), NSF grants III 1213038 and CNS 1646107.

References

- [Acuna *et al.*, 2012] Daniel E Acuna, Stefano Allesina, and Konrad P Kording. Future impact: Predicting scientific success. *Nature*, 489(7415):201, 2012.
- [Cao *et al.*, 2017] Qi Cao, Huawei Shen, Keting Cen, Wentao Ouyang, and Xueqi Cheng. Deephawkes: Bridging the gap between prediction and understanding of information cascades. In *CIKM*, 2017.
- [Chen *et al.*, 2019] Xueqin Chen, Fan Zhou, Kunpeng Zhang, Goce Trajcevski, Ting Zhong, and Fengli Zhang. Information diffusion prediction via recurrent cascades convolution. In *ICDE*, 2019.
- [Chung *et al.*, 2014] Junyoung Chung, Caglar Gulcehre, KyungHyun Cho, and Yoshua Bengio. Empirical evaluation of gated recurrent neural networks on sequence modeling. *arXiv preprint arXiv:1412.3555*, 2014.
- [Clauset *et al.*, 2017] Aaron Clauset, Daniel B Larremore, and Roberta Sinatra. Data-driven predictions in the science of science. *Science*, 355(6324):477–480, 2017.
- [Devlin *et al.*, 2019] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. In *NAACL-HLT*, pages 4171–4186, 2019.
- [Dong *et al.*, 2016] Yuxiao Dong, Reid A Johnson, and Nitesh V Chawla. Can scientific impact be predicted? *IEEE Transactions on Big Data*, 2(1):18–30, 2016.
- [Dong *et al.*, 2017] Yuxiao Dong, Nitesh V Chawla, and Ananthram Swami. metapath2vec: Scalable representation learning for heterogeneous networks. In *KDD*, pages 135–144, 2017.
- [Fortunato *et al.*, 2018] Santo Fortunato, Carl T Bergstrom, Katy Börner, James A Evans, Dirk Helbing, Staša Milojević, Alexander M Petersen, Filippo Radicchi, Roberta Sinatra, Brian Uzzi, et al. Science of science. *Science*, 359(6379), 2018.
- [Hamilton *et al.*, 2017] Will Hamilton, Zhitao Ying, and Jure Leskovec. Inductive representation learning on large graphs. In *NIPS*, pages 1024–1034, 2017.
- [Hendrycks and Gimpel, 2016] Dan Hendrycks and Kevin Gimpel. Bridging nonlinearities and stochastic regularizers with gaussian error linear units. *arXiv preprint arXiv:1606.08415*, 2016.
- [Ke *et al.*, 2015] Qing Ke, Emilio Ferrara, Filippo Radicchi, and Alessandro Flammini. Defining and identifying sleeping beauties in science. *PNAS*, 112:7426–7431, 2015.
- [Kipf and Welling, 2017] Thomas N. Kipf and Max Welling. Semi-supervised classification with graph convolutional networks. In *ICLR*, 2017.
- [LeCun *et al.*, 2015] Yann LeCun, Yoshua Bengio, and Geoffrey Hinton. Deep learning. *Nature*, 521(7553):436, 2015.
- [Li *et al.*, 2017] Cheng Li, Jiaqi Ma, Xiaoxiao Guo, and Qiaozhu Mei. Deepcas: An end-to-end predictor of information cascades. In *WWW*, 2017.
- [Lu *et al.*, 2019] Yuanfu Lu, Chuan Shi, Linmei Hu, and Zhiyuan Liu. Relation structure-aware heterogeneous information network embedding. In *AAAI*, pages 4456–4463, 2019.
- [Manessi *et al.*, 2020] Franco Manessi, Alessandro Rozza, and Mario Manzo. Dynamic graph convolutional networks. *Pattern Recognition*, 97, 2020.
- [Perozzi *et al.*, 2014] Bryan Perozzi, Rami Al-Rfou, and Steven Skiena. Deepwalk: Online learning of social representations. In *KDD*, pages 701–710, 2014.
- [Price, 1965] Derek J De Solla Price. Networks of scientific papers. *Science*, pages 510–515, 1965.
- [Shen *et al.*, 2014] Huawei Shen, Dashun Wang, Chaoming Song, and Albert-László Barabási. Modeling and predicting popularity dynamics via reinforced poisson processes. In *AAAI*, 2014.
- [Shi *et al.*, 2018] Yu Shi, Qi Zhu, Fang Guo, Chao Zhang, and Jiawei Han. Easing embedding learning by comprehensive transcription of heterogeneous information networks. In *KDD*, pages 2190–2199, 2018.
- [Sinatra *et al.*, 2016] Roberta Sinatra, Dashun Wang, Pierre Deville, Chaoming Song, and Albert-László Barabási. Quantifying the evolution of individual scientific impact. *Science*, 354(6312):aaf5239, 2016.
- [Tang *et al.*, 2015] Jian Tang, Meng Qu, Mingzhe Wang, Ming Zhang, Jun Yan, and Qiaozhu Mei. Line: Large-scale information network embedding. In *WWW*, pages 1067–1077, 2015.
- [Tong *et al.*, 2006] Hanghang Tong, Christos Faloutsos, and Jia-Yu Pan. Fast random walk with restart and its applications. In *ICDM*, pages 613–622. IEEE, 2006.
- [Trivedi *et al.*, 2019] Rakshit Trivedi, Mehrdad Farajtabar, Prasenjeet Biswal, and Hongyuan Zha. Dyrep: Learning representations over dynamic graphs. In *ICLR*, 2019.
- [Veličković *et al.*, 2018] Petar Veličković, Guillem Cucurull, Arantxa Casanova, Adriana Romero, Pietro Liò, and Yoshua Bengio. Graph attention networks. In *ICLR*, 2018.
- [Wang *et al.*, 2013] Dashun Wang, Chaoming Song, and Albert-László Barabási. Quantifying long-term scientific impact. *Science*, 342(6154):127–132, 2013.
- [Yan *et al.*, 2011] Rui Yan, Jie Tang, Xiaobing Liu, Dongdong Shan, and Xiaoming Li. Citation count prediction: learning to estimate future citations for literature. In *CIKM*, pages 1247–1252, 2011.
- [Zhang *et al.*, 2019a] Chuxu Zhang, Dongjin Song, Chao Huang, Ananthram Swami, and Nitesh V Chawla. Heterogeneous graph neural network. In *KDD*, pages 793–803, 2019.

- [Zhang *et al.*, 2019b] Jie Zhang, Yuxiao Dong, Yan Wang, Jie Tang, and Ming Ding. Prone: fast and scalable network representation learning. In *IJCAI*, pages 4278–4284, 2019.
- [Zhao *et al.*, 2015] Qingyuan Zhao, Murat A Erdogdu, Hera Y He, Anand Rajaraman, and Jure Leskovec. Seismic: A self-exciting point process model for predicting tweet popularity. In *KDD*, 2015.