

HOW MUCH OFF-THE-SHELF KNOWLEDGE IS TRANSFERABLE FROM NATURAL IMAGES TO PATHOLOGY IMAGES?

Xingyu Li, and Konstantinos N. Plataniotis***

* Department of Electrical and Computer Engineering, University of Alberta

**The Edward S. Rogers Department of Electrical and Computer Engineering, University of Toronto

ABSTRACT

Deep learning has achieved a great success in natural image classification. To overcome data-scarcity in computational pathology, recent studies exploit transfer learning to reuse knowledge gained from natural images in pathology image analysis, aiming to build effective pathology image diagnosis models. Since transferability of knowledge heavily depends on the similarity of the original and target tasks, significant differences in image content and statistics between pathology images and natural images raise the questions: how much knowledge is transferable? Is the transferred information equally contributed by pre-trained layers? To answer these questions, this paper proposes a method to quantify knowledge gain by a particular layer, conducts an empirical investigation into pathology image centered transfer learning, and reports some interesting observations. Different from prior arts in transfer learning, we show that transferability of off-the-shelf representation heavily depends on specific pathology image sets, and may obtain classification performance close to random guess. The observation in this study encourages further investigation of specific metric and tools to quantify the feasibility of transfer learning in future.

1. INTRODUCTION

Pathology is a medical sub-specialty that studies and practices the diagnosis of disease through examining biopsy samples under microscopes by pathologists. It serves as the golden truth of cancer diagnosis. To address subjectivity in pathology examination [1, 2], computational pathology exploits image analysis and machine learning for histological information understanding in tissue images. Owing to its time-efficiency, consistency, and objectivity, computational pathology merges as a promising approach to cancer diagnosis and prognosis. Based on domain knowledge of cancer diagnosis, many algorithms based on hand-crafted feature engineering were proposed to classify pathology images using nuclei’s morphology and spatial-distribution features and image texture features [3, 4, 5, 6, 7, 8, 9, 10]. Though pathology image diagnosis has achieved impressive progress using hand-crafted feature engineering, effective numerical representation of heterogeneous histological information in pathology images is still the bottleneck. To address this issue, data-driven methods, especially the end-to-end training of convolutional neural network (CNN), are adopted more often in recent pathology image classification studies [11, 12, 13, 14, 15, 16, 17, 18]. Though data sets containing hundreds of pathology images are considered “quite” large, they are still far smaller compared to the number of parameters in a medium-size neural network. Consequently, deep diagnostic models training with these data sets are prone to over-fitting and less generalizable to pathology practice.¹

One candidate to do address the shortage of large database in deep learning is transfer learning. In transfer learning, a “data-hungary” net is trained on a very large database, e.g. ImageNet, and then the pre-trained model is applied to relevant but different tasks. Many studies have demonstrated its effectiveness in data-scarce applications related to natural image classification and object recognition [19, 20, 21, 22], and natural language processing (NLP) [23]. However, due to the lack of very large annotated pathology image database, there is no reliable pre-trained deep model available in computational pathology. Hence, different from prior studies where data in the original and target tasks share similar properties (e.g. training and test sets are composed of natural images), transfer learning in computational pathology usually adopts pre-trained CNNs on natural images instead [24, 25, 26, 27, 28, 29].

It should be noted that though there are different strategies, transfer learning is essentially the use of knowledge gained in one task to solve a new but related problem. Hence, transferability of knowledge heavily depends on the similarity between the

¹To address the shortage of large database in deep pathology learning, collecting large pathology image set is highly desirable. However, due to difficulty and time-consuming nature of pathology annotation, large pathology databases with labels are expensive to collect. With recent advance in whole-slide imaging, we believe that very large pathology image sets would accelerate the development of deep learning in computational pathology.

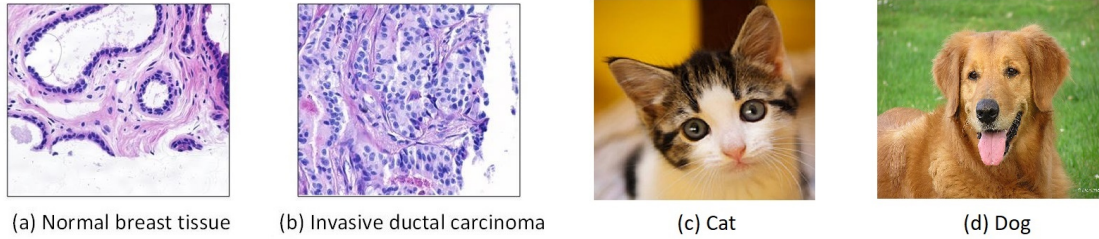


Fig. 1. Examples of (a)-(b) hemotoxylin and eosin (H&E) stained pathology images and (c)-(d) natural images. The left upper image corresponds to a normal tissue while right upper image contains abnormal breast cancer tissue. Compared to the natural images, pathology images appears more similar.

original and target tasks, and features transfer more poorly when the datasets are less similar [21]. Consequently, when using transfer learning, one needs to identify the layers generating general features so that layers computing task-specific features are either discarded or fine-tuned. As researchers focusing on computational pathology, we are fully aware the significant differences in image contents and statistics between pathology images and natural images (which is demonstrated in Fig. 1, and want to investigate reliability of transfer learning, particularly the off-the-shelf feature extraction strategy, by answering following questions:

- Is transfer learning still effective from natural image classification to computational pathology?
- Which layer in a deep net contributes more to pathology image diagnosis?

Though the answer to these questions form the basis of current pathology-image centered transfer learning, seldom literature tackles it and, to the best of our knowledge, there are only two studies related to our questions. The study in [26] concludes that fine-tuning a pre-trained net outperforms training a CNN from scratch in medical image analysis. However the experimentation does not include pathology image sets. Recently, different strategies to combine off-the-shelf features are investigated in pathology image centered transfer learning [29]. Since this study focuses on comparison of different pre-trained models (i.e. VGG16, ResNet, and DenseNet et al.), it is non-trivial to infer the descriptive power of off-the-shelf representations by layers directly from its results.

Our Contributions

To answer above three questions, we define a way to measure information gain of a particular layer in a pre-trained CNN. Using performance of a random-weight layer as the comparison baseline, the knowledge gain of that particular layer is quantified by the gap between their classification accuracy. We conduct experimentation using two public-accessible breast cancer pathology image sets and leverage the widely-used AlexNet as our pre-trained model. Based on our experimental results, we obtain following main observations, some of which are interesting and unexpected.

- Because of significant differences in image content and statistics, off-the-shelf representations learned from natural images may not boost pathology image diagnosis. Its performance varies depending on the complexity of pathology images [30, 31]. This observation is unexpected and different from prior work [29].
- For the pathology image set collected by the Israel Institute of Technology [30], image classification is boosted using pre-trained AlexNet. Through middle-layer representations from the AlexNet lead to the highest diagnosis rates, transferred general knowledge mainly resides in the early layers and the middle layers seem the places where transition from generality toward specificity commences.

Our experimental observation suggests that the strategy of off-the-shelf feature extraction in transfer learning may not success with deep models pre-trained on natural images in computational pathology. Specific metric and tools need to be investigated to quantify the feasibility of transfer learning in future.

The rest of this paper is organized as follows. The proposed method to measure knowledge gain of a particular layer in transfer learning is presented in Section 2. Experimental results and discussions are presented in Section 3, followed by conclusions in Section 4.

2. MEASUREMENT OF OFF-THE-SHELF KNOWLEDGE IN TRANSFER LEARNING

In deep learning, the incremental learning nature ensures the transition of representations in layers from generality to specificity. Hence, to reuse a model to a new task, one needs to identify the layers generating general features. To this end, we define a way to measure the knowledge gain in each layer of a pre-trained net.

Specifically, as presented in Fig. 2, we first define two base models. Assume that a CNN A has been trained using a database in the original task T_A . Its off-the-shelf features are extracted from different layers and passed to a support vector machine (SVM) for a new task T_B . Following the identical architecture of A , we define a neural network R with all convolutional and fully connected layers having random weights.

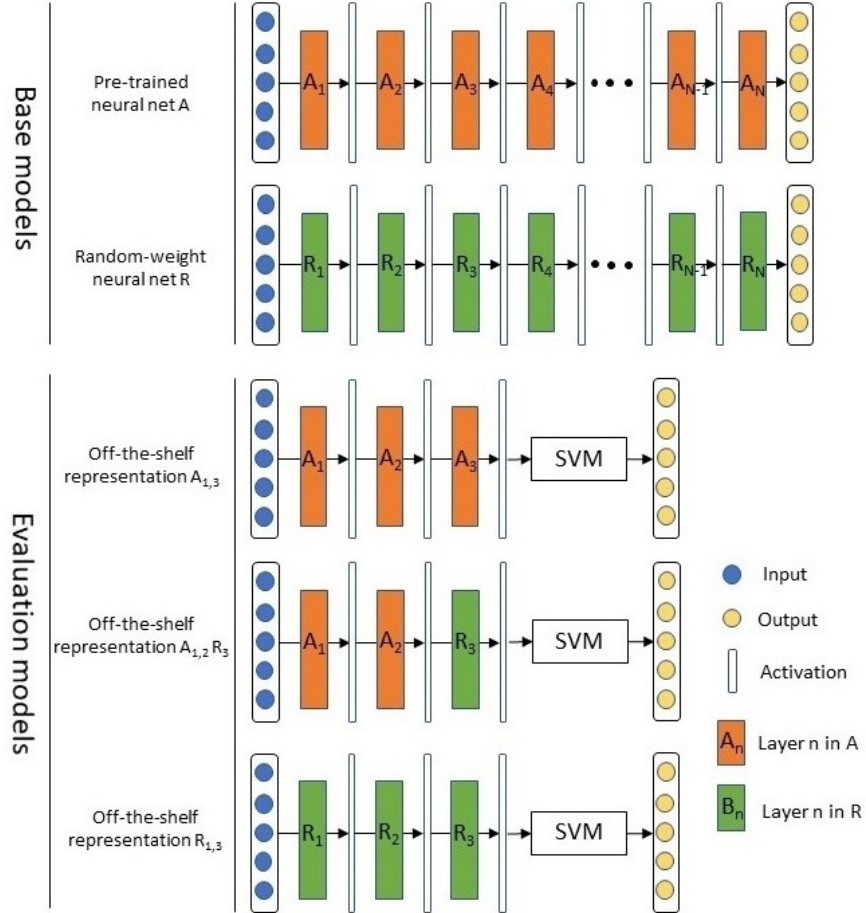


Fig. 2. Overview of the evaluation method for knowledge gain in off-the-shelf features. In the two base models, model A is pre-trained on natural images and net R is composed of random-weight layers. Three evaluation models are defined to measure knowledge gains in transfer learning. In this figure, we use layer $n = 3$ as the example layer chosen. The performance difference between models $A_{1,3}$ and $A_{1,2}R_3$ are contributed by knowledge transferred from the third layer of the pre-trained model, A_3 . And the overall information gained by the first 3 layers of the pre-trained model is quantified by the performance difference between $A_{1,3}$ and $R_{1,3}$.

In this figure, layer n in the pre-trained model is denoted by A_n ; Similarly, random-weight layer n in the model R is represented by R_n . the labeled color rectangles (e.g. A_1 and R_1) represent the weight vectors for that layer, with color differentiating the optimized and random weights. The vertical transparent bars between weight vectors represent activations at each layer. Then to evaluate the amount of knowledge transferred by the off-the-shelf representation in layer A_n , we build three models based on the two base nets as follows:

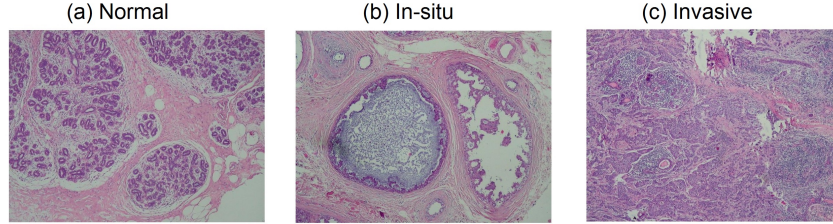


Fig. 3. Examples of pathology images in the IIT benchmark [30]. Images from left to right correspond to normal breast tissue, in-situ breast carcinoma, and invasive breast cancer, respectively.

1. $R_{1,n}$ +SVM: numerical features generated by the first n layers in the random-weight model R are passed to a SVM classifier. Its performance constitutes the comparison baseline in this study.
2. $A_{1,n}$ +SVM: the first n layers of the pre-trained model A are used to compute the off-the-shelf representation. The obtained features are then passed to a SVM machine. The performance gain to the comparison baseline is the overall knowledge gain transferred by the first n layer in model A .
3. $A_{1,n-1}R_n$ +SVM: the first $n-1$ layers in model A concatenating with the n^{th} layer in model R are used to generate features for the target task T_B . The performance difference between $A_{1,n}$ and $A_{1,n-1}R_n$ are the information gain obtained by the n^{th} layer of model A .

In the following sections of this paper, we name the three models $R_{1,n}$, $A_{1,n}$, and $A_{1,n-1}R_n$ for short.

In summary, given a pre-trained model A and a target task T_B , we measure the quantity of transferred knowledge in A by comparing its performance to net R 's performance in task T_B . We select a net composed of random-weight layers as a comparison baseline for the following reason. It is reported that the combination of random-weight convolutional layer, relu layer, pooling layer, and normalization layer might achieve similar performance as learned features [32]. Since a random-weight layer knows nothing about both the original and target tasks, its activations deliver knowledge gained without any effort/train. Through comparing the performance of $R_{1,n}$ and $A_{1,n}$, we can tell how much knowledge obtained by the first n layer in model A is transferable to the target task T_B . Similarly, the performance difference of $A_{1,n-1}R_n$ and $A_{1,n}$ is attributed to the information brought by layer A_n . We repeat the comparison for all $n \in [1, N]$.

3. EXPERIMENTATION

This experiment quantifies the transferability of off-the-shelf representation by the performance of pathology image classification. The two public pathology images exploited in the study are described as follow. The breast cancer benchmark biopsy dataset collected from clinical samples was published by the Israel Institute of Technology (IIT data set in short) [30]. The image set consists of 361 samples, of which 119 were classified by a pathologist as normal tissue, 102 as carcinoma in situ, and 140 as invasive carcinoma. The samples were generated from patients' breast tissue biopsy slides, stained with H&E. They were photographed using a Nikon Coolpix 995 attached to a Nikon Eclipse E600 at magnification of $40\times$ to produce images with resolution of about $5\mu m$ per pixel. No calibration was made, and the camera was set to automatic exposure. The images were cropped to a region of interest of 760×570 pixels and compressed using the lossy JPEG compression. The resulting images were again inspected by a pathologist to ensure that their quality was sufficient for diagnosis. Fig. 3 presents examples of pathology images in this breast cancer benchmark.

The second dataset is from the ICIAR2018 Grand Challenges on breast cancer histology images (BATCH) [31]. It is composed of 400 high-resolution (2048×1536 pixels) annotated H&E stained images with four balanced classes: normal, benign, in situ carcinoma and invasive carcinoma. All images are digitized with the same acquisition conditions, with magnification of $200\times$ and pixel size of $0.42\mu m \times 0.42\mu m$. Examples of ICIAR2018 image set is shown in Fig. 4.

3.1. Experimental Setup

3.1.1. Deep Net Architecture

Considering the experimental datasets have relatively small number of pathology images, we selects the AlexNet (which has fewer layers and parameters compared to other deep models) [33] pre-trained on the ImageNet database as the model A in

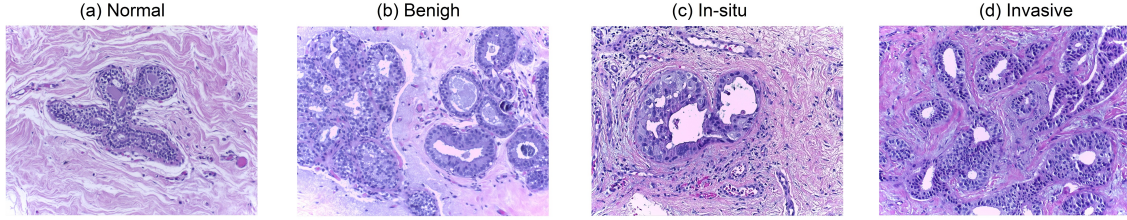


Fig. 4. Examples of ICIAR2018 pathology images [31]. Images from left to right correspond to normal breast tissue, benign tumor, in-situ breast carcinoma, and invasive breast cancer, respectively.

Table 1. Off-the-shelf feature extraction from AlexNet

Layer	Layer type	Off-the-shelf features
0	input	
1	convolution	representation layer 1
2	Relu	
3	normalization	
4	max-pooling	
5	convolution	representation layer 2
6	Relu	
7	normalization	
8	max-pooling	
9	convolution	representation layer 3
10	Relu	
11	convolution	representation layer 4
12	Relu	
13	convolution	representation layer 5
14	Relu	
15	max-pooling	
16	fully-connected	representation layer 6
17	Relu	
18	dropout	representation layer 7
19	fully-connected	
20	Relu	
21	dropout	
22	fully-connected	representation layer 8
23	Softmax	
24	Output	

this experimentation. AlexNet is composed of 25 layers, including 5 convolutional layers and 3 fully-connected layers. In this study, the off-of-shelf features are extracted after the 8 learned layers as illustrated in Table. 1. The random-weight neural network R shares the identical architecture as the AlexNet but with filter weights randomly generated following the standard normal distribution $N(0, 0.01)$, i.e. Gaussian distribution with zero mean and standard deviation of 0.01.

3.1.2. Evaluation Protocol

The image set is divided into training set and test set, with a ratio of 7:3. Images in the training set are augmented by rotation with an angle randomly drawn from $[0, 360)$ degrees, vertical reflection, and horizontal flip. The augmented training images are fed to the three evaluation models $A_{1,n}$, $A_{1,n-1}R_n$, and $R_{1,n}$, generating three different feature sets for each $n \in [1, 8]$. Then for each off-the-shelf feature set, a linear SVM is trained and optimized for pathology image diagnosis. In the testing phase, test images are processed by the evaluated models and classified by corresponding linear SVMs. Finally, agreement of classification results and annotated image labels is recorded for comparison. This study uses classification accuracy $ACC \in [0, 1]$ to measure pathology image diagnosis performance. Since the number of images in each category of both datasets is quite close, the limitation of ACC (i.e. biased by disease prevalence) is mitigated. To obtain a reliable conclusion, we repeat the experiments

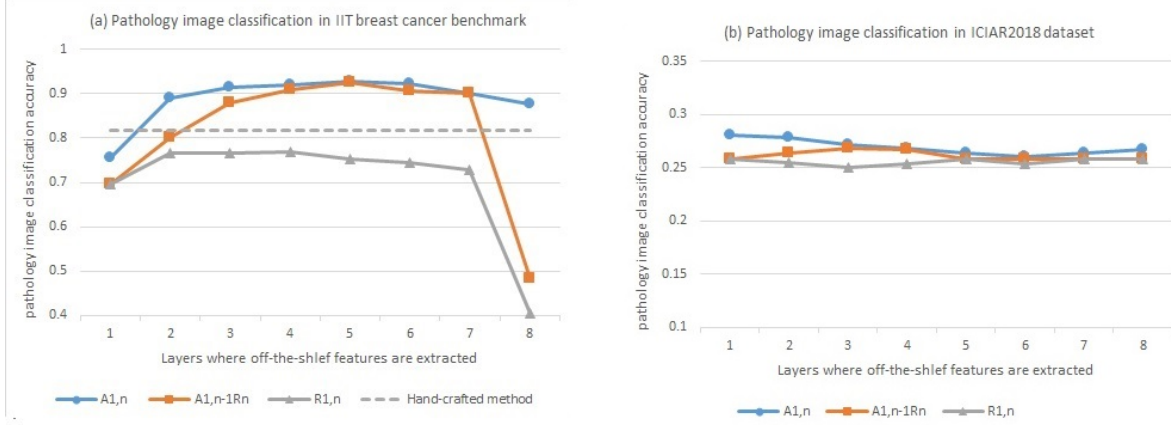


Fig. 5. The pathology image classification results. Each marker in the figure represents the average accuracy over the validation set for 50 times. The blue line connects models using off-the-shelf representation $A_{1,n}$ extracted from the n^{th} layer. The orange line connects models $A_{1,n}R_n$, which applies a random-weights filter layer to the $A_{1,n-1}$ representation, and the gray solid line corresponds to the performance associated with random-weight layer models $R_{1,n}$. For reference, classification accuracy achieved by the state-of-the-art hand-crafted method [7] is marked by the gray dash line. As we propose in this study, the knowledge gain of the n^{th} layer can be quantified by the performance difference between $A_{1,n}$ and $A_{1,n-1}R_n$ and the classification difference between $A_{1,n}$ and $R_{1,n}$ represents how much knowledge is transferable in the first n layers in the pre-trained CNN.

50 times for each $n \in [1, 8]$ and obtain the final data by averaging all ACCs.

3.2. Results and Discussions

The experimental results for the dataset from the Israel Institute of Technology are shown in the upper picture of Fig. 5, from which we get several observations. (1) Overall, the off-the-shelf representations $A_{1,n}$ for $n > 1$ outperform the state-of-the-art hand-crafted method [7]. Among the 8 layers, the middle-layer representation before the fully-connected layer ($n = 5$) achieves the highest classification accuracy. But in the sense of statistical analysis, the obtained ACCs associated with middle-layer representations $A_{1,n}$ for $3 \leq n \leq 6$ are not significantly different. (2) Let's focus on $A_{1,n}$ and $A_{1,n-1}R_n$, which are denoted by the blue and orange lines, respectively. The difference between these two models is whether weights in the n^{th} layer are pre-trained. The performance gap is mainly attributed to knowledge transferred from natural image classification to pathology image diagnosis. In this experiment, most transferable information is delivered by the first and second layers, and there is a trend that the increase of layer index comes with less knowledge gain. (3) Performance difference between the blue line $A_{1,n}$ and the gray solid line $R_{1,n}$ reveals the total amount of transferable information accumulated by the first n layers in the pre-trained AlexNet. Performance gap grows slightly wider from layer $n = 3$ to $n = 6$. This observation again verifies that the transferred middle layers in the pre-trained model do not introduce more knowledge compared to the random-weights layers $R_{1,n}$ for $3 \leq n \leq 6$. (4) When $n = 8$, we observe a big drop in the orange line ($A_{1,n-1}R_n$) and gray solid line ($R_{1,n}$), while the blue line ($A_{1,n}$) is still above the dash line of the hand-crafted method. We infer that it is because the last random-weight layer in $A_{1,n-1}R_n$ and $R_{1,n}$ distorts the information obtained by previous layers.

The transfer learning performance on images from the Bioimaging 2015 breast histology classification challenge is reported in the lower figure in Fig. 5. The 4-category diagnosis has unexpected, bad performance, comparable with the random-weight model.

In summary, the transferred off-the-shelf features ($n > 1$) outperform hand-crafted features in pathology image diagnosis in this experiment. The general knowledge transferable from natural image classification to pathology image diagnosis mainly resides in early layers of the pre-trained model. The middle and later layers add little information to the target task. Taken into account the significant differences in image content and statistics between natural images and pathology images, we conclude that the middle-layers are the place where representation's transition from generality to specificity happens in our experiment.

4. CONCLUSIONS

In this work, we proposed a way to quantify the amount of information gained by each pre-trained layer, experimentally investigated transfer efficiency of Alexnet's off-the-shelf representation, and reported several interesting observations. The experiments suggested that the off-the-shelf features learned from natural images might not be reused in computational pathology, and the amount of information that could be transferable heavily depended on complexity of pathology images. For the less-complex pathology image diagnosis scenario, we further observed that compared to middle-layer representations, early-layer features delivered more general knowledge that could be reused in pathology image analysis. Though middle-layer representation obtained the best diagnosis accuracy, they brought in less information gain. This observation had practical reference to pathology image centered transfer learning. The study encouraged further investigation of specific metric and tools to quantify the feasibility of transfer learning in future.

5. REFERENCES

- [1] SC Wludarski et al., "Her2 testing in breast carcinoma: very low concordance rate between reference and local laboratories in brazil," *Applied immunohistochemistry & molecular morphology*, vol. 19, no. 2, pp. 112 – 118, Mar. 2011.
- [2] T.J. Fuchs et al., "Computational pathology: challenges and promises for tissue analysis," *Computerized Medical Imaging and Graphics*, vol. 35, pp. 515 – 530, 2011.
- [3] M Veta et al., "Breast cancer histopathology image analysis: A review," *IEEE Transactions on Biomedical Engineering*, vol. 61, no. 5, pp. 1400 – 1411, May 2014.
- [4] P Filipczuk et al., "Computer-aided breast cancer diagnosis based on the analysis of cytological images of fine needle biopsies," *IEEE Transactions on Medical Imaging*, vol. 32, no. 12, pp. 2169 – 2178, Dec. 2013.
- [5] YM George et al., "Remote computer-aided breast cancer detection and diagnosis system based on cytological images," *IEEE Systems Journal*, vol. 8, no. 3, pp. 949 – 964, Sept. 2014.
- [6] M Kandemir et al., "Empowering multiple instance histopathology cancer diagnosis by cell graphs," in *Proc. International Conference on Medical Image Computing and Computer-Assisted Intervention*, 2014.
- [7] SH Bhandari, "A bad of features approach for malignancy detection in breast histopathology images," in *Proc. IEEE International Conference on Image Processing*, 2015.
- [8] X Li et al., "Toward breast cancer histopathology image diagnosis using local color binary pattern," in *Proc. 14th Annual Imaging Network Ontario Symposium*, 2016.
- [9] F Spanhol et al., "A dataset for breast cancer histopathological image classification," *IEEE Transactions on Biomedical Engineering*, vol. 63, no. 7, pp. 1455 – 1463, Jul. 2016.
- [10] X Li et al., "Novel chromaticity similarity based color texture descriptor for digital pathology image analysis," *PlosOne*, vol. 13, no. 11, Nov. 2018.
- [11] A Cruz-Roa et al., "Automatic detection of invasive ductal carcinoma in whole slide images with convolutional neural networks," in *Proc. Medical Imaging 2014: Digital Pathology*, 2014.
- [12] F Spanhol et al., "Breast cancer histopathological image classification using convolutional neural network," in *Proc. International Joint Conference on Neural Networks*, 2016.
- [13] K Sirinukunwattana et al., "Locality sensitive deep learning for detection and classification of nuclei in routine colon cancer histology images," *IEEE Transactions on Medical Imaging*, vol. 35, no. 5, pp. 1196 – 1206, May 2016.
- [14] T Arajo et al., "Classification of breast cancer histology images using convolutional neural networks," *PLoS ONE*, vol. 12, no. 6, pp. 1 – 14, Jun. 2017.
- [15] F Spanhol et al., "Deep features for breast cancer histopathological image classification," in *Proc. IEEE International Conference on Systems, Man, and Cybernetics*, 2017.
- [16] A Cruz-Roa et al., "Accurate and reproducible invasive breast cancer detection in wholeslide images: A deep learning approach for quantifying tumor extent," *Scientific Reports*, vol. 7, pp. 46450, Apr. 2017.
- [17] R Bidar et al., "Localization and classification of cell nuclei in post-neoadjuvant breast cancer surgical specimen using fully convolutional networks," in *Proc. Medical Imaging 2018: Digital Pathology*, 2018.
- [18] M Peikari et al., "A cluster-then-label semi-supervised learning approach for pathology image classification," *Scientific Reports*, vol. 8, no. 1, pp. 7193, May 2018.
- [19] J Donahue et al., "Decaf: A deep convolutional activation feature for generic visual recognition," in *Proc. International Conference on Machine Learning*, 2013.

- [20] A.S. Razavian et al., “Cnnfeaturesoff-the-shelf: anastoundingbaselineforrecognition,” in *Proc. IEEE International Conference on Computer Vision and Pattern Recognition*, 2014.
- [21] J Yosinski et al., “How transferable are features in deep neural networks?,” in *Proc. Advances in Neural Information Processing Systems*, 2014.
- [22] M Oquab et al., “Learning and transferring mid-level image representations using convolutional neural networks,” in *Proc. IEEE Conference on Computer Vision and Pattern Recognition*, 2014.
- [23] L Mou et al., “How transferable are neural networks in nlp applications?,” in *Proc. Conference on Empirical Methods in Natural Language Processing*, 2016.
- [24] S Hoo-Chang et al., “Deep convolutional neural networks for computer-aided detection: Cnn architectures, dataset characteristics and transfer learning,” *IEEE Transactions on Medical Imaging*, vol. 35, no. 5, pp. 1285 – 1298, May 2016.
- [25] N Bayramoglu et al., “Transfer learning for cell nuclei classification in histopathology images,” in *Proc. European Conference on Computer Vision*, 2016.
- [26] N Tajbakhsh et al., “Convolutional neural networks for medical image analysis: Full training or fine tuning?,” *IEEE Transactions on Medical Imaging*, vol. 35, no. 5, pp. 1299 – 1312, May 2016.
- [27] P Khosravi et al., “Deep convolutional neural networks enable discrimination of heterogeneous digital pathology images,” *EBioMedicine*, vol. 27, pp. 317 – 328, Jan. 2018.
- [28] H Cao et al., “Improve the performance of transfer learning without fine-tuning using dissimilarity-based multi-view learning for breast cancer histology images,” in *Proc. International Conference on Image Analysis and Recognition*, 2018.
- [29] R Mormont et al., “Comparison of deep transfer learning strategies for digital pathology,” in *Proc. IEEE Conference on Computer Vision and Pattern Recognition*, 2018.
- [30] “Breast cancer imageset,
[ftp://ftp.cs.technion.ac.il/pub/projects/medicimage/breast cancer data/](ftp://ftp.cs.technion.ac.il/pub/projects/medicimage/breast%20cancer%20data/),” .
- [31] “Iciar 2018 grand challenge on breast cancer histology images,
<https://iciar2018-challenge.grand-challenge.org/>,” .
- [32] K Jarrett et al., “What is the best multi-stage architecture for object recognition?,” in *Proc. IEEE Conference on Computer Vision*, 2009.
- [33] A Krizhevsky et al., “Imagenet classification with deep convolutional neural networks,” in *Proc. Advances in neural information processing systems*, 2012.