

Acyclic coloring of special digraphs*

Frank Gurski, Dominique Komander, and Carolin Rehs

University of Düsseldorf, Institute of Computer Science, Algorithmics for Hard Problems Group,
40225 Düsseldorf, Germany

November 23, 2020

Abstract

An acyclic r -coloring of a directed graph $G = (V, E)$ is a partition of the vertex set V into r acyclic sets. The dichromatic number of a directed graph G is the smallest r such that G allows an acyclic r -coloring. For symmetric digraphs the dichromatic number equals the well-known chromatic number of the underlying undirected graph. This allows us to carry over the $W[1]$ -hardness and lower bounds for running times of the chromatic number problem parameterized by clique-width to the dichromatic number problem parameterized by directed clique-width. We introduce the first polynomial-time algorithm for the acyclic coloring problem on digraphs of constant directed clique-width. From a parameterized point of view our algorithm shows that the Dichromatic Number problem is in XP when parameterized by directed clique-width and extends the only known structural parameterization by directed modular width for this problem. Furthermore, we apply definability within monadic second order logic in order to show that Dichromatic Number problem is in FPT when parameterized by the directed clique-width and r .

For directed co-graphs, which is a class of digraphs of directed clique-width 2, and several generalizations we even show linear time solutions for computing the dichromatic number. Furthermore, we conclude that directed co-graphs and the considered generalizations lead to subclasses of perfect digraphs. For directed cactus forests, which is a set of digraphs of directed tree-width 1, we conclude an upper bound of 2 for the dichromatic number and we show that an optimal acyclic coloring can be computed in linear time.

Keywords: acyclic coloring; directed clique-width; directed co-graphs; polynomial time algorithms

1 Introduction

Within undirected graphs $G = (V, E)$ a r -coloring corresponds to a partition of the vertex set V into r independent sets. The smallest r such that a graph G has a r -coloring is denoted as the *chromatic number* of G . Even deciding whether a graph has a 3-coloring is NP-complete but there are many efficient solutions for the coloring problem on special graph classes. Among these are chordal graphs [Gol80], comparability graphs [Hoà94], and co-graphs [CLSB81].

For oriented graphs the concept of oriented colorings, which has been introduced by Courcelle [Cou94], received a lot of attention in [CD06, Sop16, GH10, GHK⁺14, CFGK16, GKR19c, GKL20, GKL21]. An *oriented r -coloring* of an oriented graph $G = (V, E)$ is a partition of the vertex set V into r independent sets, such that all the arcs linking two of these subsets have the same direction. The *oriented chromatic number* of an oriented graph G , denoted by $\chi_o(G)$, is the smallest r such that G allows an oriented r -coloring.

In this paper, we consider an approach for coloring the vertices of directed graphs, introduced by Neumann-Lara [NL82]. An *acyclic r -coloring* of a digraph $G = (V, E)$ is a partition of the vertex set V into r sets such that all sets induce an acyclic subdigraph in G . The *dichromatic number* of G is the smallest integer r such that G has an acyclic r -coloring. Acyclic colorings of digraphs received a lot of attention in [BFJ⁺04, Moh03, NL82] and also in recent works [LM17, MSW19, SW20]. The dichromatic number is one of two basic concepts for the class of perfect digraphs [AH15] and can be regarded as a natural counterpart of the well known chromatic number for undirected graphs.

*An extended abstract of this paper will appear in the Proceedings of the 7th Annual International Conference on Algorithms and Discrete Applied Mathematics (CALDAM 2021) [GKR21].

In the Dichromatic Number problem (DCN) there is given a digraph G and an integer r and the question is whether G has an acyclic r -coloring. If r is constant and not part of the input, the corresponding problem is denoted by DCN_r . Even DCN_2 is NP-complete [FHM03], which motivates to consider the Dichromatic Number problem on special graph classes. Up to now, only few classes of digraphs are known for which the dichromatic number can be found in polynomial time. The set of DAGs is obviously equal to the set of digraphs of dichromatic number 1. Further, every odd-cycle free digraph [NL82] and every non-even digraph [MSW19] has dichromatic number at most 2.

The hardness of the Dichromatic Number problem remains true, even for inputs of bounded directed feedback vertex set size [MSW19]. This result implies that there are no XP-algorithms¹ for the Dichromatic Number problem parameterized by directed width parameters such as directed path-width, directed tree-width, DAG-width or Kelly-width, since all of these are upper bounded in terms of the size of a smallest feedback vertex set. The first positive result concerning structural parameterizations of the Dichromatic Number problem is the existence of an FPT-algorithm² for the Dichromatic Number problem parameterized by directed modular width [SW19].

In this paper, we introduce the first polynomial-time algorithm for the Dichromatic Number problem on digraphs of constant directed clique-width. Therefore, we consider a directed clique-width expression X of the input digraph G of directed clique-width k . For each node t of the corresponding rooted expression-tree T we use label-based reachability information about the subgraph G_t of the subtree rooted at t . For every partition of the vertex set of G_t into acyclic sets V_1, \dots, V_s we compute the multi set $\langle \text{reach}(V_1), \dots, \text{reach}(V_s) \rangle$, where $\text{reach}(V_i)$, $1 \leq i \leq s$, is the set of all label pairs (a, b) such that the subgraph of G_t induced by V_i contains a vertex labeled by b , which is reachable by a vertex labeled by a . By using bottom-up dynamic programming along expression-tree T , we obtain an algorithm for the Dichromatic Number problem of running time $n^{2^{\mathcal{O}(k^2)}}$ where n denotes the number of vertices of the input digraph. Since any algorithm with running time in $n^{2^{o(k)}}$ would disprove the Exponential Time Hypothesis (ETH), the exponential dependence on k in the degree of the polynomial cannot be avoided, unless ETH fails.

From a parameterized point of view, our algorithm shows that the Dichromatic Number problem is in XP when parameterized by directed clique-width. Further, we show that the Dichromatic Number problem is W[1]-hard on symmetric digraphs when parameterized by directed clique-width. Inferring from this, there is no FPT-algorithm for the Dichromatic Number problem parameterized by directed clique-width under reasonable assumptions. The best parameterized complexity which can be achieved is given by an XP-algorithm. Furthermore, we apply definability within monadic second order logic (MSO) in order to show that Dichromatic Number problem in FPT when parameterized by the directed clique-width and r , which implies that for every integer r it holds that DCN_r is in FPT when parameterized by directed clique-width.

Since the directed clique-width of a digraph is at most its directed modular width [SW20], we reprove the existence of an XP-algorithm for DCN and an FPT-algorithm for DCN_r parameterized by directed modular width [SW19]. On the other hand, there exist several classes of digraphs of bounded directed clique-width and unbounded directed modular width, which implies that directed clique-width is the more powerful parameter and thus the results of [SW19] does not imply any parameterized algorithm for directed clique-width.

In Table 1 we summarize the known results for DCN and DCN_r parameterized by parameters.

For directed co-graphs, which is a class of digraphs of directed clique-width 2 [GWY16], and several generalizations we even show a linear time solution for computing the dichromatic number and an optimal acyclic coloring. Furthermore, we conclude that directed co-graphs and the considered generalizations lead to subclasses of perfect digraphs [AH15]. For directed cactus forests, which is a set of digraphs of directed tree-width 1 [GR19b], the results of [Wie20] and [MSW19] lead to an upper bound of 2 for the dichromatic number and that an optimal acyclic coloring can be computed in polynomial time. We show that this even can be done in linear time.

2 Preliminaries

We use the notations of Bang-Jensen and Gutin [BJG18] for graphs and digraphs.

¹XP is the class of all parameterized problems which can be solved by algorithms that are polynomial if the parameter is considered as a constant [DF13].

²FPT is the class of all parameterized problems which can be solved by algorithms that are exponential only in the size of a fixed parameter while polynomial in the size of the input size [DF13].

parameter	DCN		DCN _r	
directed tree-width	∉ XP	Corollary 4.2	∉ XP	Corollary 4.2
directed path-width	∉ XP	Corollary 4.2	∉ XP	Corollary 4.2
DAG-width	∉ XP	Corollary 4.2	∉ XP	Corollary 4.2
Kelly-width	∉ XP	Corollary 4.2	∉ XP	Corollary 4.2
directed modular width	FPT	[SW19]	FPT	[SW19]
directed clique-width	W[1]-hard XP	Corollary 4.6 Corollary 4.14	FPT	Corollary 4.18
standard parameter r	∉ XP	Corollary 5.2	///	
directed clique-width + r	FPT	Theorem 4.17	///	
clique-width of $un(G)$	∉ FPT	Corollary 5.1	open	
number of vertices n	FPT	Corollary 5.3	FPT	Corollary 5.3

Table 1: Complexity of DCN and DCN_r parameterized by parameters. We assume that $P \neq NP$. The “///” entries indicate that by taking r out of the instance the considered parameter makes no sense.

2.1 Directed graphs

A *directed graph* or *digraph* is a pair $G = (V, E)$, where V is a finite set of *vertices* and $E \subseteq \{(u, v) \mid u, v \in V, u \neq v\}$ is a finite set of ordered pairs of distinct vertices called *arcs* or *directed edges*. For a vertex $v \in V$, the sets $N^+(v) = \{u \in V \mid (v, u) \in E\}$ and $N^-(v) = \{u \in V \mid (u, v) \in E\}$ are called the *set of all successors* and the *set of all predecessors* of v . The *outdegree* of v , $\text{outdegree}(v)$ for short, is the number of successors of v and the *indegree* of v , $\text{indegree}(v)$ for short, is the number of predecessors of v .

A digraph $G' = (V', E')$ is a *subdigraph* of digraph $G = (V, E)$ if $V' \subseteq V$ and $E' \subseteq E$. If every arc of E with both end vertices in V' is in E' , we say that G' is an *induced subdigraph* of digraph G and we write $G' = G[V']$.

The *out-degeneracy* of a digraph G is the least integer d such that G and all subdigraphs of G contain a vertex of outdegree at most d .

For some given digraph $G = (V, E)$ we define its *underlying undirected graph* by ignoring the directions of the arcs, i.e. $un(G) = (V, \{\{u, v\} \mid (u, v) \in E, u, v \in V\})$. There are several ways to define a digraph $G = (V, E)$ from an undirected graph $G' = (V, E')$. If we replace every edge $\{u, v\} \in E'$ by

- both arcs (u, v) and (v, u) , we refer to G as a *complete biorientation* of G' . Since in this case G is well defined by G' we also denote it by $\overleftrightarrow{G'}$. Every digraph G which can be obtained by a complete biorientation of some undirected graph G' is called a *complete bioriented graph* or *symmetric digraph*.
- one of the arcs (u, v) and (v, u) , we refer to G as an *orientation* of G' . Every digraph G which can be obtained by an orientation of some undirected graph G' is called an *oriented graph*.

For a digraph $G = (V, E)$ an arc $(u, v) \in E$ is *symmetric* if $(v, u) \in E$. Thus, each bidirectional arc is symmetric. Further, an arc is *asymmetric* if it is not symmetric. We define the symmetric part of G as $\text{sym}(G)$, which is the spanning subdigraph of G that contains exactly the symmetric arcs of G . Analogously, we define the asymmetric part of G as $\text{asym}(G)$, which is the spanning subdigraph with only asymmetric arcs.

By $\overrightarrow{P}_n = (\{v_1, \dots, v_n\}, \{(v_1, v_2), \dots, (v_{n-1}, v_n)\})$, $n \geq 2$, we denote the directed path on n vertices, by $\overrightarrow{C}_n = (\{v_1, \dots, v_n\}, \{(v_1, v_2), \dots, (v_{n-1}, v_n), (v_n, v_1)\})$, $n \geq 2$, we denote the directed cycle on n vertices.

A *directed acyclic graph* (DAG) is a digraph without any \overrightarrow{C}_n , for $n \geq 2$, as subdigraph. A vertex v is *reachable* from a vertex u in G if G contains a \overrightarrow{P}_n as a subdigraph having start vertex u and end vertex v . A digraph is *odd cycle free* if it does not contain a \overrightarrow{C}_n , for odd $n \geq 3$, as subdigraph. A digraph G is planar if $un(G)$ is planar.

A digraph is *even* if for every 0-1-weighting of the edges it contains a directed cycle of even total weight.

2.2 Acyclic coloring of directed graphs

We consider the approach for coloring digraphs given in [NL82]. A set V' of vertices of a digraph G is called *acyclic* if $G[V']$ is acyclic.

Definition 2.1 (Acyclic graph coloring [NL82]) An acyclic r -coloring of a digraph $G = (V, E)$ is a mapping $c : V \rightarrow \{1, \dots, r\}$, such that the color classes $c^{-1}(i)$ for $1 \leq i \leq r$ are acyclic. The dichromatic number of G , denoted by $\vec{\chi}(G)$, is the smallest r , such that G has an acyclic r -coloring.

There are several works on acyclic graph coloring [BFJ⁺04, Moh03, NL82] including several recent works [LM17, MSW19, SW20]. The following observations support that the dichromatic number can be regarded as a natural counterpart of the well known chromatic number $\chi(G)$ for undirected graphs G .

Observation 2.2 For every symmetric directed graph G it holds that $\vec{\chi}(G) = \chi(\text{un}(G))$.

Observation 2.3 For every directed graph G it holds that $\vec{\chi}(G) \leq \chi(\text{un}(G))$.

Observation 2.4 Let G be a digraph and H be a subdigraph of G , then $\vec{\chi}(H) \leq \vec{\chi}(G)$.

We consider the following problem.

Name Dichromatic Number (DCN)

Instance A digraph $G = (V, E)$ and a positive integer $r \leq |V|$.

Question Is there an acyclic r -coloring for G ?

If r is constant and not part of the input, the corresponding problem is denoted by r -Dichromatic Number (DCN_r). Even DCN_2 is NP-complete [FHM03].

3 Acyclic coloring of special digraph classes

As recently mentioned in [SW19], only few classes of digraphs for which the dichromatic number can be found in polynomial time are known.

Observation 3.1 The set of DAGs is equal to the set of digraphs of dichromatic number 1.

Proposition 1 ([NL82]) Every odd-cycle free digraph has dichromatic number at most 2.

Proposition 2 ([MSW19]) Every non-even digraph has dichromatic number at most 2.

Thus, given a DAG its dichromatic number is always equal to 1. Further, for some given odd-cycle free digraph or non-even digraph we first check in linear time whether the digraph is a DAG and thus has dichromatic number 1 or otherwise state that it has dichromatic number 2.

Corollary 3.2 For DAGs, odd-cycle free digraphs, and non-even digraphs the dichromatic number can be computed in linear time.

3.1 Acyclic coloring of perfect digraphs

The dichromatic number and the clique number are the two basic concepts for the class of perfect digraphs [AH15]. The *clique number* of a digraph G , denoted by $\omega_d(G)$, is the number of vertices in a largest complete bioriented subdigraph of G .

Definition 3.3 (Perfect digraphs [AH15]) A digraph G is perfect if, for every induced subdigraph H of G , the dichromatic number $\vec{\chi}(H)$ equals the clique number $\omega_d(H)$.

An undirected graph G is perfect if and only if its complete biorientation \overleftrightarrow{G} is a perfect digraph. Thus, Definition 3.3 is a generalization of perfectness to digraphs. While for undirected perfect graphs more than a hundred subclasses have been defined and studied [Hou06], for perfect digraphs there are only very few subclasses known. Obviously, DAGs and subclasses such as series-parallel digraphs, minimal series-parallel digraphs and series-parallel order digraphs [VTL82] are perfect digraphs.

By [AH15] the dichromatic number of a perfect digraph G can be found by the chromatic number of $\text{un}(\text{sym}(G))$, which is possible in polynomial time [GLS81].

Proposition 3 ([AH15]) For every perfect digraph the Dichromatic Number problem can be solved in polynomial time.

We show how to find an optimal acyclic coloring for directed co-graphs and special digraphs of directed tree-width one in linear time.

3.2 Acyclic coloring of directed co-graphs

Let $G_1 = (V_1, E_1)$ and $G_2 = (V_2, E_2)$ be two vertex-disjoint digraphs. The following operations have been considered by Bechet et al. in [BdGR97].

- The *disjoint union* of G_1 and G_2 , denoted by $G_1 \oplus G_2$, is the digraph with vertex set $V_1 \cup V_2$ and arc set $E_1 \cup E_2$.
- The *series composition* of G_1 and G_2 , denoted by $G_1 \otimes G_2$, is defined by their disjoint union plus all possible arcs between vertices of G_1 and G_2 .
- The *order composition* of G_1 and G_2 , denoted by $G_1 \odot G_2$, is defined by their disjoint union plus all possible arcs from vertices of G_1 to vertices of G_2 .

The following transformation has been considered by Johnson et al. in [JRST01] and generalizes the operations disjoint union and order composition.

- A graph G is obtained by a *directed union* of G_1 and G_2 , denoted by $G_1 \ominus G_2$ if G is a subdigraph of the order composition of $G_1 \odot G_2$ and contains the disjoint union $G_1 \oplus G_2$ as a subdigraph.

We recall the definition of directed co-graphs from [CP06].

Definition 3.4 (Directed co-graphs [CP06]) *The class of directed co-graphs is recursively defined as follows.*

1. Every digraph with a single vertex $(\{v\}, \emptyset)$, denoted by v , is a directed co-graph.
2. If G_1 and G_2 are vertex-disjoint directed co-graphs, then
 - (a) the disjoint union $G_1 \oplus G_2$,
 - (b) the series composition $G_1 \otimes G_2$, and
 - (c) the order composition $G_1 \odot G_2$ are directed co-graphs.

Every expression X using the four operations of Definition 3.4 is called a *di-co-expression* and $\text{digraph}(X)$ is the defined digraph.

As undirected co-graphs can be characterized by forbidding the P_4 , directed co-graphs can be characterized likewise by excluding the eight forbidden induced subdigraphs [CP06].

For every directed co-graph we can define a tree structure denoted as *di-co-tree*. It is an ordered rooted tree whose leaves represent the vertices of the digraph and whose inner nodes correspond to the operations applied on the subexpressions defined by the subtrees. For every directed co-graph one can construct a di-co-tree in linear time [CP06]. Directed co-graphs are interesting from an algorithmic point of view since several hard graph problems can be solved in polynomial time by dynamic programming along the tree structure of the input graph, see [BJM14, Gur17, GHK⁺20, GKR19b, GKR19c, GR18b, Ret98]. Moreover, directed co-graphs are very useful for the reconstruction of the evolutionary history of genes or species using genomic sequence data [HSW17, NEMM⁺18].

The set of *extended directed co-graphs* was introduced in [GR18a] by allowing the directed union and series composition of defined digraphs which leads to a superclass of directed co-graphs. Also for every extended directed co-graph we can define a tree structure, denoted as *ex-di-co-tree*. For the class of extended directed co-graphs it remains open how to compute an ex-di-co-tree.

Lemma 3.5 *Let G_1 and G_2 be two vertex-disjoint directed graphs. Then, the following equations hold:*

1. $\bar{\chi}((\{v\}, \emptyset)) = 1$
2. $\bar{\chi}(G_1 \oplus G_2) = \bar{\chi}(G_1 \odot G_2) = \bar{\chi}(G_1 \ominus G_2) = \max(\bar{\chi}(G_1), \bar{\chi}(G_2))$
3. $\bar{\chi}(G_1 \otimes G_2) = \bar{\chi}(G_1) + \bar{\chi}(G_2)$

Proof

1. $\bar{\chi}((\{v\}, \emptyset)) = 1$ is obviously clear.

2. $\bar{\chi}(G_1 \oplus G_2) \geq \max(\bar{\chi}(G_1), \bar{\chi}(G_2))$

Since the digraphs G_1 and G_2 are induced subdigraphs of digraph $G_1 \oplus G_2$, both values $\bar{\chi}(G_1)$ and $\bar{\chi}(G_2)$ lead to a lower bound for the number of necessary colors of the combined graph by Observation 2.4.

$$\bar{\chi}(G_1 \oplus G_2) \leq \max(\bar{\chi}(G_1), \bar{\chi}(G_2))$$

Since the disjoint union operation does not create any new arcs, we can combine color classes of G_1 and G_2 .

The results for the order composition and directed union follow by the same arguments.

3. $\bar{\chi}(G_1 \otimes G_2) \geq \bar{\chi}(G_1) + \bar{\chi}(G_2)$

Since every G_1 and G_2 are an induced subdigraphs of the combined graph, both values $\bar{\chi}(G_1)$ and $\bar{\chi}(G_2)$ lead to a lower bound for the number of necessary colors of the combined graph by Observation 2.4. Further, the series operations implies that every vertex in G_1 is on a cycle of length two with every vertex of G_2 . Thus, no vertex in G_1 can be colored in the same way as a vertex in G_2 . Thus, $\bar{\chi}(G_1) + \bar{\chi}(G_2)$ leads to a lower bound for the number of necessary colors of the combined graph.

$$\bar{\chi}(G_1 \otimes G_2) \leq \bar{\chi}(G_1) + \bar{\chi}(G_2)$$

For $1 \leq i \leq 2$ let $G_i = (V_i, E_i)$ and $c_i : V_i \rightarrow \{1, \dots, \bar{\chi}(G_i)\}$ a coloring for G_i . For $G_1 \otimes G_2 = (V, E)$ we define a mapping $c : V \rightarrow \{1, \dots, \bar{\chi}(G_1) + \bar{\chi}(G_2)\}$ as follows.

$$c(v) = \begin{cases} c_1(v) & \text{if } v \in V_1 \\ c_2(v) + \bar{\chi}(G_1) & \text{if } v \in V_2. \end{cases}$$

The mapping c satisfies the definition of an acyclic coloring, because every color class $c^{-1}(j)$, $j \in \{1, \dots, \bar{\chi}(G_1) + \bar{\chi}(G_2)\}$ is a subset of V_1 or of V_2 , such that $c^{-1}(j)$ induces an acyclic digraph in G_1 or G_2 by assumption. Since the series operation does not insert any further arcs between two vertices of G_1 or G_2 , vertex set $c^{-1}(j)$ induces also an acyclic digraph in G .

This shows the statements of the lemma. □

Lemma 3.5 can be used to obtain the following result.

Theorem 3.6 *Let G be a (-n extended) directed co-graph (given by an ex-di-co-tree). Then, an optimal acyclic coloring for G and $\bar{\chi}(G)$ can be computed in linear time.*

In order to state the next result, let $\omega(G)$ be the number of vertices in a largest clique in graph G . Since the results of Lemma 3.5 also hold for ω_d instead of $\bar{\chi}$ we obtain the following result.

Proposition 4 *Let G be a (-n extended) directed co-graph (given by an ex-di-co-tree). Then, it holds that $\bar{\chi}(G) = \chi(\text{un}(\text{sym}(G))) = \omega(\text{un}(\text{sym}(G))) = \omega_d(G)$ and all values can be computed in linear time.*

Proposition 5 *Every (extended) directed co-graph is a perfect digraph.*

Proof We show the result by verifying Definition 3.3. Since every induced subdigraph of a (-n extended) directed co-graph is a (-n extended) directed co-graph, Proposition 4 implies that every (extended) directed co-graph is a perfect digraph. □

Alternatively, the last result can be shown by the *Strong Perfect Digraph Theorem* [AH15] since for every (extended) directed co-graph G the symmetric part $\text{un}(\text{sym}(G))$ is an undirected co-graph and thus a perfect graph. Furthermore (extended) directed co-graphs do not contain a directed cycle \vec{C}_n , $n \geq 3$, as an induced subdigraph [CP06, GKR19a].

The results of Theorem 3.6 and Propositions 4 and 5 can be generalized to larger classes. Motivated by the idea of tree-co-graphs [Tin89] we replace in Definition 3.4 the single vertex graphs by a DAG, for which we know that the dichromatic number and also the clique number is equal to 1. Thus, Lemma 3.5 can be adapted to compute the dichromatic number in linear time. Furthermore following the proof of Proposition 5 we know that this class is perfect.

3.3 Acyclic coloring of directed cactus forests

We recall the definition of directed cactus forests, which was introduced in [GR19b] as a counterpart for undirected cactus forests.

Definition 3.7 (Directed cactus forests [GR19b]) *A directed cactus forest is a digraph, where any two directed cycles have at most one joint vertex.*

Since directed cactus forests may contain a cycle they have dichromatic number at least 2. Further, the set of all cactus forests is a subclass of the digraphs of directed tree-width at most 1 [GR19b], which is a subclass of non-even digraphs [Wie20]. By [MSW19] we can conclude that every cactus forest has dichromatic number at most 2 and that for every cactus forest an optimal acyclic coloring can be computed in polynomial time. In order to improve the running time, we show the following lemma.

Lemma 3.8 *Let G be a directed cactus forest. Then, an acyclic 2-coloring for G can be computed in linear time.*

Proof Let $G = (V, E)$ be a directed cactus forest. In order to define an acyclic 2-coloring $c : V \rightarrow \{1, 2\}$ for G , we traverse a DAG D_G defined as follows. D_G has a vertex for every cycle C on at least two vertices in G and a vertex for every vertex of G which is not involved in any such cycle of G .

Two vertices in D_G which both represent a cycle in G are adjacent by a single (arbitrary chosen) directed edge in D_G if these cycles have a common vertex in G . A vertex in D_G which represents a cycle C in G and a vertex in D_G which represents a vertex u in G which is not involved in any cycle in G are adjacent in the same way as the vertex of C is adjacent to u in G . Two vertices in D_G which both represent a vertex in G which is not involved in any cycle in G are adjacent in D_G in the same way as they are adjacent in G .

Then, we consider the vertices v of D_G by a topological ordering in order to define an acyclic 2-coloring for G .

- If v represents a vertex in G which is not involved in any cycle in G , we define $c(v) = 2$.
- If v represents a cycle C in G , then we distinguish the following cases.
 - If all vertices of C are unlabeled up to now, we choose an arbitrary vertex $x \in C$ and define $c(x) = 1$ and $c(y) = 2$ for all $y \in C - \{x\}$.
 - If we have already labeled one vertex x of C by 1 then we define $c(y) = 2$ for all $y \in C - \{x\}$.
 - If we have already labeled one vertex x of C by 2 then we choose an arbitrary vertex $x' \in C - \{x\}$ and define $c(x') = 1$ and further $c(y) = 2$ for all $y \in C - \{x, x'\}$.

By this definitions, in every cycle C of G we color exactly one vertex of C by 1 and all remaining vertices of G by 2. Thus, c leads to a legit acyclic 2-coloring for G . \square

If G is a DAG, then $c(x) = 1$ for $x \in V$ leads to an acyclic 1-coloring for G . Otherwise, Lemma 3.8 leads to an acyclic 2-coloring for G .

Theorem 3.9 *Let G be a directed cactus forest. Then, an optimal acyclic coloring for G and $\bar{\chi}(G)$ can be computed in linear time.*

4 Parameterized algorithms for directed clique-width

For undirected graphs the clique-width [CO00] is one of the most important parameters. Clique-width measures how difficult it is to decompose the graph into a special tree-structure. From an algorithmic point of view, only tree-width [RS86] is a more studied graph parameter. Clique-width is more general than tree-width since graphs of bounded tree-width have also bounded clique-width [CR05]. The tree-width can only be bounded by the clique-width under certain conditions [GW00]. Many NP-hard graph problems admit polynomial-time solutions when restricted to graphs of bounded tree-width or graphs of bounded clique-width.

For directed graphs there are several attempts to generalize tree-width such as directed path-width, directed tree-width, DAG-width, or Kelly-width, which are representative for what people are working on, see the surveys [GHK⁺14, GHK⁺16]. Unfortunately, none of these attempts allows polynomial-time algorithms for a large class of problems on digraphs of bounded width. This also holds for DCN_r and DCN by the following theorem.

Theorem 4.1 ([MSW19]) *For every $r \geq 2$ the r -Dichromatic Number problem is NP-hard even for input digraphs whose feedback vertex set number is at most $r + 4$ and whose out-degeneracy is at most $r + 1$.*

Thus, even for bounded size of a directed feedback vertex set, deciding whether a directed graph has dichromatic number at most 2 is NP-complete. This result rules out XP-algorithms for DCN and DCN_r , by directed width parameters such as directed path-width, directed tree-width, DAG-width or Kelly-width, since all of these are upper bounded by the feedback vertex set number.

Corollary 4.2 *The Dichromatic Number problem is not in XP when parameterized by directed tree-width, directed path-width, Kelly-width, or DAG-width, unless $P = NP$.*

Next, we discuss parameters which allow XP-algorithms or even FPT-algorithms for DCN and DCN_r . The first positive result concerning structural parameterizations of DCN was recently given in [SW19] using the directed modular width (dmw).

Theorem 4.3 ([SW19]) *The Dichromatic Number problem is in FPT when parameterized by directed modular width.*

By [GHK⁺14], directed clique-width performs much better than directed path-width, directed tree-width, DAG-width, and Kelly-width from the parameterized complexity point of view. Hence, we consider the parameterized complexity of DCN parameterized by directed clique-width.

Definition 4.4 (Directed clique-width [CO00]) *The directed clique-width of a digraph G , $d\text{-cw}(G)$ for short, is the minimum number of labels needed to define G using the following four operations:*

1. *Creation of a new vertex v with label a (denoted by $a(v)$).*
2. *Disjoint union of two labeled digraphs G and H (denoted by $G \oplus H$).*
3. *Inserting an arc from every vertex with label a to every vertex with label b ($a \neq b$, denoted by $\alpha_{a,b}$).*
4. *Change label a into label b (denoted by $\rho_{a \rightarrow b}$).*

An expression X built with the operations defined above using k labels is called a directed clique-width k -expression. Let $\text{digraph}(X)$ be the digraph defined by k -expression X .

In [GWY16] the set of directed co-graphs is characterized by excluding two digraphs as a proper subset of the set of all graphs of directed clique-width 2, while for the undirected versions both classes are equal.

By the given definition every graph of directed clique-width at most k can be represented by a tree structure, denoted as k -expression-tree. The leaves of the k -expression-tree represent the vertices of the digraph and the inner nodes of the k -expression-tree correspond to the operations applied to the subexpressions defined by the subtrees. Using the k -expression-tree many hard problems have been shown to be solvable in polynomial time when restricted to graphs of bounded directed clique-width [GWY16, GHK⁺14].

Directed clique-width is not comparable to the directed variants of tree-width mentioned above, which can be observed by the set of all complete biorientations of cliques and the set of all acyclic orientations of grids. The relation of directed clique-width and directed modular width [SW20] is as follows.

Lemma 4.5 ([SW20]) *For every digraph G it holds that $d\text{-cw}(G) \leq \text{dmw}(G)$.*

On the other hand, there exist several classes of digraphs of bounded directed clique-width and unbounded directed modular width, e.g. even the set of all directed paths $\{\vec{P}_n \mid n \geq 1\}$, the set of all directed cycles $\{\vec{C}_n \mid n \geq 1\}$, and the set of all minimal series-parallel digraphs [VTL82]. Thus, the result of [SW19] does not imply any XP-algorithm or FPT-algorithm for directed clique-width.

Corollary 4.6 *The Dichromatic Number problem is W[1]-hard on symmetric digraphs and thus, on all digraphs when parameterized by directed clique-width.*

Proof The Chromatic Number problem is W[1]-hard parameterized by clique-width [FGLS10]. An instance consisting of a graph $G = (V, E)$ and a positive integer r for the Chromatic Number problem can be transformed into an instance for the Dichromatic Number problem on digraph \vec{G} and integer r . Then, G has an r -coloring if and only if \vec{G} has an acyclic r -coloring by Observation 2.2. Since for every undirected

graph G its clique-width equals the directed clique-width of \overleftrightarrow{G} [GWY16], we obtain a parameterized reduction. \square

Thus, under reasonable assumptions there is no FPT-algorithm for the Dichromatic Number problem parameterized by directed clique-width and an XP-algorithm is the best that can be achieved. Next, we introduce such an XP-algorithm.

Let $G = (V, E)$ be a digraph which is given by some directed clique-width k -expression X . For some vertex set $V' \subseteq V$, we define $\text{reach}(V')$ as the set of all pairs (a, b) such that there is a vertex $u \in V'$ labeled by a and there is a vertex $v \in V'$ labeled by b and v is reachable from u in $G[V']$.

Example 4.7 We consider the digraph in Figure 1. The given partition into three acyclic sets $V = V_1 \cup V_2 \cup V_3$, where $V_1 = \{v_1, v_6, v_7\}$, $V_2 = \{v_2\}$, and $V_3 = \{v_3, v_4, v_5\}$ leads to the multi set $\mathcal{M} = \langle \text{reach}(V_1), \text{reach}(V_2), \text{reach}(V_3) \rangle$, where $\text{reach}(V_1) = \text{reach}(V_3) = \{(1, 1), (2, 2), (4, 4), (1, 2), (2, 4), (1, 4)\}$ and $\text{reach}(V_2) = \{(3, 3)\}$.

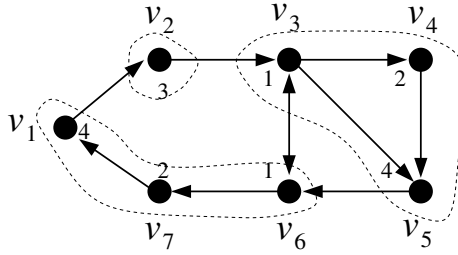


Figure 1: Digraph in Example 4.7. The dashed lines indicate a partition of the vertex set into three acyclic sets. The numbers at the vertices represent their labels.

Within a construction of a digraph by directed clique-width operations only the edge insertion operation can change the reachability between the present vertices. Next, we show which acyclic sets remain acyclic when performing an edge insertion operation and how the reachability information of these sets have to be updated due to the edge insertion operation.

Lemma 4.8 Let $G = (V, E)$ be a vertex labeled digraph defined by some directed clique-width k -expression X , $a \neq b$, $a, b \in \{1, \dots, k\}$, and $V' \subseteq V$ be an acyclic set in G . Then, vertex set V' remains acyclic in $\text{digraph}(\alpha_{a,b}(X))$ if and only if $(b, a) \notin \text{reach}(V')$.

Proof If $(b, a) \in \text{reach}(V')$, then we know that in $\text{digraph}(X)$ there is a vertex y labeled by a which is reachable by a vertex x labeled by b . That is, in $\text{digraph}(X)$ there is a directed path P from x to y . The edge insertion $\alpha_{a,b}$ leads to the arc (y, x) which leads together with path P to a cycle in $\text{digraph}(\alpha_{a,b}(X))$.

If $(b, a) \notin \text{reach}(V')$ and $V' \subseteq V$ is an acyclic set in $\text{digraph}(X)$, then there is a topological ordering of $\text{digraph}(X)[V']$ such that every vertex labeled by a is before every vertex labeled by b in the ordering. The same ordering is a topological ordering for $\text{digraph}(\alpha_{a,b}(X))[V']$ which implies that V' remains acyclic for $\text{digraph}(\alpha_{a,b}(X))$. \square

Lemma 4.9 Let $G = (V, E)$ be a vertex labeled digraph defined by some directed clique-width k -expression X , $a \neq b$, $a, b \in \{1, \dots, k\}$, $V' \subseteq V$ be an acyclic set in G , and $(b, a) \notin \text{reach}(V')$. Then, $\text{reach}(V')$ for $\text{digraph}(\alpha_{a,b}(X))$ can be obtained from $\text{reach}(V')$ for $\text{digraph}(X)$ as follows:

- For every pair $(x, a) \in \text{reach}(V')$ and every pair $(b, y) \in \text{reach}(V')$, we extend $\text{reach}(V')$ by (x, y) .

Proof Let R_1 be the set $\text{reach}(V')$ for $\text{digraph}(X)$, R_2 be the set $\text{reach}(V')$ for $\text{digraph}(\alpha_{a,b}(X))$, and R be the set of pairs constructed in the lemma starting with $\text{reach}(V')$ for $\text{digraph}(X)$. Then, it holds $R_1 \subseteq R$. Furthermore, the rule given in the lemma obviously puts feasible pairs into $\text{reach}(V')$ which implies $R \subseteq R_2$. It remains to show $R_2 \subseteq R$. Let $(c, d) \in R_2$. If $(c, d) \in R_1$ then $(c, d) \in R$ as mentioned above. Thus, let $(c, d) \notin R_1$. This implies that there is a vertex $u \in V'$ labeled by c and a vertex $v \in V'$ labeled by d and v is reachable from u in $\text{digraph}(\alpha_{a,b}(X))$. Since $\text{digraph}(X)$ is a spanning subdigraph of $\text{digraph}(\alpha_{a,b}(X))$ and the vertex labels are not changed by the performed edge insertion operation, there is a non-empty set $V_u \in V'$ of vertices labeled by c and there is a non-empty set $V_v \in V'$ of vertices labeled by d and no vertex of V_v is reachable from a vertex of V_u in $\text{digraph}(X)$. By the definition of the edge insertion operation

we know that in $\text{digraph}(X)$ there is a vertex u' labeled by a and a vertex v' labeled by b such that u' is reachable from u and v is reachable from v' . Thus, $(c, a) \in R_1$ and $(b, d) \in R_1$. Our rule given in the statement leads to $(c, d) \in R$. \square

For a disjoint partition of V into acyclic sets V_1, \dots, V_s , let \mathcal{M} be the multi set³ $\langle \text{reach}(V_1), \dots, \text{reach}(V_s) \rangle$.

Let $F(X)$ be the set of all mutually different multi sets \mathcal{M} for all disjoint partitions of vertex set V into acyclic sets. Every multi set in $F(X)$ consists of nonempty subsets of $\{1, \dots, k\} \times \{1, \dots, k\}$. Each subset can occur 0 times and not more than $|V|$ times. Thus, $F(X)$ has at most

$$(|V| + 1)^{2^{k^2} - 1} \in |V|^{2^{\mathcal{O}(k^2)}}$$

mutually different multi sets and is polynomially bounded in the size of X .

In order to give a dynamic programming solution along the recursive structure of a directed clique-width k -expression, we show how to compute $F(a(v))$, $F(X \oplus Y)$ from $F(X)$ and $F(Y)$, as well as $F(\alpha_{a,b}(X))$ and $F(\rho_{a \rightarrow b}(X))$ from $F(X)$.

Lemma 4.10 *Let $a, b \in \{1, \dots, k\}$, $a \neq b$.*

1. $F(a(v)) = \{\langle \{(a, a)\} \rangle\}$.
2. *Starting with set $D = \{\langle \rangle\} \times F(X) \times F(Y)$ extend D by all triples that can be obtained from some triple $(\mathcal{M}, \mathcal{M}', \mathcal{M}'') \in D$ by removing a set L' from \mathcal{M}' or a set L'' from \mathcal{M}'' and inserting it into \mathcal{M} , or by removing both sets and inserting $L' \cup L''$ into \mathcal{M} . Finally, we choose $F(X \oplus Y) = \{\mathcal{M} \mid (\mathcal{M}, \langle \rangle, \langle \rangle) \in D\}$.*
3. $F(\alpha_{a,b}(X))$ can be obtained from $F(X)$ as follows. First, we remove from $F(X)$ all multi sets $\langle L_1, \dots, L_s \rangle$ such that $(b, a) \in L_t$ for some $1 \leq t \leq s$. Afterwards, we modify every remaining multi set $\langle L_1, \dots, L_s \rangle$ in $F(X)$ as follows:
 - For every L_i which contains a pair (x, a) and a pair (b, y) , we extend L_i by (x, y) .
4. $F(\rho_{a \rightarrow b}(X)) = \{\langle \rho_{a \rightarrow b}(L_1), \dots, \rho_{a \rightarrow b}(L_s) \rangle \mid \langle L_1, \dots, L_s \rangle \in F(X)\}$, using the relabeling of a set of label pairs $\rho_{a \rightarrow b}(L_i) = \{(\rho_{a \rightarrow b}(c), \rho_{a \rightarrow b}(d)) \mid (c, d) \in L_i\}$ and the relabeling of integers $\rho_{a \rightarrow b}(c) = b$, if $c = a$ and $\rho_{a \rightarrow b}(c) = c$, if $c \neq a$.

Proof

1. In $\text{digraph}(a(v))$ there is exactly one vertex v labeled by a and thus the only partition of V into one acyclic set of the vertex set of $\text{digraph}(a(v))$ is $\{v\}$. The corresponding multi set is $\langle \text{reach}(\{v\}) \rangle = \langle \{(a, a)\} \rangle$.
2. $F(X \oplus Y) \subseteq \{\mathcal{M} \mid (\mathcal{M}, \langle \rangle, \langle \rangle) \in D\}$:
Every acyclic set of $\text{digraph}(X \oplus Y)$ is either an acyclic set in $\text{digraph}(X)$, or an acyclic set in $\text{digraph}(Y)$, or is the union of two acyclic sets from $\text{digraph}(X)$ and $\text{digraph}(Y)$. All three possibilities are considered when computing $\{\mathcal{M} \mid (\mathcal{M}, \langle \rangle, \langle \rangle) \in D\}$ from $F(X)$ and $F(Y)$.
 $F(X \oplus Y) \supseteq \{\mathcal{M} \mid (\mathcal{M}, \langle \rangle, \langle \rangle) \in D\}$:
Since the operation \oplus does not create any new edges, the acyclic sets from $\text{digraph}(X)$, the acyclic sets from $\text{digraph}(Y)$, and the union of acyclic sets from $\text{digraph}(X)$ and $\text{digraph}(Y)$ remain acyclic sets for $\text{digraph}(X \oplus Y)$.
3. By Lemma 4.8 we have to remove all multi sets $\langle L_1, \dots, L_s \rangle$ from $F(X)$ for which holds that $(b, a) \in L_t$ for some $1 \leq t \leq s$. The remaining multi sets are updated correctly by Lemma 4.9.
4. In $\text{digraph}(X)$ there is a vertex labeled by d which is reachable from a vertex labeled by c if and only if in $\text{digraph}(\rho_{a \rightarrow b}(X))$ there is a vertex labeled by $\rho_{a \rightarrow b}(d)$ which is reachable from a vertex labeled by $\rho_{a \rightarrow b}(c)$.

³We use the notion of a *multi set*, i.e., a set that may have several equal elements. For a multi set with elements x_1, \dots, x_n we write $\mathcal{M} = \langle x_1, \dots, x_n \rangle$. There is no order on the elements of \mathcal{M} . The number how often an element x occurs in \mathcal{M} is denoted by $\psi(\mathcal{M}, x)$. Two multi sets \mathcal{M}_1 and \mathcal{M}_2 are *equal* if for each element $x \in \mathcal{M}_1 \cup \mathcal{M}_2$, $\psi(\mathcal{M}_1, x) = \psi(\mathcal{M}_2, x)$, otherwise they are called *different*. The empty multi set is denoted by $\langle \rangle$.

This shows the statements of the lemma. \square

Since every possible coloring of G is realized in the set $F(X)$, where X is a directed clique-width k -expression for G , it is easy to find a minimum coloring for G .

Corollary 4.11 *Let $G = (V, E)$ be a digraph given by a directed clique-width k -expression X . There is a partition of V into r acyclic sets if and only if there is some $\mathcal{M} \in F(X)$ consisting of r sets of label pairs.*

Theorem 4.12 *The Dichromatic Number problem on digraphs on n vertices given by a directed clique-width k -expression can be solved in $n^{2^{\mathcal{O}(k^2)}}$ time.*

Proof Let $G = (V, E)$ be a digraph of directed clique-width at most k and T be a k -expression-tree for G with root w . For some vertex u of T we denote by T_u the subtree rooted at u and X_u the k -expression defined by T_u . In order to solve the Dichromatic Number problem for G , we traverse k -expression-tree T in a bottom-up order. For every vertex u of T we compute $F(X_u)$ following the rules given in Lemma 4.10. By Corollary 4.11 we can solve our problem by $F(X_w) = F(X)$.

Our rules given Lemma 4.10 show the following running times. For every $v \in V$ and $a \in \{1, \dots, k\}$ set $F(a(v))$ can be computed in $\mathcal{O}(1)$. The set $F(X \oplus Y)$ can be computed in time $(n+1)^{3(2^{k^2}-1)} \in n^{2^{\mathcal{O}(k^2)}}$ from $F(X)$ and $F(Y)$. The sets $F(\alpha_{a,b}(X))$ and $F(\rho_{a \rightarrow b}(X))$ can be computed in time $(n+1)^{2^{k^2}-1} \in n^{2^{\mathcal{O}(k^2)}}$ from $F(X)$.

In order to bound the number and order of operations within directed clique-width expressions, we can use the normal form for clique-width expressions defined in [EGW03]. The proof of Theorem 4.2 in [EGW03] shows that also for directed clique-width expression X , we can assume that for every subexpression, after a disjoint union operation first there is a sequence of edge insertion operations followed by a sequence of relabeling operations, i.e. between two disjoint union operations there is no relabeling before an edge insertion. Since there are n leaves in T , we have $n-1$ disjoint union operations, at most $(n-1) \cdot (k-1)$ relabeling operations, and at most $(n-1) \cdot k(k-1)$ edge insertion operations. This leads to an overall running time of $n^{2^{\mathcal{O}(k^2)}}$. \square

Example 4.13 *We consider $X = (\alpha_{1,2}(\rho_{2 \rightarrow 1}(\alpha_{2,1}(\alpha_{1,2}(1(v_1) \oplus 2(v_2)))) \oplus 2(v_3))$.*

- $F(1(v_1)) = \{\{(1, 1)\}\}$
- $F(2(v_2)) = \{\{(2, 2)\}\}$
- $F(1(v_1) \oplus 2(v_2)) = \{\{(1, 1)\}, \{(2, 2)\}, \{(1, 1), (2, 2)\}\}$
- $F(\alpha_{1,2}(1(v_1) \oplus 2(v_2))) = \{\{(1, 1)\}, \{(2, 2)\}, \{(1, 1), (2, 2), (1, 2)\}\}$
- $F(\alpha_{2,1}(\alpha_{1,2}(1(v_1) \oplus 2(v_2)))) = \{\{(1, 1)\}, \{(2, 2)\}\}$
- $F(\rho_{2 \rightarrow 1}(\alpha_{2,1}(\alpha_{1,2}(1(v_1) \oplus 2(v_2)))) = \{\{(1, 1)\}, \{(1, 1)\}\}$
- $F(\rho_{2 \rightarrow 1}(\alpha_{2,1}(\alpha_{1,2}(1(v_1) \oplus 2(v_2)))) \oplus 2(v_3)) = \{\{(1, 1)\}, \{(2, 2)\}, \{(1, 1)\}, \{(1, 1), (2, 2)\}, \{(1, 1)\}\}$
- $F(\alpha_{1,2}(\rho_{2 \rightarrow 1}(\alpha_{2,1}(\alpha_{1,2}(1(v_1) \oplus 2(v_2)))) \oplus 2(v_3))) = \{\{(1, 1)\}, \{(2, 2)\}, \{(1, 1)\}, \{(1, 1), (2, 2), (1, 2)\}, \{(1, 1)\}\}$

Thus, in $F(X)$ there is one multi set consisting of two sets of label pairs and one multi set consisting of three sets of label pairs. This implies that $\vec{\chi}(\text{digraph}(X)) = 2$.

The running time shown in Theorem 4.12 leads to the following result.

Corollary 4.14 *The Dichromatic Number problem is in XP when parameterized by directed clique-width.*

Up to now there are only very few digraph classes for which we can compute a directed clique-width expression in polynomial time. This holds for directed co-graphs, digraphs of bounded directed modular width, orientations of trees, and directed cactus forests. For such classes we can apply the result of Theorem 4.12. In order to find directed clique-width expressions for general digraphs one can use results on the related parameter bi-rank-width [KR13]. By [BJG18, Lemma 9.9.12] we can use approximate directed clique-width expressions obtained from rank-decomposition with the drawback of a single-exponential blow-up on the parameter.

Next, we give a lower bound for the running time of parameterized algorithms for Dichromatic Number problem parameterized by the directed clique-width.

Corollary 4.15 *The Dichromatic Number problem on digraphs on n vertices parameterized by the directed clique-width k cannot be solved in time $n^{2^{o(k)}}$, unless ETH fails.*

Proof In order to show the statement we apply the following lower bound for the Chromatic Number problem parameterized by clique-width given in [FGL⁺18]. Any algorithm for the Chromatic Number problem parameterized by clique-width with running in $n^{2^{o(k)}}$ would disprove the Exponential Time Hypothesis. By Observation 2.2 and since for every undirected graph G its clique-width equals the directed clique-width of \vec{G} [GWY16], any algorithm for the Dichromatic Number problem parameterized by the directed clique-width can be used to solve the Chromatic Number problem parameterized by clique-width. \square

In order to show fixed parameter tractability for DCN_r w.r.t. the parameter directed clique-width one can use its definability within monadic second order logic (MSO). We restrict to MSO_1 -logic, which allows propositional logic, variables for vertices and vertex sets of digraphs, the predicate $\text{arc}(u, v)$ for arcs of digraphs, and quantifications over vertices and vertex sets [CE12]. For defining optimization problems we use the LinEMSO_1 framework given in [CMR00].

The following theorem is from [GHK⁺14, Theorem 4.2].

Theorem 4.16 ([GHK⁺14]) *For every integer k and MSO_1 formula ψ , every ψ - LinEMSO_1 optimization problem is fixed-parameter tractable on digraphs of clique-width k , with the parameters k and length of the formula $|\psi|$.*

Next, we will apply this result to DCN .

Theorem 4.17 *The Dichromatic Number problem is in FPT when parameterized by directed clique-width and r .*

Proof Let $G = (V, E)$ be a digraph. We can define DCN_r by an MSO_1 formula

$$\psi = \exists V_1, \dots, V_r : \left(\text{Partition}(V, V_1, \dots, V_r) \wedge \bigwedge_{1 \leq i \leq r} \text{Acyclic}(V_i) \right)$$

with

$$\begin{aligned} \text{Partition}(V, V_1, \dots, V_r) = & \quad \forall v \in V : (\bigvee_{1 \leq i \leq r} v \in V_i) \wedge \\ & \quad \nexists v \in V : (\bigvee_{i \neq j, 1 \leq i, j \leq r} (v \in V_i \wedge v \in V_j)) \end{aligned}$$

and

$$\text{Acyclic}(V_i) = \quad \forall V' \subseteq V_i, V' \neq \emptyset : \exists v \in V' (\text{outdegree}(v) = 0 \vee \text{outdegree}(v) \geq 2)$$

For the correctness we note the following. For every induced cycle V' in G it holds that for every vertex $v \in V'$ we have $\text{outdegree}(v) = 1$ in G . This does not hold for non-induced cycles. But since for every cycle V'' in G there is a subset $V' \subseteq V''$, such that $G[V']$ is a cycle, we can verify by $\text{Acyclic}(V_i)$ whether $G[V_i]$ is acyclic. Since it holds that $|\psi| \in \mathcal{O}(r)$, the statement follows by the result of Theorem 4.16. \square

Corollary 4.18 *For every integer r the r -Dichromatic Number problem is in FPT when parameterized by directed clique-width.*

5 Conclusions and outlook

The presented methods allow us to compute the dichromatic number on special classes of digraphs in polynomial time.

The shown parameterized solutions of Corollary 4.14 and Theorem 4.17 also hold for any parameter which is larger or equal than directed clique-width, such as the parameter directed modular width [SW20] (which even allows an FPT-algorithm by [SW19, SW20]) and directed linear clique-width [GR19a]. Furthermore, restricted to semicomplete digraphs the shown parameterized solutions also hold for directed path-width [FP19, Lemma 2.14].

Further, the hardness result of Corollary 4.6 rules out FPT-algorithms for the Dichromatic Number problem parameterized by width parameters which can be bounded by directed clique-width. Among these are the clique-width and rank-width of the underlying undirected graph, which also have been considered in [Gan09] on the Oriented Chromatic Number problem.

Corollary 5.1 *The Dichromatic Number problem is not in FPT when parameterized by clique-width of the underlying undirected graph, unless $P = NP$.*

From a parameterized point of view width parameters are so-called structural parameters, which are measuring the difficulty of decomposing a graph into a special tree-structure. Beside these, the standard parameter, i.e. the threshold value given in the instance, is well studied. Unfortunately, for the Dichromatic Number problem the standard parameter is the number of necessary colors r and does even not allow an XP-algorithm, since DCN_2 is NP-complete [MSW19].

Corollary 5.2 *The Dichromatic Number problem is not in XP when parameterized by r , unless $P = NP$.*

A positive result can be obtained for parameter "number of vertices" n . Since integer linear programming is fixed-parameter tractable for the parameter "number of variables" [Len83] the existence of an integer program for DCN using $\mathcal{O}(n^2)$ variables implies an FPT-algorithm for parameter n .

Remark 1 *To formulate DCN for some directed graph $G = (V, E)$ as an integer program, we introduce a binary variable $y_j \in \{0, 1\}$, $j \in \{1, \dots, n\}$, such that $y_j = 1$ if and only if color j is used. Further, we use n^2 variables $x_{i,j} \in \{0, 1\}$, $i, j \in \{1, \dots, n\}$, such that $x_{i,j} = 1$ if and only if vertex v_i receives color j .*

In order to ensure that every color class is acyclic, we will use the well known characterization that a digraph is acyclic if and only if it has a topological vertex ordering. A topological vertex ordering of a directed graph is a linear ordering of its vertices such that for every edge $(v_i, v_{i'})$ vertex v_i comes before vertex $v_{i'}$ in the ordering. The existence of a topological ordering will be verified by further integer valued variables $t_i \in \{0, \dots, n-1\}$ realizing the ordering number of vertex v_i , $i \in \{1, \dots, n\}$. In order to define only feasible orderings for every color $j \in \{1, \dots, n\}$, for edge $(v_i, v_{i'}) \in A$ with $x_{i,j} = 1$ and $x_{i',j} = 1$ we verify $t_{i'} \geq t_i + 1$ in condition (4).

$$\text{minimize } \sum_{j=1}^n y_j \quad (1)$$

subject to

$$\sum_{j=1}^n x_{i,j} = 1 \text{ for every } i \in \{1, \dots, n\} \quad (2)$$

$$x_{i,j} \leq y_j \text{ for every } i, j \in \{1, \dots, n\} \quad (3)$$

$$t_{i'} \geq t_i + 1 - n \cdot (1 - (x_{i,j} \wedge x_{i',j})) \text{ for every } (v_i, v_{i'}) \in E, j \in \{1, \dots, n\} \quad (4)$$

$$y_j \in \{0, 1\} \text{ for every } j \in \{1, \dots, n\} \quad (5)$$

$$t_i \in \{0, \dots, n-1\} \text{ for every } i \in \{1, \dots, n\} \quad (6)$$

$$x_{i,j} \in \{0, 1\} \text{ for every } i, j \in \{1, \dots, n\} \quad (7)$$

Equations in (4) are not in propositional logic, but can be transformed for integer programming [Gur14].

Corollary 5.3 *The Dichromatic Number problem is in FPT when parameterized by the number of vertices n .*

It remains to verify whether the running time of our XP-algorithm for DCN can be improved to $n^{2^{\mathcal{O}(k)}}$, which is possible for the Chromatic Number problem by [EGW01, KR03]. Further, it remains open whether the hardness of Corollary 4.6 also holds for special digraph classes and for directed linear clique-width [GR19a]. Furthermore, the existence of an FPT-algorithm for DCN_r w.r.t. parameter clique-width of the underlying undirected graph is open, see Table 1.

Acknowledgements

The work of the second and third author was supported by the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) – 388221852

References

- [AH15] S.D. Andres and W. Hochstättler. Perfect digraphs. *Journal of Graph Theory*, 79(1):21–29, 2015.
- [BdGR97] D. Bechet, P. de Groote, and C. Retoré. A complete axiomatisation of the inclusion of series-parallel partial orders. In *Rewriting Techniques and Applications*, volume 1232 of *LNCS*, pages 230–240. Springer-Verlag, 1997.
- [BFJ⁺04] D. Bokal, G. Fijavz, M. Juvan, P.M. Kayll, and B. Mohar. The circular chromatic number of a digraph. *Journal of Graph Theory*, 46(3):227–240, 2004.
- [BJG18] J. Bang-Jensen and G. Gutin, editors. *Classes of Directed Graphs*. Springer-Verlag, Berlin, 2018.
- [BJM14] J. Bang-Jensen and A. Maddaloni. Arc-disjoint paths in decomposable digraphs. *Journal of Graph Theory*, 77:89–110, 2014.
- [CD06] J.-F. Culus and M. Demange. Oriented coloring: Complexity and approximation. In *Proceedings of the Conference on Current Trends in Theory and Practice of Computer Science (SOFSEM)*, volume 3831 of *LNCS*, pages 226–236. Springer-Verlag, 2006.
- [CE12] B. Courcelle and J. Engelfriet. *Graph Structure and Monadic Second-Order Logic. A Language-Theoretic Approach*. Encyclopedia of Mathematics and its Applications. Cambridge University Press, Cambridge, 2012.
- [CFGK16] H. Coelho, L. Faria, S. Gravier, and S. Klein. Oriented coloring in planar, bipartite, bounded degree 3 acyclic oriented graphs. *Discrete Applied Mathematics*, 198:109–117, 2016.
- [CLSB81] D.G. Corneil, H. Lerchs, and L. Stewart-Burlingham. Complement reducible graphs. *Discrete Applied Mathematics*, 3:163–174, 1981.
- [CMR00] B. Courcelle, J.A. Makowsky, and U. Rotics. Linear time solvable optimization problems on graphs of bounded clique-width. *Theory of Computing Systems*, 33(2):125–150, 2000.
- [CO00] B. Courcelle and S. Olariu. Upper bounds to the clique width of graphs. *Discrete Applied Mathematics*, 101:77–114, 2000.
- [Cou94] B. Courcelle. The monadic second-order logic of graphs VI: On several representations of graphs by relational structures. *Discrete Applied Mathematics*, 54:117–149, 1994.
- [CP06] C. Crespelle and C. Paul. Fully dynamic recognition algorithm and certificate for directed cographs. *Discrete Applied Mathematics*, 154(12):1722–1741, 2006.
- [CR05] D.G. Corneil and U. Rotics. On the relationship between clique-width and treewidth. *SIAM Journal on Computing*, 4:825–847, 2005.
- [DF13] R.G. Downey and M.R. Fellows. *Fundamentals of Parameterized Complexity*. Springer-Verlag, New York, 2013.
- [EGW01] W. Espelage, F. Gurski, and E. Wanke. How to solve NP-hard graph problems on clique-width bounded graphs in polynomial time. In *Proceedings of Graph-Theoretical Concepts in Computer Science (WG)*, volume 2204 of *LNCS*, pages 117–128. Springer-Verlag, 2001.
- [EGW03] W. Espelage, F. Gurski, and E. Wanke. Deciding clique-width for graphs of bounded tree-width. *Journal of Graph Algorithms and Applications - Special Issue of JGAA on WADS 2001*, 7(2):141–180, 2003.
- [FGL⁺18] F.V. Fomin, P. Golovach, D. Lokshtanov, S. Saurabh, and M. Zehavi. Cliquewidth III: The Odd Case of Graph Coloring Parameterized by Cliquewidth. *ACM Transactions on Algorithms*, 15(1):9:1–9:27, 2018.
- [FGLS10] F.V. Fomin, P.A. Golovach, D. Lokshtanov, and S. Saurabh. Intractability of clique-width parameterizations. *SIAM Journal on Computing*, 39(5):1941–1956, 2010.

- [FHM03] T. Feder, P. Hell, and B. Mohar. Acyclic homomorphisms and circular colorings of digraphs. *SIAM Journal on Discrete Mathematics*, 17(1):161–163, 2003.
- [FP19] F.V. Fomin and M. Pilipczuk. On width measures and topological problems on semi-complete digraphs. *Journal of Combinatorial Theory, Series B*, 138:78–165, 2019.
- [Gan09] R. Ganian. The parameterized complexity of oriented colouring. In *Proceedings of Doctoral Workshop on Mathematical and Engineering Methods in Computer Science, MEMICS*, volume 13 of *OASICS*. Schloss Dagstuhl - Leibniz-Zentrum fuer Informatik, Germany, 2009.
- [GH10] R. Ganian and P. Hlinený. New results on the complexity of oriented colouring on restricted digraph classes. In *Proceedings of the Conference on Current Trends in Theory and Practice of Computer Science (SOFSEM)*, volume 5901 of *LNCS*, pages 428–439. Springer-Verlag, 2010.
- [GHK⁺14] R. Ganian, P. Hlinený, J. Kneis, A. Langer, J. Obdržálek, and P. Rossmanith. Digraph width measures in parameterized algorithmics. *Discrete Applied Mathematics*, 168:88–107, 2014.
- [GHK⁺16] R. Ganian, P. Hlinený, J. Kneis, D. Meisters, J. Obdržálek, P. Rossmanith, and S. Sikdar. Are there any good digraph width measures? *Journal of Combinatorial Theory, Series B*, 116:250–286, 2016.
- [GHK⁺20] F. Gurski, S. Hoffmann, D. Komander, C. Rehs, J. Rethmann, and E. Wanke. Computing directed steiner path covers for directed co-graphs. In *Proceedings of the Conference on Current Trends in Theory and Practice of Computer Science (SOFSEM)*, volume 12011 of *LNCS*, pages 556–565. Springer-Verlag, 2020.
- [GKL20] F. Gurski, D. Komander, and M. Lindemann. Oriented coloring of msp-digraphs and oriented co-graphs. In *Proceedings of the International Conference on Combinatorial Optimization and Applications (COCOA)*, volume 12577 of *LNCS*. Springer-Verlag, 2020. to appear.
- [GKL21] F. Gurski, D. Komander, and M. Lindemann. Homomorphisms to digraphs with large girth and oriented colorings of minimal series-parallel digraphs. In *Proceedings of the International Workshop on Algorithms and Computation (WALCOM)*, *LNCS*. Springer-Verlag, 2021. to appear.
- [GKR19a] F. Gurski, D. Komander, and C. Rehs. Characterizations for special directed co-graphs. In *Proceedings of the International Conference on Combinatorial Optimization and Applications (COCOA)*, volume 11949 of *LNCS*, pages 252–264. Springer-Verlag, 2019.
- [GKR19b] F. Gurski, D. Komander, and C. Rehs. Computing digraph width measures on directed co-graphs. In *Proceedings of International Symposium on Fundamentals of Computation Theory (FCT)*, volume 11651 of *LNCS*, pages 292–305. Springer-Verlag, 2019.
- [GKR19c] F. Gurski, D. Komander, and C. Rehs. Oriented coloring on recursively defined digraphs. *Algorithms*, 12(4):87, 2019.
- [GKR21] F. Gurski, D. Komander, and C. Rehs. Acyclic coloring parameterized by directed clique-width. In *Proceedings of the International Conference on Algorithms and Discrete Applied Mathematics (CALDAM)*, *LNCS*. Springer-Verlag, 2021. to appear.
- [GLS81] M. Grötschel, L. Lovász, and A. Schrijver. The ellipsoid method and its consequences in combinatorial optimization. *Combinatorica*, 1(2):169–197, 1981.
- [Gol80] M.C. Golumbic. *Algorithmic Graph Theory and Perfect Graphs*. Academic Press, 1980.
- [GR18a] F. Gurski and C. Rehs. Computing directed path-width and directed tree-width of recursively defined digraphs. *ACM Computing Research Repository (CoRR)*, abs/1806.04457:16 pages, 2018.
- [GR18b] F. Gurski and C. Rehs. Directed path-width and directed tree-width of directed co-graphs. In *Proceedings of the International Conference on Computing and Combinatorics (COCOON)*, volume 10976 of *LNCS*, pages 255–267. Springer-Verlag, 2018.

- [GR19a] F. Gurski and C. Rehs. Comparing linear width parameters for directed graphs. *Theory of Computing Systems*, 63(6):1358–1387, 2019.
- [GR19b] F. Gurski and C. Rehs. Forbidden directed minors, directed path-width and directed tree-width of tree-like digraphs. In *Proceedings of the Conference on Current Trends in Theory and Practice of Computer Science (SOFSEM)*, volume 11376 of *LNCS*, pages 234–246. Springer-Verlag, 2019.
- [Gur14] F. Gurski. Efficient binary linear programming formulations for boolean functions. *Statistics, Optimization and Information Computing*, 2(4):274–279, 2014.
- [Gur17] F. Gurski. Dynamic programming algorithms on directed cographs. *Statistics, Optimization and Information Computing*, 5:35–44, 2017.
- [GW00] F. Gurski and E. Wanke. The tree-width of clique-width bounded graphs without $K_{n,n}$. In *Proceedings of Graph-Theoretical Concepts in Computer Science (WG)*, volume 1938 of *LNCS*, pages 196–205. Springer-Verlag, 2000.
- [GWY16] F. Gurski, E. Wanke, and E. Yilmaz. Directed NLC-width. *Theoretical Computer Science*, 616:1–17, 2016.
- [Hoà94] C.T. Hoàng. Efficient algorithms for minimum weighted colouring of some classes of perfect graphs. *Discrete Applied Mathematics*, 55:133–143, 1994.
- [Hou06] S. Hougardy. Classes of perfect graphs. *Discrete Mathematics*, 306(19-20):2529–2571, 2006.
- [HSW17] M. Hellmuth, P.F. Stadler, and N. Wieseke. The mathematics of xenology: di-cographs, symbolic ultrametrics, 2-structures and tree-representable systems of binary relations. *Journal of Mathematical Biology*, 75(1):199–237, 2017.
- [JRST01] T. Johnson, N. Robertson, P.D. Seymour, and R. Thomas. Directed tree-width. *Journal of Combinatorial Theory, Series B*, 82:138–155, 2001.
- [KR03] D. Kobler and U. Rotics. Edge dominating set and colorings on graphs with fixed clique-width. *Discrete Applied Mathematics*, 126(2-3):197–221, 2003.
- [KR13] M. Kanté and M. Rao. The rank-width of edge-coloured graphs. *Theory Comput. Syst.*, 52(4):599–644, 2013.
- [Len83] H.W. Lenstra. Integer programming with a fixed number of variables. *Mathematics of Operations Research*, 8:538–548, 1983.
- [LM17] Z. Li and B. Mohar. Planar digraphs of digirth four are 2-colorable. *SIAM J. Discrete Math.*, 31:2201–2205, 2017.
- [Moh03] B. Mohar. Circular colorings of edge-weighted graphs. *Journal of Graph Theory*, 43(2):107–116, 2003.
- [MSW19] M.G. Millani, R. Steiner, and S. Wiederrecht. Colouring non-even digraphs. *ACM Computing Research Repository (CoRR)*, abs/1903.02872:37 pages, 2019.
- [NEMM⁺18] N. Nojgaard, N. El-Mabrouk, D. Merkle, N. Wieseke, and M. Hellmuth. Partial homology relations - satisfiability in terms of di-cographs. In *Proceedings of International Computing and Combinatorics Conference (COCOON)*, volume 10976 of *LNCS*, pages 403–415. Springer-Verlag, 2018.
- [NL82] V. Neumann-Lara. The dichromatic number of a digraph. *Journal of Combinatorial Theory, Series B*, 33(2):265–270, 1982.
- [Ret98] C. Retoré. Pomset logic as a calculus of directed cographs. In *Proceedings of the Fourth Roma Workshop: Dynamic perspectives in Logic and Linguistics*, pages 221–247. CLUEB, 1998.
- [RS86] N. Robertson and P.D. Seymour. Graph minors II. Algorithmic aspects of tree width. *Journal of Algorithms*, 7:309–322, 1986.

- [Sop16] E. Sopena. Homomorphisms and colourings of oriented graphs: An updated survey. *Discrete Mathematics*, 339:1993–2005, 2016.
- [SW19] R. Steiner and S. Wiederrecht. Parameterized algorithms for directed modular width. *ACM Computing Research Repository (CoRR)*, abs/1905.13203:37 pages, 2019.
- [SW20] R. Steiner and S. Wiederrecht. Parameterized algorithms for directed modular width. In *Proceedings of the International Conference on Algorithms and Discrete Applied Mathematics (CALDAM)*, volume 12016 of *LNCS*, pages 415–426. Springer-Verlag, 2020.
- [Tin89] G. Tinhofer. Strong tree-cographs are birkhoff graphs. *Discrete Applied Mathematics*, 22:275–288, 1988/89.
- [VTL82] J. Valdes, R.E. Tarjan, and E.L. Lawler. The recognition of series-parallel digraphs. *SIAM Journal on Computing*, 11:298–313, 1982.
- [Wie20] S. Wiederrecht. Digraphs of directed treewidth one. *Discrete Mathematics*, 343(12):112124, 2020.