

# HANDLING HIGHLY CORRELATED GENES OF SINGLE-CELL RNA SEQUENCING DATA IN PREDICTION MODELS

LI XING<sup>2</sup>, SONGWAN JOUN<sup>1</sup>, KURT MACKEY<sup>1</sup>, MARY LESPERANCE<sup>1</sup>, AND XUEKUI ZHANG<sup>1,\*</sup>

**Abstract.** Motivation: Selecting feature genes and predicting cells' phenotype are typical tasks in the analysis of scRNA-seq data. Many algorithms were developed for these tasks, but high correlations among genes create challenges specifically in scRNA-seq analysis, which are not well addressed. Highly correlated genes lead to unreliable prediction models due to technical problems, such as multi-collinearity. Most importantly, when a causal gene (whose variants have a true biological effect on the phenotype) is highly correlated with other genes, most algorithms select one of them in a data-driven manner. The correlation structure among genes could change substantially. Hence, it is critical to build a prediction model based on causal genes.

Results: To address the issues discussed above, we propose a grouping algorithm that can be integrated into prediction models. Using real benchmark scRNA-seq data and simulated cell phenotypes, we show our novel method significantly outperforms standard models in both prediction and feature selection. Our algorithm reports the whole group of correlated genes, allowing researchers to either use their common pattern as a more robust predictor or conduct follow-up studies to identify the causal genes in the group.

Availability: An R package is being developed and will be available on the Comprehensive R Archive Network (CRAN) when the paper is published.

## 1. Introduction

The technologies for the Next Generation Sequencing (NGS) have developed rapidly over the past decade. Among all applications of such technologies, single-cell sequencing [Nawy, 2014] is at the forefront of genomic research. Single-cell sequencing examines the genomic information from individual cells with optimized NGS technologies. It provides a higher resolution of cellular differences and a better understanding of the function of a single cell in the context of its microenvironment. However, the development of analytic tools has trailed the rapid advance in biochemistry and molecular biology [Gawad et al., 2016], and there are still many challenges required to be addressed to fully leverage the information in single-cell sequencing profiles.

Tissues are complex ecosystems containing multiple types of cells. For example, tumors are made of cancer cells and non-cancerous cells, each with their own activation status. This heterogeneous cell composition is called a tumor microenvironment [Aran et al., 2017]. The single-cell RNA-sequencing (scRNA-seq) technology can measure gene expression profiles in the resolution of single cells, which is a powerful tool to study the composition of cell types of various tissues, such as lung [Angelidis et al., 2019], peripheral blood [Newman et al., 2019], and breast tumor [Wagner et al., 2019]. Grouping cells by cell types can be achieved by the cluster analysis of gene expression profiles obtained from the scRNA-seq data. The review article [Kiselev et al., 2019] summarized popular methods and software pipelines for clustering scRNA-seq data.

After cells are clustered by cell-types, the feature gene selection is required in two scenarios. The first type of feature genes can predict the phenotype of cells (such as disease status and cell evolution status.) Finding this type of feature genes is a traditional problem since the analysis of bulk (non-single cell) genomic data. The only difference in analyzing scRNA-seq data is that we need to conduct this separately for every cell type. The second type of feature genes can distinguish cells in each cell type from the other cell-types, which is uniquely needed in the analysis of single-cell data. The selected features enable profiling targeted gene expression in future studies, which can inference the cell composition and predict the phenotypes of cells with similar precision while reducing the cost substantially. Cost reduction is a significant advantage in real-world applications. For example, to develop a diagnostic test for a disease, a chip based on a small set of feature genes is much more financially attractive than a whole-genome based test. The commercial service of profiling targeted gene expression is made available by 10xGenomics, which is compatible with single-cell sequencing, and reduce the cost by 90% compared with whole-genome sequencing [10xGenomics, 2020]. The second type of feature genes can also be used in other applications, such as deconvolving cell types from bulk RNA-seq data [Newman et al., 2019].

Differential expression analysis is the most commonly used approach for identifying feature genes. It investigates the association of cell types or cell phenotypes with every ‘individual’ gene and select genes by their p-values. It is well known that most complex phenotypes are ‘jointly’ affected by multiple genes. Hence, we propose to use prediction (or classification) analysis and feature selection for this task. As a common task in supervised machine learning, many well developed general-purpose methods are available for building prediction models and selecting features. Researchers use general-purpose methods for prediction analysis of various genomic data. For example, Elastic Net [Zou and Hastie, 2005] is a supervised machine learning method based on penalized regressions, which achieves feature selection by regulating the coefficients of non-relevant predictors to zero. Due to its outstanding performance, Elastic Net has become one of the most popular methods for feature selection in high dimensional data, and it has been widely applied in genomics research, such as discovering a diagnostic test of 2-transcript host RNA signatures for discriminating bacterial versus viral infection in febrile children [Herberg et al., 2016], selecting genes and predicting clinical drug response [Geeleher et al., 2014], predicting resistance of HIV drugs from mutation information [Xing et al., 2019], and working as a building block to construct complex models for the analysis of single-cell sequencing data [Dixit et al., 2016].

There are important challenges in handling the highly correlated genes in the prediction analysis of scRNA-seq data, that general-purpose machine learning algorithms cannot address. When some genes are highly correlated with a causal gene (i.e. a gene whose variants carry true biological effect to affect the outcome), most machine learning methods only report one gene from the pool of highly correlated genes that are selected in a purely data-driven manner. Since real data always contains both signal and noise, the non-causal genes may have better prediction power than their highly correlated causal gene. This may lead machine learning algorithms to select non-causal genes in the prediction models. The correlation relationship may change substantially in other studies due to many factors such as heterogeneity of cells and change of environmental conditions. Hence, selecting the causal gene is critical to maintain good prediction performance in other studies. Therefore, it is desired to detect a group of highly correlated genes instead of picking one gene from the group. All genes in the detected group can be further investigated in follow-up studies, such as identifying causal genes using Mendelian randomization [Gusev et al., 2016, Richardson et al., 2020]. Even when no follow-up studies are conducted to select causal genes, using the common pattern of a group of highly correlated genes can be a more robust predictor than picking a single gene from the group. Despite the popularity of prediction analysis of scRNA-seq data, there are rarely such methods developed specifically for it. This knowledge gap motivated the research presented in this paper.

Here, we introduce a grouping algorithm that can be integrated with the general-purpose prediction methods. We group highly correlated genes and represent the group of genes by a single predictor in prediction models. In simulation studies, we show that this strategy significantly improves the performance of both prediction and feature selection. We use the Elastic Net to illustrate the proposed method in this paper, but users of our approach can replace the Elastic Net with other prediction models. The rest of this paper is organized as follows. In Section 2, we provide the details of our grouping method. In Section 3, we compare our grouping method’s performance with the general-purpose methods via simulation studies. Section 4 contains our conclusion and discussion.

## 2. Methods

We use a hypothetical extreme example to introduce our approach, and then extend it to general situations. Assume that three genes are perfectly correlated with relationship  $x_1 = -x_2 = x_3$  (i.e. their correlation is either 1 or  $-1$ ). We have a trivial approach, which can outperform all fancy methods. That is, we treat the perfectly correlated predictors as a group and use their common pattern  $z = (x_1 - x_2 + x_3)/3$  to represent this group (as a single predictor) in the prediction model. If the representative  $z$  is selected as an important predictor, all genes within the group are labelled as ‘candidate’ feature genes. The common pattern  $z$  can be used to predict phenotype of new cells. If possible, we recommend to conduct follow-up studies identify the causal gene within this group and use the causal gene in the final prediction or classification models. This grouping idea can be extended to more general situations (i.e.  $-1 < \text{correlation} < 1$ ), where we group highly positively or negatively correlated genes and create a new variable to represent the common pattern of this group in the prediction models.

Grouping or clustering is a typical task in unsupervised machine learning. Agglomerative hierarchical clustering and K-Means clustering are both popular clustering methods, however, none of them is suitable for our specific grouping task. Instead, we propose a hybrid approach, which first pre-group the genes into smaller subsets using a modified K-Means algorithm and then apply the hierarchical clustering algorithm to group genes in each subset. Next, we discuss the details of the novel grouping method.

2.1. Pre-grouping genes by the modified K-Means algorithm. In the human genome, there are about 20,000 protein-coding genes, 25,000 non-protein-coding genes, and 2300 micro-RNA genes. To cluster such a large number of genes is a huge computational challenge for hierarchical clustering algorithms. The K-Means algorithm is well-known for its ability to handle large data like this, but it cannot be applied directly to our grouping problem for three reasons. First, our goal is to group highly correlated genes, but there is no threshold parameter in the K-Means algorithm that can directly control the strength of within cluster correlations. Second, our grouping task only requires clustering of highly correlated genes, which leads to a large number of clusters. The K-Means algorithm can be significantly slower when the number of clusters becomes large. Third, the K-Means algorithm is based on the Euclidean distance, while we need a method based on correlation. Furthermore, the common pattern of negatively correlated genes must be properly addressed, so that they can be clustered together and their common pattern can be properly represented. For example, for expression levels of two genes  $x_1$  and  $x_2$ , if  $\text{cor}(x_1, x_2) = -1$ , their common pattern should be  $(x_1 - x_2)/2$  and not  $(x_1 + x_2)/2$ .

In hierarchical clustering algorithm, the resulting clusters are obtained by cutting a dendrogram. The threshold for this cut directly describes the strength of the within-cluster correlations of genes, which addresses the first problem discussed above perfectly; but the hierarchical clustering algorithm cannot handle such large numbers of genes. We therefore use a divide and conquer strategy. We pre-group the genes into smaller subsets using the K-Means algorithm, and then each subset is further divided using the hierarchical clustering algorithm.

All subsets obtained from pre-grouping should be small enough to be processed by the hierarchical clustering algorithm. Increasing the number of clusters in the K-Means algorithm does not always lead to splitting the largest subsets. So, we apply the K-Means algorithm iteratively. More specifically, we first apply the K-Means algorithm using  $K = 10$  clusters. Then we keep on applying the K-Means algorithm to split the largest cluster into  $K = 10$  sub-clusters, until the largest cluster is small enough (e.g. with less than 1000 genes). This iterative approach not only provides an efficient way to limit the size of the largest cluster, but also solves the second problem discussed above.

To address the third problem, we propose a modified K-Means algorithm. We briefly describe the K-Means algorithm and introduce our modifications. The standard K-Means algorithm iteratively applies two steps, the assignment step (A-step) and the update step (U-step) to data until convergence. Based on the current cluster memberships of all genes, the U-step updates the mean of the expression profile of all genes in each cluster, and uses these means as the current cluster centers. For every gene, the A-step calculates its Euclidean distances between every cluster center and updates its cluster membership to the nearest cluster center. We make two adjustments in our modified K-Means algorithm. In the U-step, before updating the centers, we reverse the sign of expression levels of the genes that are negatively correlated with their current cluster centers and keep track of the sign changes. Note, we need to keep track of sign change in every iteration, so that we know the direction of each gene in their final clusters. In the A-step, we replace the Euclidean distance by the dissimilarity defined as  $1 - |\text{correlation}|$ . The detailed steps of our revised algorithm are given in Algorithm 1. A good initial clustering is critical for fast convergence. Currently, we use the results of the standard K-Means algorithm as initial clusters for our modified K-Means.

2.2. Grouping genes by the hierarchical clustering algorithm. In each subset obtained from the results of Algorithm 1, no genes are negatively correlated with the cluster center and the size of each subset is not huge. We therefore assume no negative correlation exists within each subset, and apply a standard hierarchical clustering algorithm to further cluster genes in each subset. For the hierarchical clustering, we define the dissimilarity as  $(1 - \text{correlation})$  and use the average linkage. We choose the average linkage since the order of the correlation operation and average operation are interchangeable without affecting the results, since the expression levels of genes are preprocessed by normalization and standardization. That is, the correlation defined for two groups of genes is equal to the average of the correlations of all possible pairs of individual genes between the two groups. Hence, by using the average linkage, we can control the average between-group correlations of individual genes by controlling the correlation of two groups.

For each subset, the hierarchical clustering algorithm produces a tree-like dendrogram from the bottom (leaves) to the top (root) to represent the correlation structure of genes. A consistent dissimilarity threshold is needed to cut the trees of all subsets, and the genes within the same branch of the cut tree are considered one cluster. These branches of all trees define the final grouping rule of genes.

The value of the dendrogram-cutting threshold controls "how strong the correlation is needed to group two genes". One of the hardest problems in unsupervised learning is to decide upon the best value of the common threshold to cut dendrograms of all pre-grouped subsets, since there is often no known information (like labels in supervised learning) to guide such a choice. In our special situation, we have a perfect solution by combining unsupervised learning with supervised learning. We consider many candidate threshold values for cutting the dendrogram. Each candidate value corresponds to one grouping rule and a fitted Elastic Net model based on the grouped genes. This creates a one-to-one correspondence between a threshold value and the performance of the final prediction of cell phenotypes. We use 10-fold cross-validation to compare the prediction performance (e.g. AUC statistics for binary outcomes and MSE statistics for continuous outcomes) of the Elastic Net models corresponding to the candidate threshold values. The threshold value corresponding to the winner prediction model is used as the best threshold value to cut dendrograms generated from the

---

**Algorithm 1** Modified K-Means algorithm for pre-clustering genes

---

**Input:**

- (1) Gene expression level:  $\mathbf{x} = (\mathbf{x}_1^T, \dots, \mathbf{x}_p^T)$ , a  $n \times p$  matrix,
  - (2) Number of clusters:  $K$
- Note:  $n$  is the number of cells and  $p$  is the number of genes.

**Initialize:**

- (1) [Cluster memberships  $\mathcal{I} = (\mathcal{I}_1, \dots, \mathcal{I}_p)$ ] Use the results of standard KMeans algorithm to initialize  $\mathcal{I}_i = k$ , which represents the  $i^{\text{th}}$  gene belonging to the  $k^{\text{th}}$  cluster,
- (2) [Sign of correlations to its cluster center  $\mathbf{S} = (S_1, \dots, S_p)$ ] Initialize  $S_i = +1$ .

**Algorithm:**

```

repeat
  for  $k = 1$  to  $K$  do
     $\hat{\boldsymbol{\mu}}^{(k)} \leftarrow \frac{1}{n_k} \sum_{\{i: \mathcal{I}_i = k\}} S_i \mathbf{x}_i$  (Update cluster centers by signed average,  $n_k$  is the number of samples in the  $k^{\text{th}}$  cluster )
  end for
  for  $i = 1$  to  $p$  do
     $r_{i,k} \leftarrow \text{cor}(\hat{\boldsymbol{\mu}}^{(k)}, \mathbf{x}_i)$  (Calculate correlation for  $k = 1, \dots, K$ )
     $\mathcal{I}_i \leftarrow l = \arg \max_k |r_{i,k}|$  (Assign  $\mathbf{x}_i$  into most correlated cluster  $l$ )
     $S_i \leftarrow \text{sign}(r_{i,l})$  (Update the sign of correlations to its cluster center)
  end for
until cluster membership  $\mathcal{I}$  remains unchanged across iterations

```

**Output:** $\mathcal{I}$  (cluster membership) and  $\mathbf{S}$  (sign of correlations to its cluster center)

---

hierarchical clustering. The best threshold leads to the final results for gene grouping. At last, we fit the Elastic Net model using the grouped genes to obtain the final prediction model.

We summarize our proposed method in Algorithm 2.

### 3. Simulation Studies

In this section, we conduct simulation studies to compare our proposed method with the standard ungrouped method. In the simulated experiments, we examine the accuracy of predicting cell phenotypes and the performance of correctly selecting the true feature genes. Our simulation is based on recently published scRNA-seq benchmark datasets used to compare the performance of differential expression analysis methods [Soneson and Robinson, 2018]. We use the same the simulation strategy in their paper, that is assume a data generation model and learn the model parameters from real data. We revised the details of data simulation to make it closer to real-world data.

3.1. The benchmark datasets and the simulation design. Soneson and Robinson [Soneson and Robinson, 2018] developed Conquer, a collection of consistently processed benchmark datasets. They used 9 benchmark scRNA-seq datasets to evaluate 36 popular Differential Expression (DE) analysis methods in the literature, which comprise 6 full-length scRNA-seq studies and 3 UMI scRNA-seq studies. Since their simulation study did not use UMI data, we also only consider the 6 full-length scRNA-seq data sets in our simulation,

---

**Algorithm 2** Algorithm of Grouping Method Integrated with Elastic Net
 

---

Input:

- (1) Gene expression levels:  $\mathbf{x}$ , a matrix of dimension  $n \times p$ ,
  - (2) Phenotype of cells:  $\mathbf{y} = (y_1, \dots, y_n)$ , a binary vector of length  $n$  (e.g. indicator of a cell subtype),
- Note:  $n$  is the number of cells and  $p$  is the number of genes.

Algorithm:

- (1) Pre-group the genes into smaller subsets using Algorithm 1, and denote the expression level of grouped genes as  $\mathbf{z}$ .
- (2) In each subset of genes, apply the hierarchical clustering algorithm to further cluster genes, and build the dendrogram. We use (1-correlation) as dissimilarity and use the average link.
- (3) Randomly split cells into 10 folds containing equal number of cells.  
for  $c = \{10^{-1}, 5 \times 10^{-2}, 10^{-2}, 5 \times 10^{-3}, 10^{-3}, 5 \times 10^{-4}, 10^{-4}, 5 \times 10^{-5}, 10^{-5}, 5 \times 10^{-6}, 10^{-6}\}$  do
  - (4.1) Cut all dendrograms using dissimilarity threshold =  $c$ , and group all genes in the same branch after cutting. Denote gene expression of groups as  $\mathbf{z}$ .
  - (4.2) For  $i = 1, \dots, 10$ , fit the Elastic net model to data excluding cells in the  $i$ -th fold, and predict phenotypes of cells in the  $i$ -th fold  $\hat{q}_j = \Pr(y_j = 1)$ .
  - (4.3) Pool  $\hat{q}_j$  obtained from 10 folds to form cross-validation predictions on full data.
  - (4.4) Calculate AUC statistics from  $y_j$ 's and  $\hat{q}_j$ 's.
- end for
- (5) Obtain final gene-grouping results by cutting all dendrograms with the threshold value  $c$  corresponding to the largest AUC.
- (6) Fit the Elastic Net model based on final gene-grouping results.

Output:

The Elastic Net model based on final gene-grouping results.

---

which are GSE74596 [Engel et al., 2016], GSE63818-GPL16791 [Guo et al., 2015], GSE60749-GPL13112 [Kumar et al., 2014], GSE48968-GPL13112 [Shalek et al., 2014], GSE45719 [Deng et al., 2014], and EMTAB2805 [Buettner et al., 2015]. In our prediction analysis, we consider two groups of cells, and the group membership as the binary cell phenotype to be predicted. The groups in each benchmark data are defined exactly the same as what is used for evaluation of DE analysis by [Soneson and Robinson, 2018], which are provided in their Supplementary Table 1.

The simulation model: To generate synthetic data sets, the Conquer study assumed gene expression levels follow a distribution. They learned the parameters of the assumed distribution of each gene from benchmark scRNA-seq data sets, and used the learned distributions as their simulation model to simulate expression levels of each gene. If their distribution assumption is correct, such simulation strategy ensures the simulated data are similar to the real scRNA-seq data. However, the assumed distribution could be an over simplified version of the true distribution, which makes the simulated data less realistic. In addition, simulating individual genes one-by-one cannot well capture the correlation structure of genes in the real data. Therefore, in our simulation study, we use the 6 real genomic data sets and only simulate the cell phenotypes (i.e. binary group membership) from a logistic regression model

$$(1) \quad y_j \sim \text{Bernoulli}(q_j) \quad \text{and} \quad q_j = \text{logit}^{-1} \left( \sum_{i=1}^p \beta_i x_{ji} \right)$$

where  $i$  is the index of genes,  $j$  is the index of cells,  $y_j$  is the group membership indicator of the  $j$ -th cell,  $x_{ji}$  is the expression level (transcripts per million) of the  $i$ -th gene of the  $j$ -th cell, and  $\beta_i$  is the effect size (or coefficient) of the  $i$ -th gene with  $i = 1, 2, \dots, p$  and  $j = 1, 2, \dots, n$ .

The coefficients and jittering: To assign the values of coefficients  $\beta_i$ 's in the data-generating model (1), we fit an Elastic Net model to each of the 6 real data sets. The genes with non-zero fitted coefficients (i.e.  $\beta_i \neq 0$ ) are considered as feature genes in the data-generating model (1). When the feature gene is not highly correlated with other genes, our proposed method will not group it with any other genes, therefore our method becomes identical to the standard (ungrouped) method. To make the simulation comparison meaningful, when fitting the Elastic Net models, we force genes to have 0 coefficients, if their correlation with any other gene is less than 0.9. Therefore, we focus the method comparisons to situations where there are highly correlated feature genes.

By fitting Elastic Net models to real data, we obtain 6 data generating models, one from each benchmark data set. We call these 6 models the 'blueprint models'. To increase the heterogeneity of simulated data sets, we add Gaussian noises to the coefficients of each blueprint model to generate 100 different jittered data-generation models. Based on each jittered data-generation model and its corresponding real genomic data, we simulate one copy of the phenotype (i.e. binary cell type membership) for every cell in the real genomic data.

In summary, from each real scRNA-seq benchmark data, we obtain one blue print model, then 100 data-generation models, and finally 100 copies of simulated cell phenotypes. This results in 600 simulated data sets used for methods comparison.

Data analysis and evaluation criteria: We analyze these 600 simulated data sets using the standard Elastic Net model and our proposed grouping method. We denote  $\hat{\beta}_i$  and  $\hat{q}_j$  to be the estimated values of parameter  $\beta_i$  and  $q_j$ , (for  $i = 1, 2, \dots, p$  and  $j = 1, 2, \dots, n$ ), and calculate the following four criteria to compare the two methods for all simulated data.

$$(2) \quad \text{MSE} = \frac{\sum_{j=1}^n (q_j - \hat{q}_j)^2}{n},$$

$$(3) \quad \text{Precision} = \frac{\sum_{i=1}^p I(\beta_i \neq 0)I(\hat{\beta}_i \neq 0)}{\sum_{i=1}^p I(\hat{\beta}_i \neq 0)},$$

$$(4) \quad \text{Recall} = \frac{\sum_{i=1}^p I(\beta_i \neq 0)I(\hat{\beta}_i \neq 0)}{\sum_{i=1}^p I(\beta_i \neq 0)},$$

$$(5) \quad \text{F1} = 2(\text{Precision}^{-1} + \text{Recall}^{-1})^{-1}.$$

3.2. Comparison of prediction performance. For evaluation of prediction performance based on real data, the most popular criteria is the misclassification rate (i.e. 1-accuracy) and the AUC statistics, which can be derived from  $\hat{q}_j$  and  $y_j$  (a realization of a Bernoulli random variable with parameter  $q_j$ ). However, since we know the true probability of the group membership in this simulation study,  $q_j$ , we use MSE (2) to evaluate the prediction performance, which is a more direct and precise measurement. In each simulated data set, we calculate the difference of MSE obtained from our grouping method and the standard Elastic Net model. A negative difference indicates that the Elastic Net model's prediction performance can be improved by integrating it with our grouping strategy.

Figure 1 visualizes the 600 differences in MSE calculated from our simulation studies. Each box represents the results of 100 data sets simulated from one benchmark scRNA-seq data. The name of each benchmark data is shown on the left-hand side of boxes. The majority of the values in the boxplots are less than 0, which indicates our method outperforms the standard Elastic Net model. To investigate the significance of the difference visualized in these boxplots, we conducted paired Wilcoxon signed-rank test to compare these

MSE's and the p-values are all less than  $10^{-10}$ . In summary, the results of the simulation study show that the prediction performance of the Elastic Net model can be significantly improved by integrating this model with our novel grouping strategy.

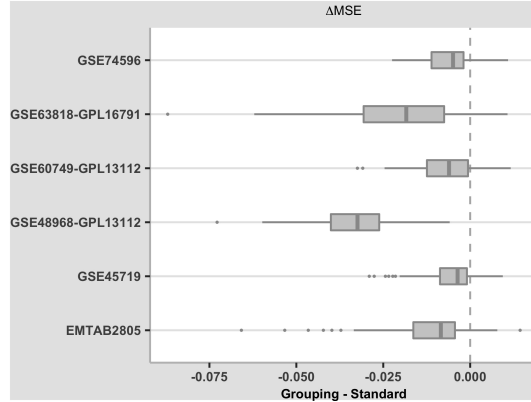


Figure 1. Boxplots of differences in the mean squared prediction error between our grouped method and the standard method. Each row represents the results of 100 simulated data sets based on one real scRNA-seq benchmark data. The vertical dashed line at 0 is used to compare two methods. Boxes on the left hand side of the vertical line indicate our method outperforms the standard Elastic Net model.

3.3. Comparison of performance on feature gene selection. The task of selecting feature genes can be considered as a series of binary decisions for all the genes. In the machine learning community, the quantities (3)- (5) are the most popular criteria to evaluate the performance of such tasks. Precision (3) is the fraction of the true feature gene among the selected ones, which is equivalent to  $1 - \text{False Discovery Rate}$ . Recall (4) is the fraction of the selected true genes among the true feature genes, which is also called sensitivity in the statistical community. When evaluating the performance of methods, precision and recall need to be considered together as a pair. These two criteria may rank the performance of the methods differently, while the F1 score (5) is the harmonic mean of precision and recall, which carries information about both statistics.

Figure 2 visualizes the pairwise differences (the grouped minus the standard) of the precision (left panel), recall (middle panel) and F1 scores (right panel) calculated from each simulated data. The positive value of these differences indicates that our method outperforms the standard Elastic Net model. Each row represents the analysis results from 100 simulated data sets based on one benchmark scRNA-seq data. The names of the benchmark data are labelled on the left-hand side of boxes. These boxes show that the majority of the differences are greater than 0, which indicates our method outperforms the standard Elastic Net model in the performance of gene selection. To investigate the significance of these differences, we conducted paired Wilcoxon signed-rank tests with p-values less than  $10^{-5}$  for the precision differences and  $10^{-14}$  for the recall differences and F1 score differences. In summary, the results of the simulation study show that the performance of feature gene selection of the Elastic Net model are significantly improved by integrating this model with our novel grouping strategy.

#### 4. Discussion and Conclusion

The prediction analysis discussed in this paper should not be confused with another common analysis scRNA-seq data, the Differential Expression (DE) analysis. Even though both involve discovering genes,



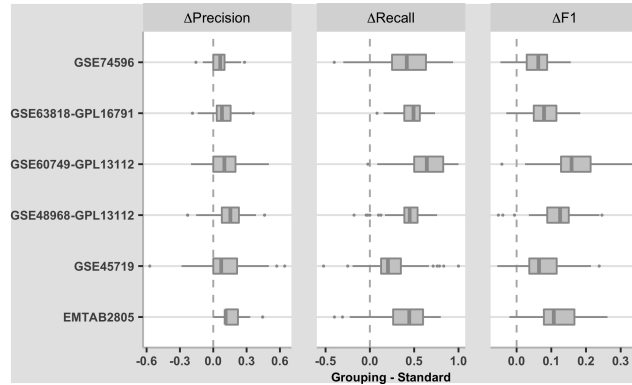


Figure 2. Boxplots of paired differences between the grouped method and the standard method in three feature selection criteria. Precision in the left panel, Recall in the middle panel, and F1 score in the right panel. Each row shows the results of simulation based on one benchmark data.

they have very different objectives. The objective of DE analysis is to identify genes significantly differentially expressed between two cell phenotypes or conditions. DE analyses test genes one-by-one and then focus on the resulting p-values. Prediction analysis discovers a parsimonious list of genes that ‘work together’ to predict the cell phenotypes, and it focuses on prediction performance (but not p-values) of the selected gene lists. The strong correlations between genes are helpful information in DE and association studies since they enable individual tests of single genomic markers to borrow information from each other [Xu et al., 2019]. However, in prediction analysis, the strong correlation between predictors can make prediction performance and feature selection unstable. Hence, it needs to be appropriately addressed in modelling. In both types of analyses, properly incorporating the strong correlations among genes is critical for improving the model performance.

By grouping highly correlated genes and replacing them with one single variable, our methods have multiple advantages in prediction and feature selection. First, highly correlated predictors cause the problem of multi-collinearity [Farrar and Glauber, 1967], which affects the stability of model fitting. This problem does not exist after we use a single variable to replace a group of highly correlated genes. Second, in feature selection, the highly correlated predictors always compete for importance, which leads to reporting them as less important than they should be. By using a single predictor to represent the group, we can avoid such competition. Third, our method reports the whole group of highly correlated genes as feature genes instead of picking one gene (as in standard methods). As shown in simulation studies, to predict new cells’ phenotypes, using the common patterns of the gene group is more robust than using a single gene in the group. Most importantly, by reporting the whole group of highly correlated genes as feature genes, we allow researchers to identify causal genes in follow-up studies. The causal genes are critical in real-world applications. For example, if a higher expression level of gene-A causes both a higher expression level of gene-B and a disease, when a drug is developed to reduce the expression level of gene-B, gene A expression and disease status will not be affected. When a drug is developed to decrease gene-A expression, it can treat the disease and also reduce the expression level of gene-B.

Our grouping method is an example of integrating the supervised machine learning with unsupervised machine learning. The motivation of our research is prediction, which is a supervised machine learning problem. To address the particular challenge in genomic studies, we introduce the grouping strategy, which

is an unsupervised machine learning problem. During this process, deciding the number of clusters or the threshold for cutting dendrogram is one of the hardest problems in unsupervised machine learning since there is no way to validate the correctness of the clustering rule. However, we perfectly solve this problem in our special situation by integrating supervised learning with unsupervised learning. Each clustering result corresponds to a grouping rule for the genes, and each grouping rule leads to a different prediction. This one-to-one correspondence between the clustering rule and the prediction performance enables us to utilize the prediction results to guide the choice of the number of clusters (or say the threshold for cutting dendrogram of hierarchical clustering results). We can use cross-validation to choose the best value. Finally, the selected best clustering rule is used to group genes for building the final prediction model.

In summary, we propose a grouping algorithm that can be integrated with any standard prediction method. In simulation studies based on multiple published benchmark scRNA-seq data sets, we show that our method significantly improves the performance of both cell phenotype prediction and feature gene selection. Most importantly, our method offers researchers the opportunity to conduct follow-up studies to identify the causal genes. The Elastic Net model is used to illustrate our method in this paper, but our method can be integrated with other prediction methods. The analysis of scRNA-seq data is the motivation of this research, but it could be applied in other applications with two characteristics: (1) predictors are highly correlated and (2) the strong correlation shown in training data may disappear in test data.

## 5. ACKNOWLEDGEMENTS

Authors thank Dr. Charlotte Soneson and Prof. Mark Robinson (University of Zurich) for their helpful discussion about the benchmark data sets and their simulation strategy for comparing DE methods of scRNA-seq data.

5.0.1. Funding. This work was supported by the Natural Sciences and Engineering Research Council Discovery Grants (XZ, ML), the Canada Research Chair (XZ), and Compute Canada RAC (XZ, LX). This research was enabled in part by support provided by WestGrid ([www.westgrid.ca](http://www.westgrid.ca)) and Compute Canada ([www.computecanada.ca](http://www.computecanada.ca)).

5.0.2. Conflict of interest statement. None declared.

## References

- [10xGenomics, 2020] 10xGenomics. (2020) Targeted gene expression for single cell sequencing. <https://www.10xgenomics.com/products/targeted-gene-expression>.
- [Angelidis et al., 2019] Angelidis, I., Simon, L. M., Fernandez, I. E., Strunz, M., Mayr, C. H., Greiffo, F. R., Tsitsiridis, G., Ansari, M., Graf, E., Strom, T.-M., et al (2019). An atlas of the aging lung mapped by single cell transcriptomics and deep tissue proteomics. *Nature communications*, 10(1):963–17.
- [Aran et al., 2017] Aran, D., Hu, Z., and Butte, A. J. (2017). xCell: digitally portraying the tissue cellular heterogeneity landscape. *Genome Biology*, 18(1):220–14.
- [Buettner et al., 2015] Buettner, F., Natarajan, K. N., Casale, F. P., Proserpio, V., Scialdone, A., Theis, F. J., Teichmann, S. A., Marioni, J. C., and Stegle, O. (2015). Computational analysis of cell-to-cell heterogeneity in single-cell RNA-sequencing data reveals hidden subpopulations of cells. *Nature biotechnology*, 33(2):155–160.
- [Deng et al., 2014] Deng, Q., Ramsköld, D., Reinius, B., and Sandberg, R. (2014). Single-cell RNA-seq reveals dynamic, random monoallelic gene expression in mammalian cells. *Science (New York, NY)*, 343(6167):193–196.
- [Dixit et al., 2016] Dixit, A., Parnas, O., Li, B., Chen, J., Fulco, C. P., Jerby-Arnon, L., Marjanovic, N. D., Dionne, D., Burks, T., Raychowdhury, R., et al (2016). Perturb-Seq: Dissecting Molecular Circuits with Scalable Single-Cell RNA Profiling of Pooled Genetic Screens. *Cell*, 167(7):1853–1866.e17.
- [Engel et al., 2016] Engel, I., Seumois, G., Chavez, L., Samaniego-Castruita, D., White, B., Chawla, A., Mock, D., Vijayanand, P., and Kronenberg, M. (2016). Innate-like functions of natural killer T cell subsets result from highly divergent gene programs. *Nature immunology*, 17(6):728–739.
- [Farrar and Glauber, 1967] Farrar, D. E. and Glauber, R. R. (1967). Multicollinearity in Regression Analysis: The Problem Revisited. *The Review of Economics and Statistics*, 49(1):92.
- [Gawad et al., 2016] Gawad, C., Koh, W., and Quake, S. R. (2016). Single-cell genome sequencing: current state of the science. *Nature Reviews Genetics*, 17(3):175–188.
- [Geeleher et al., 2014] Geeleher, P., Cox, N. J., and Huang, R. (2014). Clinical drug response can be predicted using baseline gene expression levels and in vitro drug sensitivity in cell lines. *Genome Biology*, 15(3):R47.
- [Guo et al., 2015] Guo, F., Yan, L., Guo, H., Li, L., Hu, B., Zhao, Y., Yong, J., Hu, Y., Wang, X., Wei, Y., et al (2015). The Transcriptome and DNA Methylome Landscapes of Human Primordial Germ Cells. *Cell*, 161(6):1437–1452.
- [Gusev et al., 2016] Gusev, A., Ko, A., Shi, H., Bhatia, G., Chung, W., Penninx, B. W. J. H., Jansen, R., de Geus, E. J. C., Boomsma, D. I., Wright, F. A., et al (2016). Integrative approaches for large-scale transcriptome-wide association studies. *Nature Publishing Group*, 48(3):245–252.
- [Herberg et al., 2016] Herberg, J. A., Kaforou, M., Wright, V. J., Shailes, H., Eleftherohorinou, H., Hoggart, C. J., Cebey-López, M., Carter, M. J., Janes, V. A., Gormley, S., et al (2016). Diagnostic Test Accuracy of a 2-Transcript Host RNA Signature for Discriminating Bacterial vs Viral Infection in Febrile Children. *JAMA*, 316(8):835–845.
- [Kiselev et al., 2019] Kiselev, V. Y., Andrews, T. S., and Hemberg, M. (2019). Challenges in unsupervised clustering of single-cell RNA-seq data. *Nat Rev Genet*, 20(5):273–282.
- [Kumar et al., 2014] Kumar, R. M., Cahan, P., Shalek, A. K., Satija, R., DaleyKeyser, A., Li, H., Zhang, J., Pardee, K., Gennert, D., Trombetta, J. J., et al (2014). Deconstructing transcriptional heterogeneity in pluripotent stem cells. *Nature*, 516(7529):56–61.
- [Nawy, 2014] Nawy, T. (2014). Single-cell sequencing. *Nature methods*, 11(1):18–18.
- [Newman et al., 2019] Newman, A. M., Steen, C. B., Liu, C. L., Gentles, A. J., Chaudhuri, A. A., Scherer, F., Khodadoust, M. S., Esfahani, M. S., Luca, B. A., Steiner, D., et al (2019). Determining cell type abundance and expression from bulk tissues with digital cytometry. *Nature biotechnology*, 37(7):773–782.
- [Richardson et al., 2020] Richardson, T. G., Hemani, G., Gaunt, T. R., Relton, C. L., and Davey Smith, G. (2020). A transcriptome-wide Mendelian randomization study to uncover tissue-dependent regulatory mechanisms across the human phenome. *Nature communications*, 11(1):185–11.
- [Shalek et al., 2014] Shalek, A. K., Satija, R., Shuga, J., Trombetta, J. J., Gennert, D., Lu, D., Chen, P., Gertner, R. S., Gaubblomme, J. T., Yosef, N., et al (2014). Single-cell RNA-seq reveals dynamic paracrine control of cellular variation. *Nature*, 510(7505):363–369.
- [Soneson and Robinson, 2018] Soneson, C. and Robinson, M. D. (2018). Bias, robustness and scalability in single-cell differential expression analysis. *Nature methods*, 15(4):255–261.
- [Wagner et al., 2019] Wagner, J., Rapsomaniki, M. A., Chevrier, S., Anzeneder, T., Langwieder, C., Dykgers, A., Rees, M., Ramaswamy, A., Muenst, S., Soysal, S. D., et al (2019). A Single-Cell Atlas of the Tumor and Immune Ecosystem of Human Breast Cancer. *Cell*, 177(5):1330–1345.e18.
- [Xing et al., 2019] Xing, L., Lesperance, M. L., and Zhang, X. (2019). Simultaneous prediction of multiple outcomes using revised stacking algorithms. *Bioinformatics (Oxford, England)*, 36(1):65–72.
- [Xu et al., 2019] Xu, Y., Xing, L., Su, J., Zhang, X., and Qiu, W. (2019). Model-based clustering for identifying disease-associated SNPs in case-control genome-wide association studies. *Scientific reports*, 9(1):13686–10.

[Zou and Hastie, 2005] Zou, H. and Hastie, T. (2005). Regularization and variable selection via the elastic net. *Journal of the Royal Statistical Society. Series B. Statistical Methodology*, 67(2):301–320.

<sup>1</sup>Department of Mathematics and Statistics, University of Victoria, Victoria, V8N 1Y2, Canada., <sup>2</sup>Department of Mathematics and Statistics, University of Saskatchewan, Saskatoon, SK, S7N 5E6, Canada.

E-mail address: Xuekui@UVic.ca