

Rethinking Default Values: a Low Cost and Efficient Strategy to Define Hyperparameters

Rafael G. Mantovani^{a,*}, André L. D. Rossi^c, Edesio Alcobaça^b, Jadson Castro Gertrudes^d,
Sylvio Barbon Junior^e, André C. P. L. F. de Carvalho^b

^a*Federal Technology University - Paraná (UTFPR), Campus of Apucarana - PR, Brazil*

^b*Institute of Mathematics and Computer Sciences (ICMC), University of São Paulo (USP), São Carlos - SP, Brazil*

^c*São Paulo State University (UNESP), Campus of Itapeva - SP, Brazil*

^d*Department of Computing, Federal University of Ouro Preto (UFOP), Ouro Preto - MG, Brazil*

^e*State University of Londrina (UEL), Londrina - PR, Brazil*

Abstract

Machine Learning (ML) algorithms have been successfully used to overcome various different challenges by a vast range of practitioners with different backgrounds. One of the reasons for the popularity of ML is the capability to consistently deliver accurate results, which can be further boosted by adjusting hyperparameters (HP). However, many practitioners have limited knowledge about the algorithms and do not take advantage of suitable HP settings, i.e. ML is used as a black box. In general, HP values are defined by trial and error, tuning, or by using default values. Trial and error make selecting of values very subjective, time costly and dependent on the user experience. Tuning techniques search for hyperparameter values able to maximize the predictive performance of induced models for a given dataset, but have the drawback of a high computational cost and target specificity. To avoid tuning costs, practitioners use default values suggested by the algorithm developer or by tools implementing the algorithm. Although default values usually result in models with acceptable predictive performance, different implementations of the same algorithm can suggest distinct default values. To maintain a balance between tuning and using default values, we propose a strategy to generate new optimized default values. Our approach is grounded on a small set of optimized values able to obtain predictive performance values better than default settings provided by popular tools. The HP candidates are estimated through a pool of promising values tuned from a small and informative set of datasets. After performing a large experiment and a careful analysis of the results, we concluded that our approach delivers better default values. Besides, it leads to competitive solutions when compared with using tuned values, making it easier to use and having a lower cost. Based on our results, we also extracted simple rules to guide practitioners in deciding whether to use our new methodology or a HP tuning approach.

Keywords: Hyperparameter tuning, Default settings, Optimization techniques, Support vector machines

1. Introduction

The last decades have seen an explosion of Machine Learning (ML) studies and applications, promoting and democratizing its usage by people from diverse scientific and technological backgrounds. Progress in the area has enable a large uptake of solutions by the industry and research communities. Building an ML solution requires different decisions, and one of them is to choose a suitable algorithm to solve the problem at hand. Different problems present different characteristics, and as a consequence, require different ML algorithms.

Most of these algorithms have hyperparameters (HPs) whose values directly influence their biases, and consequently, the predictive performance of the induced models. Although the number of ML tools available and their popularity has increased, users still struggle to define the best HP settings. This is not a straightforward task and may mislead practitioners to choose one algorithm over another. Usually, users adjust the HP values by trial and error, i.e., they empirically evaluate different settings and select what appear to be the best of them.

Ideally, the HP values should be defined for each problem [8, 41, 36], trying to find the (near) best settings through an optimization process. As a consequence, several tuning techniques have been used for this purpose. The most simple, and often used, are Grid Search (GS) and Random Search (RS) [7]. The former is more suitable for low dimensional problems, i.e., when there are few HPs to set. For more complex scenarios, GS is unable to explore finer promising regions due to the large hyperspace. The latter is able to explore any possible solution of the hyperspace, but also does not perform an informed search, which may lead to a high computational cost.

Meta-heuristics have also been used for HP tuning, having the advantage of performing informed searches. Population-based methods, such as Genetic Algorithm (GA) [4], Particle Swarm Optimization (PSO) [45] and Estimation of Distribution Algorithm (EDA) [36], have been largely explored in the literature due to their faster convergence. Sequential Model-based Optimization (SMBO) [47] is a more recent technique that has drawn attention due to its probabilistic nature. It replaces the target function (ML algorithm) by a surrogate model [9], which is faster to compute. However, SMBO itself has many HPs and does not eliminate the shortcoming of having to iteratively evaluate the function to be optimized. All these techniques are valuable alternatives to GS and RS, but they might have a high computational cost, since a large number of candidate solutions usually needs to be evaluated.

A computationally cheaper alternative is to use the default HP setting suggested by most of the ML

*Rafael Gomes Mantovani

Federal Technology University - Paraná, Campus of Apucarana
R. Marcílio Dias, 635 - Jardim Paraíso, Apucarana - PR, Brazil, Postal Code 86812-460

Email addresses: rafaelmantovani@utfpr.edu.br (Rafael G. Mantovani), alrossi@itapeva.unesp.br (André L. D. Rossi), edesio@usp.br (Edesio Alcobaça), jadson.castro@ufop.edu.br (Jadson Castro Gertrudes), barbon@uel.br (Sylvio Barbon Junior), andre@icmc.usp.br (André C. P. L. F. de Carvalho)

tools. These settings may be fixed a priori, regardless of the problem, or defined according to some simple characteristics of the data under analysis. For instance, the default values of the number of variables selected for each split of the Random Forest (RF) algorithm [13] and the width of the Gaussian kernel of Support Vector Machines (SVMs) [17] are usually defined based on the number of the data predictive features.

If on the one hand, default values reduce the subjectivity in the experiments, on the other they may not be suitable for every problem [12], i.e., there is no guarantee they can result in models with high predictive performance for all cases. Besides, many ML tools follow the same recommendations to propose default settings. Thus, users are not able to find different options using these tools.

Therefore, an alternative that has not received considerable attention in the literature is to consider a pool of default HP settings, which has a much lower cost than in the HP tuning and is less subjective than trial and error. A small collection of settings could be generated with a larger number of datasets and induce models with better predictive performance than traditional defaults with very few evaluations. In practice, instead of trying only one default value, a small, promising and varied set of HP settings can be assessed.

Hence, in this study, we propose and evaluate an approach to generate a new set of default HP settings for ML algorithms by tuning these values across several datasets. We hypothesize that a pool of settings may improve the performance of a model when compared to using only a default setting provided by the ML tools, with a computation cost much lower than optimization methods. The experiments described in this paper evaluated SVMs due to their well-known hyperparameter sensitivity. However, the whole process can be easily adapted and applied to other ML algorithms¹.

We can summarize the main contributions of this work as:

- Framing the simple optimization strategy to generate new default HP settings;
- Tracing the benefits of multiple default HP settings by evaluating them across different data domains;
- Performing an in-depth analysis for classification problems, leading to holding discussions and prospecting meta-analyses.

This paper is structured as follows: Section 2 contextualizes the HP tuning problem and presents the related work. Section 3 describes our experimental methodology, detailing how we evaluated the proposed method. The experimental results are discussed in Section 4. Section 5 presents possible threats to the validity of the experiments. The last section draws the conclusions and future work directions.

2. Hyperparameter tuning

In a predictive task, Machine Learning (ML) algorithms are trained with labeled data to induce a predictive model able to identify the label of new, previously unseen, instances. These algorithms have free

¹The process will, especially, benefit algorithms that are sensitive to the choice of their HP values.

“hyperparameters (HPs)” whose values directly affect the predictive performance of the models induced by them. Finding a suitable setting of HP values requires specific knowledge, intuition, and often trial and error experiments. Several HP tuning techniques, ranging from simple to complex, can be found in the literature.

From a theoretical point of view, selecting the ideal HP values requires an exhaustive search over all possible subsets of HP values. The number and type of HPs can make this task unfeasible. Therefore, the ML community usually accepts computing techniques to search for HP values in a reduced HP space, instead of the complete space [7].

Using of computing techniques for HP tuning has several benefits, such as [5]:

- Freeing the users from the task of manually selecting HP values, thus they can concentrate efforts on other aspects relevant to the use of ML algorithms; and
- Improving the predictive performance of the induced models.

Next, we briefly describe the main aspects of HP tuning, its definition, the main techniques explored in the literature, and related works that are similar to the proposed strategy.

2.1. Formal Definition

The HP tuning process is usually treated as a black-box optimization problem whose objective function is associated with the predictive performance of the model induced by an ML algorithm. Formally it can be defined as:

Definition 2.1. Let $H = H_1 \times H_2 \times \dots \times H_k$ be the HP space for an algorithm $a \in A$, where A is a set of ML algorithms. Each H_i represents a set of possible values for the i^{th} HP of a ($i \in \{1, \dots, k\}$) and can be usually defined by a set of constraints.

Definition 2.2. Let D be a set of datasets where $\mathbf{d} \in D$ is a dataset from D . The function $f : A \times D \times H \rightarrow \mathbb{R}$ measures the predictive performance of the model induced by the algorithm $\mathbf{a} \in A$ on the dataset $\mathbf{d} \in D$ given a HP setting $\mathbf{h} = (h_1, h_2, \dots, h_k) \in H$. Without loss of generality, higher values of $f(\mathbf{a}, \mathbf{d}, \mathbf{h})$ mean higher predictive performances.

Definition 2.3. Given $a \in A$, H and $\mathbf{D} \in D$, together with the previous definitions, the goal of a HP tuning task is to find $\mathbf{h}^* = (h_1^*, h_2^*, \dots, h_k^*)$ such that

$$\mathbf{h}^* = \underset{\mathbf{h} \in H}{\text{arg max}} f(\mathbf{a}, \mathbf{D}, \mathbf{h}) \quad (1)$$

The optimization of the HP values can be based on any performance measure f , which can even be defined by multi-objective criteria. Further aspects can make tuning more complex, such as:

- HP settings that lead to a model with high predictive performance for a given dataset may not lead to high predictive performance for other datasets;
- HP values often depend on each other². Hence, independent tuning of HPs may not lead to a good set of HP values;
- The exhaustive evaluation of several HP settings can be very time-consuming.

2.2. Tuning techniques

Over the last decades, different HP tuning techniques have been successfully applied to ML algorithms [10, 9, 22, 47, 5, 30]. Some of these techniques iteratively build a population $\mathcal{P} \subset \mathcal{H}$ of HP settings, when $f(a, \mathbf{D}, \mathbf{h})$ are computed for each $\mathbf{h} \in \mathcal{P}$. By doing so, they can simultaneously explore different regions of a search space. There are various population-based HP tuning strategies, which differ in how they update \mathcal{P} at each iteration. Some of them are briefly described next.

2.2.1. Random Search

Random Search (RS) [3] is a simple technique that performs random trials in a search space. Its use can reduce the computational cost when there is a large number of possible settings being investigated. Usually, RS performs its search iteratively in a predefined number of iterations. $P(i)$ is extended (updated) by a randomly generated HP setting $\mathbf{h} \in H$ in each (i th) iteration of the HP tuning process. RS has been successfully used for HP tuning of Deep Learning (DL) algorithms [5, 7].

2.2.2. Bayesian Optimization

Sequential Model-based Optimization (SMBO) [14, 47] is a sequential technique that starts with a small initial population $P(0) \neq \emptyset$ which, at each new iteration $i > 0$, is extended by a new HP setting \mathbf{h}' , such that the expected value of $f(a, \mathbf{D}, \mathbf{h}')$ is maximal according to an induced meta-model \hat{f} approximating f on the current population $P(i - 1)$. In experiments reported in the literature [9, 47, 8], SMBO performed better than GS and RS and either matched or outperformed state-of-the-art techniques in several HP optimization tasks.

2.2.3. Meta-heuristics

Bio-inspired meta-heuristics are optimization techniques based on biological processes. They also have HPs to be tuned [41]. For example, Genetic Algorithm (GA), one of the most widely used, requires an initial population $\mathcal{P}_0 = \{\mathbf{h}_1, \mathbf{h}_2, \dots, \mathbf{h}_{n_0}\}$, which can be defined in different ways, and HP values for operators based on natural selection and evolution, such as crossover and mutation.

²This is the case of Support Vector Machines (SVMs) [6].

Another bio-inspired technique, Particle Swarm Optimization (PSO) is based on swarming and flocking behaviors of particles [46]. Each particle $\mathbf{h} \in \mathcal{P}_0$ is associated with a position $\mathbf{h} = (h_1, \dots, h_k) \in \mathcal{H}$ in the search space \mathcal{H} , a velocity $\mathbf{v}_h \in \mathbb{R}^k$ and the best position found so far $\mathbf{b}_h \in \mathcal{H}$. During its iterations, the movement of each particle is changed according to its current best-found position and the current best-found position $\mathbf{w} \in \mathcal{H}$ of the entire swarm (recorded through the optimization process).

Another popular technique, Estimation of Distribution Algorithm (EDA) [22], combines aspects of GA and SMBO to guide the search by iteratively updating an explicit probabilistic model of promising candidate solutions. For such, the implicit crossover and mutation operators used in GA are replaced by an explicit probabilistic model M .

2.2.4. Iterated F-Race

The Iterated F-race (Irace) [10] technique was designed to use ‘*racing*’ concepts for algorithm configuration and optimization problems [27, 35]. One race starts with an initial population \mathcal{P}_0 , and iteratively selects the most promising candidates considering the distribution of HP values, and statistical tests. Configurations (settings) that are statistically worse than at least one of the other configuration candidates are discarded from the racing. Based on the surviving candidates, the distributions are updated. This process is repeated until a stopping criterion is reached.

2.3. Related Works

In our literature review, we found a small number of studies investigating the automatic design of default HP values. Figure 1 summarizes related studies according to the date they were published. The research question itself is very recent, motivated by the high number of public experimental results made available by the ML research community³. The first two investigations of the design of HP settings were published in 2015 [34, 50], with the remaining developments concentrated in the years 2018-2019 [39, 38, 43, 2]. We detail the main aspects of these works into tables: Table 1 presents the ML algorithms and datasets investigated by each related work; while Table 2 shows the methodology adopted to perform the HP optimization.

2.3.1. Our very first try on shared default settings

In Mantovani et al. [34], the authors used the Particle Swarm Optimization (PSO) algorithm to perform HP tuning of SVMs, and find new “default” hyperparameter settings for them. The optimization task was performed simultaneously with 21 random datasets. The HP settings returned by the HP tuning task were considered as new “optimized default” HP settings. These values were compared to default settings recommended in the **Weka** tool and in the **LibSVM** library [17]. The experiments showed promising

³A high number of experimental results can be obtained from the OpenML website: <https://www.openml.org/search?type=run>.

Table 1: Main characteristics of the “*learning*” task performed by related studies. Columns show for each related study: its reference, year of publication, ML algorithms studied, and the number/source of the datasets.

Reference			ML Algorithms	# Datasets	Data Source		
					OpenML	UCI	AClib
Mantovani et al.	(2015)	[34]	SVM	145	•	•	
Wistuba et al.	(2015)	[50]	SVM, AdaBoost	25		•	
Probst et al.	(2018)	[39]	SVM, kNN, CART, GBM, RF, Elastic-net	38*	•		
Pfisterer et al.	(2018)	[38]	SVM, AdaBoost, CART, GBM, RF, Elastic-net	38*	•		
Van Rijn et al.	(2018)	[43]	SVM	98	•		
Anastacio et al.**	(2019)	[2]	Auto-WEKA	20			•

*Only binary classification problems.

**Not only machine learning algorithms were investigated.

Table 2: Main characteristics of the “*tuning*” task performed by related studies. Columns show for each related study: its reference, year of publication, tuning techniques explored, performance measures used, the evaluation methodology and baselines used in experimental comparisons.

Reference			Tuning Techniques	Performance Measures	Evaluation Procedures	Baselines
Mantovani et al.	(2015)	[34]	PSO	BAC	Nested-CV Outer: 10-CV Inner: Holdout	WEKA defaults LibSVM defaults
Wistuba et al.	(2015)	[50]	NN-SMFO	Ranking CANE	Nested-CV Outer: 10-CV (outer) Inner: Holdout	SCoT, RS, SMAC++ MKL-GP, RC-GP
Probst et al.	(2018)	[39]	SMBO	Accuracy, AUC R^2 , Kendall’s tau	Single-CV 10-CV	None
Pfisterer et al.	(2018)	[38]	RS SMBO	Accuracy AUC	Nested-CV Outer: 10-CV Inner: Holdout	None
Van Rijn et al.	(2018)	[43]	GS	AUC	Single-CV 10-CV	None
Anastacio et al.	(2019)	[2]	SMAC GGA++ Irace	Error rate	single-CV	Auto-WEKA defaults

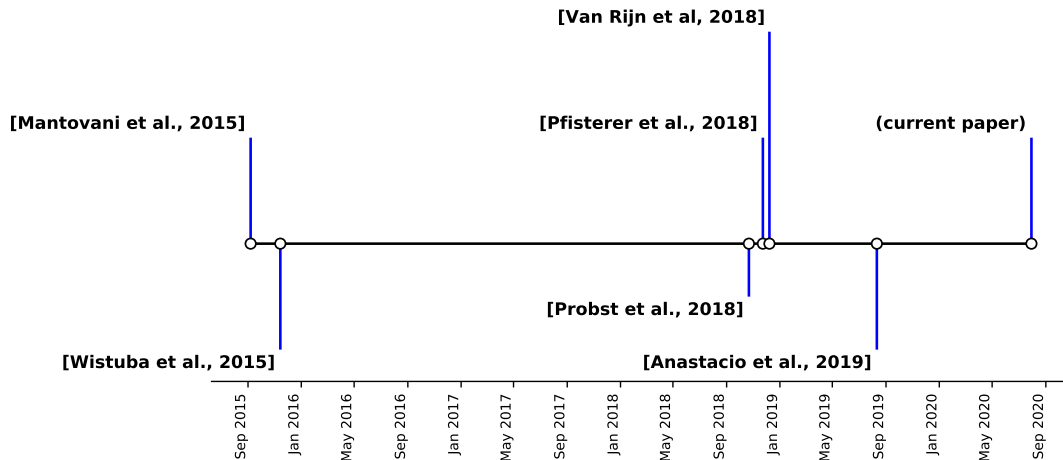


Figure 1: Timeline of related studies which perform automatic design of defaults hyperparameter values.

results whereby the new optimized settings induced models better than baselines for most of the investigated datasets.

2.3.2. Sequential Model-Free Hyperparameter Tuning

In Wistuba et al. [50], the authors proposed a method to select the best HP setting from a finite set of possibilities, which can be seen as a set of default HP settings. They used a Nearest Neighbor Sequential Model-Free Optimization (NN-SMFO) method to assess the average performance of an HP setting only on the k datasets that were similar to the new test dataset. Two datasets are considered similar if they behave similarly, e.g. they have similar predictive performance rankings, with respect to the HP settings. The authors claim that few evaluations are enough to approximate the true rank and that performance ranking is more descriptive than distance functions based on meta-features. Experiments were performed with AdaBoost and SVMs using a set of 108 and 288 HP settings, respectively, generated from a grid of HP values. Besides converging faster than the other strategies, NN-SMFO also presented the smallest ranking and average normalized error. However, these gains were not validated by a statistical significance test. In addition, the coarse Grid Search (GS) used in the experiments was probably missing promising HP search space regions.

2.3.3. Tunability: Importance of Hyperparameters of Machine Learning Algorithms

Probst et al. [39] also defined default HP values empirically based on experiments with 38 binary classification datasets. In their experiments, the best default HP setting is the configuration that minimizes on average a loss function considering many datasets, i.e., HP default settings are supposed to be suitable across different datasets. In the study, a set of HP settings is not directly evaluated due to the high computational cost. Instead, a surrogate regression model based on a meta-dataset is used. Thus, the surrogate model

learns to map an HP setting to the estimated performance of a ML algorithm w.r.t. a dataset. The authors performed experiments with six ML algorithms, including DT induction, SVMs and gradient boosting. At the end, they analyzed the impact of tuning the algorithm and its HPs, namely tunability.

2.3.4. *Learning Multiple Defaults for Machine Learning Algorithms*

In Pfisterer et al. [38], the authors wanted to find default values that generalize well for many datasets instead of only for specific datasets. In their experiments, they took advantage of a large database of prior empirical evaluations available on OpenML [48] to explore their hypothesis. Due to the high computational cost to estimate the expected risk of an induced algorithm using CV, surrogate models were used to predict the performance of the HP settings. Thus, any HP setting is evaluated faster using a surrogate model trained for each dataset. Finally, a greedy optimization technique searches through a list of defaults based on the predictions of the surrogate models. They assume that this list has at least one setting that is suitable for a given dataset. Experiments were carried out using 6 learning algorithms on a nested leave-one-out CV resampling method for up to 100 binary balanced datasets. According to the experimental results, a set of at most 32 new default settings outperformed two baseline strategies, RS and SMBO, for a budget size with 32 and 64 iterations, respectively. Therefore, new default settings are especially valuable when processing time is scarce to perform HP tuning.

Although new default values are interesting from the practical point of view, this study was not concerned with the default values found and the characteristics of the datasets. Our current study overcomes this necessity to better understand the problem itself, which may be useful to the proposal of alternative default HP settings. HP tuning is usually performed by most of the methods starting from scratch for each dataset. If HP values are somehow dependent on dataset properties, this relation could be learned for a warm start of optimization methods [40, 21], for the prediction of HP values [20] or for the proposal of symbolic default HP settings [43].

2.3.5. *Meta Learning for Default-Symbolic Defaults*

Instead of searching for a good set of default HP values, Van Rijn et al. [43] used meta-learning to learn sets of symbolic default HP settings suitable for many datasets. Symbolic default values are functions of the characteristics of the data rather than static values. An example of symbolic default is the relation to the number of features n used by LibSVM to define the width (*gamma*) of the Gaussian kernel ($\gamma = 1/N$) HP. Experiments were performed considering five different functions (transformations) over 80 meta-features for the γ and C of a SVM with Gaussian kernel. The experimental results showed that this technique is competitive to Grid Search (GS) using a surrogate model to predict the performance on a specific dataset. However, in this study, the authors only analyzed a symbolic default at each time when other HPs received static values, i.e., the authors did not take into account how multiple HPs could interact.

2.3.6. Importance of Default values for a warm-start HP tuning

Usually, algorithm configurators initialize their search for the best settings based on random values. An alternative for a warm-start is to take advantage of default settings. According to [2], default settings contain valuable information that can be exploited for HP tuning. Guided by this hypothesis, they investigated the benefit of using default settings for different automatic configurators, namely SMAC [24], GGA++ [4], and Irace [10]. In addition, they proposed two simple methods to reduce the search space based on default values. The empirical analysis was performed considering 20 problems of AClib [25], including four datasets to evaluate Auto-WEKA, an automated searching system based on the WEKA learning algorithms and their HP settings. According to experimental results, default hyperparameter settings can critically influence on the configurators' performance. This positive impact was observed mainly for Irace and other ML problems. Moreover, the methods to reduce the search space led to smaller error rates for the SMAC algorithm. Thereby, the authors claim default hyperparameter settings provide valuable information for automated algorithm configurations.

2.4. Summary of Literature Overview

As previously mentioned, the literature review carried out for this study found only six studies investigating the generation of default HP settings for ML, each addressing a related issue, as discussed next:

- three studies did not exactly perform HP tuning [50, 38, 39]: they “*simulate*” HP tuning via surrogate models. These surrogate models predict the expected performance for a given HP setting. The benefits of this approach are to set up the optimization process and reduce the cost associated with evaluating each single setting. On the other hand they can propagate an erroneous value if the predictions are very different from the true predictive performance values;
- In [43], the authors try to induce new symbolic relationships between the datasets' characteristics to set the HP values of an ML algorithm. In fact, they do not directly suggest a value, but a heuristic (formula) whose output depends on the dataset used;
- In [38], the authors propose a pool of default HP settings according to empirical data available on OpenML. There is also no tuning, just ranking and evaluation of prior HP settings. This technique might work in specific conditions, but it is not clear how these default values work for new datasets;
- In [2], the authors investigate the warm start of algorithm configuration tools, but the evaluation is focused on algorithm configuration problems (AClib).

3. Experimental Methodology

Figure 2 presents an overview of the experimental methodology adopted to generate a pool of HP settings that are suitable for a variety of problems, i.e., HP values that result in models with a high predictive

performance for datasets of different domains. Thus, once the poll of HP settings have been found, users will save time evaluating only these settings for new datasets, without the need for performing optimization again. This will not occur only if a new domain is under analysis, i.e., a domain that was not represented by the datasets selected for generating these settings.

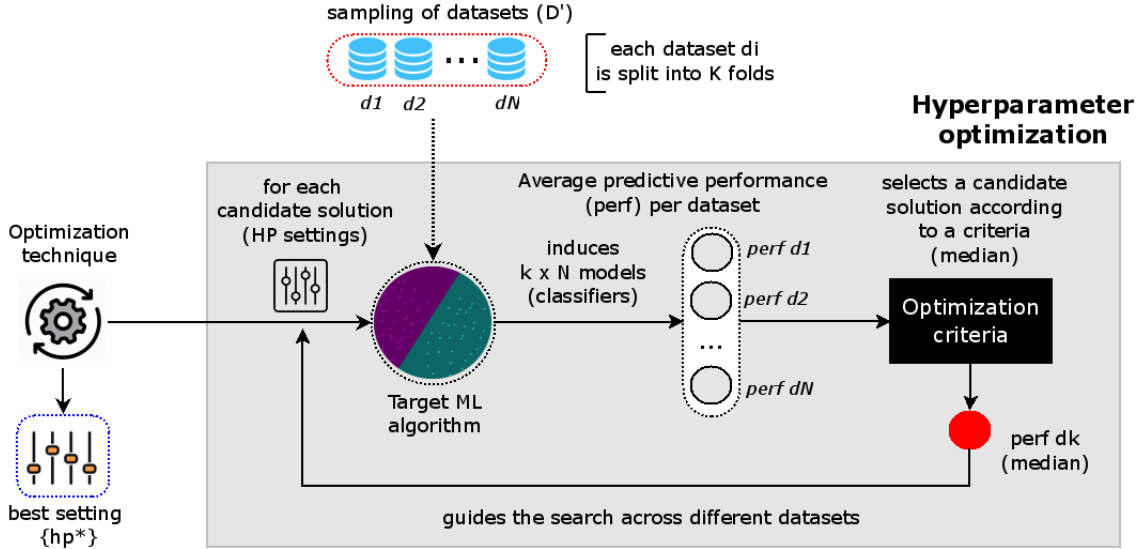


Figure 2: Hyperparameter tuning process for defining the pool of HP settings based on multiple datasets.

The complete experimental methodology is detailed in the next subsections.

3.1. Datasets

For the experiments, we used 156 datasets that were curated in [32]. The collection of datasets came from the Open Machine Learning (OpenML) [48] repository. Overall, the dataset collection is heterogeneous, covering problems from different domains, presenting different numbers of features, examples, and classes.

In order to be suitable for SVMs, all the datasets were preprocessed by:

- Removing constant and identifier features;
- Converting logical (boolean) attributes into numeric values $\in \{0, 1\}$;
- Imputing missing values by the median in numerical attributes and a new category for categorical ones;
- Converting all the categorical features to numerical values using the 1-N encoding;
- Normalizing all the features with $\mu = 0$ and $\sigma = 1$.

After preprocessing the datasets, they are randomly split into training and test sets of equal sizes (78 datasets each). The training datasets are used during the HP optimization process, while the obtained

settings are assessed using the test datasets. Since these sets are defined at random, we repeated the sampling process five (5) times to reduce the variance related to the dataset split. It is important to mention that our resampling method is very similar to a traditional Cross-validation (CV). The main difference is that instead of working with the examples of a dataset, each instance is a proper dataset.

We used the `mlr` [11]⁴ R package to preprocess datasets. More information regarding datasets and the selection criteria can be found in [32]. Besides, a detailed list of these datasets can be found in our OpenML study page ⁵.

3.2. Optimization process

The aim of the optimization process is to find HP settings that are appropriate for several different datasets. We consider appropriate settings that result in models with high predictive accuracies across datasets, and therefore, are potential default values for the ML algorithms being tuned. Before the optimization takes place, we need to define some input choices:

- *a target ML algorithm*: the algorithm whose hyperparameters will be optimized;
- *an optimization technique*: a technique that will conduct the optimization process. In theory, any optimization method can be explored;
- *a sample of datasets*: a set of datasets used to evaluate candidate solutions for new default HP settings; and
- *an optimization criterion*: a criterion that defines how candidate solutions will be evaluated and handled during the optimization.

Although our strategy is suitable to generate a pool of new (default) HP settings for any ML algorithm, we chose to perform experiments using SVM, since it is highly sensitive to HP tuning [7, 32], as confirmed by our literature review (see Table 1), and new accurate default settings can reduce the computational cost to fit them.

We selected the Particle Swarm Optimization (PSO) as an optimization technique [45]. The literature has benchmarked different optimization techniques for SVM tuning [31]. However, they showed similar results when comparing the performance of their induced models. Among the tuning techniques reported, the PSO converged faster than the others, it did not require prior tuning, and was robust to obtain accurate HP settings in different types of datasets.

Another choice of the experimental methodology is the number of training datasets (sample) used in the optimization. The smaller the number of datasets, the less the computational time necessary to perform

⁴<https://github.com/mlr-org/mlr>

⁵<https://www.openml.org/s/52/data>

the HP optimization. On the other hand, there is not a strong assumption that the larger the number of datasets, the better the settings found. Thus, we investigated whether it is possible to obtain suitable settings with few datasets, and how the number of datasets affects the quality of these settings. For such, we evaluated four different samples $D' = \{S_{11}, S_{31}, S_{51}, S_{71}\}$ with 11, 31, 51, and 71 datasets, respectively. The smallest sample considers just 11 of the 78 datasets, while the largest one includes almost all the training datasets (71 of 78). These samples were generated randomly, and their sizes were defined to facilitate the use of different optimization criteria, as discussed next. It is important to mention that the smallest samples are contained in the largest ones, i.e., $S_{11} \subset S_{31} \subset S_{51} \subset S_{71}$.

For each candidate solution h generated by the optimization technique, the target learning algorithm induces a model (classifier) for each of the N datasets of a D' sample. The predictive performance of each of the N models is assessed by the stratified cross-validation method and the BAC measure. Based on these N performances, the optimization technique uses a criterion to determine the fitness value of the candidate solution h . In our experiments, we adopted the *median* of the BAC values as the fitness of the h candidate.

3.2.1. Hyperparameter space

The SVM HP space used in the experiments is presented in Table 3. For each HP, we show its symbol, name, range or options, and the scale transformation applied to the values. We only considered the Radial Basis Function (RBF) kernel in the experiment since: i) it achieves good performance values in general; ii) it may handle nonlinear decision boundaries, and iii) it can approximate the other kernel types [23]. The HP ranges shown in this table were first explored in [42].

Table 3: SVM hyperparameter space used in experiments. In the table we show, for each hyperparameter: its symbol, name, range/options and scale transformation applied when tuned.

Symbol	Hyperparameter	Range/Options	Scale
k	kernel	{RBF}	-
C	cost	$[2^{-15}, 2^{15}]$	log
γ	width of the kernel	$[2^{-15}, 2^{15}]$	log

3.2.2. Experimental setup

We present the complete experimental setup in Table 4. Since PSO is a stochastic method, we executed it 10 times with different seeds for each sampling size, with a population of 10 particles and a budget of 300 iterations. The number of evaluations was defined by prior experiments with HP tuning evaluation [33]. To assess the models' performance in the fitness function, we used a single stratified Cross-validation (CV) resampling method with 10 folds.

Thus, after performing the optimization tasks, we have a set with 10 HP settings for each experimental scenario with a different sample size. Our strategy is to assess all of them, selecting the best choice per dataset, i.e., the best HP setting which induced the model with the best predictive performance. This strategy is hereafter referred to as “best.opt” (best optimized HP).

We compared the “best.opt” strategy with two baselines:

1. Defaults from ML tools (lower bound): default HP values from mlr (LibSVM/R), Weka (JAVA) and scikit-learn (Python) software/packages; and
2. Conventional HP tuning (upper bound): HP tuning results of an RS technique performed on each dataset with the same budget (300 evaluations). RS proved to be competitive for SVM assessment [7, 33], inducing models as accurate as those induced by more robust techniques (SMBO, PSO, EDA).

The predictive performance of the proposed strategy and the baselines are assessed for the test data sets by performing the 10-fold stratified CV resampling procedure 10 times. The models are also evaluated in terms of the BAC measure. The initial population was also warm-started with the defaults from WEKA ($Cost = 1$, $\gamma = 0.01$), since it is the only choice with static values from the baselines.

Hence, the tuning setup detailed in Table 4 were executed by parallelized jobs in a cluster facility provided by our university⁶ and it took one month to be completed. The PSO algorithm was implemented in R using the `pso` package⁷. The code developed for this study is also hosted at `GitHub`⁸. There, one can find the optimization jobs and the automated graphical analyses.

4. Results and Discussion

In this section, we present and discuss the main experimental results regarding the methodology to search for a pool of default HP settings. First, we perform an overall analysis of the predictive performance of the different methods to set HP values. Next, we present an in-depth analysis, discussing the results of our strategy regarding different sample sizes and test sets. Finally, we explore ML algorithms and techniques to identify in which cases the new optimized HP settings are most suitable.

4.1. Overall analysis

Figure 3 presents the overall results considering all strategies for setting HP values and all experimental scenarios, including different dataset sample sizes feeding the optimization. The violin plot shows the performance distributions obtained by these strategies, presented in the y-axis, sorted accordingly to their

⁶<http://www.cemeai.icmc.usp.br/Euler/index.html>

⁷<https://cran.r-project.org/web/packages/pso/index.html>

⁸<https://github.com/rgmantovani/OptimDefaults>

Table 4: Hyperparameter tuning experimental setup.

Element	Feature	Value	R package
HP tuning	Technique	Particle Swarm Optimization	
	Stopping criteria	budget size	
	Population size	10	
	Maximum number of iterations	30	pso
	Budget size	300	
	fitness criteria	median	
	Algorithm implementation	SPSO2007 ¹	
Target algorithm	ML algorithm	Support Vector Machines	e1071
Sample size	Number of datasets	{11, 31, 51, 71}	
Resampling Strategy	Single Loop	Cross-validation (CV)	mlr
		10-fold	
Performance measures	Optimized (fitness)	Balanced per class accuracy	mlr
	Evaluation	{Balanced per class accuracy, optimization paths}	
Repetitions	Seeds	10 values	
		seeds = {1, ..., 10}	
Baselines	Default settings	LibSVM ²	e1071
		WEKA ³	RWeka
		Scikit-learn ⁴	-
		Random Search	mlr

1 - Implementation detailed in [18].

2 - <https://cran.r-project.org/web/packages/e1071/e1071.pdf>

3 - <https://weka.sourceforge.io/doc.dev/weka/classifiers/functions/SMO.html>

4 - <https://scikit-learn.org/stable/modules/generated/sklearn.svm.SVC.html>

average BAC values that we projected on the x-axis. The vertical red dotted line represents the median value obtained by our shared optimization strategy and is used to highlight differences for the baselines.

Comparing the strategies, the best overall results were obtained by the RS technique, with a BAC value of 0.719, followed by the new optimized settings (0.702). Default HP settings from different ML tools presented a very similar distribution and the same performance (0.665), which was the worst one. The new optimized settings performed quite well with a similar distribution of the RS technique.

The Friedman test [44] was applied to assess the statistical significance of the HP strategies considering a significance level of $\alpha = 0.05$. The null hypothesis states that all the strategies have equivalent predictive performance. When the null hypothesis is rejected, the Nemenyi post-hoc test is also used to indicate which strategies are significantly different.

Figure 4 presents the resultant Critical Difference (CD) diagram. Strategies are connected when there are *no* significant differences between them, such as the case of the HP settings from tools. Thus, the new optimized settings and the RS technique were statistically better than the traditional default HP settings.

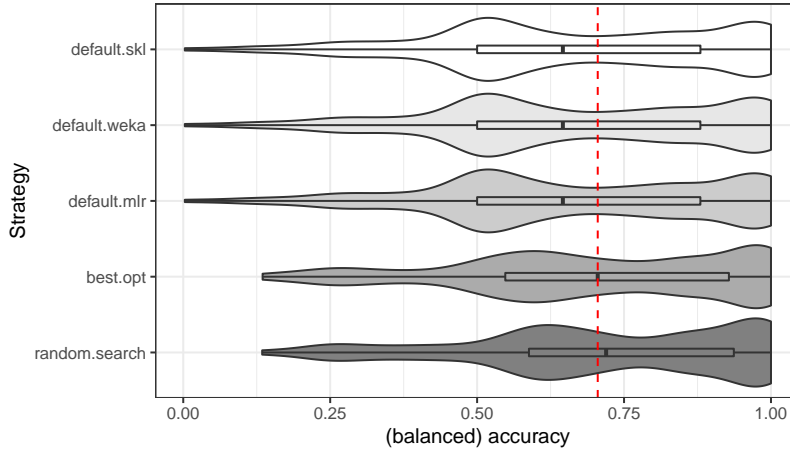


Figure 3: BAC performance values obtained by different HP settings evaluated in test datasets. The results of our strategy (best.opt) were achieved over all datasets’ sample sizes.

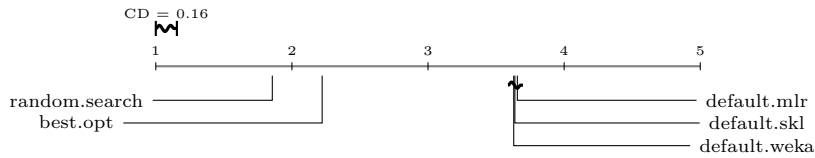


Figure 4: Comparison of the BAC values of the different HP settings according to the Friedman-Nemenyi test ($\alpha = 0.05$).

Although there is a statistical difference between RS and the new optimized settings, it is important to highlight that RS optimizes the HP values to each dataset, evaluating a higher number of candidate solutions, while it is much less computationally costly to evaluate, with good performance, a board set of datasets using the hyperparameter settings obtained by the new solution.

4.2. Sample Size Analysis

It might be the case that our strategy can benefit from a specific dataset sample size. Thus, we investigated the effect of the sample size in the HP settings starting with a few datasets and increasing it until almost the amount of training data. Figure 5 presents our strategy results (red line) in terms of the average BAC values (y-axis) obtained for different datasets’ sample sizes (x-axis). The other lines, with different colors and styles, represent the baseline strategies. It seems that there are only three lines, but it occurs because default HP settings from ML tools are overlapped.

Figure 5 suggests that our strategy is benefiting from bigger sample sizes, i.e., $\{51, 71\}$ datasets, when there is a clear approximation to the RS and a larger distance to the defaults of ML tools. Even with the average values attenuating their differences, both cases show a promising scenario: our strategy generated a small set of HP settings which are probably better than those of ML tools and competitive to the tuning technique.

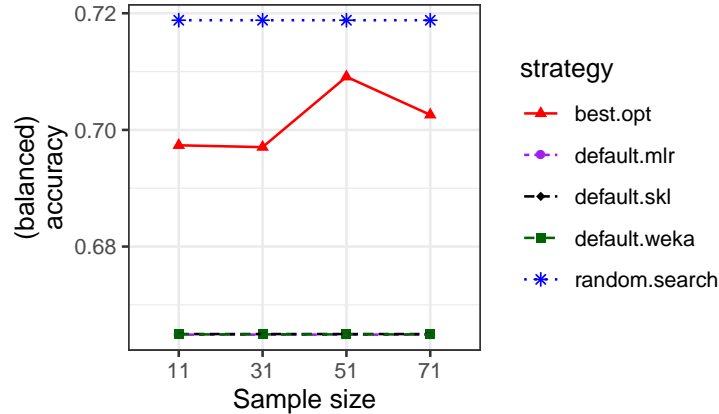


Figure 5: mean and median BAC performance values evaluated in test datasets with different sample sizes.

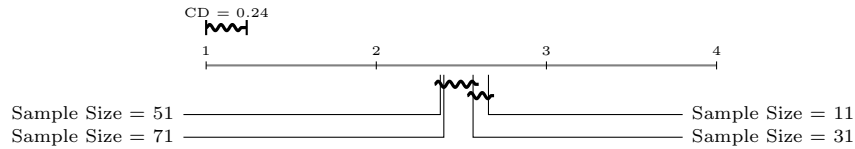


Figure 6: Comparison of the BAC values of the different HP settings according to the Friedman-Nemenyi test ($\alpha = 0.05$) for different sample sizes.

To confirm whether these sample sizes yielded different performances, we also applied the Friedman test with a level of $\alpha = 0.05$. The results obtained by baselines (RS and traditional defaults) were not included in this analysis. The null hypothesis states that all the sample sizes are equivalent with respect to the Balanced per class Accuracy (BAC) values. Figure 8 presents the resultant Critical Difference (CD) diagram. The smallest sample was statistically worse than samples with sizes equal to $\{51, 71\}$. In all the remaining cases, the different sample sizes did not present any statistical difference. Here, we can argue that smaller samples are less appropriate, but we still do not have enough evidence to choose a specific sample size as the best one.

The previous results lead us analyze this in more depth checking all the strategy distributions for each dataset sample size. Figure 7 now depicts four violin plots, each for a specific sample size: top charts show results for the optimization process considering 11 and 31 training datasets, while the bottom charts show results for 51 and 71 datasets.

In general, the same behavior previously observed in the overall analysis is shown in all these graphs: RS is the best-ranked strategy, followed by the new optimized settings, and the defaults from the used tools. However, looking at these results carefully bring us some new clues. When the sample size = 51, the median of the best-optimized settings and the RS median are very similar (0.718, 0.719). This can be most easily seen when the red vertical line is used as a guide. However, for a larger number of datasets (sample size = 71), the performance of the default optimized settings drops again, increasing the difference between the RS

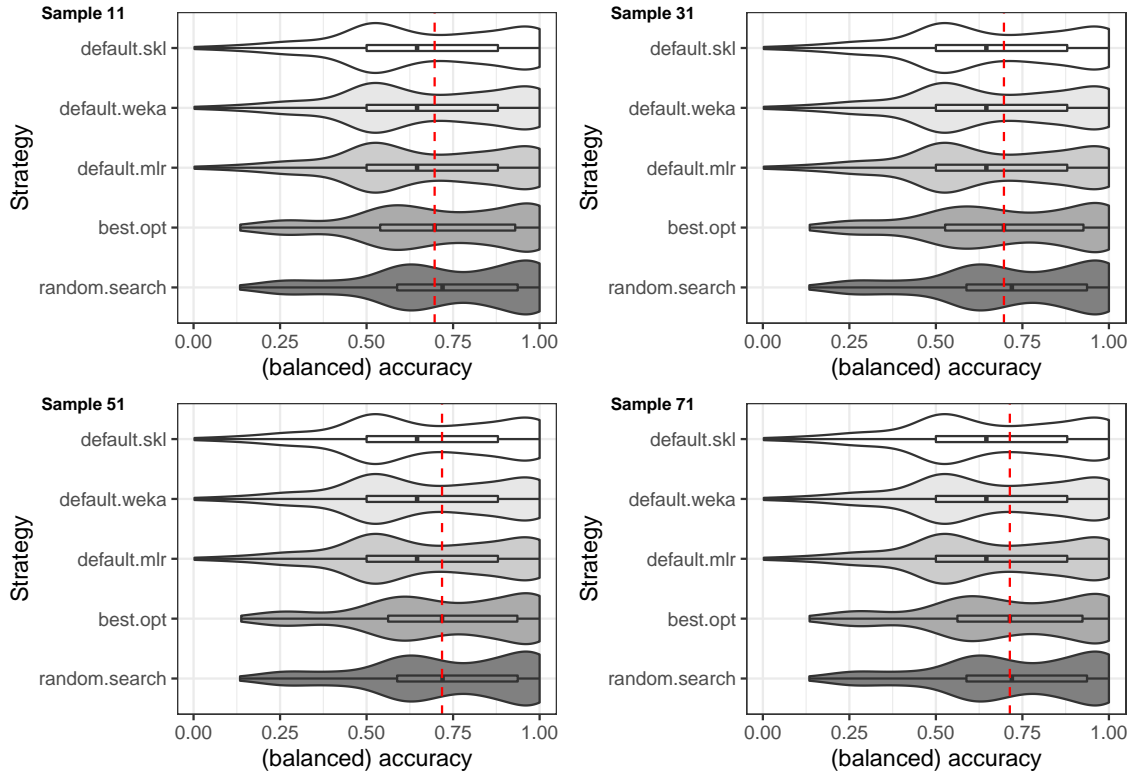


Figure 7: BAC performance distributions obtained by different HP settings evaluated in test datasets with different sample sizes.

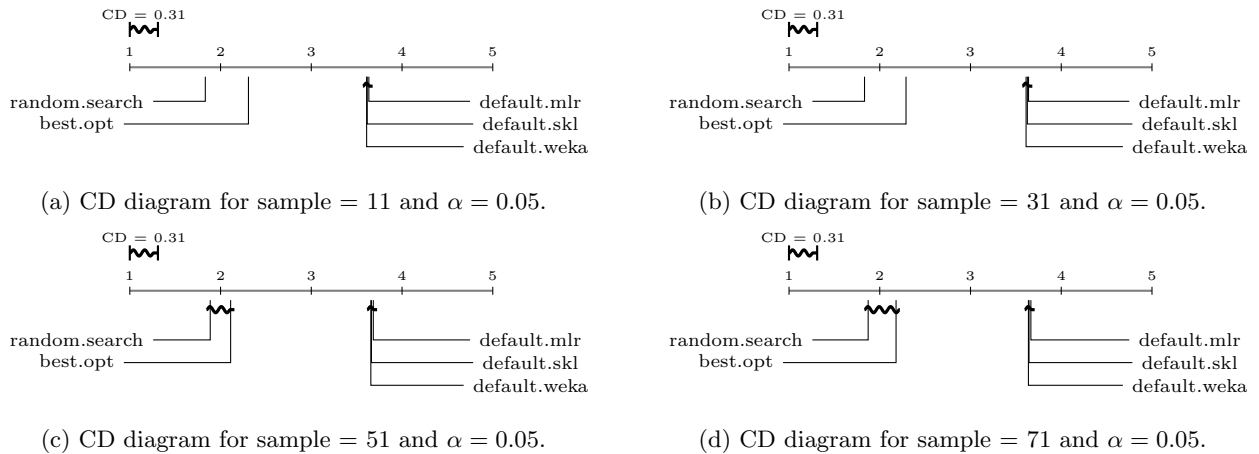


Figure 8: Comparison of the BAC values of the HP setting strategies for SVMs according to the Nemenyi test with $\alpha = 0.05$. Groups of strategies that are not significantly different are connected.

median (0.713 and 0.719, respectively). Hence, using as many training datasets as possible did not positively affect the results but increased the amount of time required to generate the settings.

Figure 8 shows the Friedman-Nemenyi results, with $\alpha = 0.05$, when comparing strategies considering different datasets' sample sizes separately. The CD diagram at the top show the results for sizes = {11, 31},

while the bottom ones show for sizes = {51, 71}. For all cases, RS was the best-ranked whereas our strategy (best.opt) was the second one, both significantly outperforming the traditional defaults. In addition, it can be observed that our strategy does not present statistically significant differences to the tuning technique when the sample size = {51, 71}, i.e., using the new optimized settings led to equivalent results when compared to RS.

Considering Figure 8, especially the results for the 51 and 71 size samples, we confirm our hypothesis that a small set of new optimized HP settings can improve predictive performance compared to traditional HP default settings. Notably, our strategy is even comparable to a tuning technique, but with a much lower computational cost.

4.3. Improvement Analysis

For a more in-depth analysis of the improvements achieved by our strategy, each graph in Figure 9 shows the BAC values (y-axis) of all strategies in a specific test set for each dataset (x-axis). Different colors and shapes of lines represent different HP strategies. These datasets are named by their `OpenML` ids and are listed by decreasing BAC values obtained by default HP values from “mlr” (LibSVM).

In Figure 9, we notice that default HP setting from ML tools (mlr, Weka and scikit-learn) performed similarly, and their curves were mostly overlapped, which was what was expected given the previous analyses. The new optimized HP settings (red line), generated by our strategy, and the RS technique (blue line) outperformed them in many datasets for different test sets. This figure also shows that the best.opt’s curve has very similar behavior to the RS curve, including most of the performance gains. We assumed that RS would defeat the new optimized default settings. Thus, this achievement is surprising to some extent given that RS is performing HP tuning for each dataset, and is consequently much more time consuming when compared to the few evaluations needed to evaluate a small set of optimized settings.

The Wilcoxon paired-test (with $\alpha = 0.05$) was applied to assess the statistical significance of the results between the two best-ranked HP strategies per dataset for each test set. We applied the test to the results of 10 repetitions used to assess the obtained HP settings and baselines. Table 5 presents the frequency each strategy was best ranked with (p.value < 0.05) and without (p.value \geq 0.05) statistical significance, when compared to the second best strategy.

Overall, the RS technique outperforms default strategies in ≈ 40 of the datasets, but with statistical significance in half of them. In practice, we would choose to use it just in the cases where it can be statistically significant. Some studies, such as [32], showed that it is possible to predict, with high accuracy, whether a process of HP tuning would be necessary for the dataset under analysis. In the latter case, our new HP settings could be explored, since they can induce models with higher predictive performance than those of ML tools.

Figure 10 shows the distribution of the predictive performance difference assessed by BAC values of

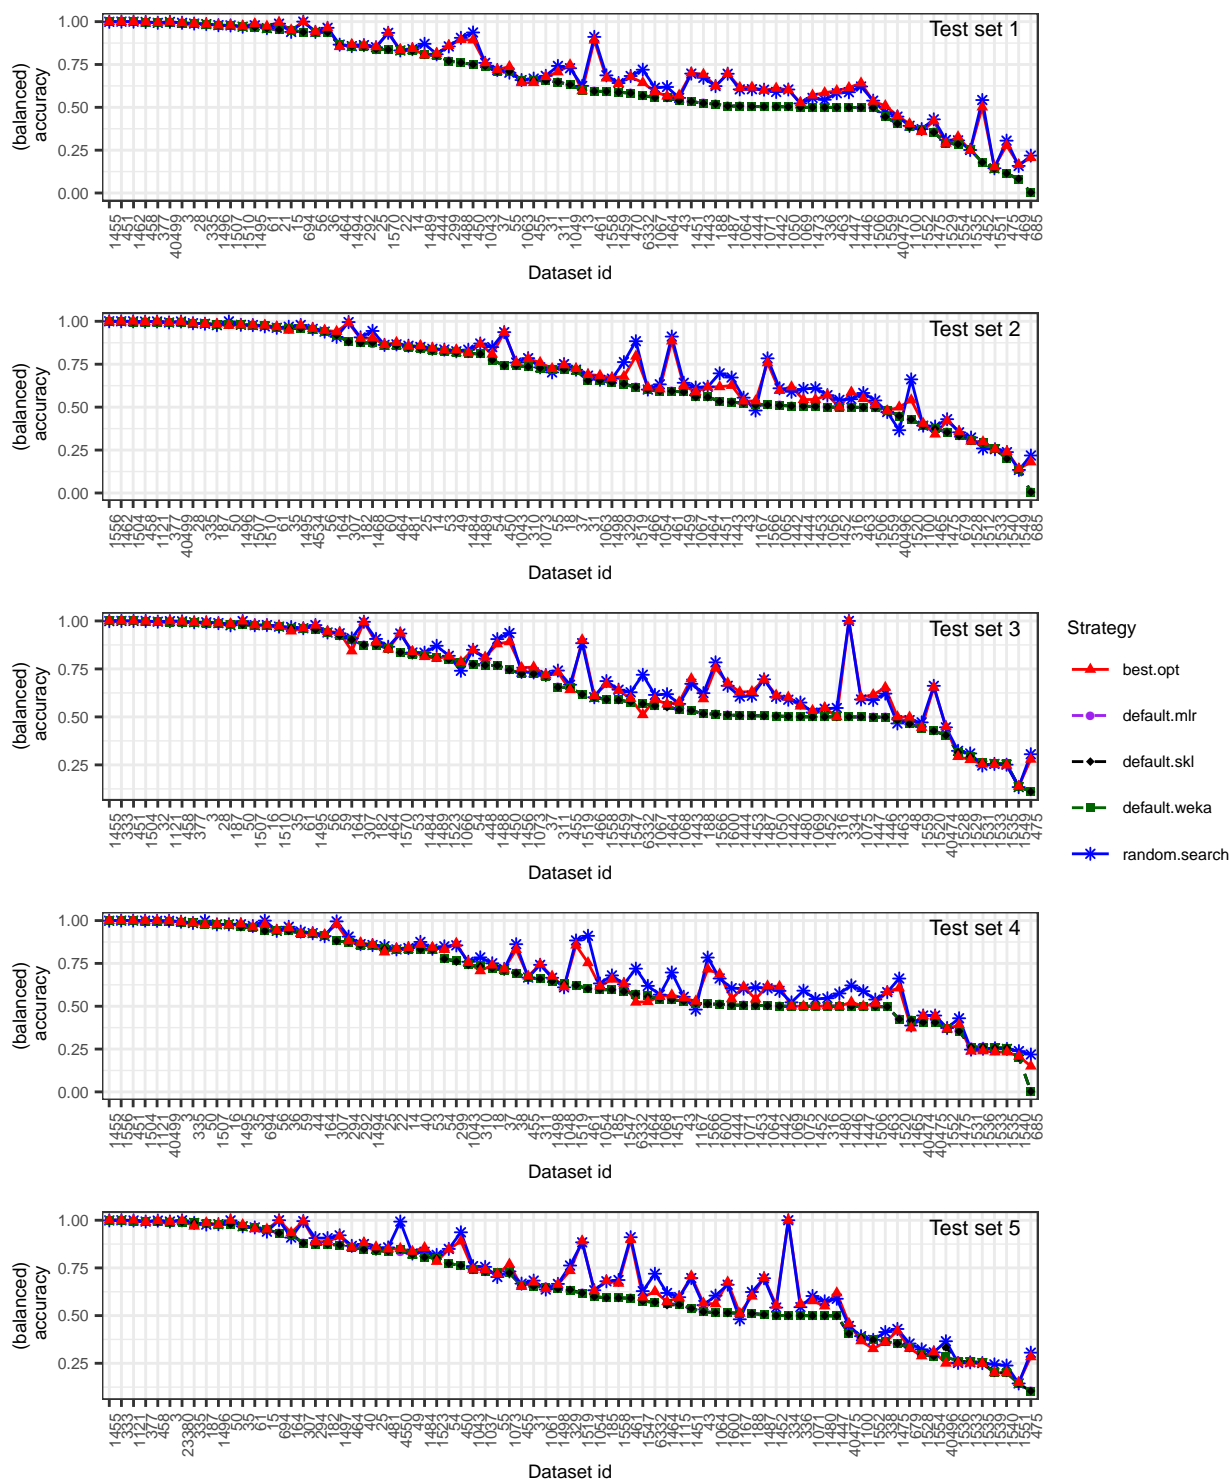


Figure 9: HP tuning results for SVMs in different test sets.

Table 5: Wilcoxon paired test comparing the two best HP strategies ranked by data set. For each HP strategy, the frequency with which it was ranked with (p.value ≤ 0.05) and without (p.value > 0.05) statistical significance is presented.

Test Set	Random Search		Best Opt		Default mlr		Default skl		Default Weka	
	< 0.05	≥ 0.05	< 0.05	≥ 0.05	< 0.05	≥ 0.05	< 0.05	≥ 0.05	< 0.05	≥ 0.05
Set 1	12	19	9	35	0	2	0	1	0	0
Set 2	19	22	5	30	0	2	0	0	0	0
Set 3	16	23	3	29	0	4	0	2	0	0
Set 4	27	20	2	21	0	7	0	1	0	0
Set 5	22	24	5	19	0	7	0	1	0	0

the HP settings found by our strategy and the best settings of the ML tools for all datasets. Results are presented for each test set. Black bars represent favorable differences to our strategy whereas red bars indicate when traditional defaults were better. There are two overlapped bars when $x=0$, showing that for a considerable number of datasets, there was a tiny performance difference in favor of our strategy (black bar) and against it (red bar). Observing the red bars, one can notice the traditional defaults only achieved minimal advantages since they are mostly close to zero. On the other hand, when using the new optimized HP settings, there are cases with high improvement (above 0.1) in all the test sets.

4.4. Analysis of the new optimized SVM HP values

Figure 11 depicts the dispersion of the new optimized HP settings in the SVM HP space. The x-axis shows the projected cost (C) values in \log_2 scale, while the y-axis shows the gamma (γ) values. Different shapes and colors denote HP settings obtained for different test sets. The dashed circle indicates the region containing the HP values included in the initial population of the optimization method. In addition, the black cross and blue point represent default values from ML tools in datasets where our strategy performed best⁹ and worst¹⁰, respectively.

⁹<https://www.openml.org/d/334>

¹⁰<https://www.openml.org/d/4550>

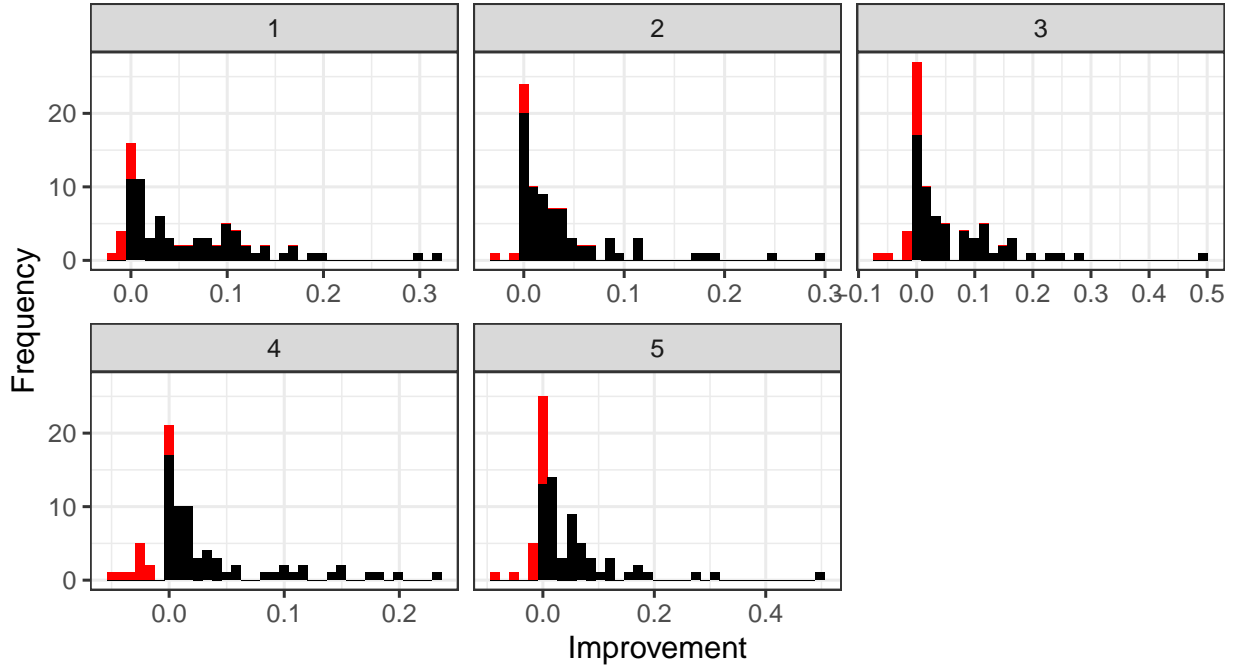


Figure 10: Performance distributions in terms of BAC when comparing results obtained by new pool of optimized HP settings to the defaults from ML tools.

Table 6: Top-ranked HP settings obtained with shared optimization and sample size = 51. Values are represented in \log_2 scale.

Rank	HP Setting	
	Cost (C)	Gamma (γ)
1	-2.1927	5.7930
2	3.0154	-4.5968
3	8.9897	4.5561
4	0.0000	-6.6000
5	12.5062	-6.4680
6	7.4370	-11.4271
7	-7.0694	-3.5971
8	-6.1878	-6.6787
9	-11.5290	-12.9075
10	2.1856	12.2462

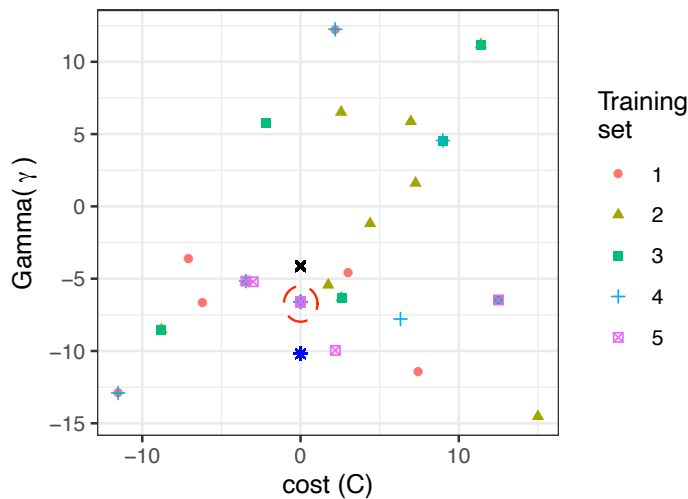


Figure 11: The dispersion of the new optimized HPs settings obtained with sample size = 51. Values projected on the \log_2 scale. The black cross and blue point shows default values from ML tools in datasets where our strategy performed best and worst, respectively.

According to this figure, there is a dispersion of the new optimized HP settings across the hyperspace. Besides, different training sets influenced the optimization process differently, with their HP settings located in different regions:

- Training sets 1, 2, 3, 4: these were able to generate various HP settings across the investigated datasets. Their HP values differ from traditional defaults. Thus, the search explored different regions from the space, and these different settings were able to induce models with good performance, often better than traditional defaults;
- Training set 5: provided few variability on their optimized settings, with most of them placed near the initial search space. Thus, one may argue that optimization became stuck in a local minimum, considering those datasets, and did not explore the remainder of the space. However, still, with values closer to the traditional ML defaults, they were competitive to the RS baseline, as shown in Figure 9 and Table 5.

The top-ranked HP settings obtained by the optimization considering different test sets are presented in Table 6. These settings are ranked according to their test set performance across different datasets. The Appendix Appendix B presents an extended table with all the unique HP settings we obtained in our experiments with the best experimental setup (sample = 51).

4.5. Learning from new optimized defaults

Although the new shared default strategy works well, some questions may arise. For example, “what dataset and learning characteristics can tell us about when to use the pool of optimized HP settings instead of an optimization technique, such as RS?”. The answer to this question can help users to choose between either HP tuning, which can provide better settings but is computationally expensive, or testing a set of default HP settings. Moreover, finding some patterns regarding this task may bring some knowledge about the learning process.

Here, we borrow some ideas from Meta-learning (MtL) [29] to investigate this problem as a binary classification task where classes identify whether the new optimized HP settings are sufficient for a given dataset or HP tuning, based on RS, should be performed. HP tuning is recommended when it significantly outperformed the new default HP settings for a given dataset based on the Wilcoxon test, previously discussed in Section 4.3. The predictive attributes consist of different characteristics extracted from each dataset by ten categories of descriptors, namely meta-features, using the `pymfe`¹¹(*v0.4*) tool, with the mean (`nanmean`) and standard deviation (`nanstd`) summary functions [1].

¹¹<https://github.com/ealcobaca/pymfe>

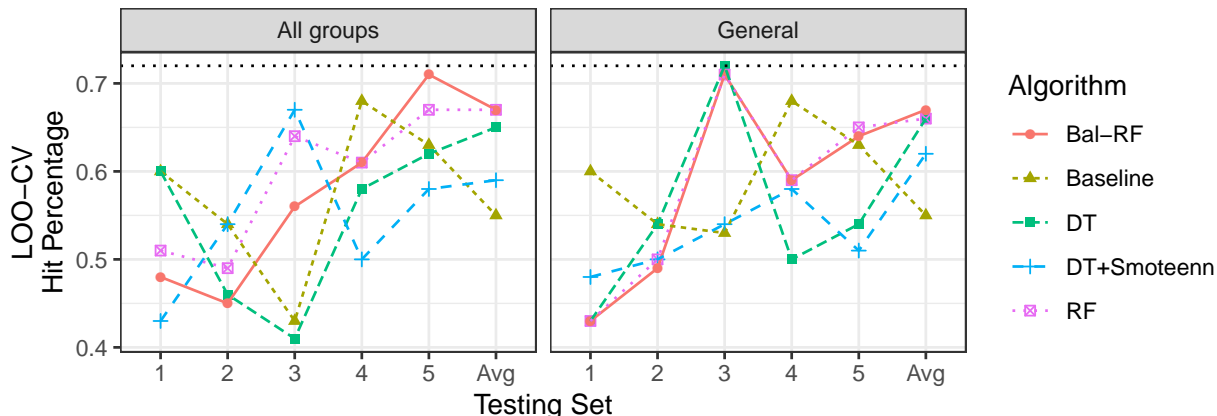


Figure 12: Hit percentage of the LOO-CV using different meta-feature groups in the setup with 51 datasets.

We considered in our analysis each test set, and the average of these sets for a sample size equal to 51. The data generated for each one was used by the Decision Tree (DT) and Random Forest (RF) algorithms to induce predictive models. These algorithms were selected because they can induce explainable models, and are therefore able to shed some light on the learning process. Due to the presence class imbalance in the meta-dataset, we also included an RF version that deals with imbalance (Bal-RF), and a DT performing oversampling via SMOTE and cleaning using ENN (Smoteenn). These ML and preprocessing algorithms are available in the `scikit-learn` and `imbalanced-learn` Python libraries [28, 37]. Their results were compared with a baseline model that always predicts the majority class.

Figure 12 shows the hit percentage of the Leave-one-out Cross-validation (LOO-CV) (y-axis) considering all groups of descriptors (All groups) and only simple and general descriptors (General) for each test set and their average. In this figure, different algorithms are represented by different colors, line types and shapes. Overall, the best result was obtained by the DT algorithm with datasets described by the general descriptors. The induced model presented a correct classification rate of 0.72 with the third test set (right side of the figure), 0.19 higher than the baseline, showing we can learn patterns from the obtained results. On the other hand, in some of the scenarios, the induced models did not overcome the baseline, which may be an indicator that we have a difficult learning problem.

Figure 13 details the results obtained by this analysis. It shows the best DT induced model with a correct hit percentage of 0.72. This model is more prone to hit the RS class than the pool of shared defaults. This behavior is desired when predictive performance is the objective. In this train of thought, it is better to run an RS than not run it, losing performance. Therefore, the best model is more concerned with the experimental performance than the optimization time.

Although we have shown that these models are better than a guess in the majority class, we have no access to which characteristics make a dataset more prone to RS than to a new pool of optimized HP yet.

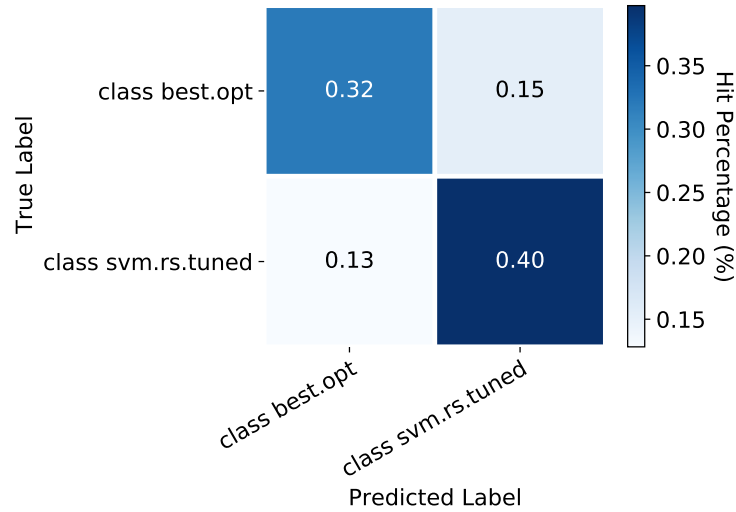


Figure 13: Confusion matrix of the best induced DT model (0.72) in test set 3, with general and simple descriptors and not using the Smoteenn.

Therefore, we draw the best DT model to understand the learned patterns. Due to its size, the complete DT model is presented in Appendix Appendix C. There, we present the entire DT model, its branches, leaves, the yielded rules, and a histogram of the features. Based on the model, we can observe two interesting rule paths where more than half of the dataset is included. The first one is shown below, where we have 23 examples, 20 of the `best.opt` class and only 3 of the `svm.rs.tuned`. The `nr_attr` represent the total number of attributes, `nr_inst` the number of instances and `attr_to_instance` the number of attributes divided by the number of instances.

```
nr_inst < 358
  attr_to_instance >= 0.02
    nr_attr < 88
      [20/3] (best.opt/svm.rs.tuned)
```

This rule suggests that HP tuning (RS) is most suitable for datasets with a small number of examples (< 358) and attributes (< 88). It may be motivated by the nature of most of datasets presented in UCI and OpenML repositories. The second interesting path, in turn, has 28 examples where 24 are of the `svm.rs.tuned` class and only 4 of the `best.opt` class. This rule suggests that the new pool of optimized HP settings are better for datasets with more examples and balanced classes (with a standard deviation of the relative frequency of each class > 0.43). Overall, the induced tree presents interesting patterns by using simple dataset characteristics. Moreover, as this tree is small, the practitioners can use it to visually identify when to use shared default hyperparameters for their new problems.

```
nr_inst >= 358
freq_class.nansd >= 0.43
  freq_class.nanmean >= 0.15
    [4/24] (best.opt/svm.rs.tuned)
```

5. Threats to Validity

In an empirical study design, methodological choices may impact the results obtained in the experiments. Next, we discuss the threats that may impact the results from this study.

5.1. Internal validity

The datasets used in the experiments were preprocessed to be handled by SVMs. We also ensured that all classes in the datasets must have at least 10 observations. Thus, 10-fold stratification can be applied without any concerns. Of course, other datasets may be used to expand data collection, if they comply with the ‘stratified’ criterion. However, the authors believe that adding datasets will not substantially change the overall behavior of HP strategies on the algorithm investigated, since they were selected to cover a wide range of classification tasks, with different characteristics.

Krstajic et. al. [26] compared different resampling strategies for assessing the predictive performance and selecting regression/classification models induced by ML algorithms. In Cawley & Talbot [16], the authors also discuss the overfitting in the evaluation methodologies when assessing ML algorithms. Based on their discussion, the most reasonable choice for our experiments is the 5 times 2-CV resampling methodology. It is suggested for cases when it is desired to reduce the variance of the results generated using a dataset with few instances. It is exactly our case: we have few instances (156) which are datasets feeding an optimization process. Thus, to reduce the bias of the performance evaluation and the computational cost of experiments, this resampling methodology was adopted in the experiments.

Since a wide variety of datasets compose the data collection, some of them may be imbalanced. Thus, the BAC measure [15] was used to assess the predictive performance of the models during the optimization process, i.e., in the fitness function. This measure considers class distributions when assessing the performance of a candidate solution. We used the same performance measure to evaluate the final solutions returned by the HP strategies. Other predictive performance measures can generate different results, depending on how they deal with data imbalance.

5.2. Conclusion validity

Section 4 presented statistical comparisons between the investigated tuning strategies. In [19], Demšar discusses the issue of statistical tests for comparisons of several techniques on multiple datasets reviewing

several statistical methodologies. The method proposed as more suitable is the non-parametric analog version of ANOVA, i.e., the Friedman test, along with the corresponding Nemenyi post-hoc test. The Friedman test ranks all the methods separately for each dataset and uses the average ranks to test whether all techniques are equivalent. In case of differences, the Nemenyi test performs all the pairwise comparisons between the techniques and identifies the presence of significant differences. Thus, the Friedman ranking test followed by the Nemenyi post-hoc test was used to evaluate our experimental results.

5.3. External validity

The experimental methodology described in Section 3 considers using HP tuning techniques that have been used and discussed in the literature, such as Pfisterer et al. [38], van Rijn et al. [43]. The PSO and RS techniques were also exhaustively benchmarked for SVM tuning [31]. In the experiments carried out in this paper, we used the default settings provided by the PSO R implementation. These default values are robust for our dataset collection. Otherwise, the tuning of PSO would considerably increase the experimental cost by adding a new level of tuning (*the tuning of tuning techniques*). Thus, this additional level was not assessed in this study.

Using budgets for SVMs tuning was investigated in [33]. The experimental results suggested that all the considered techniques required only ≈ 300 evaluations to converge. Convergence here means the tuning techniques could not improve their predictive performance more than $x = 10^5$ until the budget was consumed. Actually, in most cases, the tuning reached its maximum performance after 100 steps. Thus, a budget size of 300 evaluations was therefore deemed sufficient. Results obtained from this budget showed that the exploration made in hyperparameter spaces led to statistically significant improvements in most cases. Thus, this budget size was adopted in our experiments.

In this paper, we investigated a single ML algorithm. The methodology described here can be generalized to other ML different algorithms, especially those that are sensitive to tuning. On the other hand, algorithms such as the RF whose defaults are robust enough [39] would not benefit from the new strategy. Nonetheless, additional similar studies may prove fruitful. For such, all the experimental data generated in the experiments are available at `OpenML`¹² and `GitHub`¹³.

6. Conclusion

This work proposes and carefully analyzes a methodology to generate new optimized HP settings for ML algorithms. Its main goal was to investigate whether a small amount of these settings would be able to

¹²<https://www.openml.org/s/52>

¹³<https://github.com/rgmantovani/OptimDefaults>

improve model predictive performance compared to using default settings provided by ML tools, thus being a competitive alternative compared to the costly conventional HP tuning techniques.

For such, we carried out experiments adopting Support Vector Machines (SVMs) as the ML algorithm due to its sensitivity to HP tuning and used a collection of 156 datasets publicly available at OpenML. In addition, the PSO optimization technique was used to find HP settings that are appropriate for a sample of this collection of datasets.

Using new set of HP values, referred to as optimized settings, produced significantly better models than the defaults suggested by ML tools in all the scenarios investigated. When analyzing different sample sizes, the best results were obtained with a sample of 51 datasets. Furthermore, these results did not present statistical differences considering the use of a tuning technique.

The ideal situation would be that where we could define for which problems default settings are sufficient and for which problems HP tuning is indicated. Thus, we conducted experiments using characteristics extracted from the dataset collection and tree-based algorithms to provide some interpretability of the identified patterns. In our analysis, two main rules could be observed: (i) HP tuning is a better option when a dataset has a small number of examples (< 358) and attributes (< 88); and (ii) the new optimized settings are better for datasets with more examples and balanced classes (with a standard deviation of the relative frequency of each class (> 0.43)). It should be mentioned that the balanced accuracy measure was used during tuning. The robustness of these new optimized HP settings goes toward what has been discussed in the literature [7, 32, 49].

6.1. Main difficulties

The main difficulties faced during this study are related to the cost of the performed experiments. The optimization process is computationally expensive, since a large number of datasets are evaluated for every new candidate solution (HP setting). We also needed to run several rounds of experiments to calibrate our methodology, and each of these rounds took almost two months.

Another adversity is related to the data collection. Initially, a larger number of datasets were selected, but some of them presented problems when inducing SVMs models. For these few datasets, all the predictions were invalid with NA values. Therefore, we preferred to not consider them in the experiments.

6.2. Future Work

The findings from this study open up future research directions. In the context of AutoML, the obtained HP settings can be used as a warm start for the optimization techniques. Moreover, instead of creating pipelines from scratch, the AutoML systems can create entire pipelines based only on the optimized defaults.

It would also be a promising direction to investigate different ways of coding the individuals in the optimization process. The sample size and correspondent datasets could be embedded in the candidate solution, along with the HP values, releasing designers from these empirical choices.

Another possibility would be to cluster datasets according to their similarities to generate better-optimized HP values. The fitness value used in experiments is an aggregate measure of performance across different datasets. It would be interesting to explore other measures, such as average ranks.

The code used in this study is publicly available, easily extendable, and may be adapted to cover several other ML algorithms. Thus, experiments with different ML algorithms can also be carried out, investigating their HP profile: the need for tuning, how defaults behave, and so on. All the information generated can also be used as meta-knowledge to feed further experiments.

Acknowledgments

The authors would like to thank Fundação Araucária, CAPES and CNPq, grant 420562/2018-4, (Brazilian Agencies) for their financial support, specially for grants #2012/23114-9, #2015/03986-0, #2016/18615-0 and #2018/14819-5 from the São Paulo Research Foundation (FAPESP). This research was also carried out using the computational resources of the Center for Mathematical Sciences Applied to Industry (CeMEAI) funded by FAPESP (grant #2013/07375-0).

References

- [1] Alcobaa, E., Siqueira, F., Rivolli, A., Garcia, L.P.F., Oliva, J.T., de Carvalho, A.C.P.L.F.. Mfe: Towards reproducible meta-feature extraction. *Journal of Machine Learning Research* 2020;21(111):1–5. URL: <http://jmlr.org/papers/v21/19-348.html>.
- [2] Anastacio, M., Luo, C., Hoos, H.. Exploitation of default parameter values in automated algorithm configuration. In: *Workshop Data Science Meets Optimisation (DSO)*. Macao, China; 2019. .
- [3] Andradottir, S.. A review of random search methods. In: Fu, M.C., editor. *Handbook of Simulation Optimization*. Springer New York; volume 216 of *International Series in Operations Research & Management Science*; 2015. p. 277–292.
- [4] Ansótegui, C., Malitsky, Y., Samulowitz, H., Sellmann, M., Tierney, K.. Model-based genetic algorithms for algorithm configuration. In: *Proceedings of the 24th International Conference on Artificial Intelligence*. AAAI Press; IJCAI'15; 2015. p. 733–739. URL: <http://dl.acm.org/citation.cfm?id=2832249.2832351>.
- [5] Bardenet, R., Brendel, M., Kégl, B., Sebag, M.. Collaborative hyperparameter tuning. In: Dasgupta, S., Mcallester, D., editors. *Proceedings of the 30th International Conference on Machine Learning (ICML-13)*. JMLR Workshop and Conference Proceedings; volume 28; 2013. p. 199–207.
- [6] Ben-Hur, A., Weston, J.. A user's guide to support vector machines. In: *Data Mining Techniques for the Life Sciences*. Humana Press; volume 609 of *Methods in Molecular Biology*; 2010. p. 223–239.
- [7] Bergstra, J., Bengio, Y.. Random search for hyper-parameter optimization. *J Mach Learn Res* 2012;13:281–305.
- [8] Bergstra, J., Yamins, D., Cox, D.D.. Making a science of model search: Hyperparameter optimization in hundreds of dimensions for vision architectures. In: *Proc. 30th Intern. Conf. on Machine Learning*. 2013. p. 1–9.
- [9] Bergstra, J.S., Bardenet, R., Bengio, Y., Kégl, B.. Algorithms for hyper-parameter optimization. In: Shawe-Taylor, J., Zemel, R.S., Bartlett, P.L., Pereira, F., Weinberger, K.Q., editors. *Advances in Neural Information Processing Systems 24*. Curran Associates, Inc.; 2011. p. 2546–2554.
- [10] Birattari, M., Yuan, Z., Balaprakash, P., Stützle, T.. *F-Race and Iterated F-Race: An Overview*; Berlin, Heidelberg: Springer Berlin Heidelberg. p. 311–336.

- [11] Bischl, B., Lang, M., Kotthoff, L., Schiffner, J., Richter, J., Studerus, E., Casalicchio, G., Jones, Z.M.. mlr: Machine learning in r. *Journal of Machine Learning Research* 2016;17(170):1–5.
- [12] Braga, I., do Carmo, L.P., Benatti, C.C., Monard, M.C.. A note on parameter selection for support vector machines. In: Castro, F., Gelbukh, A., González, M., editors. *Advances in Soft Computing and Its Applications*. Springer Berlin Heidelberg; volume 8266 of *Lecture Notes in Computer Science*; 2013. p. 233–244.
- [13] Breiman, L.. Random forests. *Machine Learning* 2001;45(1):532. doi:10.1023/A:1010933404324.
- [14] Brochu, E., Cora, V.M., de Freitas, N.. A tutorial on bayesian optimization of expensive cost functions, with application to active user modeling and hierarchical reinforcement learning. *CoRR* 2010;abs/1012.2599.
- [15] Brodersen, K.H., Ong, C.S., Stephan, K.E., Buhmann, J.M.. The balanced accuracy and its posterior distribution. In: *Proceedings of the 2010 20th International Conference on Pattern Recognition*. IEEE Computer Society; 2010. p. 3121–3124.
- [16] Cawley, G.C., Talbot, N.L.C.. On over-fitting in model selection and subsequent selection bias in performance evaluation. *The Journal of Machine Learning Research* 2010;11:2079–2107.
- [17] Chang, C.C., Lin, C.J.. Libsvm: a library for support vector machines. *ACM transactions on intelligent systems and technology (TIST)* 2011;2(3):27.
- [18] Clerc, M.. *Standard particle swarm optimization*; 2012. 15 pages.
- [19] Demšar, J.. Statistical comparisons of classifiers over multiple data sets. *The Journal of Machine Learning Research* 2006;7:1–30.
- [20] Eggenberger, K., Lindauer, M., Hoos, H.H., Hutter, F., Leyton-Brown, K.. Efficient benchmarking of algorithm configurators via model-based surrogates. *Machine Learning* 2018;107(1):15–41.
- [21] Gomes, T.A.F., Prudêncio, R.B.C., Soares, C., Rossi, A.L.D., nd André C. P. L. F. Carvalho, . Combining meta-learning and search techniques to select parameters for support vector machines. *Neurocomputing* 2012;75(1):3–13.
- [22] Hauschild, M., Pelikan, M.. An introduction and survey of estimation of distribution algorithms. *Swarm and evolutionary computation* 2011;1(3):111–128.
- [23] Hsu, C.W., Chang, C.C., Lin, C.J.. *A Practical Guide to Support Vector Classification*. Department of Computer Science - National Taiwan University; Taipei, Taiwan; 2007. .
- [24] Hutter, F., Hoos, H.H., Leyton-Brown, K.. Sequential model-based optimization for general algorithm configuration. In: Coello, C.A.C., editor. *Learning and Intelligent Optimization*. Berlin, Heidelberg: Springer Berlin Heidelberg; 2011. p. 507–523.
- [25] Hutter, F., López-Ibáñez, M., Fawcett, C., Lindauer, M., Hoos, H.H., Leyton-Brown, K., Stützle, T.. Aclib: A benchmark library for algorithm configuration. In: Pardalos, P.M., Resende, M.G., Vogiatzis, C., Walteros, J.L., editors. *Learning and Intelligent Optimization*. Cham: Springer International Publishing; 2014. p. 36–40.
- [26] Krstajic, D., Buturovic, L.J., Leahy, D.E., Thomas, S.. Cross-validation pitfalls when selecting and assessing regression and classification models. *Journal of cheminformatics* 2014;6(1):10+.
- [27] Lang, M., Kotthaus, H., Marwedel, P., Weihs, C., Rahnenführer, J., Bischl, B.. Automatic model selection for high-dimensional survival analysis. *Journal of Statistical Computation and Simulation* 2015;85(1):62–76. doi:10.1080/00949655.2014.929131.
- [28] Lemaître, G., Nogueira, F., Aridas, C.K.. Imbalanced-learn: A python toolbox to tackle the curse of imbalanced datasets in machine learning. *Journal of Machine Learning Research* 2017;18(17):1–5. URL: <http://jmlr.org/papers/v18/16-365>.
- [29] Lemke, C., Budka, M., Gabrys, B.. Metalearning: a survey of trends and technologies. *Artificial intelligence review* 2015;44(1):117–130.
- [30] Li, L., Jamieson, K., DeSalvo, G., Rostamizadeh, A., Talwalkar, A.. Hyperband: A novel bandit-based approach to hyperparameter optimization. *Journal of Machine Learning Research* 2018;18(185):1–52. URL: <http://jmlr.org/papers/>

v18/16-558.html.

- [31] Mantovani, R.G.. use of meta-learning for hyperparameter tuning of classification problems. Ph.D. thesis; Instituto de Ciências Matemáticas e de Computação, Universidade de São Paulo; São Carlos, Brazil; 2018.
- [32] Mantovani, R.G., Rossi, A.L., Alcobaa, E., Vanschoren, J., de Carvalho, A.C.. A meta-learning recommender system for hyperparameter tuning: predicting when tuning improves svm classifiers. *Information Sciences* 2019;501:193–221. doi:<https://doi.org/10.1016/j.ins.2019.06.005>.
- [33] Mantovani, R.G., Rossi, A.L.D., Vanschoren, J., Bischl, B., de Carvalho, A.C.P.L.F.. Effectiveness of random search in SVM hyper-parameter tuning. In: 2015 International Joint Conference on Neural Networks, IJCNN 2015, Killarney, Ireland, July 12-17, 2015. IEEE; 2015. p. 1–8.
- [34] Mantovani, R.G., Rossi, A.L.D., Vanschoren, J., Carvalho, A.C.P.L.F.. Meta-learning recommendation of default hyper-parameter values for svms in classification tasks. In: Vanschoren, J., Brazdil, P., Giraud-Carrier, C.G., Kotthoff, L., editors. Proceedings of the 2015 International Workshop on Meta-Learning and Algorithm Selection co-located with European Conference on Machine Learning and Principles and Practice of Knowledge Discovery in Databases 2015 (ECMLPKDD 2015), Porto, Portugal, September 7th, 2015. CEUR-WS.org; volume 1455 of *CEUR Workshop Proceedings*; 2015. p. 80–92.
- [35] Miranda, P., Silva, R., Prudêncio, R.. Fine-tuning of support vector machine parameters using racing algorithms. In: Proceedings of the 22nd European Symposium on Artificial Neural Networks, Computational Intelligence and Machine Learning, ESANN 2014. 2014. p. 325–330.
- [36] Padierna, L.C., Carpio, M., Rojas, A., Puga, H., Baltazar, R., Fraire, H.. Hyper-Parameter Tuning for Support Vector Machines by Estimation of Distribution Algorithms; Cham: Springer International Publishing. p. 787–800.
- [37] Pedregosa, F., Varoquaux, G., Gramfort, A., Michel, V., Thirion, B., Grisel, O., Blondel, M., Prettenhofer, P., Weiss, R., Dubourg, V., Vanderplas, J., Passos, A., Cournapeau, D., Brucher, M., Perrot, M., Duchesnay, E.. Scikit-learn: Machine learning in Python. *Journal of Machine Learning Research* 2011;12:2825–2830.
- [38] Pfisterer, F., van Rijn, J.N., Probst, P., Müller, A., Bischl, B.. Learning multiple defaults for machine learning algorithms. arXiv preprint arXiv:181109409 2018;.
- [39] Probst, P., Bischl, B., Boulesteix, A.L.. Tunability: Importance of hyperparameters of machine learning algorithms. 2018. arXiv:arXiv:1802.09596v3 [stat.ML].
- [40] Reif, M., Shafait, F., Dengel, A.. Meta-learning for evolutionary parameter optimization of classifiers. *Machine Learning* 2012;87:357–380.
- [41] Reif, M., Shafait, F., Goldstein, M., Breuel, T., Dengel, A.. Automatic classifier selection for non-experts. *Pattern Analysis and Applications* 2014;17(1):83–96.
- [42] Ridd, P., Giraud-Carrier, C.. Using metalearning to predict when parameter optimization is likely to improve classification accuracy. In: Vanschoren, J., Brazdil, P., Soares, C., Kotthoff, L., editors. Meta-learning and Algorithm Selection Workshop at ECAI 2014. 2014. p. 18–23.
- [43] van Rijn, J.N., Pfisterer, F., Thomas, J., Müller, A., Bischl, B., Vanschoren, J.. Meta learning for defaults–symbolic defaults. In: *Neural Information Processing Workshop on Meta-Learning*. 2018. .
- [44] Santafe, G., Inza, I., Lozano, J.. Dealing with the evaluation of supervised classification algorithms. *Artif Intell Rev* 2015;44:467–508.
- [45] Shi, Y., Eberhart, R.C.. Empirical study of particle swarm optimization. In: Proceedings of the 1999 Congress on Evolutionary Computation-CEC99 (Cat. No. 99TH8406). IEEE; volume 3; 1999. p. 1945–1950.
- [46] Simon, D.. *Evolutionary optimization algorithms*. John Wiley & Sons, 2013.
- [47] Snoek, J., Larochelle, H., Adams, R.P.. Practical bayesian optimization of machine learning algorithms. In: Pereira, F., Burges, C., Bottou, L., Weinberger, K., editors. *Advances in Neural Information Processing Systems* 25. Curran

Associates, Inc.; 2012. p. 2951–2959.

- [48] Vanschoren, J., van Rijn, J.N., Bischl, B., Torgo, L.. Openml: Networked science in machine learning. *SIGKDD Explor Newsl* 2014;15(2):49–60.
- [49] Weerts, H.J.P., Mueller, A.C., Vanschoren, J.. Importance of tuning hyperparameters of machine learning algorithms. 2020. [arXiv:2007.07588](https://arxiv.org/abs/2007.07588).
- [50] Wistuba, M., Schilling, N., Schmidt-Thieme, L.. Sequential model-free hyperparameter tuning. In: 2015 IEEE International Conference on Data Mining. 2015. p. 1033–1038. doi:10.1109/ICDM.2015.20.

Appendix A. List of abbreviations used in the paper

AUC Area Under the ROC curve.

AutoML Automated Machine Learning.

BAC Balanced per class Accuracy.

CART Classification and Regression Tree.

CD Critical Difference.

CV Cross-validation.

DL Deep Learning.

DT Decision Tree.

EDA Estimation of Distribution Algorithm.

GA Genetic Algorithm.

GBM Gradient Boosting Machine.

GS Grid Search.

HP hyperparameter.

Irace Iterated F-race.

kNN k-Nearest Neighbors.

LOO-CV Leave-one-out Cross-validation.

MKL-GP Gaussian Process with Multi Kernel Learning.

ML Machine Learning.

MtL Meta-learning.

NN-SMFO Nearest Neighbor Sequential Model-Free Optimization.

OpenML Open Machine Learning.

PSO Particle Swarm Optimization.

RBF Radial Basis Function.

RC-GP Rank Correlation based Gaussian Process.

RF Random Forest.

RS Random Search.

SCoT Surrogate Collaborative Tuning.

SMAC Sequential Model-based Algorithm Configuration.

SMBO Sequential Model-based Optimization.

SVM Support Vector Machine.

UCI University of California Irvine.

Appendix B. List of HP settings generated in the experiments defaults.

Table B.7: HP settings obtained with shared optimization and sample size = 51. Values are represented in \log_2 scale. HP settings with a bullet (\bullet) were obtained by more than one training/test resamplings.

Rank	HP Setting		Fitness	Test set	+
	Cost (C)	Gamma (γ)	Value		
1	-2.192770	5.793062	0.6987194	1	\bullet
2	3.015420	-4.596853	0.6965455	1	
3	8.989739	4.556140	0.6965080	1	\bullet
4	0.000000	-6.600000	0.6944090	1	\bullet
5	12.506273	-6.468016	0.6941373	1	\bullet
6	7.437093	-11.427108	0.6921446	1	
7	-7.069438	-3.597182	0.6920009	1	
8	-6.187812	-6.678751	0.6919634	1	
9	-11.529067	-12.907540	0.6916917	1	\bullet
10	2.185601	12.246234	0.6899332	1	\bullet
11	6.311317	-7.790445	0.6666667	4	
12	11.391777	11.190030	0.6603367	3	\bullet
13	-3.451729	-5.167970	0.6585796	5	\bullet
14	2.597285	-6.316462	0.6585185	3	\bullet
15	2.199790	-9.958442	0.6580640	5	
16	-8.786429	-8.527994	0.6576431	3	\bullet
17	-2.989745	-5.215827	0.6562795	5	
18	2.565695	6.517172	0.6057916	2	
19	4.393857	-1.182761	0.6004798	2	
20	6.967503	5.874307	0.5992790	2	
21	1.751779	-5.436291	0.5981402	2	
22	15.000000	-14.527203	0.5978719	2	
23	7.267743	1.608208	0.5952172	2	

Appendix C. Decision tree model obtained during the experiments

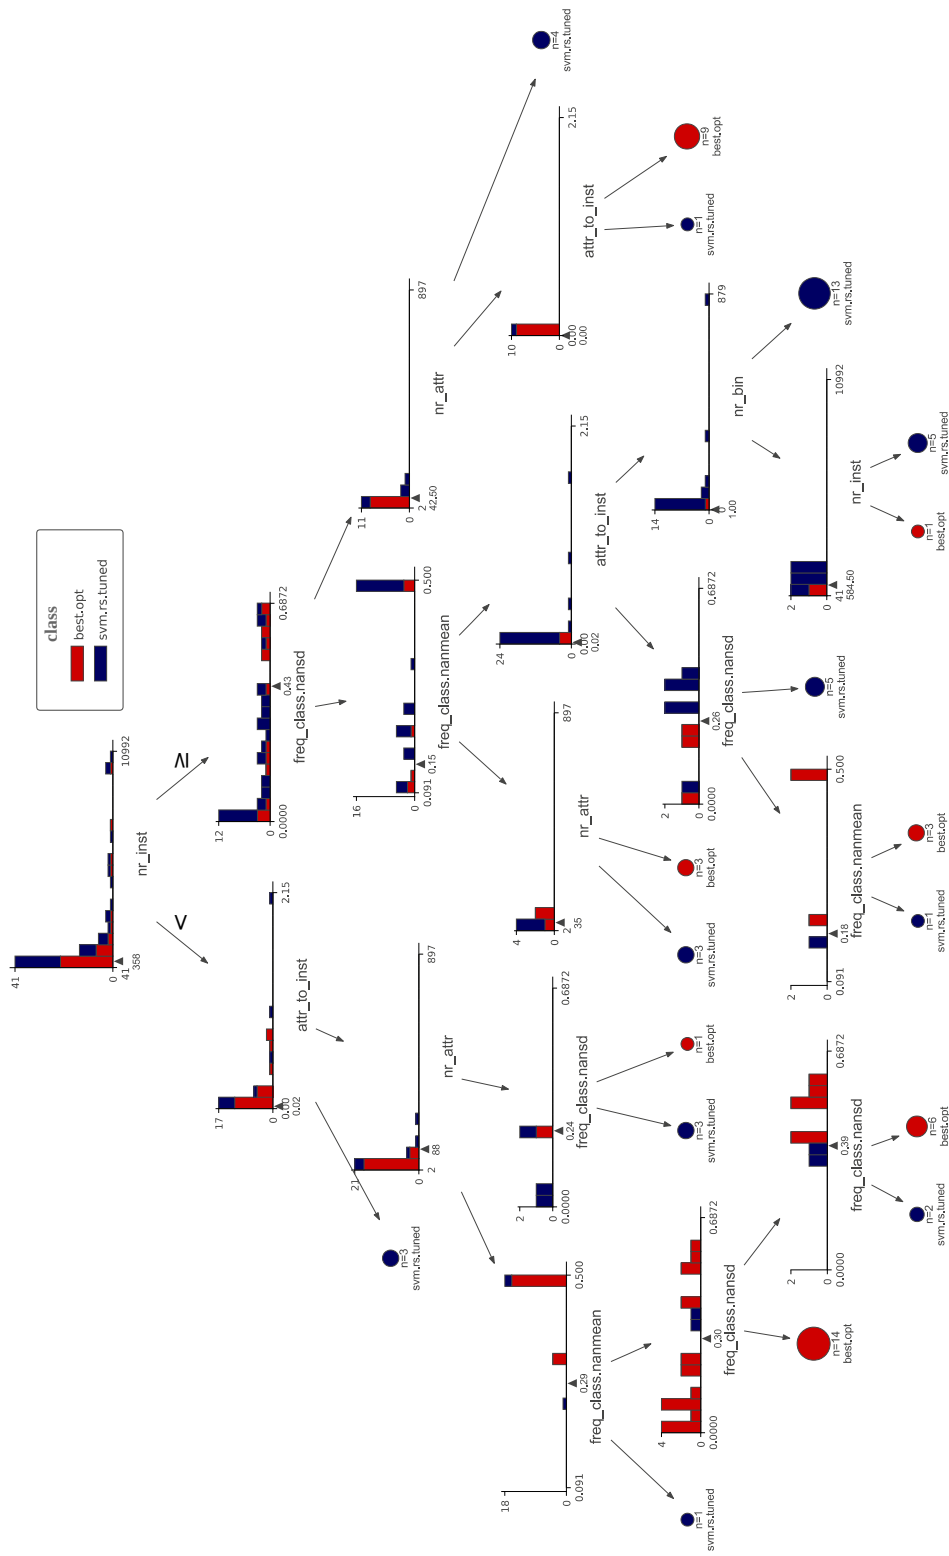


Figure C.14: The decision rules of the best DT model found.