

Nearest Empirical Distribution: An Asymptotically Optimal Algorithm For Supervised Classification of Data Vectors with Independent Non-Identically Distributed Elements

Farzad Shahrivari and Nikola Zlatanov

Abstract

In this paper, we propose a classifier for supervised classification of data vectors with mutually independent but non-identically distributed elements. For the proposed classifier, we derive an upper bound on the error probability and show that the error probability goes to zero as the length of the data vectors grows, even when there is only one training data vector per label available. As a result, the proposed classifier is asymptotically optimal for this type of data vectors. Our numerical examples show that the performance of the proposed classifier outperforms conventional classification algorithms when the number of training data is small and the length of the data vectors is sufficiently high.

Index Terms

Classification, Error probability, Independent but non-identically distribution.

I. INTRODUCTION

Supervised classification is a machine learning technique that maps an input data vector to an output label based on a set of correctly labeled training data. There is no single learning algorithm that works best on all supervised learning problems, see the no free lunch theorem in [1]. As a result, there are many algorithms proposed in the literature whose performance

Farzad Shahrivari and Nikola Zlatanov are with the Department of Electrical and Computer Systems Engineering, Monash University, Melbourne, VIC 3800, Australia. (email: farzad.shahrivari@monash.edu, nikola.zlatanov@monash.edu).

depends on the underlying problem and the amount of available training data. The most widely used algorithms in the literature are decision trees [2], [3], Support Vector Machines (SVM) [4], [5], Rule-Based Systems [6], naive Bayes classifiers [7], k-nearest neighbors (KNN) [8], logistic regressions, and neural networks [9], [10].

The main factor that impacts the accuracy of supervised classification is the amount of training data. In fact, most supervised algorithms are able to learn only if there is a very large set of training data available [11]. The main reason for this is the curse of dimensionality¹ [12], [13], which states “the higher the dimensionality of the data vectors, the more training data is needed for the supervised classifier” [14]. For example, supervised classification methods such as random forest [15], [16] and KNN [17] suffer from the curse of dimensionality. However, having large training data sets is not always possible in practice. As a result, designing a supervised classification algorithm that has good performance even when the training data set is extremely small is very important. Motivated by this, in this paper, we propose a classification algorithm for data vectors with specific statistical properties, which is able to achieve a relatively good performance compared to existing classification algorithms even with one training data vector per label.

In general, we can categorize the statistical properties of the input data vectors into three types. To this end, let $Y^n(X) = [Y_1(X), Y_2(X), \dots, Y_n(X)]$ denote the input data vector to the supervised learning algorithm, where n is the length of the data vector and X is the label to which the data vector $Y^n(X)$ belongs. Now, we can distinguish three types of input data depending on the statistics of the elements in the data vector $Y^n(X)$. The first type of input data vectors is when the elements of $Y^n(X)$ are mutually dependent and non-identically distributed (d.non-i.d.). This type of input data is the most most general data model and the most applicable in practice but it is also the most difficult to tackle analytically. As a result, although there are many supervised learning algorithms for this data model, such as [18]–[27], there is a lack of analytical tight upper bounds on their performance.

The second type of input data is when the elements of $Y^n(X)$ are independent and identically distributed (i.i.d), which is the simplest data model and the least applicable in practice. This model is identical to Hypothesis testing, which has been well investigated in the literature [28]–

¹Curse of dimensionality refers to non-intuitive properties when the length of the data vector (n) is substantially larger than $|\mathcal{X}|$.

[30]. As a result, tight upper bounds on the performance of supervised learning algorithms for this type of data are available in the literature. For instance, the authors in [28] showed that the posterior entropy and the maximum a posterior error probability decay to zero with the length of the data vector at the identical exponential rate, where the maximum achievable exponent is the minimum Chernoff information. In [29], the author determines the requirements for the length of the vector $Y^n(X)$ and the number of labels m in order to achieve vanishing exponential error probability in testing m hypothesis that minimizes the rejection zone (no-match decisions). In [30], the authors provide an upper bound and a lower-bound on the error probability of Bayesian m -ary hypothesis testing in terms of conditional entropy.

The third type of input data is when the elements of $Y^n(X)$ are mutually independent but non-identically distributed (i.non-i.d.). This model is simpler than the case of data vectors with d.non-i.d. elements, but is much more general than the case of data vectors with i.i.d. elements, and therefore, it is much more applicable to the supervised classification problems found in practice. Specifically, this type of input data model is applicable to all cases when the input to the supervised learning algorithms is a feature vector comprised of independent but non-identically distributed features. For example, assume the classification of text from the corpus. The text features such as the total number of words in the documents, average length of the words in the documents, total number of proper case (title) words in the document, frequency distribution of nouns, adverbs, adjectives, and verb counts, etc, are approximately i.non-i.d. Hence, an input vector comprised of these features will have more or less i.non-i.d. elements. Another example is when the input data vectors that need to be classified have d.non-i.d. elements but they first undergo statistical whitening process, such as the independent component analysis [31], whereby the data vector $Y^n(X)$ with dependent elements is transformed into a data vector $\hat{Y}^n(X)$ with independent elements, which is then the input to the classification algorithm. Again, in this example, the elements in $\hat{Y}^n(X)$, which will be the input to the classification algorithm, will have i.non-i.d. elements. Finally, although independence may seem as a generally poor assumption for some classification problems, in practice, the naive Bayes classifier, an algorithm developed based on the independence assumption, often competes very well with more complex classification algorithm in applications such as text classification, system performance management, and medical diagnosis [32]–[34]. Motivated by this, in this paper, we investigate supervised classification of data vectors with i.non-i.d. elements.

In this paper, we propose an algorithm for supervised classification of data vectors with i.non-

i.i.d. elements when the number of training data vectors per label is T , where $T = 1, 2, \dots$. Next, we derive an upper bound on the error probability of the proposed classifier for uniformly distributed labels and prove that the error probability exponentially decays to zero when the length of the data vector, n , grows, even when only one training vector per label is available, i.e., when $T = 1$. Hence, the proposed classification algorithm provides an asymptotically optimal performance even when the number of training vectors per label is minimal. The proposed algorithm is a form of the nearest neighbour classification algorithm, where the nearest neighbour is searched in the domain of empirical distributions. As a result, we refer to the algorithm as *the nearest empirical distribution*. To the best of our knowledge, the nearest empirical distribution algorithm was first proposed in [35], where a corresponding upper bound on its performance was derived, but only for the case when the elements of $Y^n(X)$ are i.i.d. To the best of our knowledge, an analytical upper bound on the error probability of the nearest empirical distribution algorithm for the case when the elements of $Y^n(X)$ are i.non-i.d has not been derived in the literature yet. We fill in this gap in the literature.

We compare the performance of the proposed classifier with the naive Bayes classifier and to the KNN algorithm. Our numerical results show that the proposed classifier significantly outperforms the naive Bayes classifier and the KNN algorithm for both i.i.d. and i.non-i.d. vector elements, when the number of training data vectors per label is small and the length of the data vectors n is sufficiently high.

The remainder of this paper is structured as follows. In Section II, we formulate the considered classification problem. In Section III, we provide our classifier and derive an upper bound on the error probability of the proposed classifier. In Section IV, we provide numerical examples of the performance of the proposed classifier. Finally, section V concludes the paper.

II. PROBLEM FORMULATION

The machine learning model is comprised of a label² X , a data vector $Y^n(X) = [Y_1(X), Y_2(X), \dots, Y_n(X)]$ of length n mapped to the label X , and a detected label \hat{X} , as shown in Fig. 1. The data vector $Y^n(X)$ is the input to the machine learning algorithm whose aim is to detect the label X from the observed data vector $Y^n(X)$. The performance of the machine learning algorithm is measured by the error probability $\mathbb{P}_e = \Pr\{X \neq \hat{X}\}$.

²In this paper, we adopt the information-theoretic style of notations and thereby random variables are denoted by capital letters and their realizations are denoted with small letters.

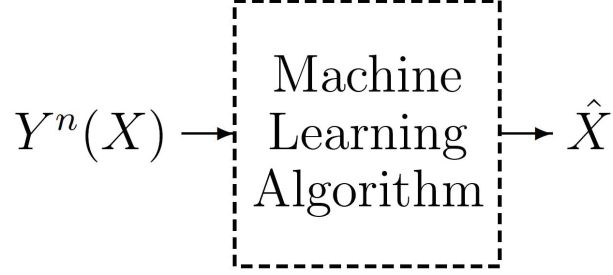


Fig. 1: A typical structural modelling of the machine learning problem.

We adopt the modelling in [36]–[38] and represent the dependency between the label X and the data vector $Y^n(X)$ via a conditional probability function $p_{Y^n|X}(y^n|x)$. As a result, the machine learning model can be represented equivalently as a system comprised of an input X , a data vector generator modelled by the conditional probability function $p_{Y^n|X}(y^n|x)$, a data vector Y^n , a classifier that aims to detect X from the observed vector Y^n , and the detected label \hat{X} , as shown³ in Fig. 2. In this classification model, we assume that the label X can take values from the set \mathcal{X} , according to $p_X(x) = \frac{1}{|\mathcal{X}|}$, where $|\cdot|$ denotes the cardinality of a set. Next, we assume that the i -th element of the data vector Y^n , Y_i , for $i = 1, 2, \dots, n$, takes values from the set $\mathcal{Y} = \{y_1, y_2, \dots, y_{|\mathcal{Y}|}\}$, according to the conditional probability function $p_{Y_i|X}(y_i|x)$. Moreover, we assume that the elements of the data vector Y^n are i.non-i.d. As a result, the data vector Y^n takes values from the set \mathcal{Y}^n according to the conditional probability function $p_{Y^n|X}(y^n|x)$ given by

$$\begin{aligned}
 p_{Y^n|X}(y^n|x) &= p_{Y_1, Y_2, \dots, Y_n|X}(y_1, y_2, \dots, y_n|x) \\
 &\stackrel{(a)}{=} \prod_{i=1}^n p_{Y_i|X}(y_i|x) \\
 &\stackrel{(b)}{=} \prod_{i=1}^n p_i(y_i|x), \tag{1}
 \end{aligned}$$

where (a) comes from the fact that elements in the data vector Y^n are mutually independent and (b) is for the sake of notational simplicity, where p_i is used instead of $p_{Y_i|X}$. As a result of (1), the considered classification model in Fig. 2 can be represented equivalently as in Fig. 3.

³Note that the system model in Fig. 2 can be seen equivalently as a communication system comprised of a channel with input X and output Y^n and a decoder (i.e., detector) that aims to detect X from Y^n . The notation used in this paper, letter X for labels and letter Y for features, is based on the notation used in information theory for modelling communication systems.

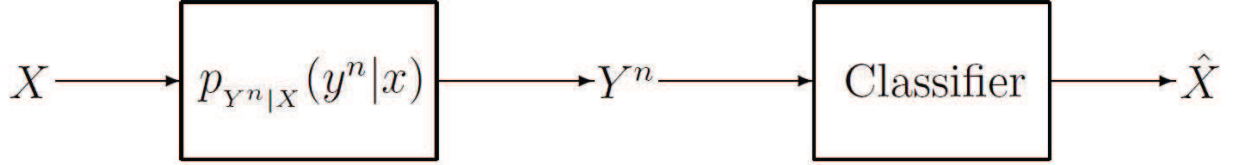


Fig. 2: An alternative modeling of the machine learning problem.

Next, we assume that $p_i(y_i|x)$, $\forall i$, and thereby $p_{Y^n|X}(y^n|x)$, are unknown to the classifier. Instead, the classifier knows \mathcal{X} , \mathcal{Y} , and for each $x_i \in \mathcal{X}$, where $i = 1, 2, \dots, |\mathcal{X}|$, it has access to a finite set of T correctly labelled input-output pairs $(x_i, \hat{y}_{i_1}^n), (x_i, \hat{y}_{i_2}^n), \dots, (x_i, \hat{y}_{i_T}^n)$, denoted by \mathcal{T}_i , referred to as the training set for label x_i .

For the classification system model defined above, we wish to propose a classifier that exhibits an asymptotically optimal error probability $\mathbb{P}_e = \Pr\{X \neq \hat{X}\}$ with respect to the length of Y^n , n , for any $T \geq 1$, i.e., for any $T \geq 1$, $\mathbb{P}_e \rightarrow 0$ as $n \rightarrow \infty$. Moreover, we wish to obtain an analytical upper bound on the error performance of the proposed classifier for a given T and n .

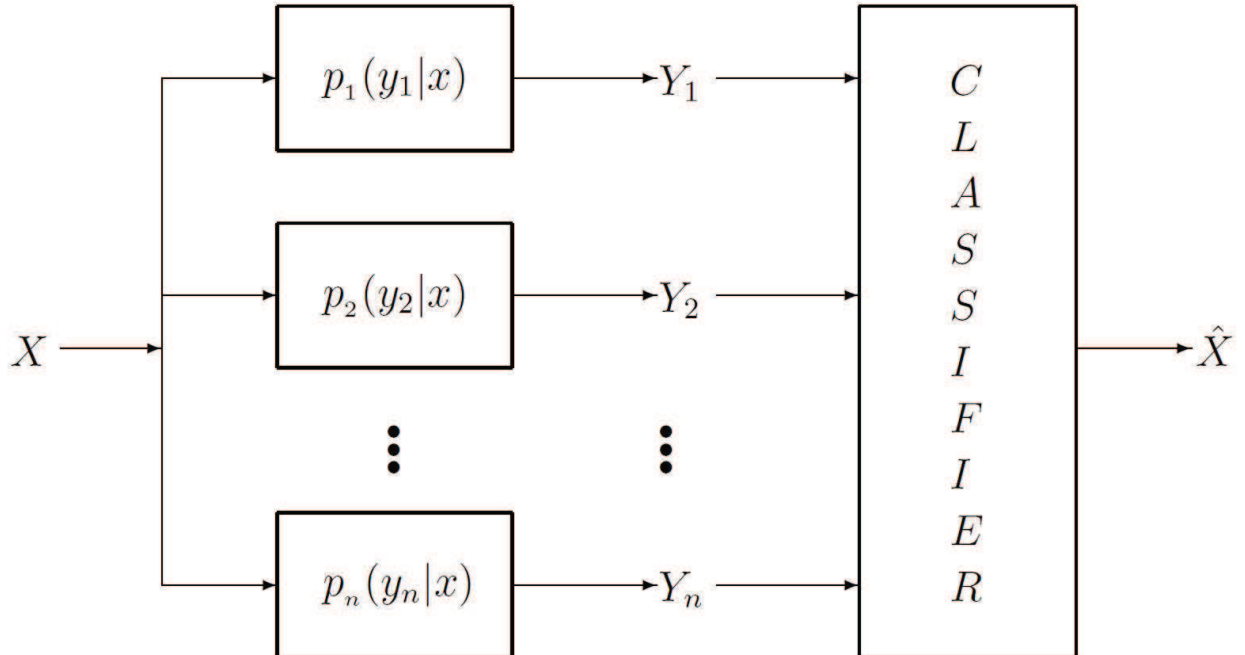


Fig. 3: An alternative modelling of the machine learning problem when the elements of $Y^n(X)$ are mutually independent but non-identically distributed (i.non-i.d.).

III. THE PROPOSED CLASSIFIER AND ITS PERFORMANCE

In this section, we propose our classifier, derive an upper bound on its error probability, and prove it is asymptotically optimality with respect to the length of the data vector Y^n , n . To this end, for a given data vector $y^k = (y_1, y_2, \dots, y_k)$, let $\mathcal{I}[y^k = y]$ be a function defined as

$$\mathcal{I}[y^k = y] = \sum_{i=1}^k \mathcal{Z}[y_i = y], \quad (2)$$

where $\mathcal{Z}[y_i = y]$ is an indicator function assuming the value 1 if $y_i = y$ and 0 otherwise. Hence, $\mathcal{I}[y^k = y]$ counts the number of elements in Y^k that have the value y . Moreover, let $\|\cdot\|_r$ represent norm r .

A. The Proposed Classifier

Let \hat{y}_i^{nT} be a vector obtained by concatenating all training data vectors for the input label x_i as

$$\hat{y}_i^{nT} = (\hat{y}_{i_1}^n, \hat{y}_{i_2}^n, \dots, \hat{y}_{i_T}^n). \quad (3)$$

Let $P_{\hat{y}_i^{nT}}$ be the empirical probability function of the concatenated training data vector for label x_i , \hat{y}_i^{nT} , given by

$$P_{\hat{y}_i^{nT}} = \left[\frac{\mathcal{I}[\hat{y}_i^{nT} = y_1]}{nT}, \frac{\mathcal{I}[\hat{y}_i^{nT} = y_2]}{nT}, \dots, \frac{\mathcal{I}[\hat{y}_i^{nT} = y_{|\mathcal{Y}|}]}{nT} \right]. \quad (4)$$

Let y^n be the observed data vector whose label we want to detect and let P_{y^n} denote the empirical probability function of y^n , given by

$$P_{y^n} = \left[\frac{\mathcal{I}[y^n = y_1]}{n}, \frac{\mathcal{I}[y^n = y_2]}{n}, \dots, \frac{\mathcal{I}[y^n = y_{|\mathcal{Y}|}]}{n} \right]. \quad (5)$$

Using the above notations, we propose the following classifier.

Proposition 1. *For the considered system model, we propose a classifier with the following classification rule*

$$\hat{x} = \arg \min_{x_i} \|P_{y^n} - P_{\hat{y}_i^{nT}}\|_r, \quad (6)$$

where $r \geq 1$ and ties are resolved by assigning the label among the ties uniformly at random.

As seen from (6), the proposed classifier assigns the label x_i if the empirical probability function of the concatenated training data vector mapped to label x_i , $P_{\hat{y}_i^{nT}}$, is the closest, in

terms of Minkowski distance r , to the empirical probability function of the observed data vector P_{y^n} . In that sense, the propose classifier can be considered as the nearest empirical distribution classifier.

B. Upper Bound On The Error Probability

The following theorem establishes an upper bound on the error probability of the proposed classifier.

Theorem 1. Let \bar{P}_j , for $j = 1, 2, \dots, |\mathcal{X}|$, be a vector defined as

$$\bar{P}_j = \left[\bar{p}(y_1|x_j), \bar{p}(y_2|x_j), \dots, \bar{p}(y_{|\mathcal{Y}}|x_j) \right], \quad (7)$$

where $\bar{p}(y|x_j)$ is given by

$$\bar{p}(y|x_j) = \frac{1}{n} \sum_{k=1}^n p_k(y|x_j). \quad (8)$$

Then, for a given $r \geq 1$, the error probability of the proposed classifier is upper bounded as

$$\mathbb{P}_e \leq 2|\mathcal{Y}|e^{-2n\epsilon^2} + 2|\mathcal{Y}|e^{-2nT^{1/3}\epsilon^2}, \quad (9)$$

where ϵ is given by

$$\epsilon = \min_{\substack{i,j \\ i \neq j}} \frac{\|P_{y_i^n} - \bar{P}_j\|_r}{(2 + T^{-1/3})|\mathcal{Y}|^{1/r}}. \quad (10)$$

Proof. We start the proof by introducing the following well-known theorem from [39].

Theorem 2 (Hoeffding's inequality [39]). Let W_1, W_2, \dots, W_n be n independent random variables such that for each $1 \leq i \leq n$, we have $\Pr\{W_i \in [a_i, b_i]\} = 1$. Then for S_n , defined as $S_n = \sum_{i=1}^n W_i$, we have

$$\Pr\{S_n - \mathbb{E}[S_n] \geq \delta\} \leq \exp\left(-\frac{2\delta^2}{\sum_{i=1}^n (b_i - a_i)^2}\right), \quad (11)$$

where $\mathbb{E}[S_n]$ is the expectation of S_n .

Proof. Please refer to [39]. □

Now, we introduce a new variable \bar{S} , defined as $\bar{S} = \frac{1}{n} \sum W_i$, and then use Theorem 2 to obtain the following upper bound

$$\begin{aligned} \Pr\left\{|\bar{S} - \mathbb{E}[\bar{S}]| \geq \delta\right\} &= \Pr\left\{\bar{S} - \mathbb{E}[\bar{S}] \geq \delta\right\} + \Pr\left\{-\bar{S} + \mathbb{E}[\bar{S}] \geq \delta\right\} \\ &\leq 2 \exp\left(-\frac{2n^2\delta^2}{\sum_{i=1}^n (b_i - a_i)^2}\right). \end{aligned} \quad (12)$$

Next, we introduce another well-known Hoeffding's Theorem from [40].

Theorem 3 (Hoeffding [40]). *Assume that Z_1, Z_2, \dots, Z_n are n independent Bernoulli random variables with probabilities of success p_1, p_2, \dots, p_n , respectively. Next, let Z be defined as $Z = Z_1 + Z_2 + \dots + Z_n$ and, let \bar{p} be defined as $\bar{p} = (p_1 + p_2 + \dots + p_n)/n$. Let W be a binomial random variable with parameters (n, \bar{p}) . Then, for a given a and b , where $0 \leq a \leq n\bar{p} \leq b \leq n$ holds, we have*

$$\Pr\{a \leq W \leq b\} \leq \Pr\{a \leq Z \leq b\}. \quad (13)$$

In other words, the probability function of W is more dispersed around its mean $n\bar{p}$ than is the probability function of Z . Except in the trivial case when $a = b = 0$, the bound in (13) holds with equality if and only if $p_1 = \dots = p_n = \bar{p}$.

Proof. Please refer to [40]. □

Setting $a = n(\bar{p} - \delta)$ and $b = n(\bar{p} + \delta)$ in (13), we obtain

$$\Pr\{n(\bar{p} - \delta) \leq W \leq n(\bar{p} + \delta)\} \leq \Pr\{n(\bar{p} - \delta) \leq Z \leq n(\bar{p} + \delta)\}. \quad (14)$$

Using (14), we have the following upper bound

$$\begin{aligned} \Pr\left\{\left|\frac{Z}{n} - \bar{p}\right| > \delta\right\} &= 1 - \Pr\{n(\bar{p} - \delta) \leq Z \leq n(\bar{p} + \delta)\} \\ &\stackrel{(a)}{\leq} 1 - \Pr\{n(\bar{p} - \delta) \leq W \leq n(\bar{p} + \delta)\} \\ &= \Pr\left\{\left|\frac{W}{n} - \bar{p}\right| > \delta\right\}, \end{aligned} \quad (15)$$

where (a) follows from (14).

We now turn to the proof of Theorem 1. Without loss of generality we assume that x_1 is the input to $p_{Y^n|X}(y^n|x)$ and y^n is observed.

Let \mathcal{A}_k^ϵ , for $1 \leq k \leq |\mathcal{Y}|$, be a set defined as

$$\mathcal{A}_k^\epsilon = \left\{y^n : \left|\frac{\mathcal{I}[y^n = y_k]}{n} - \bar{p}(y_k|x_1)\right| \leq \epsilon\right\}. \quad (16)$$

Also, let \mathcal{B}_k^ϵ , for $1 \leq k \leq |\mathcal{Y}|$, be a set defined as

$$\mathcal{B}_k^\epsilon = \left\{ \hat{y}^{nT} : \left| \frac{\mathcal{I}[\hat{y}^{nT} = y_k]}{nT} - \bar{p}(y_k|x_1) \right| \leq \frac{\epsilon}{\sqrt[3]{T}} \right\}. \quad (17)$$

Let $\mathcal{A}^\epsilon = \bigcap_{k=1}^{|\mathcal{Y}|} \mathcal{A}_k^\epsilon$ and $\mathcal{B}^\epsilon = \bigcap_{k=1}^{|\mathcal{Y}|} \mathcal{B}_k^\epsilon$. Now, for any $y^n \in \mathcal{A}^\epsilon$, we have

$$\left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[y^n = y_k]}{n} - \bar{p}(y_k|x_1) \right|^r \right)^{1/r} \stackrel{(a)}{\leq} \left(\sum_{k=1}^{|\mathcal{Y}|} \epsilon^r \right)^{1/r}, \quad (18)$$

where (a) follows from (16). Moreover, for $\hat{y}_1^{nT} \in \mathcal{B}^\epsilon$, we have

$$\left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[\hat{y}_1^{nT} = y_k]}{nT} - \bar{p}(y_k|x_1) \right|^r \right)^{1/r} \stackrel{(a)}{\leq} \left(\sum_{k=1}^{|\mathcal{Y}|} \left(\frac{\epsilon}{\sqrt[3]{T}} \right)^r \right)^{1/r}, \quad (19)$$

where (a) follows from (17). Next, we have the following upper bound

$$\begin{aligned} & \left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[y^n = y_k]}{n} - \frac{\mathcal{I}[\hat{y}_1^{nT} = y_k]}{nT} \right|^r \right)^{1/r} \\ &= \left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[y^n = y_k]}{n} - \bar{p}(y_k|x_1) - \left(\frac{\mathcal{I}[\hat{y}_1^{nT} = y_k]}{nT} - \bar{p}(y_k|x_1) \right) \right|^r \right)^{1/r} \\ &\stackrel{(a)}{\leq} \left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[y^n = y_k]}{n} - \bar{p}(y_k|x_1) \right|^r \right)^{1/r} + \left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[\hat{y}_1^{nT} = y_k]}{nT} - \bar{p}(y_k|x_1) \right|^r \right)^{1/r}, \end{aligned} \quad (20)$$

where (a) follows from the Minkowski inequality. Combining (18), (19), and (20), we obtain

$$\left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[y^n = y_k]}{n} - \frac{\mathcal{I}[\hat{y}_1^{nT} = y_k]}{nT} \right|^r \right)^{1/r} \leq |\mathcal{Y}|^{1/r} \epsilon + |\mathcal{Y}|^{1/r} \frac{\epsilon}{\sqrt[3]{T}}. \quad (21)$$

Hence, the Minkowski distance between the empirical probability function of the observed vector y^n and the empirical probability function of the concatenated training vector for label x_1 is upper bounded by the right hand side of (21). We now derive a lower bound. For any x_i , such that $i \neq 1$, we have

$$\begin{aligned} & \left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[y^n = y_k]}{n} - \frac{\mathcal{I}[\hat{y}_i^{nT} = y_k]}{nT} \right|^r \right)^{1/r} + \left(\sum_{k=1}^{|\mathcal{Y}|} \epsilon^r \right)^{1/r} \\ &\stackrel{(a)}{\geq} \left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[y^n = y_k]}{n} - \frac{\mathcal{I}[\hat{y}_i^{nT} = y_k]}{nT} \right|^r \right)^{1/r} + \left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[y^n = y_k]}{n} - \bar{p}(y_k|x_1) \right|^r \right)^{1/r} \\ &\stackrel{(b)}{\geq} \left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[\hat{y}_i^{nT} = y_k]}{nT} - \bar{p}(y_k|x_1) \right|^r \right)^{1/r}, \end{aligned} \quad (22)$$

where (a) follows from (18) and (b) is again due to the Minkowski inequality. The expression in (22), can be written equivalently as

$$\begin{aligned} & \left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[y^n = y_k]}{n} - \frac{\mathcal{I}[\hat{y}_i^{nT} = y_k]}{nT} \right|^r \right)^{1/r} \\ & \geq \left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[\hat{y}_i^{nT} = y_k]}{nT} - \bar{p}(y_k|x_1) \right|^r \right)^{1/r} - |\mathcal{Y}|^{1/r}\epsilon, \end{aligned} \quad (23)$$

where $i \neq 1$. Now, using the definitions of $P_{\hat{y}_i^{nT}}$ and \bar{P}_1 given by (4) and (7), respectively, into (23) we can replace the expression in the right-hand side of (23) by $\|P_{\hat{y}_i^{nT}} - \bar{P}_1\|_r$, and thereby for any $i \neq 1$ we have

$$\left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[y^n = y_k]}{n} - \frac{\mathcal{I}[\hat{y}_i^{nT} = y_k]}{nT} \right|^r \right)^{1/r} \geq \|P_{\hat{y}_i^{nT}} - \bar{P}_1\|_r - |\mathcal{Y}|^{1/r}\epsilon. \quad (24)$$

The expression in (24) represents a lower bound on the Minkowski r distance between the empirical probability function of the observed vector y^n and the empirical probability function of the concatenated training vector for any label x_i , where $i \neq 1$.

Using the bounds in (21) and (24), we now relate the left-hand sides of (21) and (24). As long as the following inequality holds for each $i \neq 1$,

$$|\mathcal{Y}|^{1/r}\epsilon \left(1 + \frac{1}{\sqrt[3]{T}} \right) < \|P_{\hat{y}_i^{nT}} - \bar{P}_1\|_r - |\mathcal{Y}|^{1/r}\epsilon, \quad (25)$$

which is equivalent to the following for $i \neq 1$

$$\epsilon < \frac{\|P_{\hat{y}_i^{nT}} - \bar{P}_1\|_r}{(2 + T^{-1/3})|\mathcal{Y}|^{1/r}}, \quad (26)$$

we have the following for $i \neq 1$

$$\begin{aligned} & \left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[y^n = y_k]}{n} - \frac{\mathcal{I}[\hat{y}_1^{nT} = y_k]}{nT} \right|^r \right)^{1/r} \stackrel{(a)}{\leq} |\mathcal{Y}|^{1/r}\epsilon \left(1 + \frac{1}{\sqrt[3]{T}} \right) \\ & \stackrel{(b)}{<} \|P_{\hat{y}_i^{nT}} - \bar{P}_1\|_r - |\mathcal{Y}|^{1/r}\epsilon \\ & \stackrel{(c)}{\leq} \left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[y^n = y_k]}{n} - \frac{\mathcal{I}[\hat{y}_i^{nT} = y_k]}{nT} \right|^r \right)^{1/r}, \end{aligned} \quad (27)$$

where (a), (b), and (c) follow from (21), (25), and (24), respectively. Thereby, from (27), we have the following for $i \neq 1$

$$\left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[y^n = y_k]}{n} - \frac{\mathcal{I}[\hat{y}_1^{nT} = y_k]}{nT} \right|^r \right)^{1/r} \leq \left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[y^n = y_k]}{n} - \frac{\mathcal{I}[\hat{y}_i^{nT} = y_k]}{nT} \right|^r \right)^{1/r}, \quad (28)$$

which, can be written equivalently as

$$\|P_{y^n} - P_{\hat{y}_1^{nT}}\|_r < \|P_{y^n} - P_{\hat{y}_i^{nT}}\|_r, \quad (29)$$

where the right- and left-hand sides of (28) are replaced by $\|P_{y^n} - P_{\hat{y}_1^{nT}}\|_r$ and $\|P_{y^n} - P_{\hat{y}_i^{nT}}\|_r$, respectively, and where P_{y^n} and $P_{\hat{y}_i^{nT}}$ given by (5) and (4), respectively. Now, let us highlight what we have obtained. We obtained that if there is an ϵ for which (26) holds for $i \neq 1$, and for that ϵ there are sets \mathcal{A}^ϵ and \mathcal{B}^ϵ for which $y^n \in \mathcal{A}^\epsilon$ and $\hat{y}_1^{nT} \in \mathcal{B}^\epsilon$ then (29) holds for $i \neq 1$, and thereby our classifier will detect that x_1 is the correct label. Using this we can upper bound the error probability as

$$\begin{aligned} \mathbb{P}_e &= 1 - \Pr\{\hat{x}_1 = x_1\} \\ &\leq 1 - \Pr\left\{(y^n \in \mathcal{A}^\epsilon) \cap (\hat{y}_1^{nT} \in \mathcal{B}^\epsilon) \mid \epsilon \in \mathcal{S}\right\}, \end{aligned} \quad (30)$$

where \mathcal{S} is a set defined as

$$\mathcal{S} = \left\{ \epsilon : \epsilon \leq \min_{\substack{i \\ i \neq 1}} \frac{\|P_{\hat{y}_i^{nT}} - \bar{P}_1\|_r}{(2 + T^{-1/3})|\mathcal{Y}|^{1/r}} \right\}. \quad (31)$$

In the following, we derive the expression in (30). The right-hand side of (30) can be upper bounded as

$$\begin{aligned} 1 - \Pr\left\{(y^n \in \mathcal{A}^\epsilon) \cap (\hat{y}_1^{nT} \in \mathcal{B}^\epsilon) \mid \epsilon \in \mathcal{S}\right\} &= \Pr\left\{(y^n \notin \mathcal{A}^\epsilon) \cup (\hat{y}_1^{nT} \notin \mathcal{B}^\epsilon) \mid \epsilon \in \mathcal{S}\right\} \\ &\stackrel{(a)}{\leq} \Pr\{y^n \notin \mathcal{A}^\epsilon \mid \epsilon \in \mathcal{S}\} + \Pr\{\hat{y}_1^{nT} \notin \mathcal{B}^\epsilon \mid \epsilon \in \mathcal{S}\}, \end{aligned} \quad (32)$$

where (a) follows from Boole's inequality. Now, note that we have the following upper bound for the first expression in the right-hand side of (32)

$$\begin{aligned} \Pr\{y^n \notin \mathcal{A}^\epsilon \mid \epsilon \in \mathcal{S}\} &= \Pr\left\{y^n \notin \bigcap_{k=1}^{|\mathcal{Y}|} \mathcal{A}_k^\epsilon \mid \epsilon \in \mathcal{S}\right\} \\ &= \Pr\left\{y^n \in \bigcup_{k=1}^{|\mathcal{Y}|} \bar{\mathcal{A}}_k^\epsilon \mid \epsilon \in \mathcal{S}\right\} \\ &\stackrel{(a)}{\leq} \sum_{k=1}^{|\mathcal{Y}|} \Pr\{y^n \in \bar{\mathcal{A}}_k^\epsilon \mid \epsilon \in \mathcal{S}\} \\ &= \sum_{k=1}^{|\mathcal{Y}|} \Pr\left\{\left|\frac{\mathcal{I}[y^n = y_k]}{n} - \bar{p}(y_k|x_1)\right| > \epsilon \mid \epsilon \in \mathcal{S}\right\} \\ &= \sum_{k=1}^{|\mathcal{Y}|} \Pr\left\{\left|\sum_{j=1}^n \frac{\mathcal{Z}[y_j = y_k]}{n} - \bar{p}(y_k|x_1)\right| > \epsilon \mid \epsilon \in \mathcal{S}\right\}, \end{aligned} \quad (33)$$

where $\overline{\mathcal{A}}_k^\epsilon$ is the complement of \mathcal{A}_k^ϵ and (a) follows from Boole's inequality. Note that $\mathcal{Z}[y_1 = y_k], \mathcal{Z}[y_2 = y_k], \dots, \mathcal{Z}[y_n = y_k]$ in (33) are n independent Bernoulli random variables with probabilities of success $p_1(y_k|x_1), p_2(y_k|x_1), \dots, p_n(y_k|x_1)$, respectively. Let $\mathcal{W}[y_k]$ be a binomial random variable with parameters $(n, \bar{p}(y_k|x_1))$. According to Theorem 3, the probability function of $\mathcal{W}[y_k]$ is more dispersed around its mean $n\bar{p}(y_k|x_1)$ than is the probability function of $\sum_{1 \leq j \leq n} \mathcal{Z}[y_j = y_k]$. Therefore, we can upper bound the probability in the last line of (33) as

$$\begin{aligned} \Pr \left\{ \left| \sum_{j=1}^n \frac{\mathcal{Z}[y_j = y_k]}{n} - \bar{p}(y_k|x_1) \right| > \epsilon \mid \epsilon \in \mathcal{S} \right\} &\stackrel{(a)}{\leq} \Pr \left\{ \left| \frac{\mathcal{W}[y_k]}{n} - \bar{p}(y_k|x_1) \right| > \epsilon \mid \epsilon \in \mathcal{S} \right\} \\ &\stackrel{(b)}{\leq} 2 \exp \left(- \frac{2n^2\epsilon^2}{\sum_{1 \leq i \leq n} (1-0)^2} \right) \\ &\leq 2e^{-2n\epsilon^2}, \end{aligned} \quad (34)$$

where $\epsilon \in \mathcal{S}$, defined in (31), (a) follows from (15), and (b) is the result of (12) for $a_i = 0$ and $b_i = 1$ since the binomial random variable $\mathcal{W}[y_k]$ can take values 0 or 1, respectively. Inserting (34) into (33), we obtain the following upper bound

$$\Pr \{ y^n \notin \mathcal{A}^\epsilon \mid \epsilon \in \mathcal{S} \} \leq 2|\mathcal{Y}|e^{-2n\epsilon^2}. \quad (35)$$

Similarly, we have the following result for the second expression in the right-hand side of (32)

$$\begin{aligned} \Pr \left\{ \hat{y}_1^{nT} \notin \mathcal{B}^\epsilon \mid \epsilon \in \mathcal{S} \right\} &= \Pr \left\{ \hat{y}_1^{nT} \notin \bigcap_{k=1}^{|\mathcal{Y}|} \mathcal{B}_k^\epsilon \mid \epsilon \in \mathcal{S} \right\} \\ &= \Pr \left\{ \hat{y}_1^{nT} \in \bigcup_{k=1}^{|\mathcal{Y}|} \overline{\mathcal{B}}_k^\epsilon \mid \epsilon \in \mathcal{S} \right\} \\ &\stackrel{(a)}{\leq} \sum_{k=1}^{|\mathcal{Y}|} \Pr \left\{ \hat{y}_1^{nT} \in \overline{\mathcal{B}}_k^\epsilon \mid \epsilon \in \mathcal{S} \right\} \\ &= \sum_{k=1}^{|\mathcal{Y}|} \Pr \left\{ \left| \frac{\mathcal{I}[\hat{y}_1^{nT} = y_k]}{nT} - \bar{p}(y_k|x_1) \right| > \frac{\epsilon}{\sqrt[3]{T}} \mid \epsilon \in \mathcal{S} \right\} \\ &= \sum_{k=1}^{|\mathcal{Y}|} \Pr \left\{ \left| \sum_{j=1}^{nT} \frac{\mathcal{Z}[y_j = y_k]}{nT} - \bar{p}(y_k|x_1) \right| > \frac{\epsilon}{\sqrt[3]{T}} \mid \epsilon \in \mathcal{S} \right\}, \end{aligned} \quad (36)$$

where again (a) follows from Boole's inequality. Note that due to (3), for any integer number l such that $0 \leq l \leq T-1$ the random variables $\mathcal{Z}[y_{nl+1} = y_k], \mathcal{Z}[y_{nl+2} = y_k], \dots$, and $\mathcal{Z}[y_{nl+n} = y_k]$ in (36) are n independent Bernoulli random variables with the probabilities of

success $p_1(y_k|x_1), p_2(y_k|x_1), \dots$, and $p_n(y_k|x_1)$, respectively ($y_{nl+1}, y_{nl+2}, \dots, y_{nl+n}$ are elements of \hat{y}_{l+1}^n). Also, note that

$$\begin{aligned}\bar{p}(y_k|x_1) &= \frac{1}{n} \sum_{j=1}^n p_j(y_k|x_1) \\ &= \frac{1}{nT} \left(\sum_{l=0}^{T-1} \sum_{j=1}^n p_j(y_k|x_1) \right).\end{aligned}\quad (37)$$

Notice that for each $0 \leq l \leq T-1$, $p_1(y_k|x_1) + p_2(y_k|x_1) + \dots + p_n(y_k|x_1)$ is the summation of the probabilities of success of the random variables $\mathcal{Z}[y_{nl+1} = y_k], \mathcal{Z}[y_{nl+2} = y_k], \dots$, and $\mathcal{Z}[y_{nl+n} = y_k]$. Thereby, the last expression in right-hand side of (37) is the average probability of success of random variables $\mathcal{Z}[y_j = y_k]$ for $1 \leq j \leq nT$. Now, let $\mathcal{W}[y_k]$ be a binomial random variable with parameters $(nT, \bar{p}(y_k|x_1))$. Once again, according to Theorem 3, the probability function of $\mathcal{W}[y_k]$ is more dispersed around its mean $nT\bar{p}(y_k|x_1)$ than is the probability function of $\sum_{1 \leq j \leq nT} \mathcal{Z}[y_j = y_k]$. Therefore, the probability in the last line of (36) can be upper bounded as

$$\begin{aligned}\Pr \left\{ \left| \sum_{j=1}^{nT} \frac{\mathcal{Z}[y_j = y_k]}{nT} - \bar{p}(y_k|x_1) \right| > \frac{\epsilon}{\sqrt[3]{T}} \mid \epsilon \in \mathcal{S} \right\} &\stackrel{(a)}{\leq} \Pr \left\{ \left| \frac{\mathcal{W}[y_k]}{nT} - \bar{p}(y_k|x_1) \right| > \frac{\epsilon}{\sqrt[3]{T}} \mid \epsilon \in \mathcal{S} \right\} \\ &\stackrel{(b)}{\leq} 2 \exp \left(- \frac{2(nT)^2 (T^{-1/3}\epsilon)^2}{\sum_{1 \leq i \leq nT} (1-0)^2} \right) \\ &\leq 2e^{-2nT(T^{-2/3}\epsilon^2)} \\ &= 2e^{-2nT^{1/3}\epsilon^2},\end{aligned}\quad (38)$$

where $\epsilon \in \mathcal{S}$, defined in (31), (a) follows from (15) (in which n is replaced by nT), and (b) is the result of (12) for $a_i = 0$ and $b_i = 1$ since the binomial random variable $\mathcal{W}[y_k]$ can take values 0 or 1, respectively. Inserting (38) into (36), we have the following upper bound

$$\Pr \left\{ \hat{y}_1^{nT} \notin \mathcal{B}^\epsilon \mid \epsilon \in \mathcal{S} \right\} \leq 2|\mathcal{Y}|e^{-2nT^{1/3}\epsilon^2}.\quad (39)$$

Inserting (35) and (39) into (32), and then inserting (32) into (30), we obtain the following upper bound for the error probability

$$\mathbb{P}_e \leq 2|\mathcal{Y}|e^{-2n\epsilon^2} + 2|\mathcal{Y}|e^{-2nT^{1/3}\epsilon^2},\quad (40)$$

where

$$\epsilon = \min_{\substack{i,j \\ i \neq j}} \frac{\|P_{\hat{y}_i^{nT}} - \bar{P}_j\|_r}{(2 + T^{-1/3})|\mathcal{Y}|^{1/r}},\quad (41)$$

which is the optimal value of ϵ that exhibits the tightest upper bound for the error probability \mathbb{P}_e given by (40). This completes the proof of Theorem 1. \square

The following corollary provides a simplified upper bound on the error probability when $T \rightarrow \infty$.

Corollary 1. *When the number of training vectors per label goes to infinity, i.e., when $T \rightarrow \infty$, which is equivalently to the case when the probability function $p(y^n|x)$ is known at the classifier, the error probability of the proposed classifier is upper bounded as*

$$\mathbb{P}_e \leq 2|\mathcal{Y}|e^{-2n\epsilon^2}, \quad (42)$$

where ϵ is given by

$$\epsilon = \min_{\substack{i,j \\ i \neq j}} \frac{\|\bar{P}_i - \bar{P}_j\|_r}{2|\mathcal{Y}|^{1/r}}. \quad (43)$$

Proof. The proof is straightforward. \square

As can be seen from (6) and (9), the performance of the proposed classifier depends on r . We cannot derive the optimal value of r that minimizes the error probability since we do not have the exact expression of the error probability, we only have its upper bound. On the other hand, in practice, the optimal r with respect to the upper bound on the error probability also cannot be derived since the upper bound depends on \bar{P}_j , which would be unknown in practice due to $p_{Y^n|X}(y^n|x)$ being unknown. As a result, for our numerical examples, we consider the Euclidean distance ($r = 2$), which is one of the most widely used distance metric in practice.

The following corollary establishes the asymptotic optimality of the proposed classifier with respect to n .

Corollary 2. *The proposed classifier has an error probability that satisfies $\mathbb{P}_e \rightarrow 0$ as $n \rightarrow \infty$ when $|\mathcal{Y}| \leq \mathcal{O}(n^m)$ and $r > 2m$. Thereby, the proposed classifier is asymptotically optimal.*

Proof. For the proof, please see Appendix A. \square

IV. SIMULATION RESULTS

In this section, we provide simulation results of the performance of the proposed classifier for $r = 2$ and compare it to benchmark schemes. The benchmark schemes that we adopt for comparison are the naive Bayes classifier and the KNN algorithm. For the naive Bayes classifier,

the probability function $p_{Y^n|X}(y^n|x)$ is estimated from the training vectors as follows. Let $\mathbf{y}_{i_j}^T$ be a vector obtained by concatenating the j -th elements of the training data vectors $\hat{y}_{i_1}^n, \hat{y}_{i_2}^n, \dots, \hat{y}_{i_T}^n$ for label x_i . Then, the estimated probability function of $p_j(y_j|x_i)$, denoted by $\hat{p}_j(y_j = y|x_i)$, is found as

$$\hat{p}_j(y_j = y|x_i) = \frac{\mathcal{I}[\mathbf{y}_{i_j}^T = y]}{T}, \quad (44)$$

and the naive Bayes classifier decides according to

$$\hat{x} = \arg \max_{x_i} \prod_{k=1}^n \hat{p}_k(y_k|x_i). \quad (45)$$

The main problem of the naive Bayes classifier occurs when an alphabet $y_j \in \mathcal{Y}$ is not present in the training data vectors. In that case, $\hat{p}_j(y_j|x_i)$ in (44) is $\hat{p}_j(y_j|x_i) = 0, \forall x_i \in \mathcal{X}$, and as a result the right hand side of (45) is zero since at least one of the elements in the product in (45) is zero. In this case, the naive Bayes classifier fails to provide an accurate classification of the labels. In what follows, we see that this issue of the naive Bayes classifier appears frequently when we have a small number of training data vectors. On the other hand, the KNN classifier works as follows. For the observed data vector y^n , the KNN classifier looks for the K nearest data vectors to y^n , among all training data vectors $\hat{y}_{r_s}^n$, for all $1 \leq r \leq |\mathcal{X}|$ and $1 \leq s \leq T$. Then by considering a set of K input-output pairs $(x_k, \hat{y}_{k_l}^n)$, for $k \in \{1, 2, \dots, |\mathcal{X}|\}$ and $l \in \{1, 2, \dots, |T|\}$, the KNN classifier decides a label which is most frequent among x_k -s. The optimum value of K for $T = 1$ is $K = 1$.

In the following, we provide numerical examples where we illustrate the performance of the proposed classifier when $p_{Y^n|X}(y^n|x)$ is artificially generated.

A. The I.I.D. Case With One Training Sample Per Label

In the following examples, we assume that the classifiers have access to only one training data vector for each label, the elements of the data vectors are generated i.i.d., and the alphabet size of the data vector, $|\mathcal{Y}|$, is fixed.

In Figs. 4 and 5, we compare the error probability of the proposed classifier with the naive Bayes classifier and the KNN algorithm for the case when $|\mathcal{Y}| = 6$ and $|\mathcal{Y}| = 20$, respectively. In both examples, we have two different labels, i.e., $|\mathcal{X}| = 2$. As a result, we have two different probability functions $p_{Y^n|X_1}(y^n|x_1)$ and $p_{Y^n|X_2}(y^n|x_2)$. The probability functions $p_{Y^n|X_1}(y^n|x_1)$ and $p_{Y^n|X_2}(y^n|x_2)$ are randomly generated as follows. We first generate two random vectors of

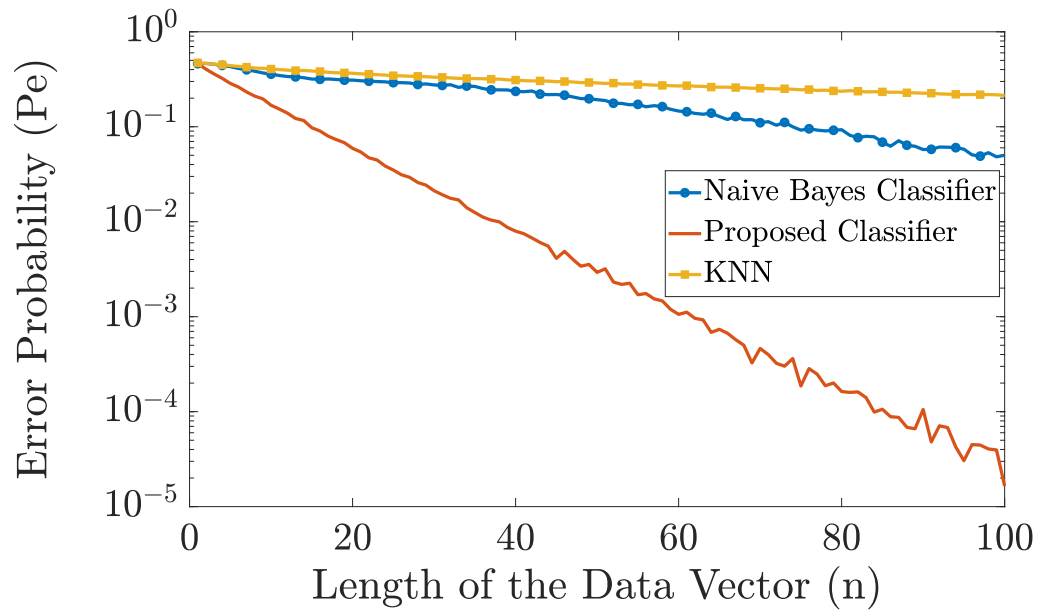


Fig. 4: Comparison in error probability between the naive Bayes classifier, KNN, and the proposed classifier.

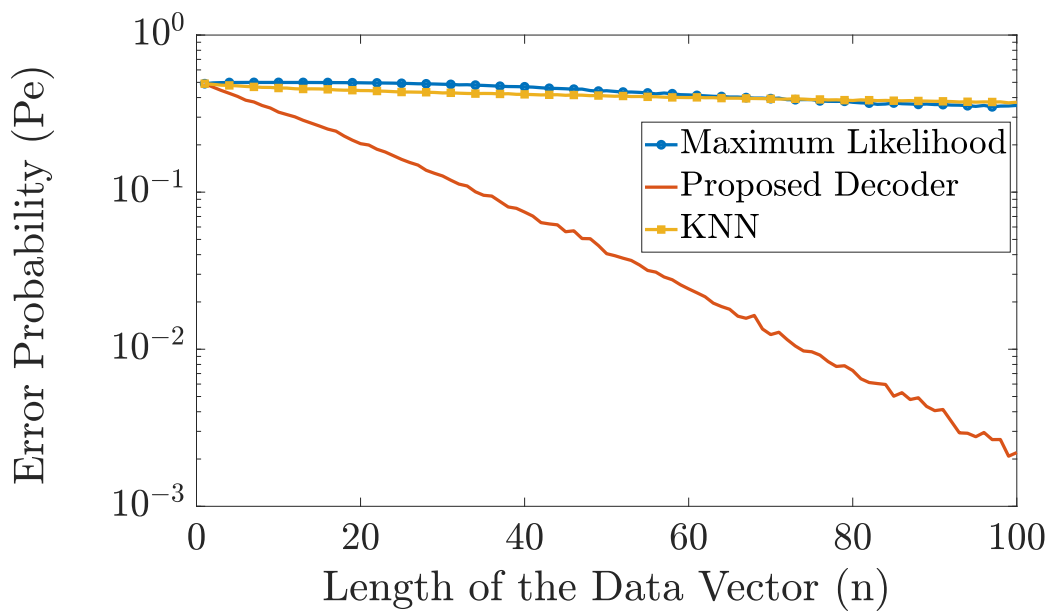


Fig. 5: Comparison in error probability between the naive Bayes classifier, KNN, and the proposed classifier.

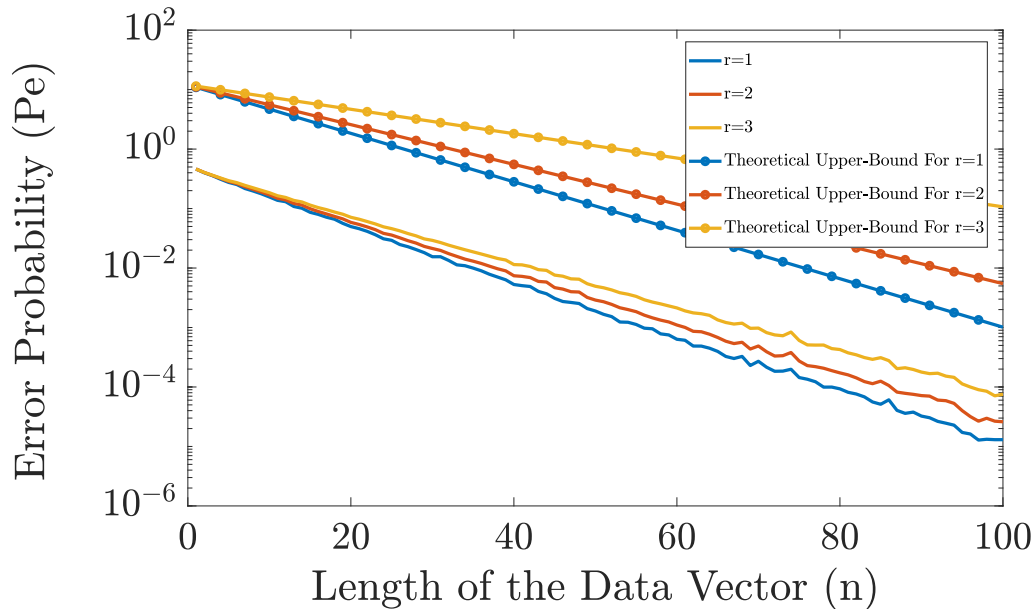


Fig. 6: Comparison in error probability of the proposed classifier for different values of r when $|\mathcal{Y}| = 6$. The related theoretical upper bounds for each value of r are also given.

length 6 and length 20 for Figs. 4 and 5, respectively, where the elements of these vectors are drawn independently from a uniform probability function. Then we normalize these vectors such that the sum of their elements is equal to one. These two normalized randomly generated vectors then represent the two probability functions $p_{Y_i|X_1}(y_i|x_1) = p_{Y|X_1}(y|x_1)$ and $p_{Y_i|X_2}(y_i|x_2) = p_{Y|X_2}(y|x_2)$, $\forall i$. Then, $p_{Y^n|X_k}(y^n|x_k)$ is obtained as $p_{Y^n|X_k}(y^n|x_k) = \prod_{i=1}^n p_{Y_i|X_k}(y_i|x_k)$, for $k = 1, 2$. The simulation is carried out as follows. For each n , we generate one training vector for each label, using the aforementioned probability functions. Then, as test samples, we generate 1000 data vectors for each label and pass these data vectors through our proposed classifier, the naive Bayes classifier, and the KNN algorithm, and compute the errors. The length of the data vector n is varied from $n = 1$ to $n = 100$. We repeat the simulation 5000 times and then plot the error probability. Figs. 4 and 5 show that the proposed classifier outperforms both the naive Bayes classification and KNN. The main reason for this performance gain is because when only one training vector per label is available, the proposed classifier is more resilient to errors than the naive Bayes classifier, whereas the KNN algorithm has very poor performance because of the ‘‘curse of dimensionality’’. Specifically, the naive Bayes classifier cannot perform an accurate classification for small n compared to $|\mathcal{Y}|$ since the chance that an alphabet will

not be present in one of the training data vectors is close to 1. On the other hand, the KNN algorithm cannot perform an accurate classification for large n since the dimension of the input data vector becomes much larger than the training data and the ‘‘curse of dimensionality’’ occurs.

In Fig. 6, we compare the performance of the proposed classifier for different values of r when $|\mathcal{Y}| = 6$ with the derived upper bounds. As can be seen, for this example, the derived theoretical upper bounds have similar slope as the exact error probabilities. Moreover, we can see that for this example, the optimal r is $r = 1$. However, this is not always the case and it depends on $p_{\mathcal{Y}^n|X_k}(y^n|x_k)$, $|\mathcal{Y}|$, and $|\mathcal{X}|$.

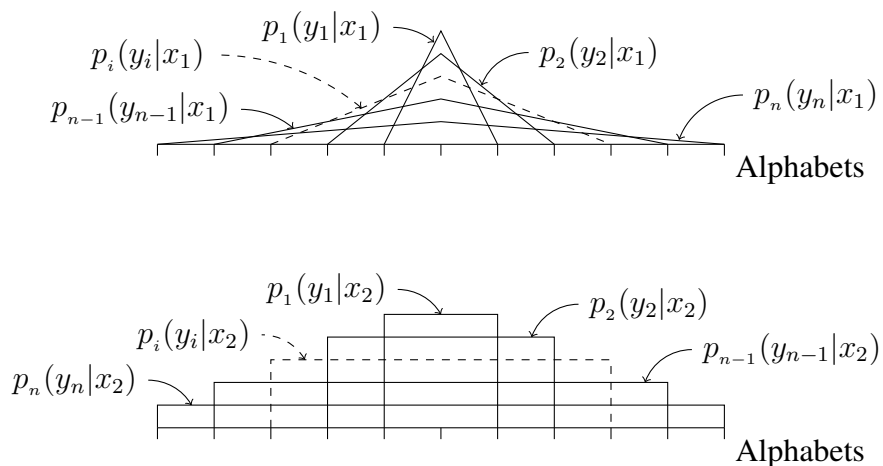


Fig. 7: Illustration of the probability functions $p_i(y_i|x_1)$ (upper figure) and $p_i(y_i|x_2)$ (lower figure), for $i = 1, 2, \dots, n$.

B. The Overlapping I.Non-I.D. Case With One Training Sample Per Label

In this example, we consider the i.non-i.d. case where the probability functions $p_i(y_i|x_k)$ are overlapping for all i , as shown in Fig. 7. The small orthogonal lines on the x-axis in Fig. 7 represent alphabets, i.e., the elements in \mathcal{Y} , and the probability of occurrence of an alphabet y_i is equal to the intersection between the corresponding orthogonal line to the represented probability function $p_i(y_i|x_k)$ for $k = 1, 2$. By ‘‘overlapping’’, we mean the following. Let \mathcal{Y}_v and \mathcal{Y}_u denote the set of outputs generated by $p_v(y_v|x_k)$ and $p_u(y_u|x_k)$, respectively. If for any v and u , $\mathcal{Y}_v \cap \mathcal{Y}_u \neq \emptyset$ holds, we say that the output alphabets are overlapping.

To demonstrate the performance of our proposed classifier in the overlapping case, we assume that we have two different labels, $\mathcal{X} = \{x_1, x_2\}$, where the corresponding conditional probability

functions $p_i(y_i|x_1)$ and $p_i(y_i|x_2)$ are obtained as follows. For a given n , let $\mathcal{Y} = \{-n, -n + 1, \dots, 0, \dots, n - 1, n\}$ be the set of all alphabets. Note that the size of \mathcal{Y} grows with n . Also, let \mathbf{u}_i and \mathbf{v}_i ($1 \leq i \leq n$) be vectors of length $2n + 1$, given by

$$\mathbf{u}_i = \left[0, \dots, 0, \frac{1}{i(i+1)}, \frac{2}{i(i+1)}, \dots, \frac{i}{i(i+1)}, \frac{i+1}{i(i+1)}, \frac{i}{i(i+1)}, \dots, \frac{1}{i(i+1)}, 0, \dots, 0 \right], \quad (46)$$

$$\mathbf{v}_i = \left[0, \dots, 0, \frac{1}{i(i+1)}, \frac{1}{i(i+1)}, \dots, \frac{1}{i(i+1)}, \frac{1}{i(i+1)}, 0, \dots, 0 \right]. \quad (47)$$

The number of zeros in each side of the vectors \mathbf{u}_i and \mathbf{v}_i is $(n - i)$. To generate a data vector from label $x_1(x_2)$, we generate the vector $y^n = (y_1, y_2, \dots, y_n)$, where y_k takes values from the set \mathcal{Y} , with a probability function $p_i(y_i|x_1) = \mathbf{u}_i(1 + 2(n + y_i))$ ($p_i(y_i|x_2) = \mathbf{v}_i(1 + 2(n + y_i))$).

The simulation is carried out as follows. For each n , we generate one training data vector for each label. Then, we generate 1000 data vectors for each label and pass them through our proposed classifier, the naive Bayes classifier, and the KNN algorithm and calculate the error probability. We change the length of the data vector from $n = 1$ to $n = 100$ and repeat the simulation 1000 times and then plot the error probability. As shown in Fig. 8, there is a huge

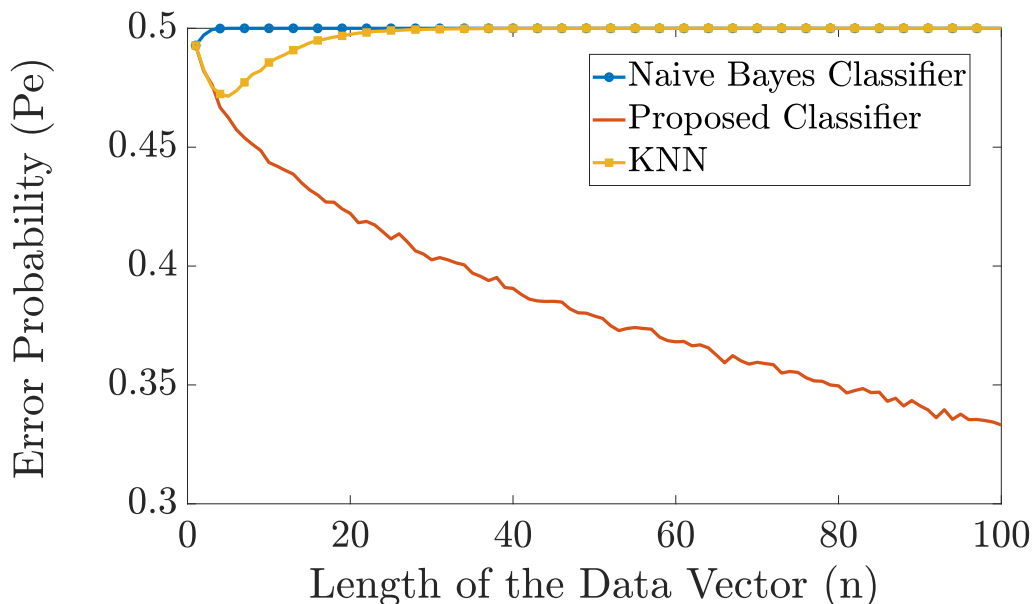


Fig. 8: Comparison in error probability between the naive Bayes classifier, KNN, and the proposed classifier ($T = 1$).

difference between the performance of the two benchmark classifiers and the proposed classifier. The error probability of the naive Bayes classifier is almost 0.5 for all shown values of n as it is

susceptible to the problem of unseen alphabets in the training vectors. The error probability of the KNN classifier is also almost 0.5 for $n > 20$ as it is susceptible to the “curse of dimensionality”. However, the error probability of our proposed classifier continuously decays as n increases.

In Fig. 9, we run the same experiments as in Fig. 8 but with $T = 100$, i.e., 100 training data vectors per label. As can be seen from Fig. 9, the performance of the proposed classifier is better than the naive Bayes classifier, for $n > 15$. Since $|\mathcal{Y}| = 2n + 1$, for small values of n , the naive Bayes classifier has access to many training samples, and thereby, it performs very close to the case when the probability function $p_{\mathcal{Y}^n|X}(y^n|x)$ is known, i.e., to the maximum-likelihood classifier, and hence it has the optimal performance. As n increases, the number of alphabets rises, i.e., $|\mathcal{Y}|$ rises, and due to the aforementioned issue of the naive Bayes classifier with unseen alphabets, our proposed classifier makes much better classification than the naive Bayes classifier. Also, note that the error probability of our proposed classifier decays exponentially as n increases which is not the case with the naive Bayes classifier. Moreover, Fig. 9 also shows the theoretical upper bound on the error probability we derived in (9).

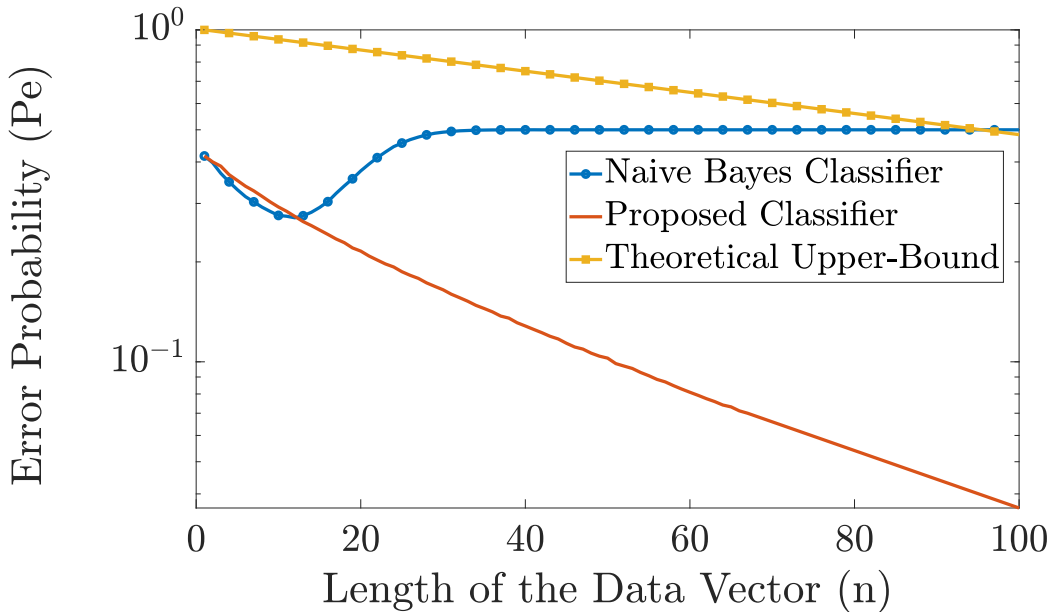


Fig. 9: Comparison in error probability between the naive Bayes classifier and the proposed classifier ($T = 100$).

C. The Non-Overlapping I.Non-I.D. Case With One Training Sample For Each Label

In this example, we consider the i.non-i.d. case where the probability functions $p_j(y_j|x_i)$ are non-overlapping for all j as shown in Fig. 10, where we defined "overlapping" in Subsection IV-B. Hence, we test the other extreme in terms of possible distribution of the elements in the data vectors Y^n .

To demonstrate the performance of our proposed classifier in the non-overlapping case, we assume that we have two different labels $\mathcal{X} = \{x_1, x_2\}$, the corresponding conditional probability functions $p_i(y_i|x_1)$ and $p_i(y_i|x_2)$ are obtained as follows. For a given n , let $\mathcal{Y} = \{1, 2, 3, \dots, (n+1)^2 - 1\}$ be the set of all alphabets of the element in the data vectors. Note again that the size of \mathcal{Y} grows with n . Also, let \mathbf{u}_i and \mathbf{v}_i for $(1 \leq i \leq n)$, be vectors of length $(n+1)^2 - 1$, given by

$$\mathbf{u}_i = \left[0, \dots, 0, \frac{1}{i(i+1)}, \frac{2}{i(i+1)}, \dots, \frac{i}{i(i+1)}, \frac{i+1}{i(i+1)}, \frac{i}{i(i+1)}, \dots, \frac{1}{i(i+1)}, 0, \dots, 0 \right], \quad (48)$$

$$\mathbf{v}_i = \left[0, \dots, 0, \frac{1}{i(i+1)}, \frac{1}{i(i+1)}, \dots, \frac{1}{i(i+1)}, \frac{1}{i(i+1)}, 0, \dots, 0 \right]. \quad (49)$$

The number of zeros in the left-hand sides of \mathbf{u}_i and \mathbf{v}_i is $i^2 - 1$. To generate a data vector from the label $x_1(x_2)$, we generate the vector $y^n = (y_1, y_2, \dots, y_n)$, where y_k take values from the set \mathcal{Y} , with probability function $p_i(y_i|x_1) = \mathbf{u}_i(y_i)$ ($p_i(y_i|x_2) = \mathbf{v}_i(y_i)$).

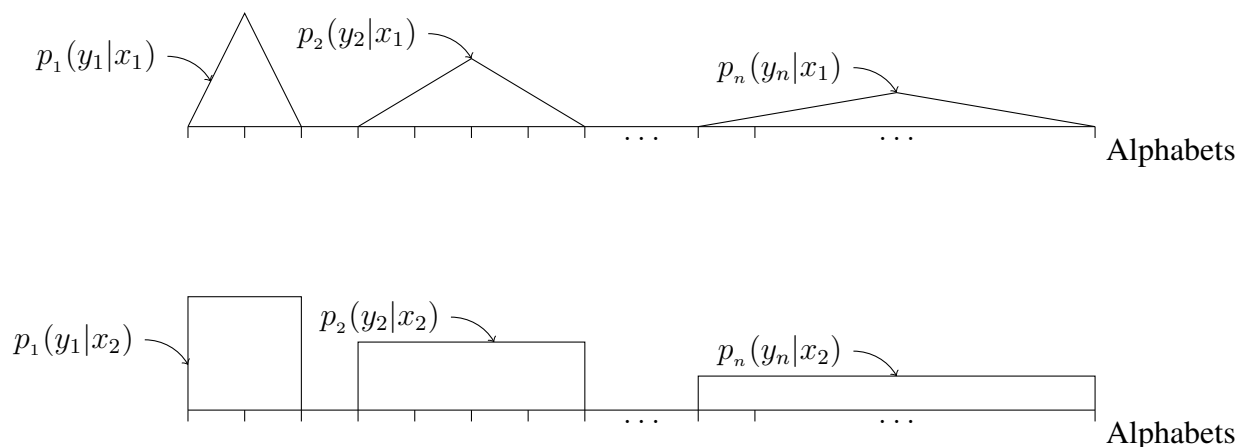


Fig. 10: Illustration of the probability functions $p_i(y_i|x_1)$ (upper figure) and $p_i(y_i|x_2)$ (lower figure), for $i = 1, 2, \dots, n$.

The simulation is carried out as follows. For each n , we generate one training data vector for each label. Then we generate 250 data vectors for each label and pass it through our proposed

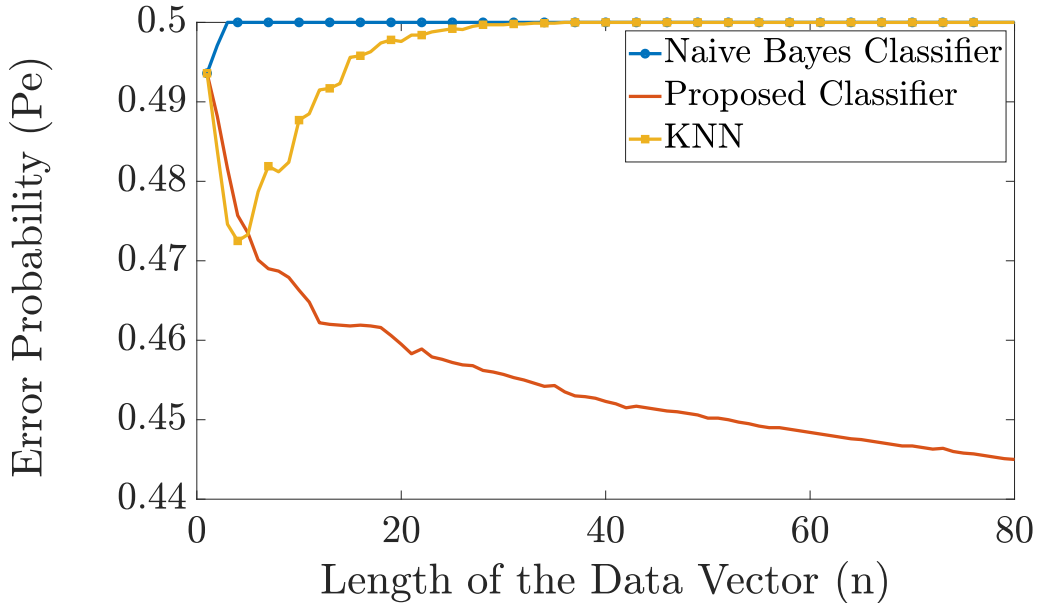


Fig. 11: Comparison in error probability between the naive Bayes classifier and the proposed classifier ($T = 1$).

classifier, the naive Bayes classifier and KNN and calculate the error probabilities. We change the length of the vector from 1 to 80 and repeat the simulation 250 times and then plot the error probability. Once again, there is a huge difference between the performance of the proposed classifier and the two benchmark classifiers. The error probability of the naive Bayes classifier is almost 0.5 for all shown values of n as it is susceptible to the issue with unseen alphabets in the training data vector. The error probability of the KNN classifier is almost 0.5 for all shown values of $n > 30$ as it becomes susceptible to the “curse of dimensionality”. However, the error probability of our proposed classifier still decays continuously as n increases.

V. CONCLUSION

In this paper, we proposed a supervised classification algorithm that assigns labels to input data vectors with independent but non-identically distributed elements, a statistical property found in practice. We proved that the proposed classifier is asymptotically optimal since the error probability goes to zero as the length of the input data vectors grows. We showed that this asymptotic optimality is achievable even when one training data vector per label is available. In the numerical examples, we compared the proposed classifier with the naive Bayes classifier and the KNN algorithm. Our numerical results show that the proposed classifier outperforms the

benchmark classifiers when the number of training data is small and the length of the input data vectors is sufficiency large.

APPENDIX A

PROOF OF COROLLARY 2

The proof is almost identical to the proof of Theorem 1, however, here we derive a looser upper-bound on the error-probability than that in (9), which is independent of $P_{\hat{y}_i^{nT}}$.

Without loss of generality we assume that x_1 is the input to $p_{Y^n|X}(y^n|x)$ and y^n is observed at the classifier.

Let $\mathcal{B}_{k,l}^\epsilon$, for $1 \leq k \leq |\mathcal{Y}|$ and $1 \leq l \leq |\mathcal{X}|$, be a set defined as

$$\mathcal{B}_{k,l}^\epsilon = \left\{ \hat{y}^{nT} : \left| \frac{\mathcal{I}[\hat{y}^{nT} = y_k]}{nT} - \bar{p}(y_k|x_l) \right| \leq \frac{\epsilon}{\sqrt[3]{T}} \right\}. \quad (50)$$

Let $\mathcal{B}_l^\epsilon = \bigcap_{k=1}^{|\mathcal{Y}|} \mathcal{B}_{k,l}^\epsilon$. For $\hat{y}_1^{nT} \in \mathcal{B}_1^\epsilon$, we have

$$\left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[\hat{y}_1^{nT} = y_k]}{nT} - \bar{p}(y_k|x_1) \right|^r \right)^{1/r} \stackrel{(a)}{\leq} \left(\sum_{k=1}^{|\mathcal{Y}|} \left(\frac{\epsilon}{\sqrt[3]{T}} \right)^r \right)^{1/r}, \quad (51)$$

Using the same derivation as (21), for any $y^n \in \mathcal{A}^\epsilon$ and for $\hat{y}_1^{nT} \in \mathcal{B}_1^\epsilon$, we have:

$$\left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[y^n = y_k]}{n} - \frac{\mathcal{I}[\hat{y}_1^{nT} = y_k]}{nT} \right|^r \right)^{1/r} \leq |\mathcal{Y}|^{1/r} \epsilon + |\mathcal{Y}|^{1/r} \frac{\epsilon}{\sqrt[3]{T}}. \quad (52)$$

On the other hand, same as the derivation in (24), for each $i \neq 1$, we have:

$$\left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[y^n = y_k]}{n} - \frac{\mathcal{I}[\hat{y}_i^{nT} = y_k]}{nT} \right|^r \right)^{1/r} \geq \|P_{\hat{y}_i^{nT}} - \bar{P}_1\|_r - |\mathcal{Y}|^{1/r} \epsilon. \quad (53)$$

Now, for any $\hat{y}_i^{nT} \in \mathcal{B}_i^\epsilon$, we have

$$\begin{aligned} & \|P_{\hat{y}_i^{nT}} - \bar{P}_1\|_r + \left(\sum_{k=1}^{|\mathcal{Y}|} \left(\frac{\epsilon}{\sqrt[3]{T}} \right)^r \right)^{1/r} \\ & \stackrel{(a)}{\geq} \left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[\hat{y}_i^{nT} = y_k]}{nT} - \bar{p}(y_k|x_1) \right|^r \right)^{1/r} + \left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[\hat{y}_i^{nT} = y_k]}{nT} - \bar{p}(y_k|x_i) \right|^r \right)^{1/r} \\ & \stackrel{(b)}{\geq} \left(\sum_{k=1}^{|\mathcal{Y}|} |\bar{p}(y_k|x_1) - \bar{p}(y_k|x_i)|^r \right)^{1/r}, \end{aligned} \quad (54)$$

where (a) follows from (50) and (b) is again due to the Minkowski inequality. The expression in (54), can be written equivalently as

$$\|P_{\hat{y}_i^{nT}} - \bar{P}_1\|_r \geq \|\bar{P}_i - \bar{P}_1\|_r - |\mathcal{Y}|^{1/r} \frac{\epsilon}{\sqrt[3]{T}}. \quad (55)$$

where $i \neq 1$. Using the bounds in (55) and (53), for any $i \neq 1$ we have

$$\left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[y^n = y_k]}{n} - \frac{\mathcal{I}[\hat{y}_i^{nT} = y_k]}{nT} \right|^r \right)^{1/r} \geq \|\bar{P}_i - \bar{P}_1\|_r - |\mathcal{Y}|^{1/r} \epsilon \left(1 + \frac{1}{\sqrt[3]{T}} \right). \quad (56)$$

Using the bounds in (52) and (56), we now relate the left-hand sides of (52) and (56) as follows. As long as the following inequality holds for each $i \neq 1$,

$$|\mathcal{Y}|^{1/r} \epsilon \left(1 + \frac{1}{\sqrt[3]{T}} \right) < \|\bar{P}_i - \bar{P}_1\|_r - |\mathcal{Y}|^{1/r} \epsilon \left(1 + \frac{1}{\sqrt[3]{T}} \right), \quad (57)$$

which is equivalent to the following for $i \neq 1$

$$\epsilon < \frac{\|\bar{P}_i - \bar{P}_1\|_r}{2(1 + T^{-1/3})|\mathcal{Y}|^{1/r}}, \quad (58)$$

we have the following for $i \neq 1$

$$\begin{aligned} \left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[y^n = y_k]}{n} - \frac{\mathcal{I}[\hat{y}_1^{nT} = y_k]}{nT} \right|^r \right)^{1/r} &\stackrel{(a)}{\leq} |\mathcal{Y}|^{1/r} \epsilon \left(1 + \frac{1}{\sqrt[3]{T}} \right) \\ &\stackrel{(b)}{<} \|\bar{P}_i - \bar{P}_1\|_r - |\mathcal{Y}|^{1/r} \epsilon \left(1 + \frac{1}{\sqrt[3]{T}} \right) \\ &\stackrel{(c)}{\leq} \left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[y^n = y_k]}{n} - \frac{\mathcal{I}[\hat{y}_i^{nT} = y_k]}{nT} \right|^r \right)^{1/r}, \end{aligned} \quad (59)$$

where (a), (b), and (c) follow from (52), (57), and (56), respectively. Thereby, from (59), we have the following for $i \neq 1$

$$\left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[y^n = y_k]}{n} - \frac{\mathcal{I}[\hat{y}_1^{nT} = y_k]}{nT} \right|^r \right)^{1/r} \leq \left(\sum_{k=1}^{|\mathcal{Y}|} \left| \frac{\mathcal{I}[y^n = y_k]}{n} - \frac{\mathcal{I}[\hat{y}_i^{nT} = y_k]}{nT} \right|^r \right)^{1/r}, \quad (60)$$

or equivalently as

$$\|P_{y^n} - P_{\hat{y}_1^{nT}}\|_r < \|P_{y^n} - P_{\hat{y}_i^{nT}}\|_r. \quad (61)$$

Once again, we obtained that if there is an ϵ for which (58) holds for $i \neq 1$ and for that ϵ there are sets \mathcal{A}^ϵ and \mathcal{B}_i^ϵ for which $y^n \in \mathcal{A}^\epsilon$ and $\hat{y}_j^{nT} \in \mathcal{B}_i^\epsilon$ for all $1 \leq l \leq |\mathcal{X}|$, then (61) holds

for $i \neq 1$, and thereby our classifier will detect that x_1 is the correct label. Using this, we can upper-bound the error probability as

$$\begin{aligned} \mathbb{P}_e &= 1 - \Pr\{\hat{x}_1 = x_1\} \\ &\leq 1 - \Pr\left\{(y^n \in \mathcal{A}^\epsilon) \cap \left(\bigcap_{j=1}^{|\mathcal{X}|} \hat{y}_j^{nT} \in \mathcal{B}_j^\epsilon\right) \middle| \epsilon \in \mathcal{S}\right\}, \end{aligned} \quad (62)$$

where \mathcal{S} is a set defined as

$$\mathcal{S} = \left\{ \epsilon : \epsilon \leq \min_{\substack{i \\ i \neq 1}} \frac{\|\bar{P}_i - \bar{P}_1\|_r}{(2 + T^{-1/3})|\mathcal{Y}|^{1/r}} \right\}. \quad (63)$$

The right-hand side of (62) can be upper-bounded as

$$\begin{aligned} 1 - \Pr\left\{(y^n \in \mathcal{A}^\epsilon) \cap \left(\bigcap_{l=1}^{|\mathcal{X}|} \hat{y}_l^{nT} \in \mathcal{B}_j^\epsilon\right) \middle| \epsilon \in \mathcal{S}\right\} &= \Pr\left\{(y^n \notin \mathcal{A}^\epsilon) \cup \left(\bigcup_{l=1}^{|\mathcal{X}|} \hat{y}_l^{nT} \notin \mathcal{B}_l^\epsilon\right) \middle| \epsilon \in \mathcal{S}\right\} \\ &\stackrel{(a)}{\leq} \Pr\{y^n \notin \mathcal{A}^\epsilon | \epsilon \in \mathcal{S}\} \\ &\quad + \sum_{l=1}^{|\mathcal{X}|} \Pr\{\hat{y}_l^{nT} \notin \mathcal{B}_l^\epsilon | \epsilon \in \mathcal{S}\}, \end{aligned} \quad (64)$$

Using the same derivation as (35), we have:

$$\Pr\{y^n \notin \mathcal{A}^\epsilon | \epsilon \in \mathcal{S}\} \leq 2|\mathcal{Y}|e^{-2n\epsilon^2}. \quad (65)$$

Similarly, we have the following result for the second expression in the right-hand side of (64), same as the derivation in (39)

$$\Pr\{\hat{y}_l^{nT} \notin \mathcal{B}_l^\epsilon | \epsilon \in \mathcal{S}\} \leq 2|\mathcal{Y}|e^{-2nT^{1/3}\epsilon^2}. \quad (66)$$

Inserting (65) and (66) into (64), and then inserting (64) into (62), we obtain the following upper-bound for the error probability

$$\mathbb{P}_e \leq 2|\mathcal{Y}|e^{-2n\epsilon^2} + 2|\mathcal{X}||\mathcal{Y}|e^{-2nT^{1/3}\epsilon^2}, \quad (67)$$

where

$$\epsilon = \min_{\substack{i,j \\ i \neq j}} \frac{\|\bar{P}_i - \bar{P}_j\|_r}{2(1 + T^{-1/3})|\mathcal{Y}|^{1/r}}, \quad (68)$$

Now, if $|\mathcal{Y}| \leq n^m$, (67) can be written as

$$\begin{aligned}
\mathbb{P}_e &\leq 2|\mathcal{Y}|e^{-2n\epsilon^2} + 2|\mathcal{X}||\mathcal{Y}|e^{-2nT^{1/3}\epsilon^2} \\
&\leq 2n^m \exp\left(-2n \min_{\substack{i,j \\ i \neq j}} \frac{\|\bar{\mathbb{P}}_i - \bar{\mathbb{P}}_j\|_r^2}{2(1+T^{-1/3})^2 n^{2m/r}}\right) \\
&\quad + 2|\mathcal{X}|n^m \exp\left(-2nT^{1/3} \min_{\substack{i,j \\ i \neq j}} \frac{\|\bar{\mathbb{P}}_i - \bar{\mathbb{P}}_j\|_r^2}{2(1+T^{-1/3})^2 n^{2m/r}}\right) \\
&\leq \mathcal{O}\left(n^m \exp\left(-n^{1-\frac{2m}{r}}\right)\right). \tag{69}
\end{aligned}$$

According to (69), for a fixed $r > 2m$, the right-hand side of (69) goes to zero as $n \rightarrow \infty$, and thereby, the classifier is asymptotically optimal.

REFERENCES

- [1] S. Shalev-Shwartz and S. Ben-David, *Understanding Machine Learning: From Theory to Algorithms*. USA: Cambridge University Press, 2014.
- [2] J. R. Quinlan, *Learning Efficient Classification Procedures and Their Application to Chess End Games*. Berlin, Heidelberg: Springer Berlin Heidelberg, 1983, pp. 463–482.
- [3] L. Breiman, J. H. Friedman, R. A. Olshen, and C. J. Stone, *Classification and Regression Trees*. Monterey, CA: Wadsworth and Brooks, 1984.
- [4] B. E. Boser, I. M. Guyon, and V. N. Vapnik, “A training algorithm for optimal margin classifiers,” in *Proceedings of the Fifth Annual Workshop on Computational Learning Theory*, ser. COLT 92. Association for Computing Machinery, 1992, p. 144152.
- [5] C. Cortes and V. Vapnik, “Support-vector networks,” *Mach. Learn.*, vol. 20, no. 3, p. 273297, Sep. 1995.
- [6] S. Lallich, O. Teytaud, and E. Prudhomme, *Association Rule Interestingness: Measure and Statistical Validation*. Studies in Computational Intelligence, 01 2007, vol. 43, pp. 251–275.
- [7] P. Langley, W. Iba, and, and K. Thompson, “An analysis of bayesian classifiers,” in *Proceedings of the Tenth National Conference on Artificial Intelligence*, ser. AAAI92. AAAI Press, 1992, p. 223228.
- [8] D. W. Aha, *Lazy Learning*. USA: Kluwer Academic Publishers, 1997, p. 710.
- [9] C. M. Bishop, *Neural Networks for Pattern Recognition*. Oxford University Press, Inc., 1995.
- [10] T. Hastie, R. Tibshirani, and J. Friedman, *The Elements of Statistical Learning: Data Mining, Inference, and Prediction*, ser. Springer series in statistics. Springer, 2009.
- [11] G. Nakhaeizadeh, C. C. Taylor, and e. Kunisch, G., “Dynamic Supervised Learning: Some Basic Issues and Application Aspects,” in *Classification and Knowledge Organization*. Springer Berlin Heidelberg, 1997, pp. 123–135.
- [12] M. Kppen, “The curse of dimensionality,” pp. 4–8, 2000.
- [13] R. O. Duda, P. E. Hart, and D. G. Stork, *Pattern Classification (2nd Edition)*. USA: Wiley-Interscience, 2000.
- [14] A. K. Jain, R. P. W. Duin, and J. Mao, “Statistical pattern recognition: A review,” *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 22, no. 1, p. 437, Jan. 2000.
- [15] B. Xu, J. Huang, G. Williams, Q. Wang, and Y. Ye, “Classifying very high-dimensional data with random forests built from small subspaces,” *International Journal of Data Warehousing and Mining*, vol. 8, 03 2012.

- [16] Y. Ye, Q. Wu, J. Z. Huang, M. K. Ng, and X. Li, “Stratified sampling for feature subspace selection in random forests for high dimensional data,” *Pattern Recognition*, vol. 46, no. 3, pp. 769 – 787, 2013.
- [17] N. Kouroukidis and G. Evangelidis, “The effects of dimensionality curse in high dimensional knn search,” in *2011 15th Panhellenic Conference on Informatics*, 2011, pp. 41–45.
- [18] C. Wang, Z. She, and L. Cao, “Coupled attribute analysis on numerical data,” in *Proceedings of the Twenty-Third International Joint Conference on Artificial Intelligence*, ser. IJCAI 13. AAAI Press, 2013, p. 17361742.
- [19] C. Wang, X. Dong, F. Zhou, L. Cao, and C.-H. Chi, “Coupled attribute similarity learning on categorical data,” *IEEE Transactions on Neural Networks and Learning Systems*, vol. 26, pp. 781–797, 2015.
- [20] C. Wang, L. Cao, M. Wang, J. Li, W. Wei, and Y. Ou, “Coupled nominal similarity in unsupervised learning,” in *Proceedings of the 20th ACM International Conference on Information and Knowledge Management*, ser. CIKM 11. Association for Computing Machinery, 2011, p. 973978. [Online]. Available: <https://doi.org/10.1145/2063576.2063715>
- [21] C. Liu and L. Cao, “A coupled k-nearest neighbor algorithm for multi-label classification,” in *PAKDD*, 2015.
- [22] C. Liu, L. Cao, and P. Yu, “A hybrid coupled k-nearest neighbor algorithm on imbalance data,” in *Proceedings of the International Joint Conference on Neural Networks*, 07 2014, pp. 2011–2018.
- [23] C. Liu, L. Cao, and P. S. Yu, “Coupled fuzzy k-nearest neighbors classification of imbalanced non-iid categorical data,” in *2014 International Joint Conference on Neural Networks (IJCNN)*, July 2014, pp. 1122–1129.
- [24] L. Cao, “Non-IIDness Learning in Behavioral and Social Data,” *The Computer Journal*, vol. 57, no. 9, pp. 1358–1370, 08 2013.
- [25] —, “Coupling learning of complex interactions,” *Information Processing and Management*, vol. 51, no. 2, pp. 167 – 186, 2015.
- [26] L. Cao, H. Zhang, Y. Zhao, D. Luo, and C. Zhang, “Combined mining discovering informative knowledge in complex data,” *IEEE Transactions on Systems, Man, and Cybernetics, Part B (Cybernetics)*, vol. 41, pp. 699–712, 2011.
- [27] L. Getoor and B. Taskar, *Introduction to Statistical Relational Learning (Adaptive Computation and Machine Learning)*. The MIT Press, 2007.
- [28] F. Kanaya and Te Sun Han, “The asymptotics of posterior entropy and error probability for bayesian estimation,” *IEEE Transactions on Information Theory*, vol. 41, no. 6, pp. 1988–1992, Nov 1995.
- [29] M. Gutman, “Asymptotically optimal classification for multiple tests with empirically observed statistics,” *IEEE Transactions on Information Theory*, vol. 35, no. 2, pp. 401–408, March 1989.
- [30] I. Sason and S. Verd, “Arimotorny conditional entropy and bayesian m -ary hypothesis testing,” *IEEE Transactions on Information Theory*, vol. 64, no. 1, pp. 4–25, Jan 2018.
- [31] A. Hyvärinen and E. Oja, “Independent component analysis: Algorithms and applications,” *Neural Netw.*, vol. 13, no. 45, p. 411430, May 2000.
- [32] P. Domingos and M. Pazzani, “On the optimality of the simple bayesian classifier under zero-one loss,” *Machine Learning*, vol. 29, no. 2, pp. 103–130, Nov 1997.
- [33] T. M. Mitchell, *Machine Learning*, 1st ed. USA: McGraw-Hill, Inc., 1997.
- [34] J. L. Hellerstein, T. S. Jayram, and I. Rish, “Recognizing end-user transactions in performance management,” *AAAI Conference on Artificial Intelligence*, pp. 596–602, 2000.
- [35] K. Matusita, “Classification based on distance in multivariate gaussian cases,” in *Proceedings of the Fifth Berkeley Symposium on Mathematical Statistics and Probability, Volume 1: Statistics*. Berkeley, Calif.: University of California Press, 1967, pp. 299–304.
- [36] M. Collins, R. E. Schapire, and Y. Singer, “Logistic regression, adaboost and bregman distances,” *Mach. Learn.*, vol. 48, no. 13, p. 253285, Sep. 2002.

- [37] M. P. Deisenroth, A. A. Faisal, and C. S. Ong, *Mathematics for Machine Learning*. Cambridge University Press, 2020.
- [38] G. Lebanon and J. Lafferty, “Cranking: Combining rankings using conditional probability models on permutations,” in *In Proceedings of the 19th International Conference on Machine Learning*, 2002, pp. 363–370.
- [39] W. Hoeffding, “Probability inequalities for sums of bounded random variables,” *Journal of the American Statistical Association*, vol. 58, no. 301, pp. 13–30, 1963.
- [40] —, “On the distribution of the number of successes in independent trials,” *Ann. Math. Statist.*, vol. 27, no. 3, pp. 713–721, Sep 1956.