BET: A BACKTRANSLATION APPROACH FOR EASY DATA AUGMENTATION IN TRANSFORMER-BASED PARAPHRASE IDENTIFICATION CONTEXT

A PREPRINT

Jean-Philippe Corbeil
Polytechnique Montreal
jean-philippe.corbeil@polymtl.ca

Hadi Abdi Ghadivel Polytechnique Montreal hadi.abdi-ghavidel@polymtl.ca

September 29, 2020

ABSTRACT

Newly-introduced deep learning architectures, namely BERT, XLNet, RoBERTa and ALBERT, have been proved to be robust on several NLP tasks. However, the datasets trained on these architectures are fixed in terms of size and generalizability. To relieve this issue, we apply one of the most inexpensive solutions to update these datasets. We call this approach BET by which we analyze the backtranslation data augmentation on the transformer-based architectures. Using the Google Translate API with ten intermediary languages from ten different language families, we externally evaluate the results in the context of automatic paraphrase identification in a transformer-based framework. Our findings suggest that BET improves the paraphrase identification performance on the Microsoft Research Paraphrase Corpus (MRPC) to more than 3% on both accuracy and F1 score. We also analyze the augmentation in the low-data regime with downsampled versions of MRPC, Twitter Paraphrase Corpus (TPC) and Quora Question Pairs. In many low-data cases, we observe a switch from a failing model on the test set to reasonable performances. The results demonstrate that BET is a highly promising data augmentation technique: to push the current state-of-the-art of existing datasets and to bootstrap the utilization of deep learning architectures in the low-data regime of a hundred samples.

Keywords BET · Back-Translation · Textual Data Augmentation · Transformers · Paraphrase Identification

1 Introduction

Machine learning and deep learning algorithms have achieved impressive results lately. A part of this success is due to the availability of a large amount of annotated data. The majority of the public NLP datasets lack a large amount of data, which limits the accuracy of the models. On the other hand, the provision of big data is costly and time-consuming. In this paper, we intend to increase the size of natural language data through an easy data augmentation technique called BET.

Data augmentation has been well-established in computer vision tasks (e.g. Shorten and Khoshgoftaar [1]), but it is not a widespread practice in the NLP community. In the past couple of years, data augmentation in NLP has gained growing interest. According to Wei and Zou [2], it is costly and challenging to increase the size of the textual data. Thus, fewer efforts have been seen in the state-of-the-art (SOTA). In this paper, we used the backtranslation approach, one of the most successful methods for phrase-based translation [3, 4, 5]. In other words, we consider the backtranslation technique to act as a paraphraser and we evaluate the augmented data on the four transformer-based architectures: BERT, XLNet, RoBERTa and ALBERT.

Our main contributions are as follows:

- We systematically divided the Google Translate (GT) languages into family clusters and select up to ten languages as intermediary languages.
- We augmented using BET the whole MRPC paraphrase corpus, as well as a downsampled version of Quora ¹ and Twitter Paraphrase Corpus [6], which we released for reproducibility²³⁴.
- Using the augmented data, we analyzed the improvement in terms of precision, recall, F1-score and accuracy for four transformer-based models.

The structure of the current paper is as follows: In section 2, we review the most recent works on data augmentation and then discuss what has been done in the paraphrase identification task, especially on MRPC Paraphrase Corpus, Quora Question Duplicate and Twitter Paraphrase Corpus. In section 3, we explain our data, baselines and methodology. In section 4, we describe our results and discuss them in detail. The last section ends the paper in our conclusion, limitations and future work.

2 Previous Works

2.1 Data Augmentation

Data augmentation in NLP has been an active research area mainly since 2018. In this section, we highlight what methods have been used and how they had an impact on NLP tasks. In what follows, we categorize the data augmentation techniques into linguistic and non-linguistic categories. By linguistic property, we mean the meaning is preserved after the data augmentation and the augmented data follows the correct linguistic form.

In the linguistic category, the augmentation is done based on word-level and sentence-level replacement or an entire generation of new sentences. In the word-level replacement, the words are usually replaced with the following alternatives: Replacing with the synonyms in the thesaurus [7, 2, 8] and Replacing with the words of most similar embedding vectors [9, 10, 11]. Another type of word-level is to substitute words with the masked words by a suggestion from a BERT model (e.g. CBERT [12]). This type of augmentation is enhanced by Reinforcement learning in works like [13, 14].

In the sentence level replacement, the alternative sentence is generated through the following methods: Backtranslation [15, 16, 4], Paraphrase generation with regex [16] and XLDA technique which selects at random a segment and translates it [17].

Entire-generation of new sentences is mostly done by the transformers based on the classification of the labels. Anaby-Tavor et al. [18] used the GPT-2 model [19] to generate new examples and filter them by using a classifier trained on the original data. In a similar work, Kumar et al. [20] combined GPT-2 [19], BERT [21] and BART [22], and then elaborated a conditional data augmentation framework by prepending the class labels to text sequences.

In the non-linguistic category, the augmentation is conducted through the methods such as:

- Random insertion [2]
- Random swap [2]
- Random deletion [2]
- Textual noise injection [16]
- Spelling error [16]

The closest work to ours in terms of the task and datasets belongs to Shakeel et al. [23]. The authors used LSTM and CNN with hand-crafted features on paraphrase corpora: Quora, MRPC and SemEval. They achieved the results competitive with the SOTA by augmenting the paraphrasing data with a graph-based technique on the syntax tree. Nevertheless, the current SOTA results from transformer-based architectures are beyond their reported results. Therefore, there is a need to verify the impact of the backtranslation data augmentation technique, particularly in the transformer-based architectures.

¹https://www.kaggle.com/c/quora-question-pairs

²https://github.com/jpcorb20/wikipedia-lang-families

³ https://github.com/jpcorb20/google-translate-backtranslation-da

⁴ https://github.com/jpcorb20/bet-backtranslation-paraphrase-experiment

2.2 Paraphrase Identification on MRPC

In this section, we highlight how automatic paraphrase identification has recently been trained on the accessible MRPC dataset.

A large-scale labelled corpus of MRPC introduced by Dolan and Brockett [24] is collected from news data. Among several models trained on this corpus, transformer-based models like BERT were the most successful ones.

Mainly before 2018, most of the paraphrase identification tasks on MRPC were conducted through using hand-crafted features such as sentence similarities metrics like Cosine distance, L2 Euclidean distance, word embeddings as well as part-of-speech tag embeddings [25], syntactic and semantic features [26], enhanced embeddings by adding syntactic and multi-sense features [27], and combination of latent features with fine-grained n-gram overlap[28].

Based on the attention-based transformer model (Vaswani et al. [21]), BERT [29] made a revolutionary change in the NLP SOTA in many GLUE tasks, especially paraphrase identification. Both accuracy and F1 score increased tremendously by BERT. However, the BERT pretraining step has some drawbacks which were addressed on the following modified versions. In RoBERTa, Liu et al. [30] removed the next-sentence pretraining objective to make improvements on the BERT masked language modelling objective. The dependency between words became visible by XLNet [31], which is pretrained based on the potential permutations of context words surrounding a target word. Followed by XLNet, ALBERT [32] was introduced to address the issues of high memory consumption and BERT's training speed. Among the tasks performed by ALBERT, paraphrase identification accuracy is better than several other models like RoBERTa. Research on how to improve BERT is still an active area, and the number of new versions is still growing. The examples are StructBERT [33], ERNIE [34], etc. Overall, the paraphrase identification performance on MRPC becomes stronger in newer frameworks.

Although we have seen the significant improvement in the paraphrase identification task in the past years due to the introduction of the transformer-based models, the data augmentation effect on them has less been touched. As a result, we aim to figure out how carrying out the augmentation influences the paraphrase identification task performed by these transformer-based models.

3 Methodology

3.1 Data

In this paper, our first experiment is on the full MRPC corpus. This corpus is introduced inside the GLUE benchmark (General Language Understanding Evaluation) [35] for NLP language models and seems to be one of the most known corpora in the paraphrase identification task. This corpus consists of sentence pairs which are automatically extracted from online news sources. We call the first sentence "sentence" and the second one, "paraphrase". There are 4076 pairs for the train and 1725 for the test set. Overall, there are 5801 pairs in the original set provided by Microsoft.

In our second experiment, we analyze the data-augmentation on the downsampled versions of MRPC and two other corpora for the paraphrase identification task, namely the TPC and Quora dataset. Lan et al. [6] published TPC as a new version of the SemEval-2015 task 1 on "Paraphrase and Semantic Similarity in Twitter" [36, 37]. 6 Amazon Mechanical Turkers annotated it with a good correlation with expert's annotations. When four or more Turkers are agreeing on the similarity, the pair is considered a paraphrase. When two or less agree, it is a non-paraphrase pair. Finally, the pairs with three Turkers agreeing and disagreeing are removed, because of their ambiguity. The Quora Question Duplicate dataset was released as a Kaggle Competition in 2017.

3.2 Downsampling Procedure

We performed downsampling on our three datasets in a balanced fashion by which we consider the equal number of positive and negative examples. We aimed to show the impact of our BET approach in a low-data regime and generalize it to other corpora within the paraphrase identification context. Previous authors used this type of approach [2, 11, 18]. In this regard, 50 samples are randomly chosen from the paraphrase pairs and 50 samples from the non-paraphrase pairs. This selection is made in each dataset to form a downsampled version with a total of 100 samples.

3.3 Translation Setup

The Google Translate (GT) API can translate 109 languages into each other. Some of these languages fall into family branches, and some others like Basque are language isolates. We systematically selected ten languages based on the following procedure:

- 1. We clustered all the languages into the related language families based on the information provided in the Wikipedia info-boxes⁵. The Romance branch is illustrated for instance in Figure 1.
- 2. Based on the maximum number of L1 speakers, we selected one language from each language family. With this process, we aimed at maximizing the linguistic differences as well as having a fair coverage in our translation process. This led us to Table 1.
- 3. We kept the top-10 languages.

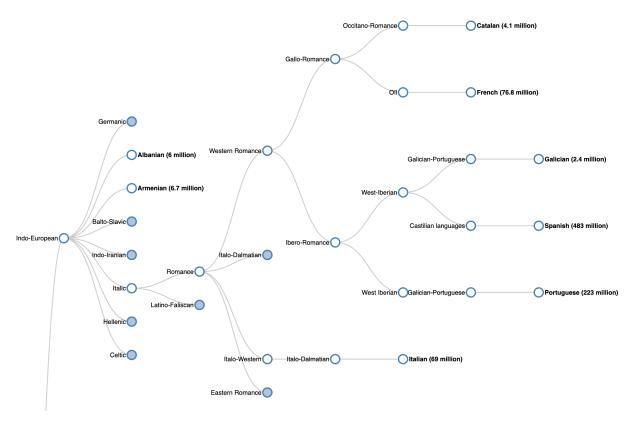


Figure 1: Romance branch in the language family tree extracted from Wikipedia info-boxes.

Table 1: Top-10 Languages sorted by most L1 speakers for each language family.

Language	Family	Native
(GT code)		speakers
		(in million)
Chinese (zh)	Sino-Tibetan	1,200
(Simplified)		
Spanish (es)	Indo-European	483
Arabic (ar)	Afro-Asiatic	310
Japanese (ja)	Japonic	125
Telugu (te)	Dravidian	82
Javanese (jv)	Austronesian	82
Korean (ko)	Koreanic	77.2
Vietnamese (vi)	Austroasiatic	76
Turkish (tr)	Turkic	75.7
Yoruba (yo)	Niger-Congo	40

⁵Code and full interactive version available at https://github.com/jpcorb20/wikipedia-lang-families

3.4 Paraphrase Identification

Our main goal is to analyze the data-augmentation effect on the transformer-based architectures. As a result, we select BERT [29], RoBERTa [30], XLNet [31] and ALBERT [32]. As discussed in Section 2, subsequent models modified BERT to improve it as much as possible.

As the quality in the paraphrase identification dataset is based on a nominal scale ("0" or "1"), paraphrase identification is considered as a supervised classification task. We input the sentence, the paraphrase and the quality into our candidate models and train classifiers for the identification task.

3.4.1 Data Augmentation

In the current study, we aim to augment the paraphrase of the pairs and keep the *sentence* as it is. Therefore, our input to the translation module is the paraphrase. Once translated into the target language, the data is then back-translated into the source language. Our filtering module removes the backtranslated texts, which are an exact match of the original paraphrase. Overall, our augmented dataset size is about ten times higher than the original MRPC size, with each language generating 3,839 to 4,051 new samples. For instance, one paraphrase pair from MRPC was:

- Sentence: They had published an advertisement on the Internet on June 10, offering the cargo for sale, he added.
- *Paraphrase*: On June 10, the ship's owners had published an advertisement on the Internet, offering the explosives for sale.

When using BET with Chinese (zh) as intermediary language, we received the new paraphrase:

• Augmented paraphrase: On June 10, the ship owner posted an advertisement on the Internet to sell explosives.

3.5 Experimental Setup

We conducted our experiments with the HuggingFace library [38] and ran the experiments locally on a NVIDIA RTX2070 GPU, making our results easily reproducible. Our hyperparameters are tuned based on what is proposed by [38] for the BERT (*BERT base uncased*), RoBERTa model (*RoBERTa base*) and ALBERT (*ALBERT base v2*) models, which is as follows:

- Epochs = 3
- Batch size = 32
- Learning rate = 3e-5
- Maximum sequence length = 128
- random seed = 42

With XLNet (XLNet base cased), we had to change the batch size to 16.

Overall, our experiment were conducted along two categorical sets: the set of models Σ and the set of intermediary languages L. More formally, we define them as $L=\{zh,es,ar,ja,te,jv,ko,vi,tr,yo\}$ and $\Sigma=\{bert,xlnet,roberta,albert\}$. The dataset set D is further added, which is $D=\{mrpc,tpc,quora\}$. For each model and dataset pairs in $\Sigma \times D$, we evaluated a baseline (base) to compare all our results obtained with the augmented datasets. We also computed results for the augmentation with all the intermediary languages (all) at once.

The performance of the paraphrase identifier is evaluated based on the following set M of metrics:

- Accuracy (Acc): Proportion of correctly identified paraphrases.
- **Precision (P) (positive predictive value)**: Proportion of correctly identified paraphrases among all the predicted paraphrases.
- Recall (R) (sensitivity): Proportion of correctly identified paraphrases among all the existing paraphrases.
- **F1 score** (**F1**): The harmonic mean of precision and recall.

In our visualizations, we looked specifically at the gain g_m in these different metrics $m \in M$ which is defined as:

$$g_m(\sigma, d, l) = m(\sigma, d, l) - m(\sigma, d, base)$$
(1)

Where $d \in D$ is a dataset, $l \in L$ is an intermediary language used for the augmentation, and $\sigma \in \Sigma$ is a model. To get a better overview of the efficiency of BET, we visualize the marginal gain distributions — $G_m(d)$, $G_m(l)$ and $G_m(\sigma)$ — along each of these categorical sets one at a time with each metric m, taking the other sets as free variables. For instance, we can have $G_m(\sigma)$ for all models in Σ , of which we can analyze the obtained gain by model for all metrics.

We divided the train set, full or downsampled, of all datasets into the train set and development set (20%). All the results are computed on their respective test sets except for the Quora Question Duplicate dataset from which we split our own test set (20%).

4 Results and Discussion

In this section, we discuss the results we obtained through training the transformer-based models on the original and augmented full and downsampled datasets. Also, we highlight which languages help boost the models.

4.1 Full MRPC

Table 2 shows the performance of each model trained on original corpus (baseline) and augmented corpus produced by all and top-performing languages. As the table depicts, the results both on the original MRPC and the augmented MRPC are different in terms of accuracy and F1 score by at least 2 percent points on BERT. For the other models, the improvements range from 1 to 1.5 percent points. These observation are visible in Figure 2. For precision and recall, we see a drop in precision except for BERT. The recall improvements are the highest gains for all models, approximately 3 percent points, except for XLNet. RoBERTa that obtained the best baseline is the hardest to improve while there is a boost for the lower performing models like BERT and XLNet to a fair degree. Nevertheless, we enhanced the SOTA performance of RoBERTa from an F1 score of 0.909 [30] up to 0.915. This boosting is achieved through the Vietnamese intermediary language's augmentation, which leads to an increase in precision and recall.

Table 2: MDDC	reculte with	basalina for o	II modala aa wal	1 as augmentation for a	II and tan no	orforming language
Table 2. MIKE	z resums wim	vaseune 101 a	ili ilioueis as wei	i as augmentation for a	u ana tod-d	errorining fanguage.

Model	Data	Acc	F1	P	R
BERT	baseline	0.802	0.858	0.820	0.899
BERT	all	0.824	0.877	0.819	0.945
BERT	es	0.835	0.882	0.840	0.929
XLNet	baseline	0.845	0.886	0.868	0.905
XLNet	all	0.837	0.883	0.840	0.932
XLNet	ja	0.860	0.897	0.877	0.919
RoBERTa	baseline	0.874	0.906	0.898	0.914
RoBERTa	all	0.872	0.907	0.877	0.939
RoBERTa	vi	0.886	0.915	0.906	0.925
ALBERT	baseline	0.853	0.890	0.885	0.895
ALBERT	all	0.841	0.886	0.847	0.929
ALBERT	yo	0.867	0.902	0.884	0.922

The results for the augmentation based on a single language are presented in Figure 3. We improved the baseline in all the languages except with the Korean (ko) and the Telugu (te) as intermediary languages. Interestingly, we have the best results in terms of gains with Spanish-based augmentation (es) than the results based on all the language augmentations (see Table 2).

Overall, we see a trade-off between precision and recall. The first is dropping while the latter is rising. We already expected this phenomenon according to our initial studies on the nature of backtranslation in the BET approach. We trade the preciseness of the original samples with a mix of these samples and the augmented ones. This mixture led to a significant gain in the recall, but sometimes a drop in precision. On average, we observed an acceptable performance gain with the Arabic (ar), Chinese (zh) and Vietnamese (vi). We note that the best improvements are obtained with Spanish (es) and Yoruba (yo). In general, we hypothesize that the method can be used with this set of five intermediary languages.

4.2 Downsampled MRPC, TPC and Quora

We display the best F1 score results for the downsampled datasets of a 100 balanced samples in Tables 3, 4 and 5. We found that many poor-performing baselines received a boost with BET. For the downsampled MRPC, the augmented data did not work well on XLNet and RoBERTa, leading to a reduction in performance. Nevertheless, the results for

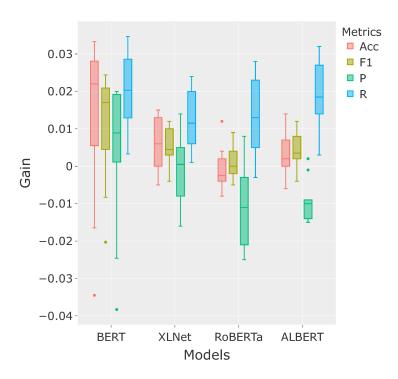


Figure 2: Gain $G_m(\sigma)$ for MRPC for each model.

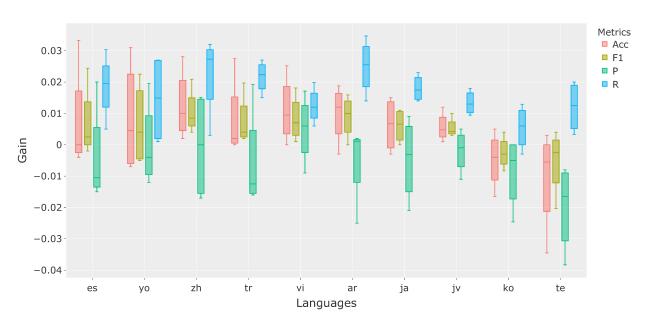


Figure 3: Gain $G_m(l)$ for MRPC for each intermediary language sorted by maximum accuracy.

BERT and ALBERT seem highly promising. For TPC, as well as the Quora dataset, we found significant improvements for all the models.

In Figure 5, we display the marginal gain distributions by augmented datasets. The downsampled TPC dataset was the one that improves the baseline the most, followed by the downsampled Quora dataset. For the Quora dataset, we also note a large dispersion on the recall gains. We explain this fact by the reduction in the recall of RoBERTa and ALBERT

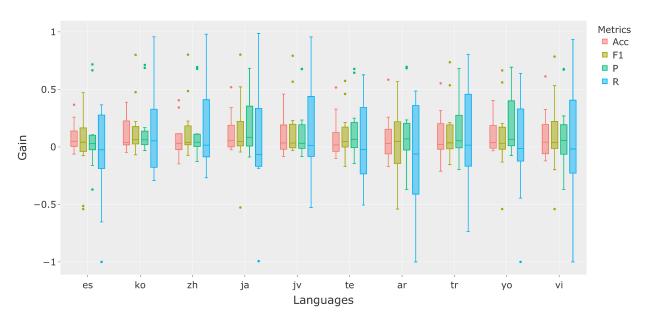


Figure 4: Gain $G_m(l)$ for each language with the downsampled datasets.

Table 3: Top F1 score results with their baseline (100 balanced samples) for our downsampled MRPC.

Model	Aug.	Acc	F1	P	R
BERT	base	0.335	0.000	0.000	0.000
BERT	ja	0.677	0.802	0.676	0.987
ALBERT	base	0.677	0.774	0.722	0.834
ALBERT	ja	0.696	0.804	0.703	0.939

(see Table 5) while XLNet and BERT obtained drastic augmentations. The augmentation of the downsampled MRPC did not work well. With Table 3, we see only a considerable improvement for the BERT model, which is illustrated by the outliers in the top of Figure 5.

In Figure 5, we displayed the marginal gain distributions by augmented datasets. The downsampled TPC dataset was the one that improves the baseline the most, followed by the downsampled Quora dataset. For the Quora dataset, we also note a large dispersion on the recall gains. We explain this fact by the reduction in the recall of RoBERTa and ALBERT (see Table When we consider the models in Figure 6, BERT improves the baseline considerably, explained by failing baselines of 0 as the F1 score for MRPC and TPC. XLNet had nearly no improvement in the accuracy, but the F1 score benefited from a 0.1 gain with high recall gain on average and small precision loss. RoBERTa gained a lot on accuracy on average (near 0.25). However, it loses the most on recall while gaining precision. On average, this results in no gain in F1 score. Finally, ALBERT gained the less among all models, but our results suggest that its behaviour is almost stable from the start in the low-data regime.

Table 4: Top F1 score results with their baseline (100 balanced samples) for our downsampled TPC.

Model	Aug.	Acc	F1	P	R
BERT	base	0.813	0.000	0.000	0.000
BERT	te	0.862	0.574	0.645	0.517
XLNet	base	0.803	0.426	0.447	0.407
XLNet	jv	0.778	0.564	0.436	0.798
ALBERT	base	0.734	0.535	0.391	0.850
ALBERT	ja	0.795	0.586	0.461	0.805
RoBERTa	base	0.180	0.305	0.180	1.000
RoBERTa	vi	0.793	0.536	0.449	0.667

Model	Aug.	Acc	F1	P	R
BERT	base	0.561	0.524	0.436	0.658
BERT	tr	0.573	0.585	0.455	0.819
XLNet	base	0.670	0.401	0.602	0.300
XLNet	all	0.713	0.661	0.585	0.761
ALBERT	base	0.515	0.601	0.431	0.992
ALBERT	ar	0.648	0.649	0.512	0.885
RoBERTa	base	0.374	0.540	0.370	1.000

0.691

0.668

0.553

0.843

RoBERTa

all

Table 5: Top F1 score results with their baseline (100 balanced samples) for our downsampled Quora.

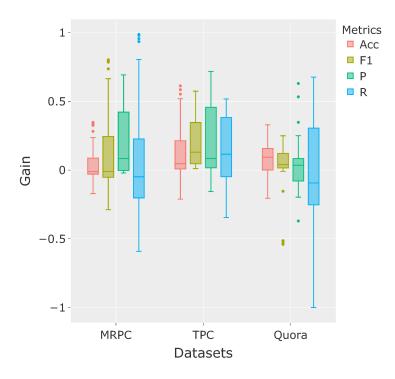


Figure 5: Gain $G_m(d)$ for each downsampled dataset.

In Figure 4, we also analyzed the marginal gains by languages. We noted a gain across most of the metrics. Our findings suggest that all languages are to some extent efficient in a low-data regime of a hundred samples. This motivates using a set of intermediary languages and not only rely on one language. By doing so, we can benefit from peculiar generated samples that maximize the performances when having a specific combination of data, model and intermediary language.

5 Conclusion and Future Work

In this paper, we described how we augmented the MRPC paraphrase corpus as well as the downsampled version of it besides TPC dataset and Quora Question Duplicate dataset. We showed that augmenting data through BET led to a gain in the performance metrics (accuracy, F1 score, precision and recall) for most transformer-based models, particularly BERT. We, further, showed that BET helps boost the paraphrase identification task in the SOTA. Among the other models, we achieved better results for the full MRPC corpus augmented with the Vietnamese language for the RoBERTa model in terms of the F1 score. In the low-data regime, we demonstrated reasonable performance gains up to large ones. By applying BET on three train sets — MRPC, TPC and Quora Question Duplicate — of only a hundred balanced samples each, we augmented drastically the number of available samples and observed a huge gain in performances on their respective test sets.

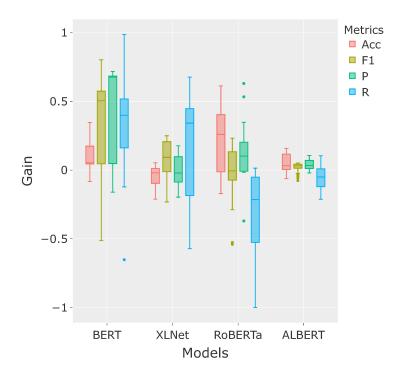


Figure 6: Gain $G_m(\sigma)$ for each model with the downsampled datasets.

In conclusion, it seems we can find a combination of a dataset, model and intermediary language that can lead to a substantial gain in the performances. Thus, BET is guaranteed to be successful through using a set of intermediary languages like Arabic, Chinese, Vietnamese, Spanish and Yoruba.

Despite the success we achieved in using BET for textual data augmentation, the current study has limitations which we plan to address in our future works:

- We did not compare BET with previous techniques from the literature. Our future work will investigate how the datasets augmented by these techniques help advance the performance of transformer-based architectures.
- The experiments can be extended to other NLP tasks like automatic short answer grading, open question answering, etc.
- Since we filtered the back-translated data based on the exact match, we plan to check them based on the grammatical correctness and topic preservation.
- Using other deep learning architectures with the augmented datasets is also part of our future works.

References

- [1] Connor Shorten and Taghi M Khoshgoftaar. A survey on image data augmentation for deep learning. *Journal of Big Data*, 6(1):60, 2019.
- [2] Jason W Wei and Kai Zou. Eda: Easy data augmentation techniques for boosting performance on text classification tasks. *arXiv preprint arXiv:1901.11196*, 2019.
- [3] Ondřej Bojar and Aleš Tamchyna. Improving translation model by monolingual data. In *Proceedings of the Sixth Workshop on Statistical Machine Translation*, pages 330–336. Association for Computational Linguistics, 2011.
- [4] Rico Sennrich, Barry Haddow, and Alexandra Birch. Improving neural machine translation models with monolingual data. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 86–96, 2016.
- [5] Guillaume Lample, Alexis Conneau, Ludovic Denoyer, and Marc'Aurelio Ranzato. Unsupervised machine translation using monolingual corpora only. *arXiv preprint arXiv:1711.00043*, 2017.

- [6] Wuwei Lan, Siyu Qiu, Hua He, and Wei Xu. A continuously growing dataset of sentential paraphrases. In *Proceedings of The 2017 Conference on Empirical Methods on Natural Language Processing (EMNLP)*, pages 1235–1245. Association for Computational Linguistics, 2017.
- [7] Xiang Zhang, Junbo Zhao, and Yann LeCun. Character-level convolutional networks for text classification. In *Advances in neural information processing systems*, pages 649–657, 2015.
- [8] Georgios Rizos, Konstantin Hemker, and Björn Schuller. Augment to prevent: Short-text data augmentation in deep learning for hate-speech classification. In *Proceedings of the 28th ACM International Conference on Information and Knowledge Management*, pages 991–1000, 2019.
- [9] William Yang Wang and Diyi Yang. That's so annoying!!!: A lexical and frame-semantic embedding based data augmentation approach to automatic categorization of annoying behaviors using# petpeeve tweets. In *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing*, pages 2557–2563, 2015.
- [10] Cameron R Wolfe and Keld T Lundgaard. Data augmentation for deep transfer learning. arXiv preprint arXiv:1912.00772, 2019.
- [11] Praveen Kumar Badimala Giridhara, Mishra Chinmaya, Reddy Kumar Modam Venkataramana, Syed Saqib Bukhari, and Andreas Dengel. A study of various text augmentation techniques for relation classification in free text. In *Proceedings of the 8th International Conference on Pattern Recognition Applications and Methods*, 2019.
- [12] Xing Wu, Shangwen Lv, Liangjun Zang, Jizhong Han, and Songlin Hu. Conditional bert contextual augmentation. In *International Conference on Computational Science*, pages 84–95. Springer, 2019.
- [13] Zhiting Hu, Bowen Tan, Russ R Salakhutdinov, Tom M Mitchell, and Eric P Xing. Learning data manipulation for augmentation and weighting. In *Advances in Neural Information Processing Systems*, pages 15738–15749, 2019.
- [14] Tong Niu and Mohit Bansal. Automatically learning data augmentation policies for dialogue tasks. *arXiv preprint arXiv:1909.12868*, 2019.
- [15] Yixuan Tong, Liang Liang, Boyan Liu, Shanshan Jiang, and Bin Dong. Supervised neural machine translation based on data augmentation and improved training \& inference process. In *Proceedings of the 6th Workshop on Asian Translation*, pages 147–151, 2019.
- [16] Claude Coulombe. Text data augmentation made simple by leveraging nlp cloud apis. *arXiv preprint* arXiv:1812.04718, 2018.
- [17] Jasdeep Singh, Bryan McCann, Nitish Shirish Keskar, Caiming Xiong, and Richard Socher. Xlda: Cross-lingual data augmentation for natural language inference and question answering. *arXiv* preprint arXiv:1905.11471, 2019.
- [18] Ateret Anaby-Tavor, Boaz Carmeli, Esther Goldbraich, Amir Kantor, George Kour, Segev Shlomov, Naama Tepper, and Naama Zwerdling. Not enough data? deep learning to the rescue! *arXiv preprint arXiv:1911.03118*, 2019.
- [19] Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. Language models are unsupervised multitask learners. *OpenAI Blog*, 1(8):9, 2019.
- [20] Varun Kumar, Ashutosh Choudhary, and Eunah Cho. Data augmentation using pre-trained transformer models. *arXiv preprint arXiv:2003.02245*, 2020.
- [21] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *Advances in neural information processing systems*, pages 5998–6008, 2017.
- [22] Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Ves Stoyanov, and Luke Zettlemoyer. Bart: Denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension. *arXiv* preprint arXiv:1910.13461, 2019.
- [23] Muhammad Haroon Shakeel, Asim Karim, and Imdadullah Khan. A multi-cascaded model with data augmentation for enhanced paraphrase detection in short texts. *Information Processing & Management*, 57(3):102204, 2020.
- [24] William B Dolan and Chris Brockett. Automatically constructing a corpus of sentential paraphrases. In *Proceedings* of the Third International Workshop on Paraphrasing (IWP2005), 2005.
- [25] Hua He, Kevin Gimpel, and Jimmy Lin. Multi-perspective sentence similarity modeling with convolutional neural networks. In *Proceedings of the 2015 conference on empirical methods in natural language processing*, pages 1576–1586, 2015.
- [26] Simone Filice, Giovanni Da San Martino, and Alessandro Moschitti. Structural representations for learning relations between pairs of texts. In *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 1003–1013, 2015.

- [27] Jianpeng Cheng and Dimitri Kartsaklis. Syntax-aware multi-sense word embeddings for deep compositional models of meaning. *arXiv preprint arXiv:1508.02354*, 2015.
- [28] Yangfeng Ji and Jacob Eisenstein. Discriminative improvements to distributional sentence similarity. In *Proceedings of the 2013 Conference on Empirical Methods in Natural Language Processing*, pages 891–896, 2013.
- [29] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv* preprint arXiv:1810.04805, 2018.
- [30] Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. Roberta: A robustly optimized bert pretraining approach. *arXiv preprint arXiv:1907.11692*, 2019.
- [31] Zhilin Yang, Zihang Dai, Yiming Yang, Jaime Carbonell, Russ R Salakhutdinov, and Quoc V Le. Xlnet: Generalized autoregressive pretraining for language understanding. In *Advances in neural information processing systems*, pages 5754–5764, 2019.
- [32] Zhenzhong Lan, Mingda Chen, Sebastian Goodman, Kevin Gimpel, Piyush Sharma, and Radu Soricut. Albert: A lite bert for self-supervised learning of language representations. *arXiv* preprint arXiv:1909.11942, 2019.
- [33] Wei Wang, Bin Bi, Ming Yan, Chen Wu, Zuyi Bao, Liwei Peng, and Luo Si. Structbert: Incorporating language structures into pre-training for deep language understanding. *arXiv preprint arXiv:1908.04577*, 2019.
- [34] Yu Sun, Shuohuan Wang, Yukun Li, Shikun Feng, Hao Tian, Hua Wu, and Haifeng Wang. Ernie 2.0: A continual pre-training framework for language understanding. *arXiv* preprint arXiv:1907.12412, 2019.
- [35] Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel R. Bowman. GLUE: A multitask benchmark and analysis platform for natural language understanding. In *GLUE: A Multi-Task Benchmark and Analysis Platform for Natural Language Understanding*, 2019. In the Proceedings of ICLR.
- [36] Wei Xu, Alan Ritter, Chris Callison-Burch, William B. Dolan, and Yangfeng Ji. Extracting lexically divergent paraphrases from Twitter. *Transactions of the Association for Computational Linguistics*, 2014.
- [37] Wei Xu. Data-Drive Approaches for Paraphrasing Across Language Variations. PhD thesis, Department of Computer Science, New York University, 2014.
- [38] Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Rémi Louf, Morgan Funtowicz, et al. Transformers: State-of-the-art natural language processing. arXiv preprint arXiv:1910.03771, 2019.