

---

# SidechainNet: An All-Atom Protein Structure Dataset for Machine Learning

---

**Jonathan E. King\***  
Comp. & Systems Biology  
University of Pittsburgh  
Pittsburgh, PA 15213  
jok120@pitt.edu

**David Ryan Koes**  
Comp. & Systems Biology  
University of Pittsburgh  
Pittsburgh, PA 15213  
dkoes@pitt.edu

## Abstract

Despite recent advancements in deep learning methods for protein structure prediction and representation, little focus has been directed at the simultaneous inclusion and prediction of protein backbone and sidechain structure information. We present SidechainNet, a new dataset that directly extends the ProteinNet dataset. SidechainNet includes angle and atomic coordinate information capable of describing all heavy atoms of each protein structure. In this paper, we first provide background information on the availability of protein structure data and the significance of ProteinNet. Thereafter, we argue for the potentially beneficial inclusion of sidechain information through SidechainNet, describe the process by which we organize SidechainNet, and provide a software package (<https://github.com/jonathanking/sidechainnet>) for data manipulation and training with machine learning models.

## 1 Background

The deep learning subfield of protein structure prediction and protein science has made considerable progress in the last several years. In addition to the dominance of the AlphaFold deep learning method in the 2018 Critical Assessment of protein Structure Prediction (CASP) competition [1, 2, 3], many novel deep learning-based methods have been developed for protein representation [4, 5], property prediction [6, 7], and structure prediction [8, 9, 10, 11]. Such methods are demonstrably effective and extremely promising for future research. They have the potential to make complex inferences about proteins much faster than competing computational methods and at a cost several orders of magnitude lower than experimental methods.

### 1.1 Protein Structure Data Availability and Information Leakage

The availability of existing data is a notable challenge for applications of deep learning methods to protein science and, in particular, to protein structure prediction. This limitation is not equally present in other applications of deep learning. For instance, in the field of image recognition, the ImageNet [12] dataset contains 14 million annotated and uniformly presented images. Similarly, in the field of natural language processing, linguistic databases and the web provide access to hundreds of millions of samples of annotated textual data and effectively limitless access to unannotated data. Though the Universal Protein Resource (UniProt) database now contains a whopping 156 million unique protein sequences [13], there are currently only 169,963 protein structures in the Protein Data Bank [14] (PDB), of which only 94,393 represent unique protein sequences. Furthermore, although protein

---

\*Carnegie Mellon University-University of Pittsburgh Joint PhD Program in Computational Biology

structure data is accessible through the PDB in individual files, it is not otherwise preprocessed for machine learning tasks in a manner analogous to other machine learning domains.

In addition to data availability, biased data presents another major challenge for machine learning practitioners [15]. Something as simple as dividing the data into training and testing splits for model development and evaluation can introduce harmful biases. Failure to analyze the similarities or differences between training and evaluation splits can lead to “information leakage” in which trained models exhibit overly optimistic performance by learning non-generalizable features from the training set. One such example of this in structural biology research is the Database of Useful Decoys: Enhanced (DUD-E) dataset [16]. DUD-E remains a common benchmark for evaluating molecular docking programs and chemoinformatic-focused machine learning methods despite recent research [17, 18] uncovering dataset bias that explains misleading performance by many of the deep learning methods trained on it.

## 1.2 Treatment of Protein Backbone and Sidechain Information

A common way to describe the structure of a protein is to divide it into two separate components—the backbone and the sidechains that extend from it. The protein backbone is a linear chain of nitrogen, carbon, and oxygen atoms. The torsional angles ( $\Phi$ ,  $\Psi$ , and  $\Omega$ ) that connect these atoms form the overall shape of the protein. In contrast, protein sidechains are chemical groups of zero to ten heavy atoms connected to the central  $\alpha$ -carbon of each amino acid residue. Each of the twenty distinct amino acids is defined by the unique structure and chemical composition of its sidechain component. Consequently, each protein is defined by the unique sequence of its constituent amino acids. The precise orientation of amino acid sidechains is critical to the biochemical function of proteins. Enzyme catalysis, drug binding, and protein-protein interactions all depend on a level of atomic precision that is not accounted for in backbone structure alone. Thus, the protein backbone and sidechain are both crucially important to protein structure and function.

Despite this, many predictive methods treat backbone structure prediction and sidechain structure prediction as distinct problems.<sup>2</sup> For instance, a common approach is to predict the protein backbone alone and then add sidechains to the generated structure using a search, energy minimization, and refinement method (e.g. Rosetta [19]). Another common approach is to select and optimize sidechain rotamers from a library of commonly occurring conformations once the backbone is fixed [20].

The methods currently employed by the community are undoubtedly effective. A possible reason for separating backbone and sidechain information could be that the community believes adequate progress in backbone structure prediction has been made without accounting for sidechain conformations during training. Alternatively, it may be the case that such information is simply not readily available for training deep learning models. Nonetheless, the potentially positive effect of including the complete backbone and sidechain structure at training time has not been determined.

## 2 SidechainNet

We propose SidechainNet, a protein sequence and structure dataset that addresses the concerns described in Sections 1.1 and 1.2.

### 2.1 Addressing Protein Structure Data Availability and Information Leakage

SidechainNet is based on Mohammed AlQuraishi’s ProteinNet [21]. ProteinNet is a dataset designed to mimic the assessment methodology of CASP proceedings.

Under the CASP contest organization, participants develop predictive methods using any publicly available protein structures. Thereafter, predictive methods are assessed using a specific set of proteins that are selected by contest organizers and withheld from participants until assessment. Organizers select proteins that are challenging to predict and, in the case of the Free Modeling contest category, have minimal similarity to available protein structures. In effect, the CASP process results in a set of data for method development and a separate set of data for evaluation. AlQuraishi proposed that these datasets could be treated as training and testing sets and re-purposed for machine learning.

---

<sup>2</sup>Recent work by Yang et al. [9] included a representation of inter-residue  $\beta$ -carbon orientations, but did not provide a representation of complete sidechain structures.

Since no validation sets are constructed by the CASP organizers, AlQuraishi used clustering methods to extract distinct protein sequences and structures from each training set to use for validation. For each CASP contest, AlQuraishi ultimately constructed seven different validation sets—each containing an increasing upper bound on the similarity between sequences in the given validation set and those in the training set. His construction allows users to evaluate a model’s performance on proteins that have high similarity to a given training set (akin to the Template-Based Modeling CASP category) or proteins that have low or zero similarity to a training set (akin to the Free Modeling CASP category).

As a result of the constraints imposed by the CASP contest structure and AlQuraishi’s validation set construction, ProteinNet accounts for protein sequence similarity across data splits. This prevents information leakage and minimizes misleading performance. For these reasons, we have replicated AlQuraishi’s training, testing, and validation set constructions in SidechainNet.

## 2.2 Unifying Protein Backbone and Sidechain Information

SidechainNet also extends ProteinNet by including all heavy atoms of each protein and all necessary torsional angles for atomic reconstruction.

We are interested in determining whether the availability of complete sidechain conformation information can improve the performance of structure prediction methods. However, even if such models are not more accurate, they will be fundamentally more expressive as they will generate all-atom protein structures. These structures could be used without modification in downstream analyses for structure-based drug discovery and even molecular dynamics simulations.

## 3 Properties of SidechainNet

To the maximum extent possible, SidechainNet attempts to replicate the features included in ProteinNet (Table 1). However, SidechainNet adds support for several new features as well. More information about the new features is included below.

### 3.1 Angle Information

One important component of protein structure data often utilized in structure prediction methods but absent from ProteinNet is the set of torsional angles that describe the orientation of the protein. The canonical backbone torsional angles ( $\Phi$ ,  $\Psi$ , and  $\Omega$ ) for each residue are provided in SidechainNet.

In the development of SidechainNet, we were surprised to observe that we incurred a noticeable amount of error when attempting to reconstruct a protein’s Cartesian coordinates given only its backbone torsional angles (Figure 1B). We determined that the error was due to our assumption that several important non-torsional angles in the protein backbone (C-N-CA, N-CA-C, and CA-C-N) could be fixed using reference values from AMBER force fields [22] rather than being allowed to vary. Thus, even if a model perfectly predicted backbone torsional angles, it would still be subject to reconstruction error if such bond angles were held fixed. For that reason, we decided to include these angles in SidechainNet as well (Figure 1A).

Entry	Dimensionality	ProteinNet	SidechainNet
Primary sequence	$L \times 1$	X	X
PSSM <sup>†</sup> + Information Content	$L \times 21$	X	X
Missing residue mask	$L \times 1$	X	X
Backbone coordinates*	$L \times 4 \times 3$	X	X
Backbone torsion angles	$L \times 3$		X
Backbone bond angles	$L \times 3$		X
Sidechain torsion angles	$L \times 6$		X
Sidechain coordinates	$L \times 10 \times 3$		X

Table 1: Differences between ProteinNet and SidechainNet where  $L$  represents protein length.

<sup>†</sup>Position Specific Scoring Matrices (PSSMs) developed from multiple sequence alignments.

\*SidechainNet includes atomic coordinates for backbone oxygen atoms while ProteinNet does not.

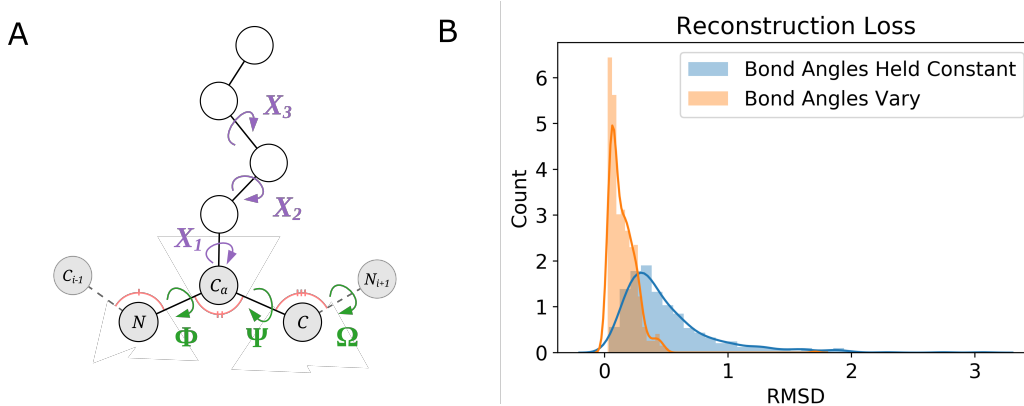


Figure 1: **(A)** A methionine residue annotated with the 3 categories of angles measured by Sidechain-Net: the canonical backbone torsional angles ( $\Phi$ ,  $\Psi$ , and  $\Omega$ ) in green, the rotatable sidechain-specific torsional angles ( $X_{1-3}$ ) in purple, and the 3-atom backbone bond angles in pink. Atoms considered part of the residue’s sidechain are colored white, while the backbone atoms are colored gray. **(B)** Backbone bond angles (C-N-CA, N-CA-C, and CA-C-N; colored pink in 1A) are important for accurately reconstructing atomic coordinates from angles. When we assumed that these angles could be fixed during coordinate reconstruction, the result was greater reconstruction error (blue distribution). When we measured these angles with SidechainNet and included their actual values during coordinate reconstruction, we achieved lower reconstruction error (orange distribution). Root-Mean-Square Deviation (RMSD) measures the difference between true atomic coordinates and coordinates reconstructed from recorded angles.

### 3.2 Sidechain Information

SidechainNet also includes sidechain-specific information that describes the orientation of each amino acid using both external (Cartesian) and internal (angular) coordinate systems. This information includes up to ten atomic coordinates and up to six torsional angles for the sidechain component of each residue.

The number of angles measured for each amino acid sidechain depends on the number of rotatable bonds in the amino acid. For those residues with aromatic sidechains (e.g., tryptophan), the torsional angles describing the ring components of the residue are omitted since they can be inferred, though their complete atomic coordinates are still recorded.

3-atom bond angles (as opposed to 4-atom torsional angles) and bond lengths associated with sidechain structures are not recorded from structure files. Instead, we extracted reference values unique to each bond from the AMBER ff19SB force field [22, 23]. Together with the recorded sidechain torsional angles, these angles and bond lengths can be used to generate all-atom sidechain structures.

### 3.3 Caveats

We failed to include data for 326 (0.3%) of the 104,323 listed protein structures from ProteinNet’s CASP 12 dataset. Issues with these structures arose due to problematic file parsing, edge cases, and disagreement between the sequences we observed and those reported by ProteinNet that could not be resolved programmatically. Although we have excluded these protein structures for now, we plan to resolve remaining issues in a subsequent release.

Furthermore, because structure files were re-downloaded in order to obtain extra information, the backbone coordinates and missing residue masks were replaced with observed values to ensure consistency. PSSMs and information content features were included without modification after being aligned to the observed protein sequence. Secondary structure information, which is absent from the ProteinNet release as of writing, is also temporarily excluded.

Finally, both ProteinNet and SidechainNet only consider single-molecule protein chains. Proteins from the PDB that contain multiple chains are divided into multiple independent entries, one for each

chain. Any missing residue or atomic information is padded with zero-vectors matching the size of the corresponding data (e.g.,  $1 \times 3$  for each missing atom,  $1 \times 1$  for each missing angle).

## 4 Using SidechainNet

SidechainNet was originally developed for Python and the PyTorch machine learning framework. As such, we have developed a Python package to load SidechainNet and efficiently train models with it.

### 4.1 Loading SidechainNet as a Python dictionary

In its simplest form, SidechainNet is stored as a Python dictionary organized by the same training, validation, and testing splits described in ProteinNet. There are multiple validation sets included therein.

Within each of SidechainNet's training, validation, and testing splits is another dictionary mapping data entry types (seq, ang, etc.) to a list containing this data type for every protein. In the example below, `seq{i}`, `ang{i}`, ... all refer to the  $i^{th}$  protein in the dataset.

```
data = {"train": {"seq": [seq1, seq2, ...], # Sequences
                 "ang": [ang1, ang2, ...], # Angles
                 "crd": [crd1, crd2, ...], # Coordinates
                 "evo": [evo1, evo2, ...], # PSSMs and Information Content
                 "ids": [id1, id2, ...], # Corresponding ProteinNet IDs
                },
        "valid-10": {...},
        ...,
        "valid-90": {...},
        "test": {...},
        "settings": {...},
        "description": "SidechainNet for CASP 12.",
        "date": "September 20, 2020"
    }
```

By default, the load function downloads the data from the web into the current directory and loads it as a Python dictionary. If the data already exists locally, it reads it from disk. Other than the requirement that the data must be loaded using Python, this method of data loading is agnostic to any downstream analyses.

```
>>> import sidechainnet as scn
>>> data = scn.load(casp_version=12)
>>> data.keys()
['train', 'test', 'valid-10', ... 'valid-90', 'settings', 'description', 'date']
>>> data['train'].keys()
['seq', 'ang', 'ids', 'crd', 'msk', 'evo']
```

### 4.2 Loading SidechainNet with PyTorch DataLoaders

The load function can also be used to load SidechainNet data as a dictionary of `torch.utils.data.DataLoader` objects. PyTorch DataLoaders make it simple to iterate over dataset items for training machine learning models. This method is recommended for using SidechainNet data with PyTorch.

By default, the provided DataLoaders use a custom batching method that randomly generates batches of proteins of similar length. For efficient GPU usage, it generates larger batches when the average length of proteins in the batch is small, and smaller batches when the proteins are large. The probability of selecting small-length batches is decreased so that each protein in SidechainNet is included in a batch with equal probability. See `dynamic_batch_size` and `collate_fn` arguments for more information on modifying this behavior. In the example below, `model_input` is a collated Tensor containing sequence and PSSM information as described in the original ProteinNet paper.

```
>>> dataloaders = scn.load(casp_version=12, with_pytorch="dataloaders")
>>> dataloaders.keys()
```

```

['train', 'train_eval', 'valid-10', ..., 'valid-90', 'test']
>>> dataloaders['train'].dataset
ProteinDataset(casp_version=12, split='train', n_proteins=81454,
               created='Sep 20, 2020')
>>> for protein_id, model_input, true_angles, true_coords in dataloaders['train']:
....     predicted_angles = model(model_input)
....     predicted_coords = angles_to_coordinates(predicted_angles)
....     loss = compute_loss(predicted_angles, predicted_coords,
                             true_angles, true_coords)
....     ...

```

We have also made it possible to access the protein sequence, mask, and PSSM data directly when training by adding `aggregate_model_input=False` to `scn.load`.

```

>>> dataloaders = scn.load(casp_version=12, with_pytorch="dataloaders",
                          aggregate_model_input=False)
>>> for (protein_id, sequence, mask, pssm, true_angles,
       true_coords) in dataloaders['train']:
....     prediction = model(sequence, pssm)
....     ...

```

### 4.3 Converting Angle Representations into All-Atom Structures

An important component of this work is the inclusion of both angular and 3D coordinate representations of each protein. Researchers who develop methods that rely on angular representations may be interested in converting this information into 3D coordinates. For this reason, SidechainNet provides a method to convert the angles it provides into Cartesian coordinates.

In the below example, `angles` is a NumPy matrix or Torch Tensor following the same organization as the NumPy angle matrices provided in SidechainNet. `sequence` is a string representing the protein's amino acid sequence. Both of these are obtainable from the SidechainNet data structures described in Sections 4.1 and 4.2.

```

>>> (len(sequence), angles.shape) # 12 angles per residue
(128, (128, 12))
>>> my_structure_builder = scn.StructureBuilder(sequence, angles)
>>> coords = my_structure_builder.build()
>>> coords.shape # 14 atoms per residue (128*14 = 1792)
(1792, 3)

```

### 4.4 Visualizing All-Atom Structures with PDB, py3Dmol, and gLTF Formats

SidechainNet also makes it easy to visualize both existing and predicted all-atom protein structures. These visualizations are available as PDB files, `py3Dmol.view` objects, and Graphics Library Transmission Format (gLTF) files. Examples of each are included below.

The PDB format is a typical format for representing protein structures and can be opened in software tools like PyMOL [24]. `py3Dmol` (built on 3Dmol.js [25]) enables users to visualize and interact with protein structures on the web and in Jupyter Notebooks via an open-source, object-oriented, and hardware-accelerated Javascript library (Figure 2). Finally, gLTF files, despite their larger size, can be convenient for visualizing proteins on the web or in contexts where other protein visualization tools are not supported.

```


>>> my_structure_builder.to_pdb("example.pdb")
>>> my_structure_builder.to_gltf("example.gltf")

```

## 5 Discussion

SidechainNet builds upon the strong foundation of ProteinNet to provide a protein structure dataset with minimal bias and maximum information content. By including many of the angles necessary to

```
In [8]: my_structure_builder = scn.StructureBuilder(sequence, angles)
my_structure_builder.to_3Dmol()
```

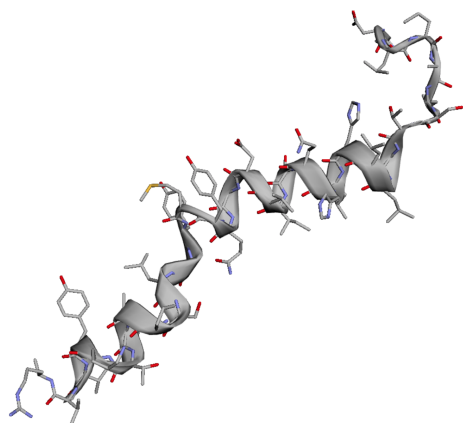

```
Out[8]: <py3Dmol.view at 0x7f26e7df0250>
```

Figure 2: py3Dmol enables the user to interactively inspect all-atom protein structures from SidechainNet within Jupyter/iPython Notebooks.

accurately reconstruct atomic Cartesian coordinates from an angle-only protein representation, we also enable future users to develop methods that utilize either or both internal and external coordinate systems at a previously inaccessible level of atomic detail. Methods developed to explicitly include the orientation and atomic coordinates of protein sidechains may have the upper hand in tasks such as structure-based drug discovery or in the analysis of specific enzyme activities, where such information is necessary. Although the impact of including sidechain information on existing predictive methods has yet to be studied, we hope SidechainNet makes such research more accessible.

SidechainNet code can be found at <https://github.com/jonathanking/sidechainnet>.

## Acknowledgments and Disclosure of Funding

Many thanks to Mohammed AlQuraishi for his inspiring work on protein structure prediction. Thanks, also, to Jeppe Hallgren for his development of a ProteinNet text record parser, which I have used in part here.

This work is supported by R01GM108340 from the National Institute of General Medical Sciences, is supported in part by the University of Pittsburgh Center for Research Computing through the resources provided, and by NIH T32 training grant T32 EB009403 as part of the HHMI-NIBIB Interfaces Initiative.

## References

- [1] Matthew Hutson. AI protein-folding algorithms solve structures faster than ever. *Nature*, July 2019.
- [2] Andrew W. Senior, Richard Evans, John Jumper, James Kirkpatrick, Laurent Sifre, Tim Green, Chongli Qin, Augustin Žídek, Alexander W. R. Nelson, Alex Bridgland, Hugo Penedones, Stig Petersen, Karen Simonyan, Steve Crossan, Pushmeet Kohli, David T. Jones, David Silver, Koray Kavukcuoglu, and Demis Hassabis. Improved protein structure prediction using potentials from deep learning. *Nature*, 577(7792):706–710, January 2020.
- [3] Andriy Kryzhtafovych, Torsten Schwede, Maya Topf, Krzysztof Fidelis, and John Moult. Critical assessment of methods of protein structure prediction (CASP)—round XIII. *Proteins: Structure, Function, and Bioinformatics*, 87(12):1011–1020, October 2019.
- [4] Ethan C. Alley, Grigory Khimulya, Surojit Biswas, Mohammed AlQuraishi, and George M. Church. Unified rational protein engineering with sequence-based deep representation learning. *Nature Methods*, 16(12):1315–1322, October 2019.

- [5] John Ingraham, Vikas K Garg, Regina Barzilay, and Tommi Jaakkola. Generative models for graph-based protein design. In *Advances in Neural Information Processing Systems*, 2019.
- [6] Ahmet Sureyya Rifaioglu, Tunca Doğan, Maria Jesus Martin, Rengul Cetin-Atalay, and Volkan Atalay. DEEPred: Automated protein function prediction with multi-task feed-forward deep neural networks. *Scientific Reports*, 9(1), May 2019.
- [7] Seokjun Seo, Minsik Oh, Youngjune Park, and Sun Kim. DeepFam: deep learning based alignment-free method for protein family modeling and prediction. *Bioinformatics*, 34(13):i254–i262, June 2018.
- [8] Jinbo Xu. Distance-based protein folding powered by deep learning. *Proceedings of the National Academy of Sciences*, 116(34):16856–16865, August 2019.
- [9] Jianyi Yang, Ivan Anishchenko, Hahnbeom Park, Zhenling Peng, Sergey Ovchinnikov, and David Baker. Improved protein structure prediction using predicted interresidue orientations. *Proceedings of the National Academy of Sciences*, 117(3):1496–1503, January 2020.
- [10] Mohammed AlQuraishi. End-to-end differentiable learning of protein structure. *Cell Systems*, 8(4):292–301.e3, April 2019.
- [11] John Ingraham, Adam Riesselman, Chris Sander, and Debora Marks. Learning protein structure with a differentiable simulator. In *International Conference on Learning Representations*, 2019.
- [12] Olga Russakovsky, Jia Deng, Hao Su, Jonathan Krause, Sanjeev Satheesh, Sean Ma, Zhiheng Huang, Andrej Karpathy, Aditya Khosla, Michael Bernstein, Alexander C. Berg, and Li Fei-Fei. ImageNet Large Scale Visual Recognition Challenge. *International Journal of Computer Vision (IJCV)*, 115(3):211–252, 2015.
- [13] The UniProt Consortium. UniProt: a worldwide hub of protein knowledge. *Nucleic Acids Research*, 47(D1):D506–D515, November 2018.
- [14] H. M. Berman. The protein data bank. *Nucleic Acids Research*, 28(1):235–242, January 2000.
- [15] David T. Jones. Setting the standards for machine learning in biology. *Nature Reviews Molecular Cell Biology*, 20(11):659–660, September 2019.
- [16] Michael M. Mysinger, Michael Carchia, John. J. Irwin, and Brian K. Shoichet. Directory of useful decoys, enhanced (DUD-e): Better ligands and decoys for better benchmarking. *Journal of Medicinal Chemistry*, 55(14):6582–6594, July 2012.
- [17] Lieyang Chen, Anthony Cruz, Steven Ramsey, Callum J. Dickson, Jose S. Duca, Viktor Hornak, David R. Koes, and Tom Kurtzman. Hidden bias in the DUD-e dataset leads to misleading performance of deep learning in structure-based virtual screening. *PLOS ONE*, 14(8):e0220113, August 2019.
- [18] Jochen Sieg, Florian Flachsenberg, and Matthias Rarey. In need of bias control: evaluating chemical data for machine learning in structure-based virtual screening. *Journal of chemical information and modeling*, 59(3):947–961, 2019.
- [19] Srivatsan Raman, Robert Vernon, James Thompson, Michael Tyka, Ruslan Sadreyev, Jimin Pei, David Kim, Elizabeth Kellogg, Frank DiMaio, Oliver Lange, Lisa Kinch, Will Sheffler, Bong-Hyun Kim, Rhiju Das, Nick V. Grishin, and David Baker. Structure prediction for CASP8 with all-atom refinement using rosetta. *Proteins: Structure, Function, and Bioinformatics*, 77(S9):89–99, 2009.
- [20] Md Shariful Islam Bhuyan and Xin Gao. A protein-dependent side-chain rotamer library. *BMC Bioinformatics*, 12(S14), December 2011.
- [21] Mohammed AlQuraishi. ProteinNet: a standardized data set for machine learning of protein structure. *BMC Bioinformatics*, 20(1), June 2019.
- [22] David A. Case, Thomas E. Cheatham, Tom Darden, Holger Gohlke, Ray Luo, Kenneth M. Merz, Alexey Onufriev, Carlos Simmerling, Bing Wang, and Robert J. Woods. The amber biomolecular simulation programs. *Journal of Computational Chemistry*, 26(16):1668–1688, 2005.
- [23] Chuan Tian, Koushik Kasavajhala, Kellon A. A. Belfon, Lauren Raguette, He Huang, Angela N. Miguels, John Bickel, Yuzhang Wang, Jorge Pincay, Qin Wu, and Carlos Simmerling. ff19sb: Amino-acid-specific protein backbone parameters trained against quantum mechanics energy surfaces in solution. *Journal of Chemical Theory and Computation*, 16(1):528–552, November 2019.
- [24] Schrödinger, LLC. The PyMOL molecular graphics system, version 1.8. November 2015.
- [25] N. Rego and D. Koes. 3dmol.js: molecular visualization with WebGL. *Bioinformatics*, 31(8):1322–1324, December 2014.