

Necessary and Sufficient Explanations in Abstract Argumentation

AnneMarie Borg¹ and Floris Bex^{1,2}

¹Department of Information and Computing Sciences, Utrecht University

²Department of Law, Technology, Markets and Society, Tilburg University
{a.borg, f.j.bex}@uu.nl

November 5, 2020

Abstract

In this paper, we discuss *necessary* and *sufficient* explanations for formal argumentation – the question whether and why a certain argument can be accepted (or not) under various extension-based semantics. Given a framework with which explanations for argumentation-based conclusions can be derived, we study necessity and sufficiency: what (sets of) arguments are necessary or sufficient for the (non-)acceptance of an argument?

1 Introduction

In recent years, *explainable AI* (XAI) has received much attention, mostly directed at new techniques for explaining decisions of (subsymbolic) machine learning algorithms [13]. However, explanations traditionally also play an important role in (symbolic) knowledge-based systems [8]. Computational argumentation is one research area in symbolic AI that is frequently mentioned in relation to XAI. For example, arguments can be used to provide reasons for or against decisions [8, 1, 12]. The focus can also be on the argumentation itself, where it is explained whether and why a certain argument or claim can be accepted under certain semantics for computational argumentation [5, 6, 7, 14]. It is the latter type of explanations that is the subject of this paper.

Abstract argumentation frameworks, as introduced in [4], consist of sets of arguments (abstract entities) and an attack relation between them. To determine the conclusions of a framework their corresponding extensions – sets of arguments that can collectively be considered as acceptable – are calculated under different semantics [4]. Many of the well-known and most studied semantics are based on the notion of *defense*: an argument is defended by a set of arguments if that set attacks all its attackers.

In this paper we investigate explanations for argumentation-based conclusions (i.e., why an argument is (not) part of an or all extensions), by applying a basic framework for explanations on top of abstract argumentation frameworks which can be evaluated by any extension-based semantics. The explanations are defined in terms of sets of relevant arguments that are part of extensions and explain the (non-)acceptance in terms of defense. We consider an argument *relevant* for another argument if the arguments are connected by means of the attack relation. By requiring relevance of an explanation, arguments that do not (in)directly attack or defend the considered argument (and therefore do not influence the acceptability of that argument) will not be part of the explanation. Since defense is a central notion in many Dung-style semantics, the explanations thus defined can be applied to all the common semantics (e.g., complete, grounded, preferred).

One of the important characteristics of explanations provided by humans is that they select *the* explanation from a possible infinite set of explanations, using criteria such as simplicity, necessity

and sufficiency [12]. In this paper we look at how to select minimal¹, necessary and sufficient explanations for the (non-)acceptance of an argument.

After introducing some preliminary notions concerning (defense) in abstract argumentation frameworks, we provide a *basic framework* with which explanations for both acceptance and non-acceptance of an argument can be provided, given any existing extension-based semantics that is based on the notion of defense. We show that these explanations are well-behaved with respect to different Dung-style semantics (e.g. explanations under grounded semantics are never supersets of explanations under preferred semantics), and discuss notions of *minimality* introduced in [5] applied to explanations in our framework.

We continue by discussing the notions of *necessity* and *sufficiency*, introducing sufficient and necessary explanations for (non-)acceptance. For these explanations we show when they exist and how the explanations provided by the basic framework are related to necessary and sufficient explanations. Furthermore, we show how our notions of necessity and sufficiency relate to the notions of minimality from [5]. We conclude with discussing related and future work.

2 Preliminaries

An *abstract argumentation framework* (AF) [4] is a pair $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$, where Args is a set of *arguments* and $\mathcal{A} \subseteq \text{Args} \times \text{Args}$ is an *attack relation* on these arguments. Such a framework can be viewed as a directed graph, in which the nodes represent arguments and the arrows represent attacks between arguments, see e.g., Figure 1.

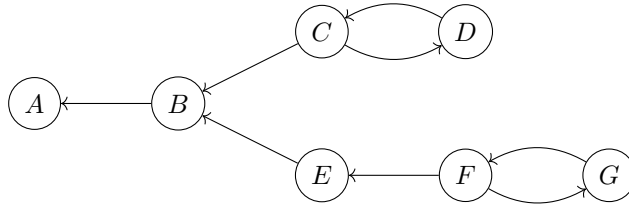


Figure 1: Graphical representation of the AF \mathcal{AF}_1 .

Example 1. Figure 1 represents $\mathcal{AF}_1 = \langle \text{Args}_1, \mathcal{A}_1 \rangle$ where $\text{Args}_1 = \{A, B, C, D, E, F, G\}$ and $\mathcal{A}_1 = \{(B, A), (C, B), (C, D), (D, C), (E, B), (F, E), (F, G), (G, F)\}$.

Given an AF, Dung-style semantics [4] can be applied to it, to determine what combinations of arguments (called *extensions*) can collectively be accepted.

Definition 1. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF, $S \subseteq \text{Args}$ a set of arguments and let $A \in \text{Args}$. Then S *attacks* A if there is an $A' \in S$ such that $(A', A) \in \mathcal{A}$; S *defends* A if S attacks every attacker of A ; S is *conflict-free* if there are no $A_1, A_2 \in S$ such that $(A_1, A_2) \in \mathcal{A}$; and S is *admissible* (adm) if it is conflict-free and it defends all of its elements.

An admissible set that contains all the arguments that it defends is a *complete extension* (cmp) of \mathcal{AF} . The *grounded extension* (grd) is the minimal (with respect to \subseteq) complete extension. A *preferred extension* (prf) is a maximal (with respect to \subseteq) complete extension. A *stable extension* (stb) is a complete extension that attacks every argument not in it. $\text{Ext}_{\text{sem}}(\mathcal{AF})$ denotes the set of all the extensions of \mathcal{AF} under the semantics $\text{sem} \in \{\text{adm}, \text{cmp}, \text{grd}, \text{prf}, \text{stb}\}$.

Where $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ is an AF, sem a semantics and $\text{Ext}_{\text{sem}}(\mathcal{AF}) \neq \emptyset$, it is said that $A \in \text{Args}$ is *skeptically* [resp. *credulously*] *accepted* if $A \in \bigcap \text{Ext}_{\text{sem}}(\mathcal{AF})$ [resp. $A \in \bigcup \text{Ext}_{\text{sem}}(\mathcal{AF})$]. These acceptability strategies are denoted by \cap [resp. \cup]. A is said to be *credulously* [resp. *skeptically*] *non-accepted* in \mathcal{AF} if for all [resp. some] $\mathcal{E} \in \text{Ext}_{\text{sem}}(\mathcal{AF})$, $A \notin \mathcal{E}$. We will say that an argument is accepted [resp. non-accepted] if the strategy is arbitrary or clear from the context.

¹Interpreting [12] simplicity as minimality

The notions of attack and defense can also be defined between arguments and can be generalized to indirect versions:

Definition 2. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF, $A, B \in \text{Args}$ and $\mathcal{E} \in \text{Ext}_{\text{sem}}(\mathcal{AF})$ for some sem. Then A *defends* B if: there is some $C \in \text{Args}$ such that $(C, B) \in \mathcal{A}$ and $(A, C) \in \mathcal{A}$, in this case A *directly defends* B ; or A defends $C \in \text{Args}$ and C defends B , in this case A *indirectly defends* B . It is said that A *defends* B in \mathcal{E} if A defends B and $A \in \mathcal{E}$.

Similarly, A *attacks* B if: $(A, B) \in \mathcal{A}$, in this case A *directly attacks* B ; or A attacks some $C \in \text{Args}$ and C defends B , in this case A *indirectly attacks* B .

We will require that an explanation for an argument A is *relevant*, in order to prevent that explanations contain arguments that do not influence the acceptance of A .

Definition 3. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ and $A, B \in \text{Args}$. It is said that A is *relevant* for B if A (in)directly attacks or defends B and it does not attack itself. A set $S \subseteq \text{Args}$ is relevant for B if all of its arguments are relevant for B .

Example 2. In \mathcal{AF}_1 (from Figure 1) C and D attack each other and both defend themselves from this attack. The grounded extension is \emptyset and $\text{Ext}_{\text{sem}}(\mathcal{AF}_1) = \{\{A, C, E, G\}, \{A, C, F\}, \{A, D, E, G\}, \{B, D, F\}\} = \{\mathcal{E}_1, \mathcal{E}_2, \mathcal{E}_3, \mathcal{E}_4\}$ for $\text{sem} \in \{\text{prf}, \text{stb}\}$. None of the arguments from Args_1 is skeptically accepted, while all of the arguments in Args_1 are credulously accepted for $\text{sem} \in \{\text{cmp}, \text{prf}, \text{stb}\}$. The argument G defends E directly and A indirectly and, similarly, it attacks F directly and B indirectly. The arguments D and G are relevant for A and B but not relevant for each other.

In order to define relevant explanations, we focus on the notion of defense. Note that many of the well-known Dung-style semantics result in defended sets of arguments. We define two notions that will be used in the basic definitions of explanations. The first, used for acceptance explanations, denotes the set of arguments that defend the argument A , while the last, used for non-acceptance explanations, denotes the set of arguments that attack A and for which there is no defense in the given extension.

Definition 4. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF, $A \in \text{Args}$ and $\mathcal{E} \in \text{Ext}_{\text{sem}}(\mathcal{AF})$ an extension for some semantics sem.

- $\text{DefBy}(A) = \{B \in \text{Args} \mid B \text{ (in)directly defends } A\}$;
- $\text{DefBy}(A, \mathcal{E}) = \text{DefBy}(A) \cap \mathcal{E}$ denotes the set of arguments that (in)directly defend A in \mathcal{E} ;
- $\text{NotDef}(A, \mathcal{E}) = \{B \in \text{Args} \mid B \text{ (in)directly attacks } A \text{ and } \mathcal{E} \text{ does not attack } B\}$, denotes the set of all (in)direct attackers of A for which no defense exists from \mathcal{E} .

Note that by definition explanations in terms of DefBy or NotDef result in relevant explanations.

Example 3 (Example 2 continued). Consider again the AF \mathcal{AF}_1 . Then: $\text{DefBy}(A, \mathcal{E}_1) = \{C, E, G\}$, $\text{DefBy}(A, \mathcal{E}_2) = \{C\}$, while $\text{NotDef}(A, \mathcal{E}_4) = \{B, D, F\}$ and $\text{NotDef}(B, \mathcal{E}_1) = \{C, E, G\}$.

We introduce the following notation to keep the notation of the explanations general and short.

Notation 1. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF, $A \in \text{Args}$ and $S \subseteq \text{Args}$. Then, for some sem:

- $\mathfrak{C}_A^{\text{sem}} = \{\mathcal{E} \in \text{Ext}_{\text{sem}}(\mathcal{AF}) \mid A \in \mathcal{E}\}$ denotes the set of sem-extensions of \mathcal{AF} of which A is a member;
- $\mathfrak{C}_A^{\text{sem}} = \{\mathcal{E} \in \text{Ext}_{\text{sem}}(\mathcal{AF}) \mid A \notin \mathcal{E}\}$ denotes the set of sem-extensions of \mathcal{AF} of which A is not a member;

Now the basic framework for explanations in formal argumentation can be defined.

3 Basic Explanations

In this section we present the basic framework with which a variety of explanations can be provided. Explanations are defined in terms of a function \mathbb{D} , which determines how “far away” we should look when considering attacking and defending arguments as explanations. \mathbb{D} can be adjusted according to, for example, the application. Examples of adjustments are shown in Sections 5.1 and 5.2.

3.1 Basic Explanations for Acceptance

We define two types of acceptance explanations: \cap -explanations provide all the reasons why an argument can be accepted by a skeptical reasoner, while \cup -explanations provide one reason why an argument can be accepted by a credulous reasoner. For the purpose of this section let $\mathbb{D}^{\text{acc}} = \text{DefBy}$. This means that the presented explanations will be based on the set of arguments that defend the requested argument.

Definition 5 (Argument explanation). Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF and let $A \in \text{Args}$ be an argument that is accepted, given some sem and an acceptance strategy (\cap or \cup). Then:

$$\begin{aligned} \text{Acc}_{\text{sem}}^{\cap}(A) &= \bigcup_{\mathcal{E} \in \text{Ext}_{\text{sem}}(\mathcal{AF})} \mathbb{D}^{\text{acc}}(A, \mathcal{E}); \\ \text{Acc}_{\text{sem}}^{\cup}(A) &\in \{\mathbb{D}^{\text{acc}}(A, \mathcal{E}) \mid \mathcal{E} \in \mathfrak{E}_A^{\text{sem}}\}. \end{aligned}$$

Let $\text{Acc}_{\text{sem}}^{\cup}(A) = \{\mathbb{D}^{\text{acc}}(A, \mathcal{E}) \mid \mathcal{E} \in \mathfrak{E}_A^{\text{sem}}\}$.

$\text{Acc}_{\text{sem}}^{\cap}(A)$ provides for each sem -extension \mathcal{E} the arguments that defend A in \mathcal{E} , and $\text{Acc}_{\text{sem}}^{\cup}(A)$ contains the arguments that defend A in one of the sem -extensions.

Remark 1. A non-empty DefBy -set for an attacked argument A does not guarantee that A is defended against all its attackers. In the AF $\mathcal{AF} = \langle \{A, B, C\}, \{(A, B), (B, C), (C, A)\} \rangle$ we have that $\text{DefBy}(A) = \{A, B, C\}$ but $A \notin \bigcup \text{Ext}_{\text{cmp}}(\mathcal{AF})$ (since it is not conflict-free with B nor with C). In the above definition of explanations this issue does not occur, since there it is required that the argument is part of the extension and thus, by definition of the semantics, it is defended against all its attackers by that extension.

Example 4 (Example 3 continued). Recall $\mathcal{AF}_1 = \langle \text{Args}_1, \mathcal{A}_1 \rangle$, shown in Figure 1. We have that:

- $\text{Acc}_{\text{prf}}^{\cup}(A) \in \{\{C, E, G\}, \{C\}, \{E, G\}\}$; and
- $\text{Acc}_{\text{prf}}^{\cup}(B) = \{D, F\}$.

The next proposition shows that the acceptance explanations, under $\mathbb{D} = \text{DefBy}$, are well-behaved when compared to Dung-style semantics. For example it shows that explanation under grounded semantics results in smaller and more skeptical explanations than under preferred semantics.

Proposition 1. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an argumentation framework, let $A \in \text{Args}$ and let $\mathbb{D} = \text{DefBy}$, then:

1. For all $\text{sem} \in \{\text{grd}, \text{cmp}, \text{prf}, \text{stb}\}$ and for $\star \in \{\cup, \cap\}$: $\text{Acc}_{\text{grd}}(A) \subseteq \text{Acc}_{\text{sem}}^{\star}(A)$.
2. $\text{Acc}_{\text{stb}}^{\cap}(A) \subseteq \text{Acc}_{\text{prf}}^{\cap}(A) \subseteq \text{Acc}_{\text{cmp}}^{\cap}(A)$.
3. $\text{Acc}_{\text{stb}}^{\cup}(A) \subseteq \text{Acc}_{\text{prf}}^{\cup}(A) \subseteq \text{Acc}_{\text{cmp}}^{\cup}(A)$.
4. For each $S \in \text{Acc}_{\text{cmp}}^{\cup}(A)$ there is an $S' \in \text{Acc}_{\text{prf}}^{\cup}(A)$ such that $S \subseteq S'$

Proof. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an argumentation framework, let $A \in \text{Args}$ be accepted and let $\mathbb{D} = \text{DefBy}$.

1. Let $B \in \text{Acc}_{\text{grd}}(A)$, then B (in)directly defends A and $B \in \text{Ext}_{\text{grd}}(\mathcal{AF})$, therefore $B \in \bigcap \text{Ext}_{\text{sem}}(\mathcal{AF})$. It follows that $B \in \text{DefBy}(A, \mathcal{E})$ for all $\mathcal{E} \in \text{Ext}_{\text{sem}}(\mathcal{AF})$. Hence $B \in \text{Acc}_{\text{sem}}^*(A)$ as well.
2. Let $B \in \text{Acc}_{\text{stb}}^\cap(A)$, then there is some $\mathcal{E} \in \text{Ext}_{\text{stb}}(\mathcal{AF})$ such that $B \in \text{DefBy}(A, \mathcal{E})$. Since $\text{Ext}_{\text{stb}}(\mathcal{AF}) \subseteq \text{Ext}_{\text{prf}}(\mathcal{AF}) \subseteq \text{Ext}_{\text{cmp}}(\mathcal{AF})$ it follows that $\mathcal{E} \in \text{Ext}_{\text{sem}}(\mathcal{AF})$ for $\text{sem} \in \{\text{prf}, \text{cmp}\}$ as well. Therefore $B \in \text{Acc}_{\text{prf}}^\cap(A)$ and $B \in \text{Acc}_{\text{cmp}}^\cap(A)$.
3. Let $S \in \text{Acc}_{\text{stb}}^\cup(A)$, then $S = \text{DefBy}(A, \mathcal{E})$ for some $\mathcal{E} \in \text{Ext}_{\text{stb}}(\mathcal{AF}) \subseteq \text{Ext}_{\text{prf}}(\mathcal{AF}) \subseteq \text{Ext}_{\text{cmp}}(\mathcal{AF})$. Therefore $S \in \text{Acc}_{\text{prf}}^\cup(A)$ and $S \in \text{Acc}_{\text{cmp}}^\cup(A)$ as well.
4. Let $S \in \text{Acc}_{\text{cmp}}^\cup(A)$, then there is some $\mathcal{E} \in \text{Ext}_{\text{cmp}}(\mathcal{AF})$ such that $S = \text{DefBy}(A, \mathcal{E})$. By Definition 1 there is some $\mathcal{E} \subseteq \mathcal{E}' \in \text{Ext}_{\text{prf}}(\mathcal{AF})$, let $S' = \text{DefBy}(A, \mathcal{E}')$. Note that $S' \in \text{Acc}_{\text{prf}}^\cup(A)$ and that $S \subseteq S'$. \square

3.2 Basic Explanations for Non-Acceptance

Understanding why something is not accepted might sometimes be just as important as understanding why something is accepted. We therefore discuss basic definitions for explanations of non-accepted arguments. Since we focus on the notion of defense and admissibility-based semantics, an argument is not accepted if it is attacked and there is no defense for this attack by an accepted argument. In this section, let $\mathbb{D}^{\text{na}} = \text{NotDef}$.

Definition 6 (Non-acceptance explanation). Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF and let $A \in \text{Args}$ be an argument that is not accepted, given some sem and some $\star \in \{\cap, \cup\}$.

$$\text{NotAcc}_{\text{sem}}^\cap(A) = \bigcup_{\mathcal{E} \in \mathfrak{E}_A^{\text{sem}}} \mathbb{D}^{\text{na}}(A, \mathcal{E});$$

$$\text{NotAcc}_{\text{sem}}^\cup(A) = \bigcup_{\mathcal{E} \in \text{Ext}_{\text{sem}}(\mathcal{AF})} \mathbb{D}^{\text{na}}(A, \mathcal{E}).$$

Intuitively, a non-acceptance explanation contains all the arguments in Args that attack A and for which no defense exists in: some sem -extensions (for \cap) of which A is not a member; all sem -extensions (for \cup). That for \cap only some extensions have to be considered follows since A is skeptically non-accepted as soon as $\mathfrak{E}_A^{\text{sem}} \neq \emptyset$, while A is credulously non-accepted when $\mathfrak{E}_A^{\text{sem}} = \text{Ext}_{\text{sem}}(\mathcal{AF})$.

Example 5. (Example 3 continued) Recall the argumentation framework from Example 1, shown in Figure 1. Then:

- $\text{NotAcc}_{\text{grd}}^\cap(A) = \text{NotAcc}_{\text{prf}}^\cap(A) = \{B, D, F\}$; and
- $\text{NotAcc}_{\text{grd}}^\cap(B) = \text{NotAcc}_{\text{prf}}^\cap(B) = \{C, E, G\}$.

The next proposition is the non-acceptance counterpart of Proposition 1 and shows how non-acceptance explanations are related to each other under different semantics.

Proposition 2. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF, let $A \in \text{Args}$ be non-accepted, $\mathbb{D} = \text{NotDef}$ and let $\star \in \{\cap, \cup\}$. Then:

1. $\text{NotAcc}_{\text{grd}}^\cap(A) \subseteq \text{NotAcc}_{\text{cmp}}^\cap(A)$.
2. $\text{NotAcc}_{\text{stb}}^*(A) \subseteq \text{NotAcc}_{\text{prf}}^*(A) \subseteq \text{NotAcc}_{\text{cmp}}^*(A)$.

Proof. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an argumentation framework, let $A \in \text{Args}$ be non-accepted and let $\mathbb{D} = \text{NotDef}$.

1. Let $\mathcal{E}_{\text{grd}} \in \text{Ext}_{\text{grd}}(\mathcal{AF})$ be the grounded extension, note that $\mathcal{E}_{\text{grd}} = \bigcap \text{Ext}_{\text{cmp}}(\mathcal{AF})$ and that $\mathcal{E}_{\text{grd}} \in \text{Ext}_{\text{cmp}}(\mathcal{AF})$ [4]. It therefore follows that, if $A \notin \mathcal{E}_{\text{grd}}$, then $\mathcal{E}_{\text{grd}} \in \mathfrak{E}_A^{\text{cmp}}$. By Definition 6 we have immediately that $\text{NotAcc}_{\text{grd}}^\cap(A) \subseteq \text{NotAcc}_{\text{cmp}}^\cap(A)$.

2. Suppose that A is not accepted w.r.t. **stb** and \cap , then for some $\mathcal{E} \in \text{Ext}_{\text{stb}}(\mathcal{AF})$, $A \notin \mathcal{E}$. Note that $\mathfrak{E}_A^{\text{stb}} \subseteq \mathfrak{E}_A^{\text{prf}} \subseteq \mathfrak{E}_A^{\text{cmp}}$. Therefore, for all $\mathcal{E} \in \mathfrak{E}_A^{\text{stb}}$, $\mathcal{E} \in \mathfrak{E}_A^{\text{prf}}$ and $\mathcal{E} \in \mathfrak{E}_A^{\text{cmp}}$. Hence $\text{NotAcc}_{\text{stb}}^\cap(A) \subseteq \text{NotAcc}_{\text{prf}}^\cap(A) \subseteq \text{NotAcc}_{\text{cmp}}^\cap(A)$.

The case for \cup is similar and left to the reader. Note that, by assumption, A is not accepted w.r.t. **cmp** and \cup , otherwise $\text{NotAcc}_{\text{cmp}}^\cup(A)$ is not defined. \square

Proposition 1 together with the above result shows that the choice of the semantics influences the size of the explanation in a similar way as the choice of semantics influences the size and number of extensions themselves. This is useful to know, since it shows that the explanations behave in a predictable way and that semantics can be chosen as usual. In the next section we will look at minimal explanations.

4 Minimality

As mentioned in the introduction, humans select *the* explanation from all the possible explanations, using criteria such as simplicity, necessity and sufficiency [12]. One way to look at simplicity is minimality. In [5] two notions of minimality were introduced (as well as two notions of maximality, but we are in this paper only interested in minimality): minimality (i.e., minimality w.r.t. \leq)² and compactness (i.e., minimality w.r.t. \subseteq). In our setting we can formulate different minimal explanations for (non-)acceptance as follows, where $\text{mima} \in \{\min^\leq, \min^\subseteq\}$.

$$\begin{aligned}\text{Acc}_{\text{sem}}^\cap(A) &= \text{mima}_{\mathcal{E} \in \text{Ext}_{\text{sem}}(\mathcal{AF})} \mathbb{D}^{\text{acc}}(A, \mathcal{E}); \\ \text{Acc}_{\text{sem}}^\cup(A) &= \text{mima}_{\mathcal{E} \in \mathfrak{E}_A^{\text{sem}}} \mathbb{D}^{\text{acc}}(A, \mathcal{E}); \\ \text{NotAcc}_{\text{sem}}^\cap(A) &= \text{mima}_{\mathcal{E} \in \mathfrak{E}_A^{\text{sem}}} \mathbb{D}^{\text{na}}(A, \mathcal{E}); \\ \text{NotAcc}_{\text{sem}}^\cup(A) &= \text{mima}_{\mathcal{E} \in \text{Ext}_{\text{sem}}(\mathcal{AF})} \mathbb{D}^{\text{na}}(A, \mathcal{E}).\end{aligned}$$

Example 6 (Examples 4 and 5 continued). Recall that, for \mathcal{AF}_1 , $\text{Acc}_{\text{prf}}^\cup(A) \in \{\{C, E, G\}, \{C\}, \{E, G\}\}$. Of these possible explanations both $\{C\}$ and $\{E, G\}$ are \subseteq -minimal, but only $\{C\}$ is \leq -minimal. Similarly, we had that $\text{NotAcc}_{\text{prf}}^\cap(B) = \{C, E, G\}$, there are two \subseteq -minimal explanations: $\{C\}$ and $\{E, G\}$ but only $\{C\}$ is also a \leq -minimal explanation.

These notions of minimality are already useful in restricting the size of an explanation. As we have seen in the example above, if $\text{mima} = \min^\subseteq$ $\text{Acc}_{\text{prf}}^\cup(A) \in \{\{C\}, \{E, G\}\}$. It is therefore no longer the case that $\text{Acc}_{\text{prf}}^\cup(A)$ could be $\{C, E, G\}$ when considering minimal explanations. However, these notions do not say anything about necessity, sufficiency or even relevance. In the next section we therefore look further into restricting the size of explanations, this time based on relevance, sufficiency and necessity.

5 Necessity and Sufficiency

Necessity and sufficiency in the context of philosophy and cognitive science are discussed in, for example, [10, 11, 15]. Intuitively, an event Γ is *sufficient* for Δ if no other causes are required for Δ to happen, while Γ is *necessary* for Δ , if in order for Δ to happen, Γ has to happen as well. In the context of logical implication (denoted by \rightarrow), one could model sufficiency by $\Gamma \rightarrow \Delta$ and necessity by $\Delta \rightarrow \Gamma$ [9]. In the next sections we formulate these logical notions in our argumentation setting.

²Where minimality w.r.t. \leq is applied to the size of sets: $S_1 \leq S_2$ denotes $|S_1| \leq |S_2|$

5.1 Necessity and Sufficiency for Acceptance

In the context of argumentation, where explanations are sets of arguments, a set of accepted arguments is sufficient if it guarantees, independent of the status of other arguments, that the considered argument is accepted, while an accepted argument is necessary if it is impossible to accept the considered argument without it.

Definition 7. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF and let $A \in \text{Args}$ be accepted (w.r.t. sem and \cup or \cap). Then:

- $S \subseteq \text{Args}$ is *sufficient for the acceptance* of A if S is relevant for A , S is conflict-free and S defends A against all its attackers;
- $B \in \text{Args}$ is *necessary for the acceptance* of A if B is relevant for A and if $B \notin \mathcal{E}$ for some $\mathcal{E} \in \text{Ext}_{\text{adm}}(\mathcal{AF})$, then $A \notin \mathcal{E}$.

Example 7 (Example 6 continued). In \mathcal{AF}_1 both $\{C\}$ and $\{E\}$ are sufficient for the acceptance of A but neither is necessary, while for E , $\{G\}$ is both sufficient and necessary.

In order to use the above notions as variations of \mathbb{D} , we introduce:³

- $\text{Suff}(A, \emptyset) = \{S \subseteq \text{Args} \mid S \text{ is sufficient for the acceptance of } A\}$ denotes the set of all sufficient sets of arguments for the acceptance of A ;
- $\text{Nec}(A, \emptyset) = \{A \in \text{Args} \mid A \text{ is necessary for the acceptance of } A\}$ denotes the set of all arguments that are necessary for the acceptance of A .

Remark 2. When $\mathbb{D} \in \{\text{Suff}, \text{Nec}\}$, $\text{Acc}_{\text{sem}}^*$ is the same for any semantics sem . This is the case since the definition of sufficiency and necessity is not defined w.r.t. sem .

Example 8 (Example 7 continued). For \mathcal{AF}_1 we have that $\text{Acc}_{\text{sem}}^{\cup}(B) \in \{\{D, F\}, \{B, D, F\}\}$ for $\mathbb{D} = \text{Suff}$ and $\text{Acc}_{\text{sem}}^{\cup}(B) = \{D, F\}$ for $\mathbb{D} = \text{Nec}$. This means that the credulous acceptance of B can be explained by the existence of the arguments D and F , which are both sufficient and necessary for B to be accepted.

Next we show some useful properties of sufficient and necessary (sets of) arguments for acceptance. In particular, we show that the sets in $\text{Suff}(A, \emptyset)$ are admissible and contain all the needed arguments. We further look at conditions under which Suff and Nec are empty, as well as the relation between Suff and Nec .

Proposition 3. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF and let $A \in \text{Args}$ be accepted w.r.t. some $\text{sem} \in \{\text{adm}, \text{cmp}, \text{grd}, \text{prf}, \text{stb}\}$ and $\star \in \{\cap, \cup\}$. Then:

1. For all $S \in \text{Suff}(A, \emptyset)$, $\{S, S \cup \{A\}\} \subseteq \text{Ext}_{\text{adm}}(\mathcal{AF})$;
2. $\text{Suff}(A, \emptyset) = \emptyset$ iff there is no $B \in \text{Args}$ such that $(B, A) \in \mathcal{A}$;
3. $\text{Nec}(A, \emptyset) = \emptyset$ iff there is no $B \in \text{Args}$ such that $(B, A) \in \mathcal{A}$ or $\bigcap \text{Suff}(A, \emptyset) = \emptyset$.
4. $\text{Nec}(A, \emptyset) \subseteq \bigcap \text{Suff}(A, \emptyset)$.

Proof. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF and let $A \in \text{Args}$ be accepted w.r.t. some sem and $\star \in \{\cap, \cup\}$.

1. Let $S \in \text{Suff}(A, \emptyset)$. Note that, by definition, S is conflict-free. If there is some $B \in S$ such that $(B, A) \in \mathcal{A}$ then there is some $C \in S$ that defends against this attack (i.e., $(C, B) \in \mathcal{A}$), a contradiction. If, there is some $B \in S$ such that $(A, B) \in \mathcal{A}$, then A indirectly attacks itself. Since there is no $D \in S$ such that $(D, A) \in \mathcal{A}$ it follows that B is not defended against the attack from A . A contradiction with the definition of S that it defends A against all attackers. Hence $S \cup \{A\}$ is conflict-free.

³ Suff and Nec are defined for an argument and the empty set. We do so because \mathbb{D} requires an argument and an extension.

Now suppose that there is some $B \in \text{Args}$ and some $C \in \text{S}$ such that $(B, C) \in \mathcal{A}$. Since C (in)directly defends A , B indirectly attacks A . By definition of a sufficient set of arguments S defends A against B . It follows that there is some $D \in \text{S}$ such that $(D, B) \in \mathcal{A}$. Hence S defends A and all its own elements against any attacker. Therefore $\{\text{S}, \text{S} \cup \{A\}\} \subseteq \text{Ext}_{\text{adm}}(\mathcal{AF})$.

2. Suppose that $\text{Suff}(A, \emptyset) = \emptyset$, then there is no $\text{S} \subseteq \text{Args}$ such that S is relevant for A and defends A against all its arguments. Since A is accepted by assumption, it follows that A is not attacked at all. Now suppose that there is no $B \in \text{Args}$ such that $(B, A) \in \mathcal{A}$. Then there is no $\text{S} \subseteq \text{Args}$ that is relevant for A and hence $\text{Suff}(A, \emptyset) = \emptyset$.
3. First suppose that $\text{Nec}(A, \emptyset) = \emptyset$. Then there is no argument relevant for A (from which it follows that there is no $B \in \text{Args}$ such that $(B, A) \in \mathcal{A}$) or there is no $B \in \text{Args}$ such that $B \in \bigcap \mathfrak{E}_A$. Note that for each $\text{S} \in \text{Suff}(A, \emptyset)$ there is some $\mathcal{E} \in \mathfrak{E}_A$ such that $\text{S} \subseteq \mathcal{E}$. Since $\bigcap \mathfrak{E}_A = \emptyset$ it follows that $\bigcap \text{Suff}(A, \emptyset) = \emptyset$ as well.

For the other direction suppose first that A is not attacked at all, then there is no argument relevant for A from which it follows that $\text{Nec}(A, \emptyset) = \emptyset$. Now suppose that $\text{Suff}(A, \emptyset) = \emptyset$. By assumption A is accepted and A is attacked, hence $\text{Suff}(A, \emptyset) \neq \emptyset$. It follows that for each $\text{S} \in \text{Suff}(A, \emptyset)$ and for each $B \in \text{S}$ there is an $\text{S}' \in \text{Suff}(A, \emptyset)$ such that $B \notin \text{S}'$ and therefore also an $\mathcal{E} \in \text{Ext}_{\text{adm}}(\mathcal{AF})$ with $B \notin \mathcal{E}$ but $A \in \mathcal{E}$. Therefore none of the arguments is necessary: $\text{Nec}(A, \emptyset) = \emptyset$.

4. In view of the above two items, suppose that A is attacked by some argument. Let $B \in \text{Nec}(A, \emptyset)$ and suppose that $B \notin \bigcap \text{Suff}(A, \emptyset)$. Then there is some $\text{S} \in \text{Suff}(A, \emptyset)$ such that $B \notin \text{S}$. Note that $\text{S} \cup \{A\} \in \text{Ext}_{\text{adm}}(\mathcal{AF})$. However, $B \notin \text{S}$, a contradiction with $B \in \text{Nec}(A, \emptyset)$. \square

The next proposition relates the introduced notions of necessity and sufficiency with $\mathbb{D} = \text{DefBy}$. This shows that, although DefBy is only one of many options for \mathbb{D} , it is closely related with these selection criteria and therefore a useful notion from which to start the investigation into explanations within the basic framework.

Proposition 4. *Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF and let $A \in \text{Args}$ be accepted w.r.t. $\text{sem} \in \{\text{adm}, \text{cmp}, \text{grd}, \text{prf}, \text{stb}\}$ and $\star \in \{\cap, \cup\}$. Then:*

- for all $\mathcal{E} \in \mathfrak{E}_A$, $\text{DefBy}(A, \mathcal{E}) \in \text{Suff}(A, \emptyset)$;
- $\bigcap_{\mathcal{E} \in \mathfrak{E}_A} \text{DefBy}(A, \mathcal{E}) = \text{Nec}(A, \emptyset)$.

Proof. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF and let $A \in \text{Args}$ be an argument that is accepted w.r.t. sem and $\star \in \{\cap, \cup\}$. Consider both items.

- Since A is accepted, there is some $\mathcal{E} \in \text{Ext}_{\text{sem}}(\mathcal{AF})$ such that $A \in \mathcal{E}$. Let $\text{T} = \text{DefBy}(A, \mathcal{E})$. By definition, T is relevant for A (i.e., all $B \in \text{T}$ (in)directly defend A and since $B \in \mathcal{E}$, $(B, B) \notin \mathcal{A}$). Now suppose that there is some $C \in \text{Args}$ such that C attacks A and A is not defended by T . By assumption $A \in \mathcal{E}$. Hence there is a $D \in \mathcal{E}$ such that $(D, C) \in \mathcal{A}$. But then D (in)directly defends A and therefore $D \in \text{T}$. Thus T defends A against all its attackers and therefore $\text{T} \in \text{Suff}(A, \emptyset)$.
- Let $\text{T} = \bigcap_{\mathcal{E} \in \mathfrak{E}_A} \text{DefBy}(A, \mathcal{E})$, since A is accepted, $\mathfrak{E}_A \neq \emptyset$. Suppose there is some $B \in \text{T}$ which is not necessary for the acceptance of A . Then there is an $\mathcal{E} \in \mathfrak{E}_A$ such that $B \notin \mathcal{E}$. However, by definition of T , $B \in \bigcap \mathfrak{E}_A$. Hence T is necessary for A . To see that T contains all the necessary arguments, assume it does not. Then there is some $B \in \text{Args}$ such that $B \notin \text{T}$ but B is necessary for the acceptance of A . However, since $B \notin \text{T}$, there is some $\mathcal{E} \in \mathfrak{E}_A$ such that $B \notin \mathcal{E}$, but $A \in \mathcal{E}$. A contradiction. \square

5.2 Necessity and Sufficiency for Non-Acceptance

When looking at the non-acceptance of an argument A , the acceptance of any of its direct attackers is a sufficient explanation. However, other arguments (e.g., some of the indirect attackers) might be sufficient as well. An argument is necessary for the non-acceptance of A , when it is relevant and A is accepted in the argumentation framework without it. In what follows we will assume that $(A, A) \notin \mathcal{A}$, since otherwise A itself is the reason for its non-acceptance.

In order to define sufficiency for non-acceptance we need the following definition.

Definition 8. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF and let $A, B \in \text{Args}$ such that A indirectly attacks B , via $C_1, \dots, C_n \in \text{Args}$, i.e., $(A, C_1), (C_1, C_2), \dots, (C_n, B) \in \mathcal{A}$. It is said that the attack from A on B is *uncontested* if there is no $D \in \text{Args}$ such that $(D, C_{2i}) \in \mathcal{A}$ for $i \in \{1, \dots, \frac{n}{2}\}$. It is *contested* otherwise, in which case it is said that the attack from A is contested in C_{2i} and that C_{2i} is the contested argument.

This definition is needed since the acceptance of an indirect attacker might already be sufficient for the non-acceptance of an argument, but not every indirect attacker is sufficient for non-acceptance. See also the next example.

Example 9 (Example 8 continued). For \mathcal{AF}_1 from Example 1 we have that the indirect attack from G on B is uncontested. This follows since E is not attacked and hence, when G is accepted, so is E . Therefore, both E and G can be seen as sufficient for the non-acceptance of B . However, the attacks from D and F on A are contested in B . For D this follows since it defends B , but B is attacked by E and, similarly, F defends B , but B is attacked by C . Hence, although D and F indirectly attack A , by just accepting one, A is not necessarily non-accepted, therefore neither would be sufficient on its own to make A non-accepted.

For the definition of necessary for non-acceptance we define subframeworks, which are needed since an argument might be non-accepted since it is attacked by an accepted or by another non-accepted argument.⁴

Definition 9. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF and let $A \in \text{Args}$. Then $\mathcal{AF}_{\downarrow A} = \langle \text{Args} \setminus \{A\}, \mathcal{A} \cap (\text{Args} \setminus \{A\} \times \text{Args} \setminus \{A\}) \rangle$ denotes the AF based on \mathcal{AF} but without A .

Since indirect attacks might be sufficient for not accepting an argument, but they also might be contested, the definition of sufficiency for non-acceptance is defined inductively.

Definition 10. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF and let $A \in \text{Args}$ be non-accepted (w.r.t. **sem** and \cup or \cap). Then:

- $S \subseteq \text{Args}$ is *sufficient for the non-acceptance* of A if S is relevant for A and there is a $B \in S$ such that:
 - $(B, A) \in \mathcal{A}$; or
 - B indirectly attacks A and that attack is uncontested; or
 - B indirectly attacks A and for every argument C in which the attack from B on A is contested and every $D \in \text{Args}$ such that $(D, C) \in \mathcal{A}$, there is an $S' \subseteq S$ that is sufficient for the non-acceptance of D .
- $B \in \text{Args}$ is *necessary for the non-acceptance* of A if B is relevant for A and A is accepted w.r.t. **sem** and \cup resp. \cap in $\mathcal{AF}_{\downarrow B}$.

Example 10 (Example 9 continued). For \mathcal{AF}_1 from Example 1 we have that B is both necessary and sufficient for the non-acceptance of A . Moreover, while D and F are neither sufficient for the non-acceptance of A , $\{D, F\}$ is. For the non-acceptance of B we have that C , E and G are sufficient, but none of these is necessary.

⁴In terms of labeling semantics (see e.g., [2]) an argument is non-accepted if it is **out** (i.e., attacked by an **in** argument) or **undecided**.

We define the following notation, to use the above notions as variations of \mathbb{D} :

- $\text{SuffNot}(A, \emptyset) = \{S \subseteq \text{Args} \mid S \text{ is sufficient for the non-acceptance of } A\}$, denotes the set of sets of arguments that, when accepted, cause A to be non-accepted;
- $\text{NecNot}(A, \emptyset) = \{B \in \text{Args} \mid B \text{ is necessary for the non-acceptance of } A\}$, denotes the set of all arguments that are necessary for A not to be accepted.

Example 11 (Example 10 continued). For \mathcal{AF}_1 we have that $\text{NotAcc}_{\text{prf}}^\cap(B) \in \{\{C\}, \{E\}, \{G\}, \{C, E\}, \{C, G\}, \{E, G\}, \{C, E, G\}\}$ ⁵ for $\mathbb{D} = \text{SuffNot}$ while $\text{NotAcc}_{\text{prf}}^\cap(B) = \emptyset$ for $\mathbb{D} = \text{NecNot}$. This means that the skeptical non-acceptance of B can be explained by the existence of the arguments C , E and G , which are all sufficient for the non-acceptance of B but none of them is necessary.

The next propositions are the non-acceptance counterparts of Propositions 3 and 4. First some basic properties of sufficiency and necessity for non-acceptance.

Proposition 5. *Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF and let $A \in \text{Args}$ be non-accepted w.r.t. $\text{sem} \in \{\text{adm}, \text{cmp}, \text{grd}, \text{prf}, \text{stb}\}$ and $\star \in \{\cap, \cup\}$. Then:*

- $\text{SuffNot}(A, \emptyset) \neq \emptyset$;
- $\text{NecNot}(A, \emptyset) = \emptyset$ implies that there are at least two direct attackers of A .

Proof. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF and let $A \in \text{Args}$ be an argument that is not accepted w.r.t. $\text{sem} \in \{\text{adm}, \text{cmp}, \text{grd}, \text{prf}, \text{stb}\}$ and $\star \in \{\cap, \cup\}$.

- Suppose that $\text{Suff}(A, \emptyset) = \emptyset$. Then there is no $S \subseteq \text{Args}$ that is relevant for A and in which $B \in \text{Args}$ (in)directly attacks A . It follows that there is no $B \in \text{Args}$ such that $(B, A) \in \mathcal{A}$. A contradiction with the assumption that A is non-accepted and that $(A, A) \notin \mathcal{A}$.
- It follows that there are $B_1, \dots, B_n \in \text{Args}$ such that $(B_1, A), \dots, (B_n, A) \in \mathcal{A}$. Assume that $\text{NecNot}(A, \emptyset) = \emptyset$ but that $n = 1$. Since by assumption in this section $(A, A) \notin \mathcal{A}$, it follows that A is not attacked in $\mathcal{AF}_{\downarrow B_1}$ and should therefore be accepted in any complete extension. Hence $n \geq 2$. \square

Now we show how $\mathbb{D} = \text{NotDef}$ is related to the here introduced notions of sufficiency and necessity for non-acceptance. For this we first need the following lemma:⁶

Lemma 1. *Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$, $\mathcal{E} \in \text{Ext}_{\text{sem}}(\mathcal{AF})$ for some $\text{sem} \in \{\text{adm}, \text{cmp}, \text{grd}, \text{prf}, \text{stb}\}$ and $A \in \text{Args}$. If there is a $B \in \mathcal{E}$ such that $(B, A) \in \mathcal{A}$, then $\mathcal{E} \in \text{Ext}_{\text{sem}}(\mathcal{AF}_{\downarrow A})$.*

Proof. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$, $\mathcal{E} \in \text{Ext}_{\text{sem}}(\mathcal{AF})$ for some sem and $A, B \in \text{Args}$ such that $B \in \mathcal{E}$ and $(B, A) \in \mathcal{A}$. Note that \mathcal{E} is still admissible in $\mathcal{AF}_{\downarrow A}$ since no new attacks are added.

$\text{sem} \in \{\text{cmp}, \text{prf}\}$. Now suppose there is some $C \in \text{Args}$ such that $C \notin \mathcal{E}$ but C is defended by \mathcal{E} in $\mathcal{AF}_{\downarrow A}$. If C is not attacked at all in $\mathcal{AF}_{\downarrow A}$, since $C \notin \mathcal{E}$, $(A, C) \in \mathcal{A}$, but then \mathcal{E} defends C in \mathcal{AF} , a contradiction. Hence there is some $D \in \text{Args}$ such that $(D, C) \in \mathcal{A}$ and \mathcal{E} defends against this attack in $\mathcal{AF}_{\downarrow A}$, but then \mathcal{E} would defend C in \mathcal{AF} as well. Again a contradiction. Hence \mathcal{E} is complete in $\mathcal{AF}_{\downarrow A}$ and if \mathcal{E} was maximally complete in \mathcal{AF} it is still maximally complete in $\mathcal{AF}_{\downarrow A}$.

$\text{sem} = \text{stb}$. Any argument, other than A , attacked by \mathcal{E} is still attacked by \mathcal{E} in $\mathcal{AF}_{\downarrow A}$. Since \mathcal{E} is still complete, it follows that \mathcal{E} is also still stable. \square

Proposition 6. *Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF and let $A \in \text{Args}$ be an argument that is not accepted w.r.t. $\text{sem} \in \{\text{cmp}, \text{grd}, \text{prf}, \text{stb}\}$ and $\star \in \{\cap, \cup\}$. Then:*

⁵The explanation could contain other arguments as well (e.g., the explanation could be $\{A, C, D, E, G\}$). This is the case since $S \in \text{Suff}(B, \emptyset)$ is not assumed to be minimal.

⁶For $\text{sem} = \text{grd}$ this lemma was shown in [3].

- for all $\mathcal{E} \in \text{Ext}_{\text{sem}}(\mathcal{AF})$ such that $A \notin \mathcal{E}$, $\text{NotDef}(A, \mathcal{E}) \in \text{SuffNot}(A, \emptyset)$;
- $\text{NecNot}(A, \emptyset) \subseteq \bigcap_{\mathcal{E} \in \mathfrak{E}_{\mathcal{A}}} \text{NotDef}(A, \mathcal{E})$.

Proof. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF and let $A \in \text{Args}$ be non-accepted w.r.t. $\text{sem} \in \{\text{cmp}, \text{grd}, \text{prf}, \text{stb}\}$ and $\star \in \{\cap, \cup\}$. Consider both items:

- By definition of NotDef , $\top = \text{NotDef}(A, \mathcal{E})$ is relevant for A . We show that there is a $B \in \top$ such that $(B, A) \in \mathcal{A}$. Suppose there is no such B , then A is not attacked at all or \mathcal{E} defends A against all its direct attackers and therefore against all its attackers, both are a contradiction with the completeness of \mathcal{E} . Hence there is such a $B \in \top$. From which it follows that $\text{NotDef}(A, \mathcal{E}) \in \text{SuffNot}(A, \emptyset)$.
- Let $B \in \text{NecNot}(A, \emptyset)$ and suppose that $B \notin \bigcap_{\mathcal{E} \in \mathfrak{E}_{\mathcal{A}}} \text{NotDef}(A, \mathcal{E})$. Then there is some $\mathcal{E} \in \mathfrak{E}_{\mathcal{A}}$ such that $B \notin \text{NotDef}(A, \mathcal{E})$. By assumption, B is relevant for A and thus (in)directly attacks A . From which it follows that there is some $C \in \mathcal{E}$ such that $(C, B) \in \mathcal{A}$. By Lemma 1, $\mathcal{E} \in \text{Ext}_{\text{sem}}(\mathcal{AF}_{\downarrow B})$, a contradiction with the assumption that $B \in \text{NecNot}(A, \emptyset)$. \square

5.3 Necessity, Sufficiency and Minimality

In order to compare the introduced notions of necessity and sufficiency with the notions of minimality known from [5] and recalled in Section 4, we define minimal sufficient sets, where $\preceq \in \{\subseteq, \leq\}$:

- $\text{MinSuff}^{\preceq}(A, \emptyset) = \{S \in \text{Suff}(A, \emptyset) \mid \nexists S' \in \text{Suff}(A, \emptyset) \text{ such that } S' \preceq S\}$, denotes the set of all \preceq -minimally sufficient sets for the acceptance of A .
- $\text{MinSuffNot}^{\preceq}(A, \emptyset) = \{S \in \text{SuffNot}(A, \emptyset) \mid \nexists S' \in \text{SuffNot}(A, \emptyset) \text{ such that } S' \preceq S\}$, denotes the set of all \preceq -minimally sufficient sets for the non-acceptance of A .

Although the notions of minimality are aimed at reducing the size of an explanation, by applying instead the notions of sufficiency and necessity as introduced in this paper, the size of the explanation can be further reduced. To see this, consider the following example:

Example 12. Let $\mathcal{AF}_2 = \langle \text{Args}_2, \mathcal{A}_2 \rangle$, shown in Figure 2. Here we have that $\text{Ext}_{\text{prf}}(\mathcal{AF}_2) = \{\{A, B\}, \{C, D\}\}$ and, for $\star \in \{\cap, \cup\}$, $\mathbb{D}^{\text{acc}} = \text{DefBy}$ and $\mathbb{D}^{\text{na}} = \text{NotDef}$, that $\text{Acc}_{\text{prf}}^{\star}(B) = \{A, B\}$, $\text{Acc}_{\text{prf}}^{\star}(D) = \{C, D\}$, $\text{NotAcc}_{\text{prf}}^{\star}(B) = \{C, D\}$ and $\text{NotAcc}_{\text{prf}}^{\star}(D) = \{A, B\}$. These are the explanations for B and D , whether as defined in Section 3 or as in Section 4.




Figure 2: Graphical representation of \mathcal{AF}_2 .

When looking at sufficient sets, we have that $\text{MinSuff}(B, \emptyset) = \{\{A\}\}$, $\text{MinSuff}(D, \emptyset) = \{\{C\}\}$, $\text{MinSuffNot}(B, \emptyset) = \{\{C\}\}$ and $\text{MinSuffNot}(D, \emptyset) = \{\{A\}, \{B\}\}$. Therefore, when $\mathbb{D}^{\text{acc}} = \text{MinSuff}$ and $\mathbb{D}^{\text{na}} = \text{MinSuffNot}$, $\text{Acc}_{\text{prf}}^{\cup}(B) = \{A\}$ and $\text{NotAcc}_{\text{prf}}^{\cap}(D) \in \{\{A\}, \{B\}\}$. To see that these explanations are still meaningful, note that A defends B against all of its arguments and as soon as A is accepted under complete semantics, B will be accepted as well. Thus, the minimally sufficient explanations for B and D are \leq - and \subseteq -smaller than the minimal explanations for B and D from Section 4.

That minimally sufficient explanations can be smaller than minimal explanations is formalized in the next propositions. For this let $\text{Acc}_{\text{sem}}^{\star; \preceq}(A)$ [resp. $\text{NotAcc}_{\text{sem}}^{\star; \preceq}(A)$] denote the set of all $\text{Acc}_{\text{sem}}^{\star}(A)$ [resp. $\text{NotAcc}_{\text{sem}}^{\star}(A)$] explanations for $\text{mima} = \min^{\preceq}$, as defined in Section 4. Similarly, let $\text{AccS}_{\text{sem}}^{\star; \preceq}(A)$ [resp. $\text{NotAccS}_{\text{sem}}^{\star; \preceq}(A)$] denote the set of all $\text{Acc}_{\text{sem}}^{\star}(A)$ [resp. $\text{NotAcc}_{\text{sem}}^{\star}(A)$] explanations for $\mathbb{D} = \text{MinSuff}$ [resp. $\mathbb{D} = \text{MinSuffNot}$].

Proposition 7. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF, let $A \in \text{Args}$ be accepted w.r.t. $\text{sem} \in \{\text{adm}, \text{cmp}, \text{grd}, \text{prf}, \text{stb}\}$ and $\star \in \{\cap, \cup\}$ and let $\preceq \in \{\subseteq, \leq\}$. Then, for $\mathbb{D} = \text{DefBy}$:

- for every $S \in \text{Acc}_{\text{sem}}^{\star, \preceq}(A)$ there is an $S' \in \text{AccS}_{\text{sem}}^{\star, \preceq}(A)$ such that $S' \preceq S$;
- where $\text{sem} = \text{adm}$, for every $S \in \text{AccS}_{\text{sem}}^{\star, \preceq}(A)$ also $S \in \text{Acc}_{\text{sem}}^{\star, \preceq}(A)$;
- for all $S \in \text{Acc}_{\text{sem}}^{\star, \preceq}(A)$, $\text{Nec}(A, \emptyset) \subseteq S$.

Proof. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF and let $A \in \text{Args}$ be accepted w.r.t. $\text{sem} \in \{\text{adm}, \text{cmp}, \text{grd}, \text{prf}, \text{stb}\}$ and $\star \in \{\cap, \cup\}$. Then, for $\mathbb{D} = \text{DefBy}$:

- Let $S \in \text{Acc}_{\text{sem}}^{\star, \preceq}(A)$, then $S = \text{DefBy}(A, \mathcal{E})$ for some $\mathcal{E} \in \mathfrak{E}_A$. By Proposition 4 it follows that $S \in \text{Suff}(A, \emptyset)$. Hence there is some $S' \in \text{AccS}_{\text{sem}}^{\star, \preceq}(A)$ such that $S' \preceq S$, for any of the considered semantics.
- Let $\text{sem} = \text{adm}$ and $S \in \text{AccS}_{\text{sem}}^{\star, \preceq}(A)$. By Proposition 3, $S \cup \{A\} \in \text{Ext}_{\text{adm}}(\mathcal{AF})$ and by definition of a sufficient set of arguments, S defends A against all its attackers. Therefore, $\text{DefBy}(A, S \cup \{A\}) = S$. Suppose that $S \cup \{A\}$ is such that $\text{DefBy}(A, S \cup \{A\}) \notin \text{Acc}_{\text{sem}}^{\star, \preceq}(A)$. Then there is some $\mathcal{E} \in \mathfrak{E}_A^{\text{adm}}$ such that $\text{DefBy}(A, \mathcal{E}) \prec \text{DefBy}(A, S \cup \{A\})$. By Proposition 4, $\text{DefBy}(A, \mathcal{E}) \in \text{Suff}(A, \emptyset)$. A contradiction since $S \in \text{AccS}_{\text{sem}}^{\star, \preceq}(A)$ and $\text{DefBy}(A, \mathcal{E}) \prec S$.
- This follows immediately from the second item in Proposition 4. □

Proposition 8. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF and let $A \in \text{Args}$ be not accepted w.r.t. $\text{sem} \in \{\text{cmp}, \text{grd}, \text{prf}, \text{stb}\}$ and $\star \in \{\cap, \cup\}$. Then, for $\mathbb{D} = \text{NotDef}$:

- for every $S \in \text{NotAcc}_{\text{sem}}^{\star, \preceq}(A)$ there is an $S' \in \text{NotAccS}_{\text{sem}}^{\star, \preceq}(A)$ such that $S' \subseteq S$.
- for all $S \in \text{NotAcc}_{\text{sem}}^{\star, \preceq}(A)$, $\text{NecNot}(A, \emptyset) \subseteq S$.

Proof. Let $\mathcal{AF} = \langle \text{Args}, \mathcal{A} \rangle$ be an AF and let $A \in \text{Args}$ be non-accepted w.r.t. $\text{sem} \in \{\text{cmp}, \text{grd}, \text{prf}, \text{stb}\}$ and $\star \in \{\cap, \cup\}$. Then, for $\mathbb{D} = \text{NotDef}$:

- Let $S \in \text{NotAcc}_{\text{sem}}^{\star, \preceq}(A)$, then $S = \text{NotDef}(A, \mathcal{E})$ for some $\mathcal{E} \in \mathfrak{E}_A$. By Proposition 6 it follows that $S \in \text{SuffNot}(A, \emptyset)$. Hence there is some $S' \in \text{NotAccS}_{\text{sem}}^{\star, \preceq}(A)$ such that $S' \preceq S$, for any of the considered semantics.
- This follows from the second item in Proposition 6. □

6 Related Work

There exist a few approaches that also aim at providing relevant explanations in terms of sets of arguments. Due to space restrictions we discuss here the main differences, leaving a formal comparison for an extended version of the paper.

In [5, 7] explanations for accepted arguments are introduced. [5] define a new semantics (i.e., related admissibility) to derive explanations for admissible arguments (i.e., arguments that are credulously accepted under admissible semantics) and introduce the notions of minimality and compactness as discussed in this paper. [7] define explanations for a claim as triples consisting of the dialectical trees that provide a warrant for the claim, dialectical trees that provide a warrant for the contrary of the claim and dialectical trees for the claim or its contrary that do not provide a warrant.

Explanations for non-accepted arguments are introduced in [6, 14], both focus on credulous non-acceptance under admissible semantics. [6] introduce argument explanations and attack explanations, such that the considered argument becomes admissible when the arguments/attacks of the explanation are removed from the AF. By their definition these explanations are minimal sets. [14] work with subframeworks, such that the considered argument is non-accepted in the subframework and any of its superframeworks.

In contrast to each of these approaches, we work with one basic framework that allows for acceptance and non-acceptance explanations and can be applied on top of any Dung-style argumentation framework that is evaluated by some extension-based semantics. The flexibility of this framework (e.g., the use of the function \mathbb{D}) allowed us to study minimality, necessity and sufficiency. As was shown in Propositions 7 and 8, our definitions of necessity and sufficiency allow for even more reduced explanations than the minimality notions from [5], while still providing meaningful explanations.

7 Conclusion

We have discussed explanations for conclusions derived from AFs in a basic framework that allow for acceptance and non-acceptance explanations, for skeptical and credulous reasoners and for many extension-based semantics. In view of observations from the social sciences [12] we have studied how the size of such explanations can be reduced in a meaningful way. To this end the notions of minimality from [5] were recalled and we introduced notions of sufficiency and necessity.

To the best of our knowledge this is the first investigation into necessary and sufficient sets for (non-)acceptance of arguments, especially in the context of integrating findings from the social sciences (e.g., [12]) into (explanations for) argumentation-based conclusions. In future work we plan to investigate how to integrate further findings, such as contrastiveness. Moreover, we will generalize this basic framework as well as the notions of sufficiency and necessity to structured argumentation.

Acknowledgements. This research was partially funded by the Dutch Ministry of Justice and the Dutch National Police.

References

- [1] Katie Atkinson, Pietro Baroni, Massimiliano Giacomin, Anthony Hunter, Henry Prakken, Chris Reed, Guillermo Simari, Matthias Thimm, and Serena Villata. Towards Artificial Argumentation. *AI magazine*, 38(3):25–36, 2017.
- [2] Pietro Baroni, Martin Caminada, and Massimiliano Giacomin. Abstract argumentation frameworks and their semantics. In Pietro Baroni, Dov Gabay, Massimiliano Giacomin, and Leon van der Torre, editors, *Handbook of Formal Argumentation*, pages 159–236. College Publications, 2018.
- [3] Guido Boella, Souhila Kaci, and Leendert van der Torre. Dynamics in argumentation with single extensions: Abstraction principles and the grounded extension. In Claudio Sossai and Gaetano Chemello, editors, *Proceedings of the 10th European Conference on Symbolic and Quantitative Approaches to Reasoning with Uncertainty (ECSQARU’09)*, volume 5590 of *Lecture Notes in Computer Science*, pages 107–118. Springer, 2009.
- [4] Phan Minh Dung. On the acceptability of arguments and its fundamental role in nonmonotonic reasoning, logic programming and n-person games. *Artificial Intelligence*, 77(2):321–357, 1995.
- [5] Xiuyi Fan and Francesca Toni. On computing explanations in argumentation. In Blai Bonet and Sven Koenig, editors, *Proceedings of the 29th AAAI Conference on Artificial Intelligence (AAAI’15)*, pages 1496–1502. AAAI Press, 2015.
- [6] Xiuyi Fan and Francesca Toni. On explanations for non-acceptable arguments. In Elizabeth Black, Sanjay Modgil, and Nir Oren, editors, *Proceedings of the 3rd International Workshop on Theory and Applications of Formal Argumentation, (TFAFA’15)*, LNCS 9524, pages 112–127. Springer, 2015.

- [7] Alejandro García, Carlos Chesñevar, Nicolás Rotstein, and Guillermo Simari. Formalizing dialectical explanation support for argument-based reasoning in knowledge-based systems. *Expert Systems with Applications*, 40(8):3233 – 3247, 2013.
- [8] Carmen Lacave and Francisco J Diez. A review of explanation methods for heuristic expert systems. *The Knowledge Engineering Review*, 19(2):133–146, 2004.
- [9] Fangzhen Lin. On strongest necessary and weakest sufficient conditions. *Artificial Intelligence*, 128(1):143–159, 2001.
- [10] Peter Lipton. Contrastive explanation. *Royal Institute of Philosophy Supplement*, 27:247–266, 1990.
- [11] Tania Lombrozo. Causal-explanatory pluralism: How intentions, functions, and mechanisms influence causal ascriptions. *Cognitive psychology*, 61(4):303–332, 2010.
- [12] Tim Miller. Explanation in artificial intelligence: Insights from the social sciences. *Artificial Intelligence*, 267:1 – 38, 2019.
- [13] Wojciech Samek, Thomas Wiegand, and Klaus-Robert Müller. Explainable artificial intelligence: Understanding, visualizing and interpreting deep learning models. *arXiv preprint arXiv:1708.08296*, 2017.
- [14] Zeynep Saribatur, Johannes Wallner, and Stefan Woltran. Explaining non-acceptability in abstract argumentation. In *Proceedings of the 24th European Conference on Artificial Intelligence (ECAI’20)*, volume 325 of *Frontiers in Artificial Intelligence and Applications*, pages 881–888. IOS Press, 2020.
- [15] James Woodward. Sensitive and insensitive causation. *Philosophical Review*, 115(1):1–50, 2006.