Isaac Sheff 💿

Max Planck Institute for Software Systems, Campus E1 5, Room 531, 66121 Saarbrücken, Germany https://IsaacSheff.com isheff@mpi-sws.org

Xinwen Wang

Cornell University, Gates Hall, 107 Hoy Road, Ithaca, New York, 14853, USA https://www.cs.cornell.edu/~xinwen/ xinwen@cs.cornell.edu

Robbert van Renesse 💿

Cornell University, 433 Gates Hall, 107 Hoy Road, Ithaca, New York, 14853, USA https://www.cs.cornell.edu/home/rvr/rvr@cs.cornell.edu

Andrew C. Myers

Cornell University, 428 Gates Hall, 107 Hoy Road, Ithaca, New York, 14853, USA https://www.cs.cornell.edu/andru/andru@cs.cornell.edu

— Abstract

In distributed systems, a group of *learners* achieve *consensus* when, by observing the output of some *acceptors*, they all arrive at the same value. Consensus is crucial for ordering transactions in failure-tolerant systems. Traditional consensus algorithms are homogeneous in three ways:

- all learners are treated equally,
- all acceptors are treated equally, and
- all failures are treated equally.

These assumptions, however, are unsuitable for cross-domain applications, including blockchains, where not all acceptors are equally trustworthy, and not all learners have the same assumptions and priorities. We present the first consensus algorithm to be heterogeneous in all three respects. Learners set their own mixed failure tolerances over differently trusted sets of acceptors. We express these assumptions in a novel *Learner Graph*, and demonstrate sufficient conditions for consensus.

We present *Heterogeneous Paxos*, an extension of Byzantine Paxos. Heterogeneous Paxos achieves consensus for any viable Learner Graph in best-case three message sends, which is optimal. We present a proof-of-concept implementation and demonstrate how tailoring for heterogeneous scenarios can save resources and reduce latency.

2012 ACM Subject Classification Computer systems organization \rightarrow Redundancy; Computer systems organization \rightarrow Availability; Computer systems organization \rightarrow Reliability; Computer systems organization \rightarrow Peer-to-peer architectures; Theory of computation \rightarrow Distributed algorithms; Information systems \rightarrow Remote replication

Keywords and phrases Consensus, Trust, Heterogeneous Trust

Supplementary Material Implementation source: https://github.com/isheff/charlotte-public

1 Introduction

The rise of blockchain systems has renewed interest in the classic problem of consensus, but traditional consensus protocols are not designed for the highly decentralized, heterogeneous environment of blockchains. In a Consensus protocol, processes called *learners* try to decide on the same value, based on the outputs of some set of processes called *acceptors*, some of whom may fail. (In our model, learners send no messages, and so they cannot fail.) Consensus is a vital part of any fault-tolerant system maintaining strongly consistent state, such as Datastores [17, 11], Blockchains [45, 24, 19], or indeed anything which orders transactions. Traditionally, consensus protocols have been *homogeneous* along three distinct dimensions:

- Homogeneous acceptors. Traditional systems tolerate some number f of failed acceptors, but acceptors are interchangeable. Prior work including "failure-prone sets" [42, 31] explores *heterogeneous* acceptors.
- Homogeneous failures. Systems are traditionally designed to tolerate either purely Byzantine or purely crash failures. There is no distinction between failure scenarios in which the same acceptors fail, but possibly in different ways. However, some projects have explored *heterogeneous*, or "mixed" failures [51, 16, 37].
- Homogeneous learners. All learners make the same assumptions, so system guarantees apply either to all learners, or to none. Systems with *heterogeneous* learners include Cobalt [40] and Stellar [43, 39, 25].

Blockchain systems can violate homogeneity on all three dimensions. Permissioned blockchain systems like Hyperledger [7], J.P. Morgan's Quorum [1], and R3's Corda [30] exist specifically to facilitate atomic transactions between mutually distrusting businesses. A crucial part of setting up any implementation has been settling on a set of equally trustworthy, failure-independent acceptors. These setups are complicated by the reality that different parties make different assumptions about whom to trust, and how.

Defining heterogeneous consensus poses challenges not covered by homogeneous definitions, particularly with respect to learners. How should learners express their failure tolerances? When different learners expect different possible failures, when do they need to agree? If a learner's failure assumptions are wrong, does it have any guarantees? No failure models developed for one or two dimensions of heterogeneity easily compose to describe all three.

Failure models developed for one or two dimensions of heterogeneity do not easily compose to describe all three, but our new trust model, the *Learner Graph* (Section 3), can express the precise trust assumptions of learners in terms of diverse acceptors and failures. Compared to trying to find a homogeneous setup agreeable to all learners, finding a learner graph for which consensus is possible is strictly more permissive. In fact, the learner graph is substantially more expressive than the models used in prior heterogeneous learner consensus work, including Stellar's *slices* [43] or Cobalt's *essential subsets* [40]. Building on our learner graph, we present the first fully *heterogeneous* consensus protocol. It generalizes Paxos to be heterogeneous along all three dimensions.

Heterogeneity allows acceptors to tailor a consensus protocol for the specific requirements of learners, rather than trying to force every learner to agree whenever any pair demand to agree. This increased flexibility can save time and resources, or even make consensus possible where it was not before, as we now show with an example.

1.1 Example

Suppose organizations Blue Org and Red Org want to agree on a value, such as the order of transactions involving both of their databases or blockchains. The people at Blue Org are *blue*




Figure 1. Illustration of the scenario in Section 1.1. Blue learners are drawn as blue eyes, red learners as red, outlined eyes. Blue acceptors are drawn as blue circles, red acceptors as red, outlined circles, and third parties as black circles. The light solid blue region holds a quorum for the blue learners, and the striped red holds a quorum for the red learners.

learners: they want to decide on a value subject to *their* failure assumptions. Likewise, the people at Red Org are *red learners* with their own assumptions. While neither organization's learners believe their own organization's acceptors (machines) are Byzantine, they do not trust the other organization's acceptors at all. To help achieve consensus, they enlist three trustworthy third-party acceptors. Figure 1 illustrates this situation.

All learners want to agree so long as there are no Byzantine failures. However, no learner is willing to lose liveness (never decide on a value) if only one of its own acceptors has crashed, one third-party acceptor is Byzantine, and all the other organization's learners are Byzantine. Furthermore, learners within the same organization expect *never* to disagree, so long as none of their own organization's acceptors are Byzantine.

Unfortunately, existing protocols cannot satisfy these learners. Stellar [43], for instance, has one of the most expressive heterogeneous models available, but it cannot express heterogeneous failures. It cannot express blue and red learners' desire to terminate if a third-party acceptor crashes, but not necessarily agree a third-party acceptor is Byzantine. Our work enables a heterogeneous consensus protocol that satisfies all learners. In particular, blue learners will have quorums of any 2 blue and any 2 third-party acceptors, and red learners will have quorums of any 2 red and any 2 third-party acceptors.

1.2 Heterogeneous Paxos

Heterogeneous Paxos, our novel generalization of Byzantine Paxos achieves consensus in a fully heterogeneous setting (Section 5), with precisely defined conditions under which learners in guaranteed safety and liveness (Section 6). Heterogeneous Paxos inherits Paxos' optimal 3-message-send best-case latency, making it especially good for latency-sensitive applications with geodistributed acceptors, including blockchains. We have implemented this protocol and used it to construct several permissioned blockchains [25]. We demonstrate the savings in latency and resources that arise from tailoring consensus to specific learners' constraintsin a variety of scenarios (Section 9.3). By including the trust requirements of learners affiliated with multiple chains, we can even append single blocks to multiple chains simultaneously. This is the equivalent of multi-shard transactions, where each shard has its own trust configuration. With this implementation, we can build composable blockchains with heterogeneous trust, allowing application-specific chains to order only the blocks they need (Section 9).

1.3 Contributions

- The Learner Graph offers a general way to express heterogeneous trust assumptions in all three dimensions (Section 3).
- We formally generalize the traditional consensus properties (Validity, Agreement, and Termination) for the fully heterogeneous setting (Section 4).
- Heterogeneous Paxos is the first consensus protocol with heterogeneous learners, heterogeneous acceptors, and heterogeneous failures (Section 5). It also inherits Paxos'

optimal 3-message-send best-case latency, and supports repeated consensus (Section 7).

Experimental results from our implementation of Heterogeneous Paxos demonstrate its use to construct permissioned blockchains with previously unobtainable security and performance properties (Section 9).

2 System Model

We consider a *closed-world* (or *permissioned*) system consisting of a fixed set of *acceptors*, a fixed set of *proposers*, and a fixed set of *learners*. Proposers and acceptors can send messages to other acceptors and learners. Some predetermined, but unknown set of acceptors are *faulty* (we assume a non-adaptive adversary). Faults include crash failures, which are not *live* (they can stop at any time without detection), and Byzantine failures, which are neither *live* nor *safe* (they can behave arbitrarily).

▶ Definition 1 (Live). A live acceptor eventually sends every message required by the protocol.

▶ Definition 2 (Safe). A safe acceptor will not send messages unless they are required by the protocol, and will send messages only in the order specified by the protocol.

Learners set the conditions under which they expect to agree. They want to decide values, and to be guaranteed agreement under certain conditions. While learners can make bad assumptions, since they do not send messages, they cannot misbehave, and so there are no "faulty learners."

2.1 Network

Network communication is point-to-point and reliable: if a live acceptor sends a message to another live acceptor, or to a learner, the message arrives. We adopt a slight weakening of *partial synchrony* [21]: after some unknown global stabilization time (GST), all messages between live acceptors arrive within some unknown latency bound Δ . In Heterogeneous Paxos, live acceptors send all messages to all acceptors and learners, but Byzantine acceptors may equivocate, sending messages to different recipients in different orders, with unbounded delays. We assume that messages carry effectively unbreakable cryptographic signatures, and that acceptors are identified by public keys. We also assume messages can **reference** other messages by collision-resistant hash: if one message contains a hash of another, it uniquely identifies the message it is referencing [46].

2.2 Consensus

The purpose of consensus is for each learner to decide on exactly one value, and for all learners to decide on the same value. Here, *execution* refers to a specific instance of consensus: the actions of a specific set of acceptors during some time frame. A *protocol* refers to the instructions that safe acceptors follow during an execution.

An execution of consensus begins when *proposers propose* candidate values, in the form of a message received by a correct acceptor. (No consensus can make guarantees about proposed values only known to crashed or Byzantine acceptors.) Proposers might be clients sending requests into the system. We make no assumptions about proposer correctness for safety properties, but to guarantee liveness, we will assume that acceptors can act as proposers as well (i.e. proposers are a superset of acceptors). We assume, however, that values are *verifiable*: for instance, a *propose* message might need to bear relevant signatures. After receiving some messages from acceptors, each learner eventually *decides* on a single value.

5

Traditionally, consensus requires three properties [22]:

- Validity: if a learner decides p, then p was proposed.¹
- Agreement: if learner a decides value v, and learner b decides value v', then v = v'.
- *Termination*: all learners eventually decide.

In Section 4, we generalize these properties to account for heterogeneity.

3 The Learner Graph

We characterize learners' failure assumptions with a novel construct called a *learner graph*. The learner graph is a general way to characterize trust assumptions for heterogeneous consensus. It can encompass most existing formulations, including Stellar's "slices" [43] and Cobalt's "essential sets" [40]. We discuss other formulations in Section 11.

▶ Definition 3 (Learner Graph). A learner graph is an undirected graph in which vertices are learners, each labeled with the conditions under which they must terminate (Section 4.3 formally defines termination). Each pair of learners is connected by an edge, labeled with the conditions under which those learners must agree (Section 4.2 formally defines agreement).

3.1 Quorums

A quorum is a set of acceptors sufficient to make a learner decide: even if everything else has crashed [36], if a quorum are behaving correctly, a learner will eventually decide. In a learner graph, each learner a is labeled with a set of quorums Q_a . The learner requires termination precisely when at least one quorum are all live.

Definition 4 (Quorum). A quorum q_a is a set of acceptors.

Within a specific execution, we assume some (unknown) set of pre-determined acceptors are actually *live*. We call this set \mathcal{L} .

3.2 Safe Sets

To characterize the conditions under which two learners want to agree, we need to express all possible failures they anticipate. Surprisingly, crash failures cannot cause disagreement: any disagreement that occurs when some acceptor has crashed could also occur if the same acceptor were correct, but very slow, and did not act until after the learner decided. Therefore, for agreement purposes, each tolerable failure scenario is characterized by a *safe set* (usually written s), the set of acceptors who are *safe*, meaning they act only according to the protocol.

▶ Definition 5 (Safe Set). A safe set *s* is a set of acceptors.

Between any pair of learners a and b in the learner graph, we label the edge between them with a set of safe sets a-b: so long as one of the safe sets in a-b indeed comprises only safe acceptors, the learners demand agreement.

Within a specific execution, we assume some (unknown) set of pre-determined acceptors are actually *safe*. We call this set S. We do not require it, but systems often assume that $S \subseteq \mathcal{L}$, since a Byzantine acceptor [35] may choose not to send messages. Flexible BFT [41] explores "alive-but-corrupt" failures, which we would characterize as

¹ Correia, Neves, and Veríssimo list several popular validity conditions. Ours corresponds to MCV2 [18]




Figure 2. Learner Graph from Section 3.3: Learners are eyes, with darker blue learners on the left, and outlined red learners on the right. Edge labels display *one* safe set for which the learners want to agree (unsafe acceptors are marked with a devil). The center label represents all edges between red and blue learners. Learner labels display *one* quorum for which the learner wants to terminate (crashed acceptors are marked with a skull). In each label, blue acceptors are blue circles, red acceptors are red, outlined circles, and third-party acceptors are black circles.

3.2.1 Subset of Tolerable Failures

We generally assume that a subset of tolerable failures is always tolerated:

► Assumption 6. Subset of failures properties:

 $\begin{array}{l} \forall \ell \ . \ q_a \in Q_a \ \Rightarrow \ \ell \cup q_a \in Q_a \\ \forall x \ . \ s \in a - b \ \Rightarrow \ x \cup s \in a - b \end{array}$

One might imagine, for example, two learners who demand agreement if two acceptors fail, but not if only one acceptor fails. However, we have no guarantee on time: if two acceptors are indeed faulty, one might act normally for an indefinite time, so the system would act as though only one has failed, and we will have to guarantee agreement.

3.2.2 Generalized Learner Graph Labels

It is possible to generalize the labels of learners and learner graph edges, and characterize quorums (conditions under which a learner must terminate) and safe sets (conditions under which pairs of learners must agree) as more detailed formal models (e.g., modeling network synchrony failures). All consensus failure models of which we are aware can be formalized using learner graphs with generalized labels. Heterogeneous Paxos works with any model of labels, so long as each label can be mapped (not necessarily uniquely) to a set of quorums for each learner, and a set of safe sets for each edge. For simplicity, in this work, we define labels as a set of quorums for each learner, and a set of safe sets for each edge.

3.3 Example

Consider our example from Section 1.1 and Figure 1. All learners want to agree when all acceptors are safe. However, each learner demands termination (it must eventually decide on a value) even when one of its own acceptors has crashed, and one third part as well as all the other organization's acceptors have failed as well. Furthermore, learners within the same organization expect *never* to disagree, so long as none of their own organization's acceptors are Byzantine: neither organization tolerates the other, or third-party acceptors, creating internal disagreement. In Figure 2, we diagram the learner graph. For space reasons, we draw each label with only *one* quorum or *one* safe set.

3.4 Agreement is Transitive and Symmetric

Agreement (formally defined in Section 4.2) is symmetric, so learner graphs are undirected (a-b = b-a). Agreement is also transitive: if *a* agrees with *b* and *b* agrees with *c*, then *a* agrees with *c*. As a result, *a* and *c* must agree whenever both the conditions a-b and b-c are met. When learners' requirements reflect this assumption, we call the resulting learner graph condensed.

▶ Definition 7 (Condensed Learner Graph (CLG)). A learner graph G is condensed iff: $\forall a, b, c. (a-b \cap b-c) \subseteq a-c$

3.5 Condensed Learner Graph (CLG)

A Condensed Learner Graph (CLG) represents all the conditions under which each pair of learners must actually have agreement, after transitivity is taken into account. As a result of the transitive property of agreement, for any learner graph G featuring principals a, b, and c, we can create a new learner graph G', in which a-c is replaced by:

 $a - c \cup (a - b \cap b - c)$

Starting with learner graph G, applying this operation repeatedly results in a Condensed Learner Graph (CLG): a learner graph in which this operation doesn't change anything when applied to any pair of adjacent edges.²

Given Assumption 6, there is an equivalent expression in terms of unions of safe sets:

```
► Lemma 8.
```

$$((a-b \cap b-c) \subseteq a-c) \Leftrightarrow (s \in a-b \land s' \in b-c \Rightarrow s \cup s' \in a-c)$$

Proof. First, we show:

 $((a-b \cap b-c) \subseteq a-c) \Rightarrow (s \in a-b \land s' \in b-c \Rightarrow s \cup s' \in a-c)$

By Assumption 6:

$$s \in a - b \Rightarrow s \cup s' \in a - b$$

$$\land \quad s' \in b - c \Rightarrow s \cup s' \in b - c$$

Therefore: $s \in a - b \land s' \in b - c \Rightarrow s \cup s' \in a - b \cap b - c$. Given $(a - b \cap b - c) \subseteq a - c$:

 $s \in a - b \land s' \in b - c \Rightarrow s \cup s' \in a - c$

Second, we show

$$(s \in a - b \land s' \in b - c \Rightarrow s \cup s' \in a - c) \Rightarrow ((a - b \cap b - c) \subseteq a - c)$$

For any $s \in a - b \cap b - c$, it certainly holds that

$$s \in a - b$$
$$\land \quad s \in b - c$$

Given $s \in a-b \land s' \in b-c \Rightarrow s \cup s' \in a-c$, it follows that $a-b \cap b-c \supseteq a-c$.

<

² With the Floyd-Warshall algorithm [23], this can be done in $O(|G|^3)$ time.

3.6 Self-Edges

A CLG describes when a learner a agrees with itself (i.e., if it decides twice, both decisions must have the same value): a-a.

▶ Lemma 9 (Self-agreement). A learner must agree with itself in order to agree with anyone: $a-b \subseteq a-a$

Proof. Follows from Definition 7, and the fact that the CLG is undirected (Section 3.4)

3.7 Liveness Bounds from Safety

Given the conditions under which learners want to agree, we can derive a (sufficient) bound on the quorums they require to terminate. In other words, given labels for the edges in the learners graph, we can bound the labels for the vertices.

As we will cover in more detail in Section 5.3, each of a learner's quorums must intersect its neighbors quorums at a safe acceptor. As a result, we can construct a sufficient set of quorums for each learner in a CLG as follows: for each edge of the learner, each quorum includes a majority of acceptors from a each of the safety sets.

3.8 Safety Bounds from Liveness

Given the conditions under which learners want to terminate, we can derive a (necessary) bound on the safe sets they can require on each of their edges. As we will cover in more detail in Section 5.3, each of a learner's quorums must intersect its neighbors quorums at a safe acceptor. As a result, safe sets can be assembled for each edge in a CLG as follows: each set includes one acceptor from the intersection of each pair of quorums (one from each learner).

4 Heterogeneous Consensus

We now define our novel heterogeneous generalization of traditional consensus properties.

4.1 Validity

Intuitively, a consensus protocol shouldn't allow learners to always decide some predetermined value. Validity is the same in heterogeneous and homogeneous settings.

▶ **Definition 10** (Heterogeneous Validity).

- A consensus execution is valid if all values learners decide were proposed in that execution.
- A consensus protocol is valid if all possible executions are valid.

4.2 Agreement

Our generalization of Agreement from the homogeneous setting to a heterogeneous one is the key insight that makes our conception of heterogeneous consensus possible. It generalizes not only the traditional homogeneous approach, but also the "intact nodes" concept from Stellar [43], and "linked nodes" from Cobalt [40].

▶ **Definition 11** (Entangled). In an execution, two learners are entangled if their failure assumptions matched the failures that actually happen: Entangled $(a, b) \triangleq S \in a-b$

In the example (Section 1.1), if one third-party acceptor were Byzantine, the blue learners would be entangled with each other, and similarly with the red learners, but no blue learners would be entangled with red learners. It is possible for failures to divide the learners into separate groups, which may then decide different values even if they agree among themselves.

▶ **Definition 12** (Heterogeneous Agreement).

- Within an execution, two learners have agreement if all decisions for either learner have the same value.
- A heterogeneous consensus protocol has agreement if, for all possible executions of that protocol, all entangled pairs of learners have agreement.

In Heterogeneous Paxos, as in many other protocols, learners decide on a value whenever certain conditions are met for that value: learners can even decide multiple times. If there aren't too many failures, a learner is guaranteed to decide the same value every time. Because learners send no messages, they cannot *fail*, but they can make incorrect assumptions. Within the context of an execution, entanglement neatly defines when a learner is *accurate*, meaning it cannot decide different values.

▶ Definition 13 (Accurate Learner). An accurate learner is entangled with itself:

 $Accurate(a) \triangleq Entangled(a, a)$

In the example (Section 1.1), if one third-party acceptor were Byzantine, then the blue and red learners would be accurate, but if a blue acceptor were also Byzantine, the blue learners would not be accurate (although the red learners would still be accurate).

4.3 Termination

Termination has no well agreed-upon definition for the heterogeneous setting, as it does not generalize easily from the homogeneous one. A heterogeneous consensus protocol is specified in terms of the (possibly differing) conditions under which each learner is guaranteed termination (Section 3). For example, in our prior work on Heterogeneous Fast Consensus, we distinguish between "gurus," learners with accurate failure assumptions, and "chumps," who hold inaccurate assumptions [50]; Stellar calls them "intact" and "befouled" [43]. When discussing termination properties, we use the following terminology:

- ▶ **Definition 14** (Termination).
- Within an execution, a learner has termination if it eventually decides.
- A heterogeneous consensus protocol has termination if, for all possible executions of that protocol, all learners with a safe and live quorum have termination.

Protocols can only guarantee termination under specific network assumptions, and varying notions of "eventually" [22, 33, 44]. Following in the footsteps of Dwork et al. [21], Heterogeneous Paxos guarantees Validity and Agreement in a fully asynchronous network, and termination in a partially synchronous network (Assumption 41). Furthermore, as in all other consensus protocols, if there are too many acceptor failures, some learners may not terminate. Specifically, a learner will decide (terminate) if at least one of its quorums is live.

▶ Definition 15 (Terminating Learner). A terminating learner has a live, safe quorum:

 $Terminating(a) \triangleq \mathcal{L} \cup \mathcal{S} \in Q_a$

```
1 acceptor_initial_state:
                                                           1 learner_initial_state:
   known_messages = {}
                                                                known_messages = {}
2
   recently_received = {}
                                                           4 learner_on_receipt(m):
4
5 acceptor_on_receipt(m):
                                                              for r \in m.refs:
                                                                while r \notin known_messages:
   for r \in m.refs:
6
                                                           6
    while r \notin known_messages:
                                                                wait()
                                                           7
      wait()
                                                              known_messages \cup = \{m\}
8
                                                           8
                                                              for S \subset known_messages:
   atomic:
                                                           9
9
    if m \notin known_messages:
                                                          10
                                                               if Decision<sub>self</sub> (S \cup \{m\}):
      forward m to all acceptors and learners
                                                                  decide (V(m))
                                                          11
      recently_received \cup = \{m\}
12
      known_messages \cup = \{m\}
13
      if m has type 1a:
14
        z = new 1b(refs = recently_received)
        recently_received = {}
16
        on_receipt(z)
17
      if \overline{m} has type 1b and b(m) = \max_{x \in known_messages} b(x)
18
        for learner \in learners:
19
          z = new 2a(refs = recently_received, lrn = learner)
20
           if WellFormed(z):
21
             recently_received = {}
             on_receipt(z)
```

Figure 3. Pseudo-code for Acceptor (left) and Learner (right). Section 5 defines message structure (Section 5.4), *WellFormed* (Assumption 29), b() (Definition 22), V() (Definition 23), and Decision() (Definition 24).

5 Heterogeneous Paxos

Heterogeneous Paxos is a consensus protocol (Section 2.2) based on Byzantine Paxos, Lamport's Byzantine-fault-tolerant [35] variant of Paxos [32, 33] using a simulated leader [34]. This protocol is conceptually simpler than *Practical Byzantine Fault Tolerance* [12]. When all learners have the same failure assumptions, Heterogeneous Paxos is *exactly* Byzantine Paxos.

Byzantine Paxos was originally written as a sequence of changes from crash-tolerant Paxos [34, 32]. We were able to construct a complete version of Byzantine Paxos in such a way that we could describe Heterogeneous Paxos with only a few additions, highlighted in pale blue. To our knowledge, without the portions highlighted in pale blue this is also the most direct description of the Byzantine Paxos via Simulated Leader protocol in the literature. Figure 3 presents pseudocode for Heterogeneous Paxos acceptors and learners.

5.1 Overview

Informally, Heterogeneous Paxos proceeds as a series of (possibly overlapping) *phases* corresponding to three types of messages, traditionally called *1a*, *1b*, and *2a*:

- Proposers send 1a messages, each carrying a value and unique ballot number (stage identifier), to acceptors.
- Acceptors send 1b messages to each other to communicate that they've received a 1a (line 15 of Figure 3).
- When an acceptor receives a 1b message for the highest ballot number it has seen from a learner a's quorum of acceptors, it sends a 2a message labeled with a and that ballot number (line 20 of Figure 3). There is one exception (WellFormed in Figure 3): once a safe acceptor sends a 2a message m for a learner a, it never sends a 2a message with a different value for a learner b, unless:

- It knows that a quorum of acceptors has seen 2a messages with learner a and ballot number higher than m.
- Or it has seen Byzantine behavior that proves a and b do not have to agree.
- A learner a *decides* when it receives 2a messages with the same ballot number from one of its quorums of acceptors (line 11 on the right of Figure 3).

Proposers can restart the protocol at any time, with a new ballot number. Acceptor and Learner behavior in Heterogeneous Paxos is described in Figure 3. We now describe their sub-functions, including message construction (Section 5.4), *WellFormed* (Assumption 29), b() (Definition 22), V() (Definition 23), and Decision() (Definition 24).

Key Insight: Intuitively, Heterogeneous Paxos operates much like Byzantine Paxos, except that all acceptors execute the final phase separately for each learner. The shared phases allow learners to agree when possible, while the replicated final phase allows different learners to decide under different conditions.

5.2 Assumptions and Definitions

Additional assumptions and definitions are needed to precisely define Heterogeneous Paxos:

- **Acceptors** are servers which both send and receive messages as part of the protocol [34].
- **Proposers** are machines that propose potential values for consensus [34].
- **Learners** receive messages from the acceptors. Learners *decide* on values [34].
- Acceptors can exchange messages over the network, and digital signatures make messages unforgeable.
- Messages can reference other messages by collision-resistant hash: if one message contains a hash of another, it uniquely identifies the message it is referencing [46].
- **Safe** acceptors will not send messages unless required by the protocol, and will not send messages in any order other than the order specified by the protocol.
- **Live** acceptors eventually send any message required by the protocol.
- Any message from one live acceptor to another live acceptor eventually arrives (Section 2.1).
- The learner graph (including its labels) as *valid*.

Section 8 describes several heterogeneous consensus scenarios, as well as quorums for each learner.

5.3 Valid Learner Graph

Naturally, there are bounds on the learner graphs for which Heterogeneous Paxos can provide guarantees. Unlike traditional consensus, in a Heterogeneous Consensus learner graph, each learner a has its own set of quorums Q_a . These describe the learner's termination constraints: it may not terminate if all of its quorums contain a non-live acceptor (Definition 15). The notion of a *valid* learner graph generalizes the homogeneous assumption that every pair of quorums have a safe acceptor in their intersection.

Homogeneous Byzantine Paxos guarantees agreement (Section 4.2) when all pairs of quorums have at least one safe acceptor in their intersection. The heterogeneous case has a similar requirement:

▶ **Definition 16** (Valid Learner Graph). A learner graph is valid iff for each pair of learners a and b, whenever they must agree, all of their quorums feature at least one safe acceptor in their intersection: $s \in a - b \land q_a \in Q_a \land q_b \in Q_b \Rightarrow q_a \cap q_b \cap s \neq \emptyset$

5.4 Messaging

Acceptors send messages to each other. Live acceptors echo all messages sent and received to all other acceptors and learners, so if one live acceptor receives a message, all acceptors eventually receive it. When safe acceptors receive a message, they process and send resulting messages specified by the protocol atomically: they do not receive messages between sending results to other acceptors. Safe acceptors also receive any messages they send to themselves immediately: they receive no other messages between sending and receiving.

Each message x contains a cryptographic signature allowing anyone to identify the signer:

▶ Definition 17 (Message Signer). $Sig(x:message) \triangleq the acceptor or proposer that signed x$

We can define Sig() over sets of messages, to mean the set of signers of those messages:

▶ **Definition 18** (Message Set Signers). $Sig(x : set) \triangleq \{Sig(m) \mid m \in x\}$

Furthermore, each message x carries references to 0 or more other messages, *x.refs*. These references are by hash, ensuring both the absence of cycles in the reference graph and that it is possible to know exactly when one message references another [46]. In each message, safe acceptors reference each message they received since the last message they sent. Since all messages sent are sent to all acceptors, and safe acceptors receive messages sent to themselves immediately, each message a safe acceptor sends *transitively* references all messages it has ever sent or received. Safe acceptors delay receipt of any message until they have received all messages it references. This ensures they receive, for example, a 1*a* for a given ballot before receiving any 1*b*s for that ballot. It also ensures that safe acceptors' messages are always received in the order they were sent.

Each message has a unique ID and an identifiable type: 1a, 1b, or 2a. A 2a message x has one type-specific field: x.lrn specifies a learner. A 1a message y has two type-specific fields: y.value is a proposed value, and y.ballot is a natural number specific to this proposal.

We assume that each 1a has a unique ballot number, which could be accomplished by including signature information in the least significant bits of the ballot number:

▶ Assumption 19 (Unique ballot assumption). $z:1a \land y:1a \land z.ballot = y.ballot \Rightarrow z = y$

5.5 Machinery

To describe Heterogeneous Paxos, we require some mathematical machinery.

5.5.1 Transitive References

We define Tran(x) to be the transitive closure of message x's references. Intuitively, these are all the messages in the "causal past" of x.

▶ Definition 20. $Tran(x) \triangleq \{x\} \cup \bigcup_{m \in x.refs} Tran(m)$

5.5.2 Get1a

It is useful to refer to the 1a that started the ballot of a message: the highest ballot number 1a in its transitive references.

▶ Definition 21. $Get1a(x) \triangleq \underset{m:1a \in Tran(x)}{\operatorname{argmax}} m.ballot$

5.5.3 Ballot Numbers

The ballot number of a 1a is part of the message, and the ballot number of anything else is the highest ballot number among the 1as it (transitively) references.

▶ **Definition 22.** $b(x) \triangleq Get1a(x).ballot$

5.5.4 Value

The value of a 1a is part of the message, and the value of anything else is the value of the highest ballot 1a among the messages it (transitively) references.

▶ Definition 23. $V(x) \triangleq Get1a(x).value$

5.5.5 Decisions

A learner decides when it has observed a set of 2a messages with the same ballot, sent by a quorum of acceptors. We call such a set a *decision*:

▶ Definition 24.
$$Decision_a(q_a) \triangleq Sig(q_a) \in Q_a \land \forall \{x, y\} \subseteq q_a.$$
 $\begin{pmatrix} b(x) = b(y) \\ \land x.lrn = a \\ \land x: 2a \end{pmatrix}$

Messages in a decision share a ballot (and therefore a value), so we extend our value function to include decisions: $\text{Decision}_a(q_a) \Rightarrow V(q_a) = V(m) \mid m \in q_a$

Although decisions are not messages, applications might send decisions in other messages as a kind of "proof of consensus." This is how the Heterogeneous Paxos integrity attestations work in our prototype blockchains (Section 9).

5.5.6 Caught

Some behavior can create proof that an acceptor is Byzantine. Unlike Byzantine Paxos, our acceptors and learners must adapt to Byzantine behavior. We say that an acceptor p is *Caught* in a message x if the transitive references of the messages include evidence such as two messages, m and m', both signed by p, in which neither is featured in the other's transitive references (safe acceptors transitively reference all prior messages).

► Definition 25.
$$Caught(x) \triangleq \begin{cases} Sig(m) \\ Sig(m) \\ N \\ m \notin Tran(m') \\ N \\ m' \notin Tran(m) \end{cases}$$

5.5.7 Connected

When some acceptors are proved Byzantine, clearly some learners need not agree, meaning that S isn't in the edge between them in the CLG: at least one acceptor in each safe set in the edge is proven Byzantine. Homogeneous learners are always connected unless there are so many failures no consensus is required.

Definition 26.

$$Con_{a}(x) \triangleq \left\{ \begin{array}{c} b \\ \wedge & s \cap Caught(x) = \emptyset \end{array} \right\}$$

It is clear that disconnected learners may not agree, and so each 2a message x will have some implications only for learners still connected to its specified learner: $\operatorname{Con}_{x.lrn}(x)$.

5.5.8 Quorums in Messages

2a messages reference quorums of messages with the same value and ballot. A 2a's quorums are formed from fresh 1b messages with the same ballot and value (we define fresh in Definition 31).

► Definition 27.

$$q(x:2a) \triangleq \begin{cases} m & m:1b \\ \land & fresh_{x.lrn}(m) \\ \land & m \in Tran(x) \\ \land & b(m) = b(x) \end{cases}$$

5.5.9 Buried messages

A 2a message can become irrelevant if, after a time, an entire quorum of acceptors has seen 2as with different values, the same learner, and higher ballot numbers. We call such a 2a buried (in the context of some later message y):

$$\blacktriangleright \text{ Definition 28. } Buried(x:2a,y) \triangleq \left\{ \begin{array}{c|c} m \in Tran(y) \\ \land z:2a \\ \land \{x,z\} \subseteq Tran(m) \\ \land V(z) \neq V(x) \\ \land b(z) > b(x) \\ \land z.lrn = x.lrn \end{array} \right\} \in Q_{x.lrn}$$

5.5.10 Well-Formedness

In addition to the basic message layout, 2a and 1b messages must be *well-formed*. No 2a should have an invalid quorum upon creation, and no acceptor should create a 2a unless it sent one of the 1b messages in the 2a. Similarly, no 1b should reference any message with the same ballot number besides a 1a (safe acceptors make 1bs as soon as they receive a 1a). Acceptors and learners should ignore messages that are not well-formed.

```
► Assumption 29 (Well-Formedness Assumption).
```

```
\begin{array}{ll} x:1b \ \land \ y \in Tran(x) \ \land \ x \neq y \ \land \ y \neq Get1a(x) \ \Rightarrow \ b(y) \neq b(x) \\ z:2a \Rightarrow \ q(z) \in \displaystyle \underset{z.lrn}{Q} \ \land \ Sig(z) \in Sig(q(z)) \end{array}
```

5.5.11 Connected 2a messages

Entangled learners must agree, but learners that are not connected are not entangled, so they need not agree. Intuitively, a 1b message references a 2a message to demonstrate that some learner may have decided some value. For learner a, it can be useful to find the set of 2a messages from the same sender as a message x (and sent earlier) which are still unburied, and for learners connected to a. The 1b cannot be used to make any new 2a messages for learner a that have values different from these 2a messages.

► Definition 30.
$$Con2as_a(x) \triangleq \begin{cases} m : 2a \\ \land m \in Tran(x) \\ \land Sig(m) = Sig(x) \\ \land \neg Buried(m, x) \\ \land m.lrn \in Con_a(x) \end{cases}$$

5.5.12 Fresh 1b messages

Acceptors send a 1b message whenever they receive a 1a message with a ballot number higher than they have yet seen. However, this does not mean that the 1b's value (which is the same as the 1a's) agrees with that of 2a messages the acceptor has already sent. We call a 1b message *fresh* (with respect to a learner) when its value agrees with that of unburied 2a messages the acceptor has sent.

▶ Definition 31. $fresh_a(x:1b) \triangleq \forall m \in Con2as_a(x)$. V(x) = V(m)

5.6 The Heterogeneous Paxos Protocol

Heterogeneous Paxos can be thought of as taking place in *stages* identified by natural numbers called ballots. Section 5.6.3 describes one way to construct unique ballot numbers. Acceptor and Learner behavior is described in Figure 3.

Heterogeneous Paxos reduces to a Byzantine Paxos variant in the case of homogeneous learners. For a precise definition of this Byzantine Paxos variant, ignore the text highlighted in pale blue.

It may be possible to optimize an implementation with additional messages pertaining to outdated ballots, but these are not strictly necessary for correctness. For instance, an acceptor might inform a proposer that their proposal has been ignored because of its ballot number, and the proposer might then know to try again later.

5.6.1 For Ballot b

The actions in each ballot are broken down into three *phases*, traditionally called 1a, 1b, and 2a [33], corresponding to the subtypes of message.

1a: A proposer proposes a value v by creating a new ballot number b, and sending a 1a message containing v and b to all acceptors.

1b: Upon receiving a *1a*, an acceptor sends a *1b*, which references all messages it has ever received (transitively).

2a: If an acceptor receives a 1b message m, and has never received a message with a higher ballot number, it creates a new 2a message m' for each learner, and if m' is well-formed (Assumption 29), and if $m \in q(m')$, it sends m' to all acceptors and learners.

If a learner a receives 2a messages for learner a all with ballot b and value v', signed by one of learner a's quorums of acceptors, then learner a decides value v'.

5.6.2 Multiple Ballots

Proposers construct new 1*a* messages (with a value and a unique ballot number), and send them to all acceptors. Just like in Homogeneous Byzantine Consensus, it is possible for a ballot to *fail*: after some number of ballots, it may be the case that all messages have arrived, the protocol in Figure 3 doesn't require any acceptor to send any further messages, and yet no learner has decided. For this reason, it is necessary to start a new ballot when an old one is failing.

One way to handle this is to leave the responsibility at the proposers: if a proposer proposes a ballot, and learners don't decide for a while, then the proposer should propose again. Randomized exponential backoff can be used to allow clients to adapt to the unknown delay in a partially synchronous [21] network without flooding the system.

Another way is to have acceptors propose after a ballot has failed: when sufficiently many *1b* messages for a given ballot are collected, but none are fresh, an acceptor could send a new *1a*. There are subtleties to ensuring liveness, which we discuss in Section 6.4.1.

5.6.3 Ballot Numbers

In our implementation, ballot numbers are constructed from lexicographically ordered pairs featuring the current time on the proposer's clock and the proposer signature of the hash of the value for that ballot. The latter ensures no two *1as* with the same ballot have different values. The former ensures that ballot numbers generally increase with time, which improves expected decision latency. To prevent proposers from entering artificially high ballot numbers, each acceptor delays the receipt of any received message until its own clock exceeds the message's ballot number's time. If all clocks are synchronized, the "best" a proposer can do is to use the correct time.

6 Correctness

6.1 Useful Lemmas

First, we build up some useful facts about Heterogeneous Paxos.

6.1.1 Con() and Caught()

▶ Lemma 32. Safe Acceptors are Uncaught: No safe acceptor can be caught in any message.

 $p \text{ is safe } \Rightarrow p \notin Caught(x)$

Proof. By the definitions of correct behavior, the unforgeability of signatures, and the definition of Caught (Definition 25).

Lemma 33. Quorum Intersection: If a message x references two quorums' messages, and the learners for those quorums are still connected as of x, then there must be an uncaught acceptor who signed at least one message in each.

$$\begin{pmatrix} Sig(q_a) \in Q_a \\ \land Sig(q_b) \in Q_b \\ \land q_a \cup q_b \subseteq Tran(x) \\ \land b \in Con_a(x) \end{pmatrix} \Rightarrow \exists m_a \in q_a, m_b \in q_b, p \notin Caught(x). \ Sig(m_a) = Sig(m_b) = p$$

Proof. By the definition of Con (Definition 26):

 $\exists s \in a - b \in \text{CLG} \land s \cap \text{Caught}(x) = \emptyset$

Therefore, by the definition of CLG and quorum properties:

 $\operatorname{Sig}(q_a) \cap \operatorname{Sig}(q_b) \cap s \neq \emptyset$ $\therefore \exists p \in \operatorname{Sig}(q_a) \cap \operatorname{Sig}(q_b) \cap s$ $p \in \operatorname{Sig}(q_a) \Rightarrow \exists m_a \in q_a.\operatorname{Sig}(m_a) = p$ $p \in \operatorname{Sig}(q_b) \Rightarrow \exists m_v \in q_b.\operatorname{Sig}(m_b) = p$ $p \in s \Rightarrow p \notin \operatorname{Caught}(x)$

6.1.2 Entangled Learners

▶ Lemma 34. Entangled Learners are Connected: If two learners are entangled, then for all messages that are actually sent, they are connected.

 $Entangled(a, b) \Rightarrow a \in Con_b(x)$

Proof. By the definition of Entangled (Definition 11):

 $\mathcal{S} \in \underline{a} - \underline{b}$

Therefore, by Lemma 32:

 $\mathcal{S} \cap \operatorname{Caught}(x) = \emptyset$

So by the definition of *Con* (Definition 26):

 $a \in \operatorname{Con}_{b}(x)$

▶ Lemma 35. Entanglement is not ordered:

 $Entangled(a, b) \Rightarrow Entangled(b, a)$

Proof. By the definition of entangled (Definition 11):

 $\mathcal{S} \in \underline{a} - \underline{b}$

CLG is undirected, so a-b = b-a. Therefore:

 $\mathcal{S} \in \mathbf{b}-\mathbf{a}$

And so:

Entangled(b, a)

◀

Lemma 36. Entanglement is Transitive: If a and b are entangled, and b and c are entangled, then so are a and c.

 $Entangled(a, b) \land Entangled(b, c) \Rightarrow Entangled(a, c)$

Proof. By the definition of entangled (Definition 11):

 $\begin{array}{ll} \mathcal{S} \in \mathbf{a} - \mathbf{b} \\ \wedge \quad \mathcal{S} \in \mathbf{b} - c \end{array}$

By the definition of condensed (Definition 7):

 $\mathcal{S} \cup \mathcal{S} \in \mathbf{\underline{a}} - c$

 $\therefore \mathcal{S} \in \mathbf{a} - c$

And so by the definition of entangled (Definition 11):

Entangled(\boldsymbol{a}, c)

Technical Report

▶ Lemma 37. Self-Entanglement: If a learner is entangled to anyone, it must also be entangled with itself.

 $Entangled(a, b) \Rightarrow Entangled(a, a)$

Proof. By Lemma 35, Entangled(b, a). And so by Lemma 36: Entangled(a, a).

▶ Lemma 38. After Observing a Decision: If a learner observes a quorum of 2as with the same ballot, then any 2as for an entangled learner with a higher ballot must have the same value.

 $\begin{pmatrix} Entangled(a, b) \\ \land & Decision_a(q_a) \\ \land & w : 2a \\ \land & w.lrn = b \\ \land & b(w) > b(q_a) \end{pmatrix} \Rightarrow V(q_a) = V(w)$

(Using our definition of V() from Section 5.5.5)

Proof. As ballot numbers are natural numbers, we prove this by induction on b(w). Base Case: for $b(w) \le b(q_a)$, Lemma 38 trivially holds.

Induction: Assume Lemma 38 holds for all values of w < w'. We now show that it holds for w'.

By well-formedness (Assumption 29),

 $q(w') \in Q_b$

By Lemma 34:

 $b \in \operatorname{Con}_{a}(w')$

By Lemma 33,

 $\exists m_a \in q_a, m_w \in q(w'), p \notin \text{Caught}(w')$. $\text{Sig}(m_a) = \text{Sig}(m_b) = p$

By the definition of Well-formed (Assumption 29):

 $\forall (r : 2a) \in \operatorname{Tran}(m_w) \ . \ b(r) < b(m_w)$

By the definition of q (Definition 27), m_w is fresh. By Lemma 34, $b \in \text{Con}_a(w')$, and so by the definition of fresh (Definition 31), either $m_a \in \text{Con}2as_b(m_w)$, in which case:

 $V(m_a) = V(q_a) = V(w') = V(m_w)$

or Buried (m_a, m_w) . However, by the definition of buried (Definition 28):

 $\exists (r: 2a) \in \operatorname{Tran}(m_w) : r.lrn = a \land (b(r) > b(m_a)) \land (V(r) \neq V(m_a))$

By Lemma 37, Entangled(a, a), so by our induction hypothesis, no such r exists. Therefore, m_a is not buried, so:

 $V(q_a) = V(w')$

4

6.2 Validity

If a learner decides a value, that value was proposed.

▶ **Theorem 39** (Validity). *Heterogeneous Paxos is Valid (Definition 10):* Decision_a(q_a) ⇒ $\exists x : 1a. V(x) = V(q_a)$

Proof. By the definition of Get1A for Decisions (Definition 21),

 $\operatorname{Get1a}(q_a) : 1a \wedge \operatorname{V}(\operatorname{Get1a}(q_a)) = \operatorname{V}(q_a)$

6.3 Agreement

If two entangled learners (a and b) each decide, they decide the same value (Section 4.2).

▶ **Theorem 40** (Agreement). *Heterogeneous Paxos has Agreement (Definition 12):* Entangled($(a, b) \land Decision_a(q_a) \land Decision_b(q_b) \Rightarrow V(q_a) = V(q_b)$

Proof. If $b(q_a) = b(q_b)$, then by the ballot assumption (Assumption 19), and definition of V (Section 5.5.5):

 $V(\mathbf{q}_a) = V(\mathbf{q}_b)$

Otherwise, without loss of generality, assume $b(q_a) < b(q_b)$. By the definition of decision (Definition 24):

 $\exists m : 2a \in q_b$. $V(m) = V(q_b)$

By Lemma 38:

$$V(\boldsymbol{m}) = V(\boldsymbol{q_b}) = V(\boldsymbol{q_a})$$

6.4 Liveness

6.4.1 Network Assumption

Heterogeneous Paxos, and indeed Byzantine Paxos, rely on a weak network assumption to guarantee termination. The assumption is complex precisely because it is weak; a simpler but stronger assumption, such as a partially synchronous network, would suffice.

▶ Assumption 41 (Network Assumption). To guarantee that a learner *a* decides, we assume that for some quorum $q_a \in Q_a$ of safe and live acceptors:

- Eventually, there will be 13 consecutive periods of any duration, with no time in between, numbered 0 through 12, such that any message sent to a or an acceptor in q_a before one period begins is delivered before it ends.
- If an acceptor in q_a sends a message in between receiving two messages m and m' (and it receives no other messages in between), and m is delivered in some period n, then the message is sent in period n.
- No 1a message except x, y, and z is delivered to any acceptor in q_a during any of the 13 periods.

- x is delivered to an acceptor in q_a in period 0, y is delivered to an acceptor in q_a in period 4, and z is delivered to an acceptor in q_a in period 9.
- V(y) = V(z) is the value of the highest ballot 2a known to any acceptor in q_a at the end of period 3.
- **b**(x) is greater than any ballot number of any message delivered to any acceptor in q_a before period 0, and b(x) < b(y) < b(z).

This assumption is *only necessary* for termination, not any safety property. Furthermore, it is possible to use artificial delays to reduce other network assumptions to this one (Section 6.4.2).

▶ **Theorem 42** (Termination). If Assumption 41 holds for learner a, then a has Termination (Definition 14). Specifically, after period 12: Terminating(a) $\Rightarrow \exists q_a.Decision_a(q_a)$ If Assumption 41 holds for all terminating learners, then Heterogeneous Paxos has Termination.

Proof. Periods 0-3 are sufficient for all acceptors in q_a to send 1bs (and 2as) in response to any 1a delivered prior to period 0.

By the end of period 1, x will be delivered to all acceptors in q_a . They will therefore cease generating 2as for any ballot number < b(x).

By the end of period 3, all acceptors in q_a will have received all 1bs and 2as generated by acceptors in q_a with $\leq b(x)$. This means that any prior 2a signed by an acceptor in q_a is received by all acceptors in q_a . If there are no prior 2as, there will now be 2as with value V(x).

By the end of period 5, y will be delivered to all acceptors in q_a . They will then send $1b{\rm s}$ to each other.

By the end of period 8, all 2*a*s generated by acceptors in q_a with values $\neq V(y)$ will be buried.

By the end of period 10, z is delivered to all acceptors in q_a . All acceptors in q_a must respond with fresh 1bs.

By the end of period 11, all acceptors in q_a receive a quorum of fresh 1bs, and so produce 2as.

By the end of period 12, a quorum of 2as with ballot b(z) have been delivered. These form q_a .

6.4.2 Introducing Artificial Delays in a Partially Synchronous Network

A partially synchronous network is one in which, after some point in time, there exists some (possibly unknown) constant latency Δ such that all sent messages arrive within Δ [21]. We can introduce artificial delays to ensure that in any partially synchronous network, Heterogeneous Paxos has Termination.

If the set of proposers is finite (it could be limited to the set of acceptors in any learner's quorum), then each can be assigned specific times they are allowed to propose. For example, if proposals include a timestamp, and all safe acceptors delay receipt of a *1a* until after that time, there could be a limited set of timestamps each proposer is allowed to use.

Allowed times can be allocated in turns: each proposer gets a span of time during which only they can propose, and these turns are allocated in a round-robin fashion. If turns grow exponentially longer with time (from some predetermined start time), then for any maximum message latency Δ and any maximum clock skew Δ' , the network assumption will eventually be met during the turn of a correct proposer, with a turn of duration exceeding $13(\Delta + \Delta')$. The correct proposer need only propose once, wait a third of its turn, and then propose twice more, using the value of the highest known 2a to any safe acceptor.

7 Repeated Consensus

In maintaining, for instance, an ordered log, it is useful for learners to *decide* on the value which goes in each *slot*, traditionally starting at slot 0, then 1, etc. In general, one might want to prohibit filling a slot before a previous slot has been filled. With homogeneous learners, one might say that 1a messages should be ignored unless they can show that consensus for the previous slot was reached. For instance, an acceptor might ignore a 1a for slot n unless it references 2a messages signed by a quorum of acceptors which share a ballot and a value identified as belonging in slot n-1. In other words, an acceptor can demand *proof of consensus* for slot n-1 before filling slot n (for $n \neq 0$).

Heterogeneous learners makes this concept more difficult. What if the previous slot has been filled for one learner, but not for another? What if they are filled with different values for different learners? We describe a few possible solutions:

7.1 Allow slots to be filled in any order.

Each consensus protocol for each slot is fully independent. This is easier to implement, technically correct, and probably acceptable for some applications.

7.2 A 1a for slot s is a 1a for slot s - 1.

Suppose each 1a for slot s > 0 is required to reference a 1a for slot s - 1. Furthermore, each safe acceptor delays receipt of each 1a until it has received and acted on the 1as referenced. Other than that, we treat all slots independently.

No slot could be filled for any learner without consensus at least having *begun* for all prior slots. This does not guarantee, however, that consensus has yet *finished* for all prior slots. However, given termination (Section 4.3), it *will finish*, and so all prior slots *will be filled*.

This does not guarantee that the value decided in slot s references the value decided in slot s - 1.

7.3 Keep track of proof of consensus per learner.

A proposer could put all known proofs for slot s - 1 in each 1a for slot s, and acceptors only consider those learners in the 2a phase for the ballot that 1a begins. This pushes the duty of tracking proofs of consensus onto the proposer.

Later 1a messages might feature more learners, thus enabling more learners to achieve consensus for slot s.

This is compatible with the 1a for slot s references a 1a for slot s-1 solution (Section 7.2).

8 Examples

In Section 1, we contrast Heterogeneous Paxos with traditional consensus in three ways:

- Heterogeneous failures
- Heterogeneous acceptors
- Heterogeneous learners

We illustrate the advantages of heterogeneity through examples with all eight combinations of heterogeneous or homogeneous failures, acceptors, and learners.



Figure 4. Fully Homogeneous Example: acceptors are shown as black circles, and a quorum is shown as a shaded region.




Figure 5. Heterogeneous Failures Example: acceptor are shown as circles, and a quorum is shown as a shaded region.

8.1 Fully Homogeneous

Consider a traditional Byzantine-tolerant consensus protocol with 4 acceptors, tolerating any 1 Byzantine failure. Quorums (for any learner) consist of any 3 acceptors. Safe sets (for any edge) likewise consist of any 3 acceptors. We illustrate this traditional scenario in Figure 4.

8.2 Heterogeneous Failures

Heterogeneous Paxos can express protocols wherein learners and acceptors are homogeneous, but mixed failures [51] are allowed. For instance, consider a protocol with 6 acceptors, tolerating at most 1 Byzantine failure, and 1 additional crash failure. Quorums (for any learner) consist of any 4 acceptors. Safe sets (for any edge) consist of any 5 acceptors: the crash failure is safe, but not live. We illustrate this scenario in Figure 5.

Note that in order to tolerate 2 total failures, a homogeneous Byzantine-fault-tolerant consensus protocol would need at least 7 acceptors. Heterogeneity spares the expense (in latency and resources) of an unnecessary additional acceptor.

8.3 Heterogeneous Acceptors

Heterogeneous Paxos can express protocols wherein learners and failures are homogeneous, but not all acceptors are the same. For instance, consider a protocol with 6 acceptors, divided into two groups of 3. We tolerate up to 2 Byzantine failures, but only if *all failures are in one group*. This makes the acceptors heterogeneous: it matters *which* two acceptors fail. Quorums (for any learner) consist of 3 acceptors from one group, and one acceptor from the other. Safe sets (for any edge) likewise consist of 3 acceptors from one group, and one from the other. This scenario is illustrated in Figure 6.

Note that in order to tolerate 2 total failures, a homogeneous Byzantine-fault-tolerant consensus protocol would need at least 7 acceptors. Heterogeneity spares the expense (in




Figure 6. Heterogeneous Acceptors Example: Here, we draw one group of acceptors as solid blue circles, and the other as hollow red circles. A quorum is shown as a shaded region.




Figure 7. Heterogeneous Failures and Acceptors Example: Here, we draw one group of acceptors as solid blue circles, and the other as hollow red circles. A quorum is shown as a shaded region.

latency and resources) of an unnecessary additional acceptor It is possible to express this kind of heterogeneity with quorums in Byzantine Paxos [34].

8.4 Heterogeneous Failures and Acceptors

Heterogeneous Paxos can express protocols wherein learners are homogeneous, but with mixed failures, and heterogeneous acceptors. For instance, consider a protocol with 8 acceptors, divided into two groups of 4. We tolerate up to 2 Byzantine failures, and 1 additional crash failure, but only if all Byzantine failures are in one group, and at most 2 failures occur in the same group. This makes the acceptors heterogeneous: it matters which acceptors fail. Quorums (for any learner) consist of 3 acceptors from one group, and 2 acceptors from the other. Safe sets (for any edge) consist of 4 acceptors from one group, and 2 acceptors from the other. We illustrate this example in Figure 7.

Note that in order to tolerate 3 total failures, a homogeneous Byzantine-fault-tolerant consensus protocol would need at least 10 acceptors. Heterogeneity spares the expense (in latency and resources) of 2 unnecessary additional acceptors.

To address a similar situation with homogeneous failures, we'd still need 10 acceptors (to tolerate 2 Byzantine failures in one group, and 1 in the other). To tolerate 2 Byzantine failures and one crash failure (so heterogeneous failures) with homogeneous acceptors, we'd need 9 total acceptors. The additional detail of heterogeneous acceptors spares the expense (in latency and resources) of an unnecessary additional acceptor, as opposed to just heterogeneous failures.




Figure 8. Membership Disagreement Example: Here, we draw one the blue acceptor as a solid blue circle, the red acceptor as a hollow red circle, and the black acceptors as black circles.




Figure 9. Membership Disagreement Learner Graph: Only edge labels are shown. Learners are drawn as eyes, with darker blue learners on the left, and lighter, outlined red learners on the right. Note that the edges are labeled with safe sets for which the pair of learners want to agree. In each safe set, Byzantine failures are marked with a demonic face, and the unmarked acceptors are *safe*. All the edges except the rightmost and leftmost share the same label, in the middle.

8.5 Heterogeneous Learners

Heterogeneous Paxos can express protocols wherein learners have different failure assumptions, but each assumes acceptors and failures are homogeneous. This is the sort of scenario the original Ripple consensus protocol [48] tried to address, although it lacks liveness [15].

8.5.1 Acceptor Disagreement

We discussed an acceptor disagreement example in Section 3.3, and we expand upon it here.

Suppose learners agree that they want to tolerate 1 Byzantine failure out of 4 acceptors, but disagree about who the 4 relevant acceptors are. Suppose there are 4 learners: 2 red and 2 blue, as well as 5 acceptors: 1 red, 1 blue, and 3 black. The acceptors are illustrated in Figure 8.

The red learners want to agree if there is at most 1 Byzantine failure among the red and black acceptors, even if the blue acceptor has failed. Likewise, the blue learners want to agree if there is at most 1 Byzantine failure among the blue and black acceptors, even if the red acceptor has failed. The red learners and blue learners acknowledge that they may disagree with each other if a black acceptor fails, but otherwise they want to agree. Thus we draw the learner graph (Section 3) in, Figure 9.




Figure 10. Membership Disagreement Quorums: A quorum for the blue learners is shown in the light solid blue region, and a quorum for the red learners is shown as a striped red region.

For the red learners, quorums are any 3 red or black acceptors, while for the blue learners, quorums are any 3 blue or black acceptors. Quorums are shown in Figure 10.

Note that in order to tolerate 2 total failures, a homogeneous Byzantine-fault-tolerant consensus protocol would need at least 7 acceptors. Heterogeneity spares the expense of 2 unnecessary additional acceptors.

8.5.2 Failure Disagreement

Alternatively, learners might disagree about the types of failures they expect. Even if each learner expects homogeneous failures, learners' expectations may differ.

For example, consider a protocol with 5 acceptors. Two learners, called *blue*, want termination and agreement so long as there isn't more than one failure, even if that failure is Byzantine. Another two learners, called *red*, want termination and agreement so long as there are no more than 2 crash failures, but accept that they may disagree if there is a Byzantine failure. The red learners and the blue learners accept that they may disagree iff there is at least one Byzantine failure. Thus we draw the learner graph (Section 3), in Figure 11.

For the red learners, quorums are any 3 acceptors, while for the blue learners, quorums are any 4 acceptors. The safe sets on the edge between the blue learners consist of any 4 acceptors, and on all the other edges consist of all the acceptors. Quorums are illustrated in Figure 12.

Note that in order to tolerate 2 total failures, a homogeneous Byzantine-fault-tolerant consensus protocol would need at least 7 acceptors. Heterogeneity spares the expense (in latency and resources) of 2 unnecessary additional acceptors.

8.6 Heterogeneous Learners and Failures

Heterogeneous Paxos can express protocols wherein learners have different failure assumptions, and failures are heterogeneous, but acceptors are homogeneous. Consider a protocol with 12 acceptors, and 4 learners. Two learners, called *blue*, want agreement and termination so long as there aren't aren't more than 3 Byzantine failures, and 1 additional crash failure. The edges between blue learners have safe sets consisting of any 9 acceptors. Another two learners, called *red*, want agreement and termination so long as there is no more than 1 Byzantine failure, and 4 additional crash failures. The edges between red learners have safe sets consisting of any 11 acceptors. The red learners and the blue learners want to agree if there is no more than 1 Byzantine failure. They accept that they may disagree otherwise. The edges between red and blue learners likewise have safe sets consisting of any 11 acceptors. Thus we draw the learner graph (Section 3) in Figure 13.

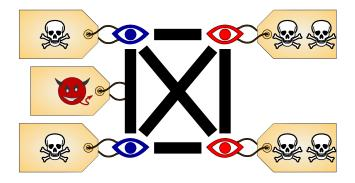


Figure 11. Failure Disagreement Learner Graph: Learners are shown as eyes, with darker blue learners on the left, and lighter, outlined red learners on the right. The edge between the blue learners is labeled with one Byzantine failure: they want to agree even if one acceptor is Byzantine. All the other learners may disagree if there is a Byzantine failure. The learners are each labeled with a number of crash failures: they want to terminate even if one or two acceptors crash.




Figure 12. Failure Disagreement Example: A quorum for the blue learners is shown in the light solid blue region, and a quorum for the red learners is shown as a striped red region.

For the red learners, quorums are any 7 acceptors, while for the blue learners, quorums are any 8 acceptors. Example quorums are shown in Figure 14.

Note that in order to tolerate 5 total failures, a homogeneous Byzantine-fault-tolerant consensus protocol would need at least 16 acceptors. Heterogeneity spares the expense (in latency and resources) of 4 unnecessary additional acceptors.

To simultaneously tolerate all learners' worst fears, (3 Byzantine and 2 additional crash failures), we'd need 14 acceptors. The additional detail of heterogeneous learners spares the expense (in latency and resources) of 2 unnecessary additional acceptors, as opposed to just heterogeneous failures.

8.7 Heterogeneous Learners and Acceptors

Heterogeneous Paxos can express protocols wherein learners have different failure assumptions, and acceptors are heterogeneous, but failures are homogeneous. Consider a protocol with 8 acceptors, and 4 learners. The acceptors are divided into two groups of 4: *blue* and *red*.

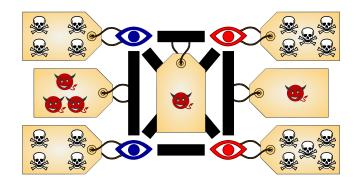


Figure 13. Heterogeneous Learners and Failures Learner Graph: Learners are drawn as eyes, with darker blue learners on the left, and lighter, outlined red learners on the right. Note that the edges between each pair of learners are labeled with the Byzantine failures under which they require agreement. All edges except the rightmost and leftmost share a central label. Each learner is labeled with the crash failures under which they require termination.




Figure 14. Heterogeneous Learners and Failures Example: A quorum for the blue learners is shown in the light solid blue region, and a quorum for the red learners is shown as a striped red region.

All learners want agreement whenever at most 1 acceptor is Byzantine. All edges therefore include at safe sets consisting of any 7 acceptors. Two learners, called *blue*, also want agreement with each other, as well as termination, whenever at most 1 blue and 2 red acceptors are Byzantine. The edge between them therefore includes safe sets with any 3 blue and 2 red acceptors, and their quorums likewise consist of any 3 blue and 2 red acceptors. Two learners, called *red*, also want agreement with each other, as well as termination, whenever at most 1 red and 2 blue acceptors are Byzantine. The edge between them therefore includes safe sets with any 2 blue and 3 red acceptors, and their quorums likewise consist of any 2 blue and 3 red acceptors. Example quorums are illustrated in Figure 15.

To tolerate all the failures any learner believes possible, a consensus with homogeneous learners would need at least one more acceptor. Taking heterogeneous learners into account spares the expense of that unnecessary acceptor

Since a single learner can tolerate 3 total failures, a protocol with homogeneous acceptors would require at least 10 acceptors. Heterogeneity spares the expense of 2 unnecessary




Figure 15. Heterogeneous Learners and Acceptors Example: Here, we draw one group as solid blue circles, and the other as hollow red circles. A quorum for the blue learners is shown in the light solid blue region, and a quorum for the red learners is shown as a striped red region.




Figure 16. Heterogeneous Learners, Acceptors, and Failures Example: Here, we draw one group as solid blue circles, and the other as hollow red circles. A quorum for the blue learners is shown in the light solid blue region, and a quorum for the red learners is shown as a striped red region.

additional acceptors.

8.8 Heterogeneous Learners, Failures, and Acceptors

Heterogeneous Paxos can express protocols wherein learners have different failure assumptions, failures are heterogeneous, and so are acceptors. Consider a protocol with 9 acceptors, and 4 learners. The acceptors are divided into 3 groups of 3: *blue*, *black*, and *red*.

All learners want agreement when no Byzantine failures occur: all edges in the learner graph include safe sets with all 9 acceptors. Two learners, called *blue*, want agreement whenever at most 1 black acceptor, and all the red acceptors, are Byzantine: the edge between them includes safe sets with all the blue acceptors, and any 2 black acceptors. Furthermore, blue learners want termination even when one blue acceptor has crashed, one black acceptor is Byzantine, and all red acceptors are Byzantine. The blue learners' quorums therefore consist of any 2 blue acceptors, as well as any 2 black acceptors.

Another two learners, called *red*, want agreement whenever at most 1 black acceptor, and all the blue acceptors, are Byzantine: the edge between them includes safe sets with all the red acceptors, and any 2 black acceptors. Furthermore, red learners want termination even when one red acceptor has crashed, one black acceptor is Byzantine, and all blue acceptors are Byzantine. The red learners' quorums therefore consist of any 2 red acceptors, as well as any 2 black acceptors. Example quorums are illustrated in Section 8.8.

For a fully homogeneous consensus to tolerate 4 Byzantine failures would require 13

acceptors, so heterogeneity spares the cost of 4 additional unnecessary acceptors.

9 Implementation

Since Heterogeneous Paxos is designed for cross-domain applications where different parties have different trust assumptions, it is well-suited for blockchains. We constructed a variety of example blockchains using the Charlotte framework [49], which allows for pluggable integrity (consensus) mechanisms. In particular, we added a new "proof of consensus" subtype featuring decision sets (Definition 24), for a given learner. Each block on a chain features such a proof, to demonstrate that the learners for that chain have decided on that block at that height.

9.1 Cross-Domain Commits

The Charlotte framework [49] allows a single proof to atomically commit one block into two distinct data structures. This is similar to atomically committing a transaction on two separate databases. Such a proof must simultaneously satisfy the learners (who dictate the failure tolerance requirements) relevant to both data structures. Heterogeneous Paxos provides an expressive language for learners to specify precise trust assumptions: the learner graph (Section 3). If one group of learners care about one data structure, they presumably have edges among themselves dictating the conditions under which they agree on the makeup of that data structure. If another group cares about another data structure, then when both groups want to commit a block to both, they need to specify a new learner graph, including edges between the two groups: the conditions under which they want the commit to be atomic.

To preserve maximum *safety* (but not necessarily maximum liveness), the new learner graph will feature new quorums for each learner: each quorum necessary for a dual-datastructure protocol is the union of one quorum from each component type. With this construction, we can atomically commit a single block onto multiple Heterogeneous Paxos chains.

To preserve maximum *liveness*, learners should simply not demand to agree between the two groups. We can posit some hypothetical acceptor which everyone knows to be Byzantine, and include that acceptor in all safe sets in the edges between the two groups. Each will commit blocks independently, and they will likely not agree (it's not very safe). With this construction, Heterogeneous Paxos neatly describes independent consensus protocols as a single protocol.

9.2 Charlotte Representation

We implemented a prototype of Heterogeneous Paxos as a "Fern" Integrity service within the Charlotte framework [49]. The proofs it produces are specific to each learner's assumptions. We also use Charlotte's blocks as messages in the consensus protocol, taking advantage of its reference-by-hash format, as well as marshaling and message-passing functions. Our servers are implemented in 1,704 lines of Java,³ available at https://github.com/isheff/charlotte-public. Charlotte uses 256-bit SHA3 hashes, P256 elliptic curve signatures, protobufs [47] for marshalingand unmarshaling, and gRPC [28] for transmitting messages over TLS 1.3 channels.

³ excluding import statements and comments

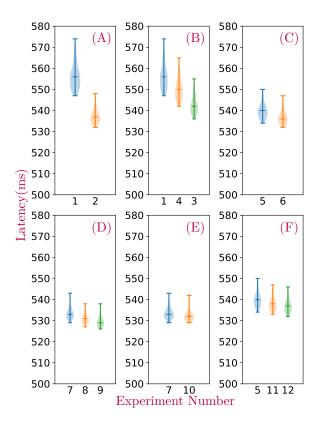


Figure 17. Round-trip latency in various heterogeneous configurations. Bars represent the 5th percentile, median, and 95th percentile for each experiment, within the distribution shown as a violin plot. Experiments are clustered according to their ability to tolerate similar failures with varying degrees of heterogeneity (some are shown in multiple clusters). Optimal latency is 500 ms.

Our implementation has a separate *light client* that does not participate in consensus; it merely requests that a block be added to a chain, and an acceptor server acts as the proposer in the consensus protocol. Including communication with the light client, the process has a minimum latency of 5 messages.

9.3 Evaluation

We ran two types of experiments: heterogeneous configuration experiments demonstrate the advantages of tailoring consensus to a heterogeneous environment, and contention experiments measure our implementation's ability to handle multiple simultaneous proposals. In each experiment, we assigned quorums to preserve maximum safety Section 9.1, and a single light client appended 2,000 blocks. To avoid any "warm-up" or "cool-down" effects, the measurements ignore the first and last 500 blocks. Our servers were VMs with 1 physical core of an Intel E5-2690 2.9 GHz CPU, and 8 GB of RAM each. To simulate geodistribution, we added 100 ms of artificial latency to each network connection, so the theoretical optimum latency from the light client, through the consensus protocol, and back, is 500 ms.

9.3.1 Heterogeneous Configuration Experiments

To show the advantages of tailoring consensus for heterogeneous environments, we ran several experiments, each with a single blockchain and a different CLG (Section 3). In

#	acceptors			agreement			termination		§
	b	r	other	all	blue	red	blue	red	
1			16	5			5		
2	3	3	3	0	$1t \wedge 3r$	$3b \wedge 1t$	1b∧1t∧ <mark>3r</mark>	<mark>3</mark> b∧1t∧1r	8.8
3			12	1	3	1	4	5	8.6
4	14 3				5				
5	10 3						3		
6	4	4	0	lr∨1b	2r∧1b	$1r \land 2b$	$2r \wedge 1b$	$1\mathrm{r} \wedge 2\mathrm{b}$	8.8
7			7	2			2		
8	6			1		2		8.2	
9			5	0	1	0	1	2	8.5.2
10	3	3	0	$2b \vee 2r$			$2b \vee 2r$		8.3
11			9	2			3		
12	4	4	0	$2b \vee 2r$			$(\mathrm{2b} \wedge \mathrm{1r}) \lor (\mathrm{1b} \wedge \mathrm{2r})$		8.4

Table 1. Each experiment is numbered (#). For each, we divide acceptors into groups of red (r), blue (b), and other (t), as necessary. Each experiment has multiple red and blue learners. For learners of the same or different colors, the agreement column lists the number of Byzantine failures of each acceptor group for which the learners require agreement. For each color of learner, the termination column lists the number of crash failures of each acceptor group for which the learners require termination.

general, heterogeneous configurations save resources and latency compared with homogeneous configurations tolerating the same failures. Table 1 describes the acceptors and learner graph for each experiment. Figure 17 shows the round-trip latency distributions for committing blocks in each.

Experiment 2 uses the setup from Section 1.1. Since the learners can tolerate 5 failures, some of them Byzantine, a fully homogeneous system would need 16 acceptors, becoming experiment 1. Homogeneity costs 7 additional unnecessary acceptors, and as Figure 17.A shows, 51% median latency overhead (over the 500 ms optimal latency).

Similarly, experiment 3 uses heterogeneous learners and failures. To tolerate all learners' worst fears, two more acceptors would be necessary, as represented in experiment 4. Heterogeneous learners save the unnecessary expense of 2 acceptors, and, as Figure 17.B shows, 14% median latency overhead. Since learners can tolerate 5 failures, some of them Byzantine, a fully homogeneous system would need 16 acceptors, becoming experiment 1. Heterogeneous failures alone save the unnecessary expense of a further 2 acceptors, and, as Figure 17.B shows, 12% median latency overhead. For experiment 3, then, heterogeneity saves the unnecessary expense of 4 acceptors, and, as Figure 17.B shows, 33% median latency overhead.

Without the ability to distinguish heterogeneous acceptors, experiment 6 becomes experiment 5: learners need to tolerate 3 Byzantine failures. Heterogeneous acceptors save the unnecessary expense of 2 acceptors, and, as Figure 17.C shows, 11% median latency overhead.

Since learners in experiment 8 can tolerate 2 failures, 1 of them Byzantine, a homogeneous system would need 7 acceptors, becoming experiment 7. Heterogeneity saves the unnecessary expense of an additional acceptor, and, as Figure 17.D shows, 6% median latency overhead. Without accounting for heterogeneous learners, experiment 9 would need to tolerate 1 Byzantine and 1 additional crash failure, becoming experiment 8. Heterogeneous learners

save the expense of an unnecessary acceptor and, as Figure 17.D shows, 7% median latency overhead. A fully homogeneous consensus would need to tolerate 2 Byzantine failures, becoming experiment 7. Heterogeneity saves the unnecessary expense of 2 additional acceptors, and, as Figure 17.D shows, 14% median latency overhead.

Without the ability to distinguish heterogeneous acceptors, learners in experiment 10 would reduce to a homogeneous consensus tolerating 2 Byzantine failures. They would need 7 acceptors, becoming experiment 7. Heterogeneity saves the unnecessary expense of an additional acceptor, and, as Figure 17.E shows, 3% median latency overhead.

Without heterogeneous failures, experiment 11 becomes a homogeneous system tolerating 3 Byzantine failures. Learners would need 10 acceptors, becoming experiment 5. Heterogeneity saves the expense of an additional acceptor and, as Figure 17.F shows, 5% median latency overhead. Without accounting for heterogeneous acceptors, experiment 12 would need to tolerate 2 Byzantine and 1 crash failure, becoming experiment 11. Heterogeneous acceptors save the expense of 1 unnecessary acceptor, and, as Figure 17.F shows, 3% median latency overhead. A fully homogeneous system tolerating 3 Byzantine failures would need 10 acceptors, becoming experiment 5. Heterogeneity saves the expense of 2 unnecessary acceptors, and, as Figure 17.F shows, 8% median latency overhead.

9.3.2 Multichain shared blocks

Shared (joint) blocks facilitate cross-domain interaction. In these experiments, the client appends blocks to 2–4 chains, simultaneously, so a single execution of consensus decides atomically whether the block is appended to all chains, or none of them. Each chain uses with 4 or 7 "Fern" Consensus acceptors, and tolerates 1 or 2 Byzantine failures. These cross-chain commits preserve the *safety* of both chains (Section 9.1): quorums for the cross-chain commits each include a quorum from each individual chain. As the yellow lines in Figure 18 show, latency scales roughly linearly with the number of chains. Each acceptor's computational overhead (marshaling messages and verifying signatures) is linear in the number of chains. The darker green lines in Figure 18 serve as a control: running 1–4 independent chains in parallel (on separate VMs) does not affect individual chains' latency.

9.3.2.1 Single Chain

In these experiments, a client appends 2000 successive blocks to one chain. Mean latency is 527 ms for a chain with 4 Fern servers and 538ms for 7 Fern servers. Since the best possible latency is 500 ms, these results are promising. Overheads include cryptographic signatures, verification, and garbage collection.

9.3.3 Contention

In these experiments, all clients simultaneously contend to append 2000 unique blocks to the same chain. We measured the blocks that were actually accepted into slots 500–1500 of the chain. We used 2–36 clients, and chains with 4 or 7 servers, configured with 2 GB RAM. Like Byzantized Paxos [34], Heterogeneous Paxos can require a dynamic timeout to automatically trigger a new ballot. Chain throughput is shown in Figure 21. Our chains, on average, achieved 1.88 blocks/sec throughput for 4 servers and 1.85 blocks/sec for 7, not far from the 2 blocks/sec optimum. Throughput does not decrease much with the number of clients.




Figure 18. Heterogeneous Paxos Multichain and Parallel experiments. In Parallel experiments, each chain operates independently (and has its own client). In Multichain experiments, one client tries to append all blocks to all chains. Optimal latency is 500 ms.

Figure 19. Throughput of Heterogeneous Paxos under contention. 2–36 clients try to append 2000 blocks to just one chain. Optimal throughput is 2 blocks/sec.




Figure 20. Throughput of Heterogeneous Paxos mixedworkload experiment (4 Fern servers).




Figure 21. Throughput of Heterogeneous Paxos under contention. 2-36 clients try to append 2000 blocks to a single chain with either 4 or 7 acceptors (Fern servers), tolerating 1 or 2 Byzantine failures. Optimal throughput is 2 blocks/sec.

9.3.4 Mixed

These experiments attempt to simulate a more realistic scenario with multiple clients appending to multiple chains. including the previous 3 types of workload. 2–5 clients contend to append blocks onto either 2 or 7 chains, each with 4 acceptors. On each block, a client tries to append a shared block to two random chains with probability 10% and otherwise tries appending to a random single chain. The results are in Figure 20. Throughput can be over 2.0 blocks/sec because multiple clients can append blocks to different chains in parallel. Mean throughput is 1.8 blocks/sec and 2.7 blocks/sec for 2 and 7 chains respectively, which is expected because the 2-chain configuration has more contention.

Heterogeneous Paxos scales horizontally with multiple chains running in parallel. Furthermore, throughput does not decrease much with contention.

This gives us ability to make progress even with many clients concurrently connecting to the same chain. We also notice that the number of servers plays a major role in latency. With a small group of servers, Heterogeneous Paxos almost reaches the theoretical optimum of 500 ms. Since our Heterogeneous Paxos implementation is just a prototype, we believe that with further efforts in optimization, average latency performance can be improved.

10 **Future Work**

We have generalized what it means to have Validity, Agreement and Termination in a heterogeneous setting, and designed and implemented a consensus protocol that meets these properties with minimum theoretical latency. However, Heterogeneous Paxos is far from

perfect. For example, we have not discussed reconfiguration or changing the learner graph. Here are a few more ways it can almost certainly improved, without altering its core concepts.

10.1 Additional Failure Types

Although the labels in our learner graphs have so far only taken crash and Byzantine failures into account, there are many other possible behaviors we can express. For instance, detectable failures could be very useful to add to the model: rather than reconfiguring when acceptors are known to have failed, detection could be integrated directly.

10.2 Network Assumption and Termination

While Paxos and PBFT are partially synchronous consensus protocols [32, 13], recent advances in cryptography have made fully asynchronous, probabilistically terminating consensus protocols viable [44, 2]. These have the advantage of never needing to insert artificial delays in order to guarantee termination. It is possible that Heterogeneous Paxos could be adapted to this setting, using a similar "shared coin flip" mechanism, however it may require more interesting cryptography to deal with non-uniform quorums.

Even in the partially synchronous [21] setting, there are almost certainly better timing strategies than those we present (Section 6.4.2). Optimizations like the leader/view change used in pbft [13] or the batching used in BFT-SMart [5] could greatly improve performance.

10.3 Bandwidth

If each message bounces off of each acceptor, and each message is sent to each acceptor and each learner, and each phase features each acceptor sending a message, then the communication overhead for a setup with n acceptors and m learners is $O(n^3 + n^2m)$ messages. While the reference-by-hash architecture allows each message to avoid copying the proposed value, that can still be a lot of overhead. A fairly naive optimization would be to allow acceptors not to bounce all messages they receive, and instead request them only if the original sender didn't broadcast the message fast enough. This could reduce communication overhead to $O(n^2 + nm)$, in the absence of Byzantine failures.

Using advanced cryptographic techniques, protocols like Hot-Stuff [2] achieve consensus in O(n) bandwidth overhead. It may be possible to adapt Heterogeneous Paxos with some of these optimizations.

10.4 Programming

Implementations like BFT-SMart [5] have been heavily optimized, with researchers discovering better data structures and communication protocols along the way. Our implementation is far from optimal. Better memory layout, data structures, and parallelism are certainly possible.

11 Related Work

11.1 Heterogeneous Acceptors and Failures

Heterogeneous Paxos is based on Leslie Lamport's Byzantine-fault-tolerant variant [34] of Paxos [32]. Byzantine Paxos supports heterogeneous acceptors because it uses quorums: not all acceptors need be of equal worth, but all quorums are. Although Lamport does not

Isaac Sheff, Xinwen Wang, Robbert van Renesse, and Andrew C. Myers

describe it explicitly, Byzantine Paxos can have heterogeneous, or *mixed* [51], failures, so long as quorum intersections have a safe acceptor and at least one quorum is safe and live.

Many papers have investigated hybrid failure models [51, 16, 9, 37] in which different consensus protocol acceptors can have different failure modes, including crash failures and Byzantine failures (heterogeneous failures). These papers typically investigate how many failures in each class can be tolerated. Other papers have looked at system models in which different acceptors may be more or less likely to fail [26, 42], or where failures are dependent (heterogeneous acceptors) [31, 20, 29].

Further generalizations are possible. Our Learner Graph uses only *safe* and *live* acceptors, but its labels might be generalized to support other failure types such as rational failures [3]. We have only considered learners that all make the same (weak) synchrony assumption, but others have studied learners with heterogeneous network assumptions [6, 41].

11.2 Heterogeneous Learners

Unlike ours, most related work conflates learners and acceptors. Early related work on "Consensus with Unknown Participants" [14, 27, 4] defines protocols in which each participant knows only a subset of other participants, inducing a "who-knows-whom" digraph; this work identifies properties of this graph that must hold to achieve consensus. Not every participant knows all participants, but trust assumptions are homogeneous: participants have the same beliefs about trustworthiness of other participants.

Our prior work describes [50] a heterogeneous failure model in which different participants may have different failure assumptions about other participants. We distinguished learners whose failure assumptions are accurate from those whose failure assumptions are inaccurate and we specified a heterogeneous consensus protocol in terms of the possibly different conditions under which each learner is guaranteed agreement. The paper constructs a heterogeneous consensus protocol that meets the requirements of all learners using latticebased information flow to analyze and prove protocol properties.

Heterogeneous learners became of interest to blockchain implementations based on voting protocols where open membership was desirable. Ripple (XRP) [48] was the earliest blockchain to attempt support for heterogeneous learners. Originally, each learner had its own Unique Node List (UNL), the set of acceptors that it partially trusts and uses for making decisions. An acceptor in more UNLs is implicitly more influential. The protocol was updated because of correctness issues [15], and support for diverse UNLs was all but eliminated. Ripple has proposed a protocol called Cobalt [40], in which each learner specifies a set of acceptors they partially trust, and it works if those sets intersect "enough." Cobalt does not account for heterogeneous failures, and only limited acceptor heterogeneity.

The Stellar Consensus [43, 38, 39] blockchain protocol supports both heterogeneous learners and acceptors, although it does not distinguish the two; each learner specifies a set of "quorum slices." Like Cobalt, Stellar does not account for heterogeneous failures. Neither Stellar nor Cobalt match Heterogeneous Paxos' best-case latency. Heterogeneous Paxos inherits Byzantine Paxos' 3-message-send best case latency, which is optimal for a consensus tolerating $\left\lceil \frac{n}{3} \right\rceil - 1$ failures in the homogeneous Byzantine case or $\left\lceil \frac{n}{2} \right\rceil - 1$ failures in the homogeneous crash case [8]. However, both Cobalt and Stellar are designed for an "open-world" model, where not all acceptors and learners are known in advance. We have not yet adapted Heterogeneous Paxos to an open-world setting.

The heterogeneous learner models of Cobalt and Stellar have been studied in detail by García-Pérez and Gotsman [25]. They explore what happens when Byzantine nodes lie about their trust choices and strengthen earlier results. Cachin and Tackmann examine Stellar-

style asymmetric trust models, including in shared-memory environments [10]. However, neither paper separates learners from acceptors, attempts to solve consensus, or considers heterogeneous failures; the Learner Graph is more general.

Like our work, *Flexible BFT* [41] distinguishes learners from acceptors and accounts for both heterogeneous learners and heterogeneous failures. It does not allow heterogeneous acceptors: they are interchangeable, and quorums are specified by size. Flexible BFT also has optimal best-case latency. It does not support crash failures, but introduces a new failure type called *alive-but-corrupt* for acceptors interested in violating safety but not liveness.

12 Conclusion

Heterogeneous Paxos is the first consensus protocol with heterogeneous acceptor, failures, and learners. It is based on the Learner Graph, a new and expressive way to capture learners' diverse failure-tolerance assumptions. Heterogeneous consensus facilitates a more nuanced approach that can save time and resources, or even make previously unachievable consensus possible. Heterogeneous Paxos is proven correct against our new generalization of consensus for heterogeneous settings. This approach is well-suited to systems spanning heterogeneous trust domains; for example, we demonstrate working , composable blockchains with heterogeneous trust.

Future work may expand learner graphs to represent even more types of failures. Heterogeneous Paxos may be extended to allow for changing configurations, or improved efficiency in terms of bandwidth and computational overhead. New protocols can also make use of our definition of heterogeneous consensus, perhaps adding new guarantees such as probabilistic termination in asynchronous networks.

— References -

- 1 Quorum whitepaper. Technical report, ConsenSys, 2018.
- 2 Ittai Abraham, Guy Gueta, and Dahlia Malkhi. Hot-stuff the linear, optimal-resilience, one-message BFT devil. CoRR, abs/1803.05069, 2018.
- 3 Amitanand S. Aiyer, Lorenzo Alvisi, Allen Clement, Mike Dahlin, Jean-Philippe Martin, and Carl Porth. BAR fault tolerance for cooperative services. In 20th ACM Symp. on Operating System Principles (SOSP), SOSP '05, pages 45–58, 2005.
- 4 Eduardo A. Alchieri, Alysson Neves Bessani, Joni Silva Fraga, and Fabíola Greve. Byzantine consensus with unknown participants. In *Conference on Principles of Distributed Systems*, OPODIS 2008, pages 22–40, 2008.
- 5 Alysson Bessani, João Sousa, and Eduardo EP Alchieri. State machine replication for the masses with bft-smart. In Dependable Systems and Networks (DSN), 2014 44th Annual IEEE/IFIP International Conference on, pages 355–362. IEEE, 2014.
- 6 Erica Blum, Jonathan Katz, and Julian Loss. Synchronous consensus with optimal asynchronous fallback guarantees. In Dennis Hofheinz and Alon Rosen, editors, *Theory of Cryptography*, pages 131–150, 2019.
- 7 Tamas Blummer, Sean Bohan, Mic Bowman, Christian Cachin, Nick Gaski, Nathan George, Gordon Graham, Daniel Hardman, Ram Jagadeesan, Travin Keith, Renat Khasanshyn, Murali Krishna, Tracy Kuhrt, Arnaud Le Hors, Jonathan Levi, Stanislav Liberman, Esther Mendez, Dan Middleton, Hart Montgomery, Dan O'Prey, Drummond Reed, Stefan Teis, Dave Voell, Greg Wallace, and Baohua Yang. An introduction to hyperledger. Technical report, Hyperledger, 2018.
- 8 Gabriel Bracha and Sam Toueg. Resilient consensus protocols. In 2nd ACM Symp. on Principles of Distributed Computing, PODC '83, pages 12–26, 1983.

- 9 Christian Cachin and Michael Backes. Reliable broadcast in a computational hybrid model with byzantine faults, crashes, and recoveries. In *Conference on Dependable Systems and Networks (DSN)*, page 37, jun 2003.
- 10 Christian Cachin and Björn Tackmann. Asymmetric distributed trust. In Pascal Felber, Roy Friedman, Seth Gilbert, and Avery Miller, editors, 23rd International Conference on Principles of Distributed Systems, OPODIS 2019, December 17-19, 2019, Neuchâtel, Switzerland, volume 153 of LIPIcs, pages 7:1–7:16. 2019.
- 11 Brad Calder, Ju Wang, Aaron Ogus, Niranjan Nilakantan, Arild Skjolsvold, Sam McKelvie, Yikang Xu, Shashwat Srivastav, Jiesheng Wu, Huseyin Simitci, et al. Windows Azure Storage: a highly available cloud storage service with strong consistency. In 23rd ACM Symp. on Operating System Principles (SOSP), pages 143–157. ACM, 2011.
- 12 Miguel Castro and Barbara Liskov. Practical Byzantine fault tolerance. In 3rd USENIX Symp. on Operating Systems Design and Implementation (OSDI), February 1999.
- 13 Miguel Castro and Barbara Liskov. Practical Byzantine fault tolerance and proactive recovery. ACM Trans. on Computer Systems, 20:2002, 2002.
- 14 David Cavin, Yoav Sasson, and André Schiper. Consensus with unknown participants or fundamental self-organization. In Ioanis Nikolaidis, Michel Barbeau, and Evangelos Kranakis, editors, Ad-Hoc, Mobile, and Wireless Networks (ADHOC-NOW), volume 3158 of Lecture Notes in Computer Science, pages 135–148. 2004.
- 15 Brad Chase and Ethan MacBrough. Analysis of the XRP ledger consensus protocol. CoRR, abs/1802.07242, 2018.
- 16 Allen Clement, Manos Kapritsos, Sangmin Lee, Yang Wang, Lorenzo Alvisi, Mike Dahlin, and Taylor Riche. Upright cluster services. In 22nd ACM Symp. on Operating System Principles (SOSP), pages 277–290, 2009.
- 17 James C. Corbett, Jeffrey Dean, Michael Epstein, Andrew Fikes, Christopher Frost, Jeffrey John Furman, Sanjay Ghemawat, Andrey Gubarev, Christopher Heiser, Peter Hochschild, et al. Spanner: Google's globally distributed database. ACM Transactions on Computer Systems (TOCS), 31(3):8, 2013.
- 18 Miguel Correia, Nuno Neves, and Paulo Veríssimo. From consensus to atomic broadcast: Time-free byzantine-resistant protocols without signatures. Comput. J., 49:82–96, 01 2006.
- 19 Kyle Croman, Christian Decker, Ittay Eyal, Adem Efe Gencer, Ari Juels, Ahmed Kosba, Andrew Miller, Prateek Saxena, Elaine Shi, Emin Gün Sirer, Dawn Song, and Roger Wattenhofer. On scaling decentralized blockchains. In Jeremy Clark, Sarah Meiklejohn, Peter Y.A. Ryan, Dan Wallach, Michael Brenner, and Kurt Rohloff, editors, *Financial Cryptography and Data Security*, pages 106–125, 2016.
- 20 Carole Delporte-Gallet, Hugues Fauconnier, Rachid Guerraoui, and Andreas Tielmann. The disagreement power of an adversary. *Distributed Computing*, 24:137–147, November 2011.
- 21 Cynthia Dwork, Nancy Lynch, and Larry Stockmeyer. Consensus in the presence of partial synchrony. J. ACM, 35(2):288–323, April 1988.
- 22 M. J. Fischer, N. A. Lynch, and M. S. Paterson. Impossibility of distributed consensus with one faulty process. *Journal of the ACM*, 32(2):374–382, April 1985. Also published as MIT Laboratory of Science Technical Report MIT/LCS/TR-282, Cambridge, MA, 1982.
- 23 Robert W. Floyd. Algorithm 97: Shortest path. Commun. ACM, 5(6):345–, June 1962.
- 24 Ethereum Foundation. Ethereum white paper. Technical report, Ethereum Foundation, 2018.
- 25 Álvaro García-Pérez and Alexey Gotsman. Federated Byzantine Quorum Systems. In Jiannong Cao, Faith Ellen, Luis Rodrigues, and Bernardo Ferreira, editors, 22nd International Conference on Principles of Distributed Systems (OPODIS 2018), volume 125 of Leibniz International Proceedings in Informatics (LIPIcs), pages 17:1–17:16, 2018.
- 26 David K. Gifford. Weighted voting for replicated data. In 7th ACM Symp. on Operating System Principles (SOSP), ACM Operating Systems Review, pages 150–162, December 1979. ACM SIGOPS.

- 27 Fabíola Greve and Sebastien Tixeuil. Knowledge connectivity vs. synchrony requirements for fault-tolerant agreement in unknown networks. In 37th Annual IEEE/IFIP International Conference on Dependable Systems and Networks (DSN'07), pages 82–91, June 2007.
- **28** grpc: A high performance, open-source universal RPC framework. https://grpc.io, 2018.
- 29 Rachid Guerraoui and Marko Vukolić. Refined quorum systems. In Principles of Distributed Computing, PODC 2007, pages 119–128, 2007.
- 30 Mike Hearn and Richard Gendal Brown. Corda: A distributed ledger. Technical report, r3, 2019.
- 31 Flavio Junqueira and Keith Marzullo. Designing algorithms for dependent process failures. In Workshop on Future Directions in Distributed Computing, pages 24–28, 2003.
- 32 Leslie Lamport. The Part-time Parliament. ACM Trans. on Computer Systems, 16(2):133–169, May 1998.
- 33 Leslie Lamport. Paxos made simple. Technical report, Microsoft Research, December 2001.
- 34 Leslie Lamport. Byzantizing Paxos by refinement. In 25th Int'l Conf. on Distributed Computing (DISC), pages 211–224, 2011.
- 35 Leslie Lamport, Robert Shostak, and Marshall Pease. The Byzantine Generals Problem. ACM Trans. on Programming Languages and Systems, 4(3):382–401, July 1982.
- 36 Butler W. Lampson and Howard E. Sturgis. Crash recovery in a distributed data storage system. Technical report, Xerox Palo Alto Research Center, Palo Alto, CA, 1979.
- 37 Shengyun Liu, Paolo Viotti, Christian Cachin, Vivien Quéma, and Marko Vukolic. Xft: Practical fault tolerance beyond crashes. In OSDI, 2016.
- 38 Marta Lokhava, Giuliano Losa, David Mazières, Graydon Hoare, Nicolas P E Barry, Eli Gafni, Jonathan Jové, Rafał Malinowsky, and J Murphy McCaleb. Fast and secure global payments with Stellar. In 27th ACM Symp. on Operating System Principles (SOSP), 2019.
- 39 Giuliano Losa, Eli Gafni, and David Mazières. Stellar consensus by instantiation. In DISC, 2019.
- 40 Ethan MacBrough. Cobalt: BFT governance in open networks. *CoRR*, abs/1802.07240, 2018.
- 41 Dahlia Malkhi, Kartik Nayak, and Ling Ren. Flexible byzantine fault tolerance. In 26th ACM Conf. on Computer and Communications Security (CCS), CCS 2019, pages 1041–1053, 2019.
- 42 Dahlia Malkhi and Michael Reiter. Byzantine quorum systems. In 29th ACM Symposium on Theory of Computing, pages 569–578, May 1997.
- 43 David Mazières. The Stellar consensus protocol: A federated model for internet-level consensus. https://www.stellar.org, April 2015.
- 44 Andrew Miller, Yu Xia, Kyle Croman, Elaine Shi, and Dawn Song. The honey badger of BFT protocols. In 23rd ACM Conf. on Computer and Communications Security (CCS), pages 31–42, 2016.
- 45 Satoshi Nakamoto. Bitcoin: A peer-to-peer electronic cash system, 2008.
- 46 Bart Preneel. Collision resistance. In Henk C. A. van Tilbor and Sushil Jajodia, editors, Encyclopedia of Cryptography and Security, pages 221–222, 2011.
- 47 Protocol buffers. https://developers.google.com/protocol-buffers/, 2018.
- 48 David Schwartz, Noah Youngs, and Arthur Britto. The Ripple protocol consensus algorithm. Technical report, Ripple Labs Inc, 2014.
- 49 Isaac Sheff, Xinwen Wang, Haobin Ni, Robbert van Renesse, and Andrew C. Myers. Charlotte: Composable authenticated distributed data structures, technical report, 2019.
- 50 Isaac C. Sheff, Robbert van Renesse, and Andrew C. Myers. Distributed protocols and heterogeneous trust: Technical report. Technical Report arXiv:1412.3136, Cornell University Computer and Information Science, December 2014.
- 51 Hin-Sing Siu, Yeh-Hao Chin, and Wei-Peng Yang. Byzantine agreement in the presence of mixed faults on processors and links. *Parallel and Distributed Systems, IEEE Transactions* on, 9(4):335–345, Apr 1998.