

Probabilistic Resource-Aware Session Types

ANKUSH DAS, Carnegie Mellon University, USA

DI WANG, Carnegie Mellon University, USA

JAN HOFFMANN, Carnegie Mellon University, USA

Session types guarantee that message-passing processes adhere to predefined communication protocols. Prior work on session types has focused on deterministic languages but many message-passing systems, such as Markov chains and randomized distributed algorithms, are probabilistic. To model and analyze such systems, this article introduces probabilistic session types and explores their application in automatic expected resource analysis. Probabilistic session types describe probability distributions over messages and are a conservative extension of intuitionistic (binary) session types. To send on a probabilistic channel, processes have to utilize internal randomness from a probabilistic branching expression or external randomness from receiving on a probabilistic channel. The analysis for expected resource bounds is integrated with the type system and is a variant of automatic amortized resource analysis. It can automatically derive symbolic bounds for different cost metrics by reducing type inference to linear constraint solving. The technical contributions include the meta theory that is based on a novel nested multiverse semantics and a type-reconstruction algorithm that allows flexible mixing of different sources of randomness without burdening the programmer with type annotations. The type system has been implemented in the language PRast. Experiments demonstrate that PRast is applicable in different domains such as resource analysis of randomized distributed algorithms, verification of limiting distributions in Markov chains, and analysis of probabilistic digital contracts.

1 INTRODUCTION

Session types statically describe communication protocols for message-passing processes and well-typedness ensures adherence to these protocols at runtime. Session types were introduced by Honda [Honda 1993; Honda et al. 1998] for defining binary communication between processes, which can be interpreted classically [Wadler 2012] or intuitionistically [Caires and Pfenning 2010]. In this work, we follow the intuitionistic interpretation [Caires et al. 2014; Pfenning and Griffith 2015] of session types that is in Curry-Howard correspondence with intuitionistic linear logic [Girard 1987] and guarantees the *absence of deadlocks* (global progress) and *session fidelity* (type preservation).

Existing work on session types has focused on deterministic (i.e., non-probabilistic) languages but many message-passing systems are naturally probabilistic. Often, distributed algorithms internally use randomization as a tool to overcome limitations of deterministic algorithms. Examples of such algorithms include Lehmann and Rabin [1981] randomized dining philosophers protocol or Itai and Rodeh [1990] distributed leader election. In other systems, probability distributions are used to model uncertainty of external events such as incoming jobs in a data center. More generally, Markov chains can be viewed as systems of probabilistic message-passing processes.

This article presents PRast, a concurrent probabilistic programming language with novel *probabilistic session types* that can be used to model and analyze probabilistic message-passing systems. The key novelty is an additional type former that assigns a prob. distribution to a choice of labels in a session type. Such a probabilistic internal choice would, for instance, prescribe that the label H has to be sent on a channel with probability 0.25 and the label T has to be sent with probability 0.75. To adhere to this type, a process can utilize two sources of randomness: A new term former

Authors' addresses: Ankush Das, Carnegie Mellon University, USA, ankushd@cs.cmu.edu; Di Wang, Carnegie Mellon University, USA, diw3@cs.cmu.edu; Jan Hoffmann, Carnegie Mellon University, USA, jhoffmann@cmu.edu.

2021. 2475-1421/2021/1-ART1 \$15.00

<https://doi.org/>

for probabilistic branching provides an internal source of randomness and receiving messages on a probabilistic channel according to some distribution provides an external source of randomness. Probabilistic session types are carefully designed to be a *conservative extension* of intuitionistic (binary) session types. In particular, we support both probabilistic and standard choice types, which is technically challenging.

In addition to the design of the type system, a major technical contribution is an efficient type-reconstruction algorithm that ensures that prob. distributions of labels sent on a probabilistic channel matches the specification of the session type. The type rules provide a high degree of flexibility and the correct prob. distribution of probabilistic communication can be achieved by nesting internal and external sources of randomness. This flexibility complicates reconstruction of type derivations as we do not want to burden programmers with providing channel probabilities for different branches of a probabilistic split. We solve this challenge by automatically reconstructing probabilities in type derivations by generating and solving linear constraints.

A distinguishing feature of PRast is that it can be employed for *lightweight verification* of probabilistic systems. Probabilistic session types statically guarantee the prob. distribution of messages on a certain channel. These can naturally be composed to produce a desired output prob. distribution given an input prob. distribution. We have used this feature to verify correctness of dice programs [Knuth and Yao 1976] that model dice from coin flips, prove that a biased coin can be converted to an unbiased coin, and verify limiting distributions of standard Markov chains. In some situations, PRast can also *infer the prob. distribution* on a given channel. For instance, if the input probabilities for a process are given, the output probabilities can be inferred automatically.

As an application of PRast, we focus on automatically deriving *expected cost bounds for concurrent message-passing systems*. Probabilistic models are often used as the basis for a quantitative analysis such as the expected number of messages exchanged (in randomized distributed protocols), the expected response time (quality of service in a data center), or expected number of state transitions in a Markov chain. To derive bounds on such quantities, PRast’s type system combines two recently introduced techniques: session-types for work analysis of (deterministic) concurrent systems [Das et al. 2018] and expected cost analysis for functional probabilistic programs [Wang et al. 2020a]. Both of these techniques can be seen as a variant of automatic amortized resource analysis (AARA) [Hoffmann et al. 2017; Hofmann and Jost 2003] and inference can be reduced to standard linear programming (LP). The newly designed AARA for PRast has interesting and non-trivial interactions with probabilistic channels that enable a more compositional analysis resulting in precise bounds. While there are several techniques for automatic expected cost analysis of sequential probabilistic programs [Chatterjee et al. 2016; Ngo et al. 2018; Wang et al. 2019a], we are only aware of manual rule-based reasoning systems [McIver et al. 2016; Tassarotti and Harper 2019] or probabilistic model checking techniques [Kwiatkowska et al. 2011] for analyzing cost of concurrent probabilistic programs.

The meta theory of PRast—another contribution of this work—is based on a novel variant of progress and type preservation. The preservation proof is challenging as state-of-the-art techniques for probabilistic programming languages [Avanzini et al. 2019; Borgström et al. 2016] do not directly apply. From an operational point of view, the problem is that different universes that result from a probabilistic split cannot be considered in isolation since the prob. distributions of messages on the channels diverge. Our solution is to use a *nested-multiverse* semantics that manage the divergence of message distributions to control their impact on other processes.

We have implemented PRast and performed experiments with probabilistic message-passing systems from different domains. The implementation of PRast infers, for instance, bounds on the expected cost of randomized distributed protocols, such as Lehmann and Rabin’s randomized dining philosophers algorithm [Lehmann and Rabin 1981], Itai and Rodeh’s synchronous leader

election protocol [Itai and Rodeh 1990], and Chaum’s dining cryptographers protocol [Chaum 1988]. We have also implemented and verified several standard Markov chain-models such as Google’s PageRank algorithm [Page et al. 1999], random walks, and dice programs. Finally, we implemented some case studies that showcase how probabilistic session types can be used as specifications of probabilistic digital contracts, such as lotteries and slot machines. PRast can verify winning probabilities and automatically compute bounds on the expected financial gain/loss.

In summary, this article contains the following contributions.

- The design of PRast, a language with probabilistic session types and a flexible type system for probabilistic send and receive. (Section 4)
- An AARA for deriving symbolic bounds on the expected cost of PRast programs. (Section 4)
- The soundness proof of the type system with a novel probabilistic nested-multiverse semantics establishing global progress, session fidelity and probability consistency. (Section 5)
- An efficient type reconstruction algorithm that derives probabilities based on linear constraint solving. (Section 7)
- An implementation of PRast and an experimental evaluation with distributed algorithms, digital contracts, and Markov chains. (Sections 6 and 7)

We start with an informal overview of PRast (Section 2) and a recapitulation of session types for work analysis, which PRast extends (Section 3).

2 OVERVIEW OF PROBABILISTIC SESSION TYPES

We briefly overview probabilistic session types with a series of illustrative examples. We follow the approach and syntax of Rast [Das and Pfenning 2020a,b,c], which is based on a Curry-Howard isomorphism between intuitionistic linear logic and session types, extended by recursively defined types and processes. In this intuitionistic approach, every channel has a unique provider and a client. We view the session type as describing the communication from the provider’s point of view, with the client having to perform dual actions.

As a first example, consider the session type `bool` defined as

$$\text{bool} \triangleq \oplus\{\text{true} : 1, \text{false} : 1\}$$

Here, the *internal choice* type constructor \oplus dictates that the provider must send either **true** or **false**. In either case, the continuation type (after the colon) is **1**, indicating the end of the communication and requiring the provider to terminate after sending a close message.

As a first example, we define a simple process `TT` that outputs **true** and terminates.

```
decl TT : . |- (b : bool)
proc b <- TT = b.true ; close b
```

The first line declares the `TT` process showing that it uses an empty context (dot before the turnstile) and offers the channel `b` of type `bool`. The second line shows the process definition. The term `b <- TT` is the syntax for defining (or spawning) process `TT` offering on `b` and using no channels. The term `b.true` denotes sending the label **true** on `b` and `close b` denotes closing the channel `b` and terminating. A similar `FF` process can be defined that outputs **false**.

Probabilistic Processes. Suppose we wish to define a process `TF` that outputs **true** with probability $p \in [0,1]$ and **false** with probability $1 - p$. We introduce a new probabilistic term `flip p` ($H \Rightarrow P_1 \mid T \Rightarrow P_2$), operationally interpreted as flipping a coin that outputs heads with prob. p and tails with prob. $1 - p$. If the coin outputs heads (`H`), we execute P_1 , otherwise we execute P_2 . We employ this term to define process `TF` with $p = 0.6$ (we only allow constant probabilities).

```
decl TF : . |- (b : bool)
```

```
proc b <- TF = flip 0.6 (H => b.true ; close b | T => b.false ; close b)
```

The TF process first flips a coin with prob. of H being 0.6. If the coin flips to H, the process sends the label **true** and terminates. If the coin flips to T, the process sends **false** and terminates. Since the prob. of H is 0.6, the process TF outputs **true** with prob. 0.6, and **false** with prob. $1 - 0.6 = 0.4$.

Negation. Suppose we consider a negation process *neg* that takes a channel $b : \text{bool}$ as input and negates it (output **false** if input is **true** and vice-versa).

```
decl neg : (b : bool) |- (c : bool)
proc c <- neg b = case b ( true => c.false ; wait b ; close c
                        | false => c.true ; wait b ; close c )
```

The declaration describes that the *neg* process uses channel $b : \text{bool}$ and provides $c : \text{bool}$. This is similarly denoted in the definition as $c \leftarrow \text{neg } b$. The definition branches on the label received on channel b : if the process receives **true**, it sends **false** on c and vice-versa. Then, in either case, the process waits for the channel b to close using the term *wait b* and then closes channel c .

Probabilistic Session Types. Although processes can exhibit probabilistic behavior, this information is not visible in their session types. In particular, the *neg* process is unaware of the probability of **true** or **false** along channel b . Therefore, in this article, we introduce novel *probabilistic session types* that assign probabilities to the labels in a session type. We introduce a *probabilistic internal choice type operator* $\oplus_P\{\ell^{p_\ell} : A_\ell\}$: the provider sends label ℓ with prob. p_ℓ and continues to provide type A_ℓ . The dual type is $\&_P\{\ell^{p_\ell} : A_\ell\}$ where the provider is guaranteed to receive label ℓ with probability p_ℓ . As illustrations, we describe several prob. session types.

$$\begin{aligned} \text{tbool} &\triangleq \oplus_P\{\text{true}^{1.0} : 1, \text{false}^{0.0} : 1\} & \text{fbool} &\triangleq \oplus_P\{\text{true}^{0.0} : 1, \text{false}^{1.0} : 1\} \\ \text{pbool} &\triangleq \oplus_P\{\text{true}^{0.6} : 1, \text{false}^{0.4} : 1\} & \text{npbool} &\triangleq \oplus_P\{\text{true}^{0.4} : 1, \text{false}^{0.6} : 1\} \end{aligned}$$

The type *tbool* always outputs **true**, i.e. with prob. 1. Similarly, the type *fbool* always outputs **false**. The type *pbool* outputs **true** with prob. 0.6 and **false** otherwise. Its negation type *npbool* outputs **true** with prob. 0.4 and **false** otherwise. With these types, *without changing the process definitions*¹, we obtain the following types for the aforementioned processes. Note that the previous typings with the type *bool* are also valid but provide less information.

```
decl TT : . |- (b : tbool)      decl FF : . |- (b : fbool)
decl TF : . |- (b : pbool)      decl neg : (b : pbool) |- (c : npbool)
```

The soundness theorem ensures that the distribution of the labels sent on a probabilistic channel at runtime does indeed match the distribution on the labels in the choice types. To send on a probabilistic channel, a process can use two sources of randomness: a flip (like in TF) or case on labels received on another probabilistic channel according to a known distribution (like in *neg*). These sources of randomness can be combined and nested as long as the resulting distributions are valid. For instance, we can define an unbiased process that uses a biased coin ($b : \text{pbool}$) and produces an unbiased coin ($c : \text{ubool} \triangleq \oplus_P\{\text{true}^{0.5} : 1, \text{false}^{0.5} : 1\}$). In each branch, the process flips a fair coin to decide whether to negate the input or not. Since the input is copied or negated with *equal probability*, we are able to debias the input using a combination of flip and case.

```
decl unbiased : (b : pbool) |- (c : ubool)
proc c <- unbiased b = case b (
  true => flip 0.5 (H => c.false ; wait b ; close c | T => c.true ; wait b ; close c )
| false => flip 0.5 (H => c.true ; wait b ; close c | T => c.false ; wait b ; close c ))
```

¹In this article, we actually distinguish between standard and probabilistic send and case analysis for clarity. However, it is not necessary to make this distinction in the surface syntax.

A contribution of the article is an efficient type checking algorithm that validates that implementations produce the distributions defined in the types.

Probabilistic session types are naturally compositional. We can define a *negneg* process that calls *neg* twice to obtain an identity process.

```
decl negneg : (b : pbool) |- (d : pbool)
proc d <- negneg b = c <- neg b ; d <- neg c
```

The term $c \leftarrow \text{neg } b$ corresponds to calling the *neg* process passing b as an input channel, and binding c to the output channel. We call *neg* again using $d \leftarrow \text{neg } c$ and binding the return channel to d . Since $1 - (1 - p) = p$, we obtain that the input and output types for *negneg* are equal.

Inference of Probabilities. If the input probabilities to a process are given, PRast internally employs an LP solver to infer the output probabilities automatically. For instance, recall the TF process that outputs **true** with prob. 0.6 and **false** otherwise. We allow the programmer to define a *starred* boolean type as $\text{sbool} \triangleq \oplus_P\{\mathbf{true}^* : 1, \mathbf{false}^* : 1\}$, where $*$ denotes unknown prob. values that need to be inferred. The programmer can then define

```
decl TF : . |- (b : sbool)
proc b <- TF = flip 0.6 (H => b.true ; close b | T => b.false ; close b)
```

The type checker internally replaces $*$ with prob. variables, i.e. substitutes *sbool* with $\oplus_P\{\mathbf{true}^{p_1} : 1, \mathbf{false}^{p_2} : 1\}$ with the constraint $p_1 + p_2 = 1$. Then, the typing rules of PRast are applied to the program, which intuitively compute the prob. of outputting each label. In the H branch, the prob. of outputting **true** is 1, while in the T branch, the prob. of outputting **true** is 0. Therefore, the total prob. of outputting **true** is $0.6 * 1 + (1 - 0.6) * 0$. Similarly, the total prob. of outputting **false** is $0.6 * 0 + (1 - 0.6) * 1$. Noting these observations, the type checker generates the following linear constraints

$$p_1 = 0.6 * 1 + (1 - 0.6) * 0 \quad p_2 = 0.6 * 0 + (1 - 0.6) * 1 \quad p_1 + p_2 = 1$$


The LP solver then solves these constraints to produce the solution $p_1 = 0.6, p_2 = 0.4$ which is then substituted back in the type annotations for the programmer to view and verify. In a similar fashion, PRast can infer the output probabilities for the *neg* and the *unbias* processes if the input probabilities are given.

Application to Markov Chains. Probabilistic session types are adept for implementing and verifying Markov chains. A practical application of Markov chains are *dice programs* [Knuth and Yao 1976] that use a fair coin to model a die. The Markov chain for one such program is described in Figure 1(a). For simplicity of exposition, we consider a 3-faced die, although we have implemented the complete 6-faced die program (see Section 7).

The Markov chain initiates in state 1, and transitions to states 2 or 3 with prob. 0.5 each. In state 2, with prob. 0.5, the chain outputs face 1 and with prob. 0.5, it transitions to back to state 1. In state 3, with prob. 0.5, the chain outputs face 2 and with prob. 0.5, it outputs face 3.

We can prove the functional correctness of this die program using probabilistic session types. To this end, we implement the probabilistic program corresponding this Markov chain. First, we need to define three different probabilistic types, one corresponding to each state. We define $T_1 \triangleq \oplus_P\{\mathbf{one}^{p_1} : 1, \mathbf{two}^{p_2} : 1, \mathbf{three}^{p_3} : 1\}$, $T_2 \triangleq \oplus_P\{\mathbf{one}^{p_4} : 1, \mathbf{two}^{p_5} : 1, \mathbf{three}^{p_6} : 1\}$ and $T_3 \triangleq \oplus_P\{\mathbf{one}^{p_7} : 1, \mathbf{two}^{p_8} : 1, \mathbf{three}^{p_9} : 1\}$. Each of these types output **one**, **two** or **three** with different probabilities and terminate.

We define processes P_i corresponding to each state i . Each process P_i offers type T_i . Figure 1(b) outlines the declaration and definition of each process. The process P_1 flips a coin with prob. 0.5, and in the H branch, it calls P_2 (corresponding to transitioning to state 2), and in the T branch, it calls P_3 . The process P_2 outputs **one** in the H branch, and calls P_1 in the T branch. Finally, process

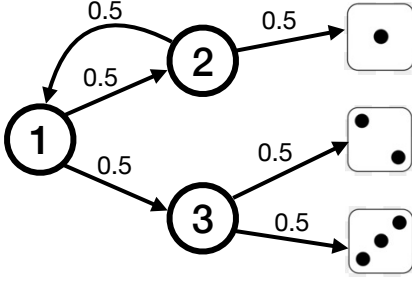

```

decl P1 : . |- ( p : T1 )
decl P2 : . |- ( p : T2 )
decl P3 : . |- ( p : T3 )

```

```

proc p <- P1 = flip 0.5 ( H => p <- P2
                        | T => p <- P3 )
proc p <- P2 = flip 0.5 ( H => p.one ; close p
                        | T => p <- P1 )
proc p <- P3 = flip 0.5 ( H => p.two ; close p
                        | T => p.three ; close p )

```

Fig. 1. (a) Markov chain associated with the 3-faced die program, and (b) corresponding program

P_3 outputs **two** in the H branch and **three** in the T branch. Since the Markov chain is mutually recursive, so are the processes P_1 and P_2 . This program exactly corresponds to the Markov chain in Figure 1(a).

Since this Markov chain is mutually recursive, computing the conditional prob. of sending each label from each state is challenging. As a first illustration, consider process P_3 . The prob. of sending **one** for P_3 is $0.5 * 0 + (1 - 0.5) * 0 = 0$. The prob. of sending **two** is $0.5 * 1 + (1 - 0.5) * 0 = 0.5$. The prob. of sending **three** is $0.5 * 0 + (1 - 0.5) * 1 = 0.5$.

Next, consider the prob. of outputting **one** for process P_1 . In the H branch, it calls process P_2 which outputs **one** with prob. p_4 . In the T branch, it calls process P_3 which outputs **one** with prob. p_7 . Therefore, the total prob. that P_1 outputs **one** is $0.5 * p_4 + (1 - 0.5) * p_7$. We apply a similar argument for labels **two** and **three** to obtain the constraints

$$\begin{aligned}
 p_1 &= 0.5 * p_4 + (1 - 0.5) * p_7 \\
 p_2 &= 0.5 * p_5 + (1 - 0.5) * p_8 \\
 p_3 &= 0.5 * p_6 + (1 - 0.5) * p_9 \\
 p_1 + p_2 + p_3 &= 1
 \end{aligned}$$

Using a similar argument for process P_2 , we obtain the constraints

$$\begin{aligned}
 p_4 &= 0.5 * 1 + (1 - 0.5) * p_1 \\
 p_5 &= 0.5 * 0 + (1 - 0.5) * p_2 \\
 p_6 &= 0.5 * 0 + (1 - 0.5) * p_3 \\
 p_4 + p_5 + p_6 &= 1
 \end{aligned}$$

Lines 1, 2, 3 equate the prob. of sending labels **one**, **three** and **three** respectively. We use the LP solver to solve these constraints and produce the following type annotations

$$\begin{aligned}
 T_1 &\triangleq \oplus_P \{ \mathbf{one}^{1/3} : 1, \mathbf{two}^{1/3} : 1, \mathbf{three}^{1/3} : 1 \} \\
 T_2 &\triangleq \oplus_P \{ \mathbf{one}^{2/3} : 1, \mathbf{two}^{1/6} : 1, \mathbf{three}^{1/6} : 1 \} \\
 T_3 &\triangleq \oplus_P \{ \mathbf{one}^0 : 1, \mathbf{two}^{1/2} : 1, \mathbf{three}^{1/2} : 1 \}
 \end{aligned}$$

PRast can automatically infer that state i offers type T_i . The programmer only needs to implement the program in Figure 1(b) with * annotations for types T_1 , T_2 , and T_3 . PRast infers the probabilities on each type automatically. Moreover, the successful type-checking of this program indicates that state 1 truly outputs each of the labels with equal probability, thus proving its functional correctness.

Automated Expected Cost Analysis. A natural application of probabilistic session types is the type-guided analysis of the expected cost of distributed protocols and Markov chains. For instance,

we would like automatically compute a bound on the expected number of flips that are executed if we run the previously defined process P_1 , which is simulating a 3-faced die.

To perform the expected cost analysis we combine probabilistic session types with existing techniques for automatic work analysis with session types [Das et al. 2018], which can be seen as an instantiation of *automatic amortized resource analysis* (AARA) [Hoffmann et al. 2017; Hofmann and Jost 2003]. The idea is to statically associate a potential with each process that is used to pay for the (expected) work that is performed by this process. A key feature is that this potential can also be transferred to other processes to cover the work incurred by them, thus allowing amortization. Importantly, the amount of potential transferred with a message or associated with a process can be efficiently inferred by linear constraint solving. This technique is parametric in the cost model and can, for e.g., bound the expected number of messages or flips or other user-defined quantities.

We build intuition for the type system by revisiting the previously discussed examples. Consider again the processes TF and neg and assume a cost model in which the cost of sending the label true is 1 and the cost of sending the label false is 2. Since $p = 0.6$, we can derive the typing

$$\cdot \vdash^{1.4} \text{TF} :: (b : \text{bool})$$

where the number on the turnstile reflects the expected cost. Since we incur cost 1 with prob. 0.6, and cost 2 with prob. 0.4, we deduce that the expected cost of executing TF is $0.6 * 1 + 0.4 * 2 = 1.4$. To infer the expected potential q of a probabilistic expression flip p ($H \Rightarrow P_H \mid T \Rightarrow P_T$), we use the second key idea expressed as the equation

$$q = p \cdot q_H + (1 - p) \cdot q_T$$

where q_H and q_T are the expected potentials for P_H and P_T respectively.

Reasoning about expected cost is not inextricably connected to probabilistic session types and can be studied as an independent problem. However, there are interesting connections between the two concepts that we explore. For example, we are able to derive the following typing for the process neg (cost of 2 for sending **false**, and 1 for sending **true**).

$$(b : \text{pbool}) \vdash^{2*0.6+(1-0.6)} \text{neg} :: (c : \text{npbool})$$

It states that the expected work cost of the process is bounded by $2 * 0.6 + (1-0.6) = 1.6$. In the typing derivation, it is essential to have access to the distribution of messages on the channel b . If this information is not available then we have to assume the worst case—the label **false** is sent on channel c —and derive the bound 2.

$$(b : \text{bool}) \vdash^2 \text{neg} :: (c : \text{bool})$$

Thus, probabilistic session types help us infer expected cost, instead of worst-case cost.

For the 3-faced die program, we are interested in the expected cost of the process P_1 . For illustration purposes it is convenient to consider a cost metric that counts the number of evaluated flips. Then the expected cost of P_1 is $\frac{8}{3}$. To infer this (tight) bound the type system assigns potential q_i to process P_i . Process P_3 requires only 1 unit of potential, since it performs *only one* flip. Taking the p -weighted sum of the expected cost in both branches, we get

$$q_1 = 1 + 0.5 \cdot q_2 + 0.5 \cdot q_3 = 1.5 + 0.5 \cdot q_2 \quad q_2 = 1 + 0.5 \cdot 0 + 0.5 \cdot q_1 = 1 + 0.5 \cdot q_1$$

For each equation, the summand 1 accounts for the flip at the start of each process. For q_1 , the potential in the H branch is q_2 since we call process P_2 and q_3 in the T branch since we call process P_3 . For q_2 , the potential in H branch is 0 since it does not involve any flips, and q_1 in the T branch since we call P_1 . Solving these equations leads to the solution $q_1 = \frac{8}{3}, q_2 = \frac{7}{3}, q_3 = 1$.

Our implementation (Section 7) automatically generates and solves these linear equations. In Section 6, we show how we can automatically derive expected cost bounds on randomized distributed protocols. We can also derive symbolic bounds that depend on the numbers of processes in the network by incorporating potential transfers in a (recursive) session type as in previous

Proc $P, Q ::= x.k ; P \mid \text{case } x (\ell \Rightarrow P_\ell)_{\ell \in L} \mid \text{send } x \ y ; P \mid y \leftarrow \text{recv } x ; P_y \mid \text{close } x \mid \text{wait } x ; P$
 $\mid x \leftrightarrow y \mid y \leftarrow f \ \bar{x} ; P_y \mid \text{get } x \ \{r\} \mid \text{pay } x \ \{r\} \mid \text{work } \{r\} ; P$
 $\mid \text{flip } p \ (\text{H} \Rightarrow P_H \mid \text{T} \Rightarrow P_T) \mid x.k ; P \mid \text{pcase } x (\ell \Rightarrow P_\ell)_{\ell \in L}$

Type $A, B ::= \oplus \{\ell : A_\ell\}_{\ell \in L} \mid \& \{\ell : A_\ell\}_{\ell \in L} \mid A \otimes B \mid A \multimap B \mid \mathbf{1} \mid V \mid \triangleright^r A \mid \triangleleft^r A$
 $\mid \oplus_P \{\ell^{r_\ell} : A_\ell\}_{\ell \in L} \mid \&_P \{\ell^{r_\ell} : A_\ell\}_{\ell \in L}$

Fig. 2. Process expressions and session types of PRast

work [Das et al. 2018] for deterministic processes. For example, we infer that the expected number of messages in Lehmann and Rabin’s randomized dining philosophers algorithm [Lehmann and Rabin 1981] is bounded by $6.25n$, where n is the number of philosophers.

3 PRAST AND RESOURCE-AWARE SESSION TYPES

This section describes the syntax and static semantics of PRast. The types and expressions of PRast are defined by the grammars in Figure 2. The symbol ℓ stands for a label (like in a sum type) and the symbols x and y stand for variables, which range over channels. The annotations r and r_ℓ are non-negative rational numbers. They denote potential annotations and probabilities. The subscript y on the process terms P_y indicates that the variable y is free in P_y and bound in the respective syntactic form. We focus the discussion on the (deterministic) fragment of the language, which is similar to previous work on resource-aware session types [Das et al. 2018]. The novel probabilistic part of PRast is a conservative extension and discussed in Section 4 (marked in blue in Figure 2).

Static Semantics. Type constructors in session types ($\oplus, \&, \otimes, \multimap, \mathbf{1}$) are derived from assigning an operational interpretation to connectives in intuitionistic linear logic. To express resource cost, we use two type operators $\triangleright^r A$ and $\triangleleft^r A$ to send and receive r units of potential. Finally, we also have type identifiers V , which can refer to type definitions to define recursive types.

The underlying base system of session types is derived from a Curry-Howard interpretation [Caires and Pfenning 2010; Caires et al. 2014] of intuitionistic linear logic [Girard and Lafont 1987]. An intuitionistic linear sequent $A_1, A_2, \dots, A_n \vdash A$ is interpreted as the interface to a process expression P . We label each of the antecedents with a channel name x_i and the succedent with channel name z . The x_i ’s are *channels used by P* and z is the *channel provided by P* .

$$x_1 : A_1, x_2 : A_2, \dots, x_n : A_n \vdash P :: (z : C)$$

The resulting judgment states that process P provides a service of session type C along channel z , while using the services of session types A_1, \dots, A_n provided along channels x_1, \dots, x_n , respectively. All these channels must be distinct. We abbreviate the antecedent of the sequent by Δ .

The typing judgment of PRast adds a non-negative rational number q and a signature Σ .

$$\Delta \vdash_\Sigma^q P :: (x : A)$$

The number q is the potential of the process that can be used to cover (expected) evaluation cost. The signature Σ contains type and process definitions. Because it is fixed, we elide it from the presentation of the rules.

Process and Type Definitions. Type definitions in the signature have the form $V = A$ and can be (mutually) recursive, departing from a strict Curry-Howard interpretation of linear logic. However, we require A to be *contractive* [Gay and Hole 2005] meaning A should not itself be a type name. Our type definitions are *equi-recursive* so we can silently replace type names V by A during type checking, and do not have explicit rules for recursive types. Process definitions have the form $f = (\Delta, q, P, x, A)$, where f is the name of the process and P its defining expression, with Δ being

Type	Cont.	Process Term	Cont.	Description
$c : \oplus\{\ell : A_\ell\}_{\ell \in L}$	$c : A_k$	$c.k ; P$ case $c (\ell \Rightarrow Q_\ell)_{\ell \in L}$	P Q_k	provider sends label k along c client receives label k along c
$c : \&\{\ell : A_\ell\}_{\ell \in L}$	$c : A_k$	case $c (\ell \Rightarrow P_\ell)_{\ell \in L}$ $c.k ; Q$	P_k Q	provider receives label k along c client sends label k along c
$c : A \otimes B$	$c : B$	send $c w ; P$ $y \leftarrow \text{recv } c ; Q_y$	P $Q_y[w/y]$	provider sends channel $w : A$ along c client receives channel $w : A$ along c
$c : A \multimap B$	$c : B$	$y \leftarrow \text{recv } c ; P_y$ send $c w ; Q$	$P_y[w/y]$ Q	provider receives channel $w : A$ along c client sends channel $w : A$ along c
$c : \mathbf{1}$	—	close c wait $c ; Q$	— Q	provider sends <i>close</i> along c client receives <i>close</i> along c
$c : \triangleright^r A$	$c : A$	pay $c \{r\} ; P$ get $c \{r\} ; Q$	P Q	provider sends potential r along c client receives potential r along c
$c : \triangleleft^r A$	$c : A$	get $c \{r\} ; P$ pay $c \{r\} ; Q$	P Q	provider receives potential r along c client sends potential r along c

Table 1. Deterministic session types with operational description

the channels used by f and $x : A$ being the offered channel, and q its potential. All definitions are collected in a fixed global signature Σ . For a *well-formed signature*, we require that $\Delta \vdash_\Sigma^q P :: (x : A)$ for every process definition $f = (\Delta, q, P, x, A)$ in Σ . Like type definitions, process definitions are mutually recursive.

3.1 Basic Session Types

Table 1 describes the deterministic session types, their associated process expressions, their continuation (both in types and expressions) and operational description. Figure 3 contains the type rules for basic session types. The potential annotations q present in these type rules are simply passed around unchanged. They are discussed in detail in Section 3.2.

Internal and External Choice. The *internal choice* type constructor $\oplus\{\ell : A_\ell\}_{\ell \in L}$ is an n -ary labeled generalization of the additive disjunction $A \oplus B$. Operationally, the provider of $x : \oplus\{\ell : A_\ell\}_{\ell \in L}$ is required to send a label $k \in L$ and then continue to provide A_k . The corresponding process expression is $(x.k ; P)$ where P is the continuation. Dually, the client must branch based on the label $k \in L$ received from the provider using the expression case $x (\ell \Rightarrow Q)_{\ell \in L}$. The corresponding typing rules are $\oplus R$ and $\oplus L$ in Figure 3. The process potential is unaffected and will be equal in the premise and conclusion for all the structural rules.

The *external choice* constructor $\&\{\ell : A_\ell\}_{\ell \in L}$ is the dual of internal choice requiring the provider to branch on one of the labels received from the client (type rules $\& R$ and $\& L$). Dual constructors, like this one, reverse the role of the provider and client.

Channel Passing. The *tensor* operator $A \otimes B$ prescribes that the provider of $x : A \otimes B$ sends a channel y of type A and continues to provide type B . The corresponding process expression is send $x y ; P$ where P is the continuation. Correspondingly, its client must receives a channel using the expression $y \leftarrow \text{recv } x ; Q$, binding it to variable y and continuing to execute Q . This is formalized by the rules $\otimes R$ and $\otimes L$.

The dual operator $A \multimap B$ (type rules $\multimap R$ and $\multimap L$) allows the provider to receive a channel of type A and continue to provide type B . The client of $A \multimap B$, on the other hand, sends the channel of type A and continues to use B .

$$\begin{array}{c}
\frac{(\forall \ell \in L) \quad \Delta \not\vdash P_\ell :: (x : A_\ell)}{\Delta \not\vdash \text{case } x (\ell \Rightarrow P_\ell)_{\ell \in L} :: (x : \&\{\ell : A_\ell\}_{\ell \in L})} \&R \quad \frac{(k \in L) \quad \Delta, (x : A_k) \not\vdash Q :: (z : C)}{\Delta, (x : \&\{\ell : A_\ell\}_{\ell \in L}) \not\vdash (x.k ; Q) :: (z : C)} \&L \\
\\
\frac{(k \in L) \quad \Delta \not\vdash P :: (x : A_k)}{\Delta \not\vdash (x.k ; P) :: (x : \oplus\{\ell : A_\ell\}_{\ell \in L})} \oplus R \quad \frac{(\forall \ell \in L) \quad \Delta, (x : A_\ell) \not\vdash Q_\ell :: (z : C)}{\Delta, (x : \oplus\{\ell : A_\ell\}_{\ell \in L}) \not\vdash \text{case } x (\ell \Rightarrow Q_\ell)_{\ell \in L} :: (z : C)} \oplus L \\
\\
\frac{\Delta \not\vdash P :: (x : B)}{\Delta, (y : A) \not\vdash (\text{send } x \ y ; P) :: (x : A \otimes B)} \otimes R \quad \frac{\Delta, (y : A), (x : B) \not\vdash Q :: (z : C)}{\Delta, (x : A \otimes B) \not\vdash (y \leftarrow \text{recv } x ; Q) :: (z : C)} \otimes L \\
\\
\frac{\Delta, (y : A) \not\vdash P :: (x : B)}{\Delta \not\vdash (y \leftarrow \text{recv } x ; P) :: (x : A \multimap B)} \multimap R \quad \frac{\Delta, (x : B) \not\vdash Q :: (z : C)}{\Delta, (x : A \multimap B), (y : A) \not\vdash (\text{send } x \ y ; Q) :: (z : C)} \multimap L \\
\\
\frac{q = 0}{\cdot \not\vdash (\text{close } x) :: (x : 1)} 1R \quad \frac{\Delta \not\vdash Q :: (z : C)}{\Delta, (x : 1) \not\vdash (\text{wait } x ; Q) :: (z : C)} 1L \quad \frac{q = 0}{y : A \not\vdash (x \leftrightarrow y) :: (x : A)} \text{id} \\
\\
\frac{(\overline{y'} : B, p, P, x', A) \in \Sigma \quad r = p + q \quad \Delta' = \overline{(y : B)} \quad \Delta, (x : A) \not\vdash Q :: (z : C)}{\Delta, \Delta' \not\vdash (x \leftarrow f \ \overline{y} ; Q) :: (z : C)} \text{spawn}
\end{array}$$

Fig. 3. Type Rules for Basic Session Types

$$\begin{array}{c}
\frac{q \geq r \quad \Delta \not\vdash^{r-r} P :: (x : A)}{\Delta \not\vdash \text{pay } x \{r\} ; P :: (x : \triangleright^r A)} \triangleright R \quad \frac{\Delta \not\vdash^{r+r} P :: (x : A)}{\Delta \not\vdash \text{get } x \{r\} ; P :: (x : \triangleleft^r A)} \triangleleft R \\
\\
\frac{q \geq r \quad \Delta \not\vdash^{r-r} P :: (x : A)}{\Delta \not\vdash \text{work } \{r\} ; P :: (x : A)} \text{work} \quad \frac{\Delta, (x : A) \not\vdash^{r+r} Q :: (z : C)}{\Delta, (x : \triangleright^r A) \not\vdash \text{get } x \{r\} ; Q :: (z : C)} \triangleright L \\
\\
\frac{q \geq r \quad \Delta, (x : A) \not\vdash^{r-r} Q :: (z : C)}{\Delta, (x : \triangleleft^r A) \not\vdash \text{pay } x \{r\} ; Q :: (z : C)} \triangleleft L \quad \frac{\Delta \not\vdash^{r+r} P :: (x : A)}{\Delta \not\vdash P :: (x : A)} \text{weak}
\end{array}$$

Fig. 4. Type Rules for Resource-Aware Session Types

Termination and Forwarding. The type 1, the multiplicative unit of linear logic, indicates *termination* requiring that the provider send a *close* message followed by terminating the communication. In the corresponding type rules 1R and 1L, linearity enforces that the provider does not use any channels. Since the potential is a linear quantity, we require that the potential of a terminating process is 0.

The rule id handles forwarding of a channel. A process $x \leftrightarrow y$ identifies the channels x and y so that any further communication along either x or y will be along the unified channel. Its typing rule corresponds to the logical rule of identity. Since a forwarding process will terminate on interaction with a message, we require its potential to be 0 to preserve its linearity.

Spawning and Tail Calls. A new instance of a defined process f can be spawned with the expression $x \leftarrow f \ \overline{y} ; Q$ (rule spawn) where \overline{y} is a sequence of channels matching the antecedents Δ' . The newly spawned process will use all variables in \overline{y} and provide x to the continuation Q . The declaration of f is looked up in the signature Σ (first premise), matching the types in Δ' and \overline{y} (third premise). Similarly, the freshly created channel x has type A from the signature. The potential r of the parent process must be equal to the sum of the potential p of the spawned process and q of the continuation. Sometimes a process invocation is a tail call, written without a continuation as $x \leftarrow f \ \overline{y}$. This is a short-hand for $x' \leftarrow f \ \overline{y} ; x \leftrightarrow x'$ for a fresh variable x' , that is, we create a fresh channel and immediately identify it with x .

Type	Cont.	Process Term	Cont.	Description
$c : \oplus_P \{\ell^{p_\ell} : A_\ell\}_{\ell \in L}$	$c : A_k$	$c..k ; P$ $\text{pcase } c (\ell \Rightarrow Q_\ell)_{\ell \in L}$	P Q_k	provider sends label k on chan. c ($p_k = 1$) client receives distribution $\mathbb{P}(\ell) = p_\ell$ on c
$c : \&_P \{\ell^{p_\ell} : A_\ell\}_{\ell \in L}$	$c : A_k$	$\text{pcase } c (\ell \Rightarrow P_\ell)_{\ell \in L}$ $c..k ; Q$	P_k Q	provider receives dist. $\mathbb{P}(\ell) = p_\ell$ along c client sends label k along chan. c ($p_k = 1$)

Table 2. Probabilistic session types with operational description

3.2 Resource-Aware Types

To describe the resource contracts for inter-process communication, the type system further supports amortized resource analysis [Tarjan 1985]. The key idea is that *processes store potential* and *messages carry potential*. This potential can either be consumed to perform *work* or exchanged using special messages. The resource-aware type rules are presented in Figure 4.

The type system provides the programmer with the flexibility to specify what constitutes work. Thus, the programmer can choose to count the resource they are interested in, and the type system provides the corresponding upper bound. We use the expression $\text{work } \{r\} ; P$ to define cost r . In this article, we only consider monotone resource like time where $r \geq 0$. The type rule work requires that the potential q is sufficient to pay for the cost r and the remaining potential $q - r \geq 0$. Since the amount of potential consumed to type check this expression is equal to the amount of work performed by it, the type safety theorem expresses that the total work done by a system can never exceed its initial potential. Note that it is not necessary to expose the syntactic form $\text{work } \{r\}$ in the surface syntax of the language. It can be easily inserted automatically to reflect a cost metric such as number of evaluation steps. For example, to count the total number of messages sent, we insert $\text{work } \{1\}$ just before sending every message.

Two dual type constructors $\triangleright^r A$ and $\triangleleft^r A$ are used to exchange potential. The provider of $x : \triangleright^r A$ must *pay* r units of potential along x using process expression $(\text{pay } x \{r\} ; P)$, and continue to provide A by executing P . These r units are deducted from the potential stored inside the sender. Dually, the client must receive the r units of potential using the expression $(\text{get } x \{r\} ; Q)$ and add this to its internal stored potential. This is reflected in the type rules $\triangleright R$ and $\triangleright L$. When sending potential, we ensure that the sender has sufficient potential to pay ($q \geq r$), which is then deducted from the internal process potential. Dually, while gaining potential, it is added to the internal process potential. The dual type $\triangleleft^r A$ enables the provider to receive potential that is sent by its client. This is formalized in the rules $\triangleleft R$ and $\triangleleft L$.

Affine Potential. The previously-discussed rules treat potential as a linear resource. As a result, the potential reflects the exact cost of programs. However, we are most often interested in upper bounds on the resource usage. For instance, if we treat potential linearly we cannot type a process that has different work cost in different branches.

To treat potential in an affine way, we have to provide the ability to throw away potential. This can be achieved by the rule weak in Figure 4. Alternatively, we can drop the premise $q = 0$ from the rules $1R$ and id in Figure 3.

4 PROBABILISTIC SESSION TYPES

In this section, we discuss the static semantics of the novel probabilistic aspects of PRast. First, we introduce an expression $\text{flip } p \ (H \Rightarrow P_H \mid T \Rightarrow P_T)$ for probabilistic branching. This expression together with the deterministic fragment of PRast from Section 3 results in a probabilistic session-typed language in which distributions are not reflected in the types. We then add probabilistic choice types and syntactic forms (see Table 2) for probabilistic send and receive, as well as their interactions with probabilistic branching. The additional type rules are given in Figure 5.

$$\begin{array}{c}
\frac{\Delta = p \cdot \Delta_H +^L (1-p) \cdot \Delta_T \quad A = p \cdot A_H +^R (1-p) \cdot A_T}{q = p \cdot q_H + (1-p) \cdot q_T \quad \Delta_H \stackrel{\text{gH}}{=} P_H :: (x : A_H) \quad \Delta_T \stackrel{\text{gT}}{=} P_T :: (x : A_T)} \text{flip} \\
\Delta \stackrel{\text{g}}{=} \text{flip } p \ (H \Rightarrow P_H \mid T \Rightarrow P_T) :: (x : A) \\
\\
\frac{(\forall \ell \in L) \ \Delta_\ell, (x : A_\ell) \stackrel{\text{g}\ell}{=} Q_\ell :: (z : C_\ell) \quad q = \sum_{\ell \in L} p_\ell \cdot q_\ell \quad \Delta = \sum_{\ell \in L}^L p_\ell \cdot \Delta_\ell \quad C = \sum_{\ell \in L}^R p_\ell \cdot C_\ell}{\Delta, (x : \oplus_P \{\ell^{p_\ell} : A_\ell\}_{\ell \in L}) \stackrel{\text{g}}{=} \text{pcase } x \ (\ell \Rightarrow Q_\ell)_{\ell \in L} :: (z : C)} \oplus_P L \\
\\
\frac{\frac{p_k = 1 \quad p_j = 0 \ (j \neq k)}{\Delta \stackrel{\text{g}}{=} P :: (x : A_k)} \oplus_P R}{\Delta \stackrel{\text{g}}{=} x..k ; P :: (x : \oplus_P \{\ell^{p_\ell} : A_\ell\}_{\ell \in L})} \oplus_P R \quad \frac{\frac{p_k = 1 \quad p_j = 0 \ (j \neq k)}{\Delta, (x : A_k) \stackrel{\text{g}}{=} P :: (z : C)} \&_P L}{\Delta, (x : \&_P \{\ell^{p_\ell} : A_\ell\}_{\ell \in L}) \stackrel{\text{g}}{=} x..k ; P :: (z : C)} \&_P L \\
\\
\frac{(\forall \ell \in L) \ \Delta_\ell \stackrel{\text{g}\ell}{=} Q_\ell :: (x : A_\ell) \quad q = \sum_{\ell \in L} p_\ell \cdot q_\ell \quad \Delta = \sum_{\ell \in L}^L p_\ell \cdot \Delta_\ell}{\Delta \stackrel{\text{g}}{=} \text{pcase } x \ (\ell \Rightarrow Q_\ell)_{\ell \in L} :: (x : \&_P \{\ell^{p_\ell} : A_\ell\}_{\ell \in L})} \&_P R
\end{array}$$

Fig. 5. Type Rules for Probabilistic Session Types

Probabilistic Flip. The expression $\text{flip } p \ (H \Rightarrow P_H \mid T \Rightarrow P_T)$ operationally corresponds to flipping a coin with prob. p (of outputting H , and T otherwise) and executing P_H if the coin flips to H and executing P_T otherwise. The corresponding typing rule is flip in Figure 5. In the fragment without probabilistic choice types, we can ignore the probabilistic split of the types (blue parts) of the rule and instead consider the following rule simple-flip that is a special case and identical to flip in the deterministically-typed fragment of PRast.

$$\frac{q = p \cdot q_H + (1-p) \cdot q_T \quad \Delta \stackrel{\text{gH}}{=} P_H :: (x : A) \quad \Delta \stackrel{\text{gT}}{=} P_T :: (x : A)}{\Delta \stackrel{\text{g}}{=} \text{flip } p \ (H \Rightarrow P_H \mid T \Rightarrow P_T) :: (x : A)} \text{simple-flip}$$

Both branches P_H and P_T of the probabilistic branching, are typed with the initial context Δ and have to offer on the same channel x of type A . Notably, the probabilistic behavior of a process is not visible in its type. The interesting aspect of rule is the treatment of potential. The initial potential q is not identical to q_H and q_T (unlike rule $\oplus L$ in Figure 3). Instead, q is the weighted sum $p \cdot q_H + (1-p) \cdot q_T$ which corresponds to the *expected potential* needed to cover the probabilistic branch. The rule simple-flip can already be used in conjunction with the deterministic rules to derive interesting and non-trivial bounds on the expected cost.

Probabilistic Choices. Using probabilistic branching, processes can send labels according to certain probability distribution. For example, consider again the process TF from Section 2. The prob. distribution on true and false labels implemented by the process is \mathbb{P} where $\mathbb{P}(\text{true}) = 0.6$ and $\mathbb{P}(\text{false}) = 0.4$ (we use $\text{b}.. \text{true}$ to denote a probabilistic send of label true on channel b).

```
proc b <- TF = flip 0.6 (H => b..true ; close b | T => b..false ; close b)
```

To reflect this prob. distribution in the type of the channel b , we assign $b : \oplus_P \{\text{true}^{0.6} : 1, \text{false}^{0.4} : 1\}$. In general, we introduce the type formers

$$\oplus_P \{\ell^{p_\ell} : A_\ell\}_{\ell \in L} \quad \text{and} \quad \&_P \{\ell^{p_\ell} : A_\ell\}_{\ell \in L}$$

for probabilistic internal and external choice. The types are similar to their deterministic versions but labels are annotated with probabilities p_ℓ . In a well-formed type, we have $p_\ell \in [0, 1]$ and $\sum_{\ell \in L} p_\ell = 1$. The internal choice $\oplus_P \{\ell^{p_\ell} : A_\ell\}_{\ell \in L}$ requires the provider to send label $k \in L$ with probability p_k .

Receiving on a probabilistic channel can be seen as an external version of a probabilistic branch. We again first consider a simplified version of the probabilistic receive that is a special case of the

rule $\&_P R$ in Figure 5.

$$\frac{(\forall \ell \in L) \Delta \Vdash^q Q_\ell :: (x : A_\ell) \quad q = \sum_{\ell \in L} p_\ell \cdot q_\ell}{\Delta \Vdash \text{pcase } x (\ell \Rightarrow Q_\ell)_{\ell \in L} :: (x : \&_P \{\ell^{p_\ell} : A_\ell\}_{\ell \in L})} \text{simple-}\&_P R$$

Similar to the flip, the rule $\text{simple-}\&_P R$ is similar to the rule $\& R$ but takes the weighted sum $q = \sum_{\ell \in L} p_\ell \cdot q_\ell$ as initial potential instead of the maximum. The additional premises in the rule $\& R$ are used to enable probabilistic sending of labels.

Sending on a Probabilistic Channel. Validating the prob. distributions of processes that perform a probabilistic send is one of the most interesting aspects of the type system. It would be possible to combine a probabilistic branching with the probabilistic sending of the label in one atomic operation. However, we are presenting a more flexible approach that *decouples* the sending of labels on probabilistic channels from probabilistic branching. The key idea is to alter the probabilities in the session types of the channels in the context.

It is beneficial to first discuss the type rules $\oplus_P R$ and $\&_P L$ for probabilistic send. The most notable feature of the rules is that we require that the probability p_k of the label k that is sent along channel x must be 1. In general, we need to apply probabilistic branching to alter the probabilities on the channel to arrive at such a trivial distribution. For example, in the type derivation of the process TF, the channel b has type $\oplus_P \{\text{true}^1 : 1, \text{false}^0 : 1\}$ in the H branch of the flip and type $\oplus_P \{\text{true}^0 : 1, \text{false}^1 : 1\}$ in the T branch of the flip.

In a probabilistic branching, we are using weighted sums of prob. distributions on labels in the similar way as we are using weighted sums of potential annotations. In our running example TF, the type derivation is sound because of the following relation.

$$\oplus_P \{\text{true}^{0.6} : 1, \text{false}^{0.4} : 1\} = 0.6 \cdot \oplus_P \{\text{true}^1 : 1, \text{false}^0 : 1\} +^R 0.4 \cdot \oplus_P \{\text{true}^0 : 1, \text{false}^1 : 1\}$$

The two types on the right side of the equation are the types of the channel b in the branches of the flip. The probabilities 0.6 and 0.4 are the probabilities of the respective branches. The operation $+^R$ combines the label probabilities p point-wise. For example we have $0.6 = 0.6 \cdot 1 + 0.4 \cdot 0$.

Formally, we define two such weighted sum relations $+^R$ and $+^L$. However, their intended effect is identical and they simply reflect the duality of types in the consumed and offered channels. They are used in the probabilistic branching rules $\oplus_P L$, $\&_P R$, and flip to allow different probability annotations in different branches. Here, we generalize the notion of weighted sums to n -ary sums. Note that the prob. in a probabilistic branching does not uniquely determine the prob. distributions of the channels. For instance, we have $A = p \cdot A +^R (1-p) \cdot A$ and $A = p \cdot A +^L (1-p) \cdot A$ for any p .

Weighted Sums of Session Types. The weighted sum relations $A = p \cdot A_1 +^R (1-p) \cdot A_2$ (resp. $A = p \cdot A_1 +^L (1-p) \cdot A_2$) for probabilistic session types A , A_1 , and A_2 are inductively defined in Figure 6. The most interesting cases are the dual rules \oplus_P and $\&_P$, which are applied to channels with internal or external choices that correspond to a probabilistic send. In these rules we apply the weighted $p_\ell = p \cdot q_\ell + (1-p) \cdot r_\ell$ to the outermost labels. *Note that these rules do not recursively apply weighted sums to continuation types A_ℓ .* Probability distributions at deeper level of the types (in A_ℓ) are not altered in different branches. Similarly, other rules do not alter the distributions on the types. So in all other cases $A = p \cdot A_1 +^R (1-p) \cdot A_2$ and $A = p \cdot A_1 +^L (1-p) \cdot A_2$ implies $A = A_1 = A_2$. This is reflected by the other rules in Figure 6. The wildcard $*$ stands for both L and R. In the rules chan and emp, the relation $+^L$ is extended point-wise to contexts, using the same notations.

Counterexamples for Deep Weighted Sums. At first, the shallow definitions of the weighted sums seem to be overly restrictive. However, a closer examination shows that using more general

$$\begin{array}{c}
\frac{(\forall \ell \in L) \quad p_\ell = p \cdot q_\ell + (1-p) \cdot r_\ell}{\oplus_P \{ \ell^{p_\ell} : A_\ell \}_{\ell \in L} = p \cdot \oplus_P \{ \ell^{q_\ell} : A_\ell \}_{\ell \in L} +^R (1-p) \cdot \oplus_P \{ \ell^{r_\ell} : A_\ell \}_{\ell \in L}} \oplus_P \\
\frac{(\forall \ell \in L) \quad p_\ell = p \cdot q_\ell + (1-p) \cdot r_\ell}{\&_P \{ \ell^{p_\ell} : A_\ell \}_{\ell \in L} = p \cdot \&_P \{ \ell^{q_\ell} : A_\ell \}_{\ell \in L} +^L (1-p) \cdot \&_P \{ \ell^{r_\ell} : A_\ell \}_{\ell \in L}} \&_P \\
\frac{}{\oplus \{ \ell : A_\ell \}_{\ell \in L} = p \cdot \oplus \{ \ell : A_\ell \}_{\ell \in L} +^* (1-p) \cdot \oplus \{ \ell : A_\ell \}_{\ell \in L}} \oplus \\
\frac{}{\&\times \{ \ell : A_\ell \}_{\ell \in L} = p \cdot \&\times \{ \ell : A_\ell \}_{\ell \in L} +^* (1-p) \cdot \&\times \{ \ell : A_\ell \}_{\ell \in L}} \&\times \quad \frac{}{A \otimes B = p \cdot A \otimes B +^* (1-p) \cdot A \otimes B} \otimes \\
\frac{}{A \multimap B = p \cdot A \multimap B +^* (1-p) \cdot A \multimap B} \multimap \quad \frac{}{1 = p \cdot 1 +^* (1-p) \cdot 1} 1 \\
\frac{}{[] = p \cdot [] +^L (1-p) \cdot []} \text{emp} \quad \frac{A = p \cdot B +^L (1-p) \cdot C \quad \Delta = p \cdot \Delta_1 +^L (1-p) \cdot \Delta_2}{\Delta, (x : A) = p \cdot \Delta_1, (x : B) +^L (1-p) \cdot \Delta_2, (x : C)} \text{chan}
\end{array}$$

Fig. 6. Inductive Definition of the Weighted Sum Relations

definitions of weighted sum of probabilities are in general not compatible with the intended semantics of probabilistic choice types. Consider for instance the following type.

$$B \triangleq \oplus \{ \text{true} : \oplus_P \{ \mathbf{H}^{0.5} : 1, \mathbf{T}^{0.5} : 1 \}, \text{false} : \oplus_P \{ \mathbf{H}^{0.5} : 1, \mathbf{T}^{0.5} : 1 \} \}$$

A process that offers on a channel of type B should first send a boolean and then provide a fair coin flip. However, if we would allow a nested weighted sum of probabilities then the following undesirable implementation would type check. The problem is that a process that uses channel b does not receive a fair distribution after receiving the boolean label.

```

decl bad : . |- (b : B)
proc b <- bad = flip 0.5 ( H => b.true ; b..H; close b
                        | T => b.false ; b..T; close b )

```

Another potential use of randomness would be to not only change the probabilities on internal choices but also on external choices on the top level. However, this would lead to unsound behavior. Consider for example the following process bad' . It offers a channel $x : \oplus_P \{ \mathbf{H}^{0.5} : 1, \mathbf{T}^{0.5} : 1 \}$ with a fair probabilistic internal choice. However, we could justify the following unsound typing if we allowed the type $\oplus_P \{ \mathbf{H}^{0.5} : 1, \mathbf{T}^{0.5} : 1 \}$ of y to be split as $\oplus_P \{ \mathbf{H}^1 : 1, \mathbf{T}^0 : 1 \}$ and $\oplus_P \{ \mathbf{H}^0 : 1, \mathbf{T}^1 : 1 \}$ in the two branches of the flip.

```

decl bad' : (y : \oplus_P \{ \mathbf{H}^{0.5} : 1, \mathbf{T}^{0.5} : 1 \}) |- (x : \oplus_P \{ \mathbf{H}^1 : 1, \mathbf{T}^0 : 1 \})
proc x <- bad' <- y = flip 0.5 ( H => pcase y ( H => x..H; x <-> y
                        | T => x..T; x <-> y )
                        | T => pcase y ( H => x..T; x <-> y
                        | T => x..H; x <-> y ) )

```

5 META THEORY

In this section, we formalize the meta-theory of PRast and proofs can be found in appendix A. We first illustrate the difficulties for standard semantic constructions to integrate internal and external choices with probabilities in a concurrent system (Section 5.1). Then we develop a novel probabilistic *nested-multiverse* semantics that retains local distribution information to deal with the difficulties (Section 5.2). Finally, we sketch our proof methodology for the soundness of PRast (Section 5.3).

5.1 Difficulties for Standard Approaches

Operationally, a state of a concurrent system is a *configuration* of running processes in the system. The probabilistic-flip expressions are the sole source of randomness in PRAst. In the literature, there are two canonical approaches to extending a non-probabilistic semantics with probabilities:

- *Trace-based* [Borgström et al. 2016; Castellan and Paquet 2019]: The state-to-state transition relation is interpreted under a *fixed* trace of random sources (e.g., a trace of coin flips), where the random constructs (e.g., coin flips) are resolved as deterministic readouts from the trace. In our setting, however, this approach lacks a mechanism for tracking the *correlations* among traces, which have been shown to be important for expected-cost analysis [Wang et al. 2020b]. With the presence of probabilistic internal- and external-choice types, it is also unclear how to guarantee type preservation for the transitions guided by a fixed trace.
- *Distribution-based* [Borgström et al. 2016; Kozen 1981]: The state-to-state transition relation is lifted to a state-to-distribution transition relation, where the support of the distribution consists of successor states. In our setting, this approach amounts to updating operational rules to transit from configurations to distributions on configurations. However, this approach loses track of *correlations* among configurations derived from different outcomes of probabilistic-flip expressions. As a consequence, to guarantee type preservation, one has to reason about the outcomes of a probabilistic-flip expression *separately*, which might not be always possible.

Recently, Inverso et al. [2020] proved the soundness of a probabilistic session-type system *without* standard internal and external choices, and channel passing, with respect to a distribution-based semantics. Their idea is that to prove type preservation for a probabilistic-flip expression, one needs to first construct new type derivations for all possible configurations after the probabilistic flip, and then combine the types via a “weighted sum” with respect to the flip probability. This approach is *global*, in the sense that after a *local* coin flip in a process, one has to re-analyze the *whole* configuration with other unchanged processes. However, this approach would fail if one attempts to add standard internal and external choices to the system.

Example 1 (Difficulties for adding standard internal and external choices). Consider the program below:

```

decl P : . | - ( y :  $\oplus_P\{H^{0.5} : 1, T^{0.5} : 1\}$  )
proc y <- P = flip 0.5 ( H => y..H; close y | T => y..T; close y )
decl Q : ( y :  $\oplus_P\{H^{0.5} : 1, T^{0.5} : 1\}$  ) ( z :  $\&_P\{H^{0.5} : 1, T^{0.5} : 1\}$  ) | - ( x :  $\&\{H : 1, T : 1\}$  )
proc x <- Q y z =
  case x ( H => pcase y ( H => flip 0.6 ( H => z..H; ... | T => z..T; ... )
                        | T => flip 0.4 ( H => z..H; ... | T => z..T; ... ) )
    | T => pcase y ( H => flip 0.7 ( H => z..H; ... | T => z..T; ... )
                  | T => flip 0.3 ( H => z..H; ... | T => z..T; ... ) ) )

```

Intuitively, there is a probabilistic choice (the case expression on y) *inside* a standard choice (the case expression on x). If in the operational semantics, we make a step on the process P first and the coin shows heads, then the type of the channel y becomes $\oplus_P\{H^1 : 1, T^0 : 1\}$. As a consequence, the types of the channel z for the two probabilistic case expressions become $\&_P\{H^{0.6} : 1, T^{0.4} : 1\}$ and $\&_P\{H^{0.7} : 1, T^{0.3} : 1\}$, respectively. However, we cannot apply the rule ($\&R$) to re-derive a type-judgment for this configuration, because the rule requires that both branches of the case expression on x have the same type on the channel z .

5.2 A Nested-Multiverse Semantics

The example above suggests that *we should make probabilistic flips as local as they could be*. In other words, the influence of a coin flip should remain within the flipped process, *until* the process tries

to communicate with other processes. With this intuition, we define the *nested-multiverse* semantic objects to have either form (i) $\text{proc}(c, w, P)$ for a process P that is provided along channel c and has performed w units of work, or form (ii) $\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}})$, for a distribution—resulted from flip expressions—of local *configurations* that are provided along channel c , where each configuration is a set of semantic objects and $\sum_{i \in \mathcal{I}} p_i = 1$. Intuitively, these semantic objects collect nested information from different “universes” (e.g., the results of coin flips) explicitly. Formally, the syntax of semantic objects is defined as follows, with the understanding that in a configuration $\mathcal{O}_1 \parallel \dots \parallel \mathcal{O}_n$, the sender is always put to the *right* of the receiver:

$$\begin{aligned}\mathcal{E} &::= (w, P) \mid \{C_i : p_i\}_{i \in \mathcal{I}} \\ \mathcal{O} &::= \text{proc}(c, \mathcal{E}) \\ \mathcal{C} &::= \mathcal{O}_1 \parallel \dots \parallel \mathcal{O}_n\end{aligned}$$

Figure 7 presents the rules of the novel nested-multiverse semantics of PRast. The rules should be understood as *multiset-rewriting* rules [Cervesato and Scedrov 2009]: every rule mentions only the rewritten parts of a configuration. We distinguish two kinds of evaluation rules:

- *Single-process* rules: The relation \mapsto has exactly *one* semantic object on the left-hand-side. These rules do *not* involve communication.
- *Communication* rules: The relation $\xRightarrow{d, \kappa}$ has exactly *two* semantic objects on the left-hand-side. The relation is intended to describe a communication carried out on channel d with sort $\kappa \in \{\text{det}, \oplus_P, \&_P\}$. The sort κ is used to categorize the communication on channel d : The sorts \oplus_P and $\&_P$ stand for probabilistic internal and external choices, respectively, while det represents all other kinds of communication. Such information becomes useful when two communicating semantic objects are distribution objects. For example, in the rule (C:BDIST:L), if the underlying communication is of sort \oplus_P , i.e., the object $\text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}})$ sends probabilistically on channel d , and $\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}})$ receives on channel d . Intuitively, $\text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}})$ has evaluated one or more probabilistic flips to obtain the local distribution, to achieve the goal of sending labels probabilistically on channel d . Thus, on the receiving side, these different senders in different “universes” should be considered as a whole, in order to justify the probabilities on the \oplus_P -typed channel. Therefore, the rule (C:BDIST:L) keeps $\text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}})$ intact, but decomposes $\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}})$.

The rule (E:FLIP) deals with probabilistic flips. To evaluate a coin flip $\text{flip } p \ (H \Rightarrow P_H \mid T \Rightarrow P_T)$ while keeping the randomness local in the flipped process, this rule creates a local distribution object, whose support contains two process objects: P_H with probability p and P_T with probability $(1 - p)$. Note that this rule does not change the work counter of the flipped process. If the flipped process (P_H or P_T) can further evaluate probabilistic-flip expressions, the configuration will become nested naturally.

There are two non-communication deterministic rules. In the rule (E:WORK) for work tracking, we simply increment the work counter of the process. The other rule (E:DEF) describes process spawning. Let f be a defined process. The spawning expression $x \leftarrow f \ \bar{d} ; Q$ creates a new process providing *fresh* channel b , which is constructed from the definition P_f of f with proper renaming. The work counter of the newly created process is set to zero.

In the semantics, communication is *synchronous*: processes sending a message pause their evaluation until the message is received. In the rule (C: \oplus) for internal choices, the provider $d.k ; P$ sends a message k along the d and continues as P , while the client receives the message k and selects branch k . The rule (C: \oplus_P) for probabilistic internal choices is almost the same as (S: \oplus), except that it marks the communication with \oplus_P . In the rule (C: \otimes) for sending channels, the provider send $d \ e ; P$ sends the channel e and continues as P , while the client receives the channel e and

(E:DEF)	$\text{proc}(c, w, x \leftarrow f \bar{d} ; Q) \mapsto \text{proc}(c, w, Q[b/x]) \parallel \text{proc}(b, 0, P_f[b/x', \bar{d}/\bar{y'}])$ for $y' : \bar{B} \not\equiv f = P_f :: (x' : A) \in \Sigma$ and b fresh
(E:WORK)	$\text{proc}(c, w, \text{work } \{r\} ; P) \mapsto \text{proc}(c, w + r, P)$
(E:FLIP)	$\text{proc}(c, w, \text{flip } p \ (H \Rightarrow P_H \mid T \Rightarrow P_T)) \mapsto \text{proc}(c, \{\text{proc}(c, w, P_H) : p, \text{proc}(c, w, P_T) : 1 - p\})$
(E:DIST)	$\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \mapsto \text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I} \setminus \{i_0\}} \# \{C'_{i_0} : p_{i_0}\})$ for some $i_0 \in \mathcal{I}$ such that $C_{i_0} \mapsto C'_{i_0}$
(C:⊕)	$\text{proc}(c, w_c, \text{case } d \ (\ell \Rightarrow Q_\ell)_{\ell \in L}) \parallel \text{proc}(d, w_d, d.k ; P) \xRightarrow{d, \text{det}} \text{proc}(c, w_c, Q_k) \parallel \text{proc}(d, w_d, P)$
(C:⊗)	$\text{proc}(c, w_c, d.k ; Q) \parallel \text{proc}(d, w_d, \text{case } d \ (\ell \Rightarrow P_\ell)_{\ell \in L}) \xRightarrow{d, \text{det}} \text{proc}(c, w_c, Q) \parallel \text{proc}(d, w_d, P_k)$
(C:⊗)	$\text{proc}(c, w_c, y \leftarrow \text{recv } d ; Q) \parallel \text{proc}(d, w_d, \text{send } d \ e ; P) \xRightarrow{d, \text{det}} \text{proc}(c, w_c, Q[e/y]) \parallel \text{proc}(d, w_d, P)$
(C:→)	$\text{proc}(c, w_c, \text{send } d \ e ; Q) \parallel \text{proc}(d, w_d, y \leftarrow \text{recv } d ; P) \xRightarrow{d, \text{det}} \text{proc}(c, w_c, Q) \parallel \text{proc}(d, w_d, P[e/y])$
(C:1)	$\text{proc}(c, w_c, \text{wait } d ; Q) \parallel \text{proc}(d, w_d, \text{close } d) \xRightarrow{d, \text{det}} \text{proc}(c, w_c + w_d, Q)$
(C:Id)	$\text{proc}(c, w_c, Q\langle d \rangle) \parallel \text{proc}(d, w_d, d \leftrightarrow e) \xRightarrow{d, \kappa} \text{proc}(c, w_c + w_d, Q\langle d \rangle[e/d])$ for $Q\langle d \rangle$ (d, κ)-blocked
(C:▷)	$\text{proc}(c, w_c, \text{get } d \ \{r\} ; Q) \parallel \text{proc}(d, w_d, \text{pay } d \ \{r\} ; P) \xRightarrow{d, \text{det}} \text{proc}(c, w_c, Q) \parallel \text{proc}(d, w_d, P)$
(C:◁)	$\text{proc}(c, w_c, \text{pay } d \ \{r\} ; Q) \parallel \text{proc}(d, w_d, \text{get } d \ \{r\} ; P) \xRightarrow{d, \text{det}} \text{proc}(c, w_c, Q) \parallel \text{proc}(d, w_d, P)$
(C:⊕ _p)	$\text{proc}(c, w_c, \text{pcase } d \ (\ell \Rightarrow Q_\ell)_{\ell \in L}) \parallel \text{proc}(d, w_d, d..k ; P) \xRightarrow{d, \oplus_p} \text{proc}(c, w_c, Q_k) \parallel \text{proc}(d, w_d, P)$
(C:⊗ _p)	$\text{proc}(c, w_c, d..k ; Q) \parallel \text{proc}(d, w_d, \text{pcase } d \ (\ell \Rightarrow P_\ell)_{\ell \in L}) \xRightarrow{d, \otimes_p} \text{proc}(c, w_c, Q) \parallel \text{proc}(d, w_d, P_k)$
(C:DIST)	$\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \xRightarrow{d, \kappa} \text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I} \setminus \{i_0\}} \# \{C'_{i_0} : p_{i_0}\})$ for some $i_0 \in \mathcal{I}$ such that $C_{i_0} \xRightarrow{d, \kappa} C'_{i_0}$
(C:SDIST:R)	$\text{proc}(c, w, Q) \parallel \text{proc}(d, \{C_i : p_i\}_{i \in \mathcal{I}}) \xRightarrow{d, \kappa} C'$ for $\text{proc}(c, \{(\text{proc}(c, w, Q) \parallel C_i) : p_i\}_{i \in \mathcal{I}}) \xRightarrow{d, \kappa} C'$
(C:SDIST:L)	$\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \parallel \text{proc}(d, w, P) \xRightarrow{d, \kappa} C'$ for $\text{proc}(c, \{(C_i \parallel \text{proc}(d, w, P)) : p_i\}_{i \in \mathcal{I}}) \xRightarrow{d, \kappa} C'$
(C:BDIST:D)	$\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \parallel \text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}}) \xRightarrow{d, \text{det}} C''$ for $\text{proc}(c, \{(C_i \parallel C'_j) : p_i \cdot p'_j\}_{i \in \mathcal{I}, j \in \mathcal{J}}) \xRightarrow{d, \text{det}} C''$
(C:BDIST:R)	$\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \parallel \text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}}) \xRightarrow{d, \otimes_p} C''$ for $\text{proc}(c, \{(\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \parallel C'_j) : p'_j\}_{j \in \mathcal{J}}) \xRightarrow{d, \otimes_p} C''$
(C:BDIST:L)	$\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \parallel \text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}}) \xRightarrow{d, \oplus_p} C''$ for $\text{proc}(c, \{(C_i \parallel \text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}})) : p_i\}_{i \in \mathcal{I}}) \xRightarrow{d, \oplus_p} C''$

Fig. 7. Rules for the multiset-rewriting small-step nested-multiverse semantics of PRast.

substitutes e for y in the continuation Q . In the rule (C:▷) for paying potential, the provider of d pays r units of potential along d to the client. The dual rules (C:⊗), (C:⊗_p), (C:→), and (S:◁) simply reverse the role of the provider and the client in (C:⊕), (C:⊕_p), (C:⊗), and (C:▷), respectively. Note that these eight rules do not change the work counters of the processes.

The rule (C:1) accounts for termination, i.e., the client simply waits the provider to terminate. A similar rule (S:Id) deals with forwarding. Operationally, a process $d \leftrightarrow e$ forwards any message that arrives on e to d and vice-versa. There is an extra side condition $Q\langle d \rangle$ (d, κ)-blocked, which means that the expression $Q\langle d \rangle$ is communicating along channel d whose sort is κ . Note that we write $Q\langle d \rangle$ to indicate that the channel d must occur freely in the process Q . We will formulate the definition of blocked semantic objects later in Section 5.3. For both termination and forwarding, the work performed by the provider is absorbed by the client.

5.3 Type Soundness

In this section, we prove the soundness of PRast with respect to the nested-multiverse semantics. Different from the system presented by [Inverso et al. \[2020\]](#), PRast is a conservative extension of the resource-aware session types [\[Das et al. 2018\]](#).

Configuration typing. The type rules for configurations are given below. The judgment $\Delta \Vdash^q \mathcal{C} :: \Gamma$ means that the configuration \mathcal{C} uses the channels in the context Δ and provides the channels in Γ , and the nonnegative number q denotes the *expected* value of the sum of the total potential and work done by the system. The rule (T:COMPOSE) imposes an order on linear configurations and flattens the linear object tree in a way that for any semantic object the providers of the channels used by the object are to the *right* of the object in the configuration.

$$\begin{array}{c}
 \text{(T:PROC)} \\
 \frac{\Delta \Vdash^q P :: (c : A)}{\Delta \Vdash^{q+w} \text{proc}(c, w, P) :: (c : A)} \\
 \\
 \text{(T:DIST)} \\
 \frac{\begin{array}{c} \forall i \in \mathcal{I} : \Delta_i \Vdash^{q_i} \mathcal{C}_i :: (c : A_i) \\ \Sigma_{i \in \mathcal{I}}^L p_i \cdot \Delta_i = \Delta \quad \Sigma_{i \in \mathcal{I}}^R p_i \cdot A_i = A \quad \Sigma_{i \in \mathcal{I}} p_i \cdot q_i = q \end{array}}{\Delta \Vdash^q \text{proc}(c, \{\mathcal{C}_i : p_i\}_{i \in \mathcal{I}}) :: (c : A)} \\
 \\
 \text{(T:COMPOSE)} \\
 \frac{\Delta_1, \Delta' \Vdash^{q_1} \mathcal{O} :: (c : A) \quad \Delta_2 \Vdash^{q_2} \mathcal{C} :: (\Delta, \Delta')}{\Delta_1, \Delta_2 \Vdash^{q_1+q_2} (\mathcal{O} \parallel \mathcal{C}) :: (\Delta, (c : A))}
 \end{array}$$

Type preservation and global progress. We prove the preservation theorem below by induction on the nested-multiverse semantics.

THEOREM 2. *Suppose that $\Delta \Vdash^q \mathcal{C} :: \Gamma$. If $\mathcal{C} \mapsto \mathcal{C}'$ or $\mathcal{C} \xRightarrow{d, \kappa} \mathcal{C}'$ for some d, κ , then $\Delta \Vdash^q \mathcal{C}' :: \Gamma$.*

The global progress turns out to be more complex because we have to discover possible communication in a nested configuration. To aid the proof of global progress, we define several relations to characterize the *status* of a semantic object:

- \mathcal{C} *poised* means that *all* process in \mathcal{C} are communicating along their providing channels. Figure 8 lists the rules.
- \mathcal{C} *live* means that there exists a process in \mathcal{C} that can make a step *without* communication. Figure 9 lists the rules.
- $\mathcal{C} (d, \kappa)$ -*poised* means that *some* process in \mathcal{C} is communicating along its providing channel d of sort κ , and channel d is external to \mathcal{C} . Figure 10 lists the rules. Note that we introduce a new sort \top as the *super*-sort of det , \oplus_P , $\&_P$.
- $\mathcal{C} (d, \kappa)$ -*blocked* means that *some* process in \mathcal{C} is communicating along its consumed channel d of sort κ , and channel d is external to \mathcal{C} . Figure 11 lists the rules.
- $\mathcal{C} (d, \kappa)$ -*comm* means that there exist two processes that are going to communicate in \mathcal{C} along channel d of sort κ . Figure 12 lists the rules. Note that in the rule (CM:COMPOSE:C), we use $\kappa <: \kappa'$ to handle the case where $\kappa' = \top$.

We first prove that these status characterizations introduced above are sufficient conditions for a configuration to make a step in the nested-multiverse semantics.

LEMMA 1.

- If \mathcal{C} *live*, then there exists \mathcal{C}' such that $\mathcal{C} \mapsto \mathcal{C}'$.
- If $(\cdot) \Vdash^q \mathcal{C} :: \Gamma$ and $\mathcal{C} (d, \kappa)$ -*comm*, then $\mathcal{C} \xRightarrow{d, \kappa} \mathcal{C}'$ for some \mathcal{C}' .

Then we prove that for a well-typed configuration, we can always find a suitable status characterization for it.

$(P:1R)$ $\overline{\text{proc}(c, w, \text{close } c) \text{ poised}}$	$(P:\oplus R)$ $\overline{\text{proc}(c, w, c.k ; P) \text{ poised}}$	$(P:\&R)$ $\overline{\text{proc}(c, w, \text{case } c (\ell \Rightarrow P_\ell)_{\ell \in L}) \text{ poised}}$
$(P:\oplus_p R)$ $\overline{\text{proc}(c, w, c..k ; P) \text{ poised}}$	$(P:\&_p R)$ $\overline{\text{proc}(c, w, \text{pcase } c (\ell \Rightarrow P_\ell)_{\ell \in L}) \text{ poised}}$	$(P:\triangleright R)$ $\overline{\text{proc}(c, w, \text{pay } c \{r\} ; P) \text{ poised}}$
$(P:\lhd R)$ $\overline{\text{proc}(c, w, \text{get } c \{r\} ; P) \text{ poised}}$	$(P:\otimes R)$ $\overline{\text{proc}(c, w, \text{send } c e ; P) \text{ poised}}$	$(P:\multimap R)$ $\overline{\text{proc}(c, w, y \leftarrow \text{recv } c ; P) \text{ poised}}$
$(P:\text{Id}R)$ $\overline{\text{proc}(c, w, c \leftrightarrow e) \text{ poised}}$	$(P:\text{DIST})$ $\frac{\forall i \in \mathcal{I} : \mathcal{C}_i \text{ poised}}{\overline{\text{proc}(c, \{\mathcal{C}_i : p_i\}_{i \in \mathcal{I}}) \text{ poised}}}$	$(P:\text{COMPOSE})$ $\frac{\mathcal{O} \text{ poised} \quad \mathcal{C} \text{ poised}}{\overline{(\mathcal{O} \parallel \mathcal{C}) \text{ poised}}}$

Fig. 8. Rules for poised semantic objects.

$(L:\text{FLIP})$ $\overline{\text{proc}(c, w, \text{flip } p (H \Rightarrow P_H \mid T \Rightarrow P_T)) \text{ live}}$	$(L:\text{WORK})$ $\overline{\text{proc}(c, w, \text{work } \{r\} ; P) \text{ live}}$	$(L:\text{DEF})$ $\overline{\text{proc}(c, w, x \leftarrow f \bar{d} ; Q) \text{ live}}$
$(L:\text{DIST})$ $\frac{\mathcal{C}_{i_0} \text{ live}}{\overline{\text{proc}(c, \{\mathcal{C}_i : p_i\}_{i \in \mathcal{I}}) \text{ live}}}$	$(L:\text{COMPOSE:H})$ $\frac{\mathcal{O} \text{ live}}{\overline{(\mathcal{O} \parallel \mathcal{C}) \text{ live}}}$	$(L:\text{COMPOSE:T})$ $\frac{\mathcal{C} \text{ live}}{\overline{(\mathcal{O} \parallel \mathcal{C}) \text{ live}}}$

Fig. 9. Rules for live semantic objects.

$\frac{(\text{PR:1})}{\text{proc}(c, w, \text{close } c) \text{ (c, det)-poised}}$	$\frac{(\text{PR:}\oplus)}{\text{proc}(c, w, c.k ; P) \text{ (c, det)-poised}}$
$\frac{(\text{PR:}\&)}{\text{proc}(c, w, \text{case } c (\ell \Rightarrow P_\ell)_{\ell \in L} \text{ (c, det)-poised}}$	$\frac{(\text{PR:}\oplus_p)}{\text{proc}(c, w, c..k ; P) \text{ (c, } \oplus_p\text{)-poised}}$
$\frac{(\text{PR:}\&_p)}{\text{proc}(c, w, \text{pcase } c (\ell \Rightarrow P_\ell)_{\ell \in L} \text{ (c, } \&_p\text{)-poised}}$	$\frac{(\text{PR:}\triangleright)}{\text{proc}(c, w, \text{pay } c \{r\} ; P) \text{ (c, det)-poised}}$
$\frac{(\text{PR:}\lhd)}{\text{proc}(c, w, \text{get } c \{r\} ; P) \text{ (c, det)-poised}}$	$\frac{(\text{PR:}\otimes)}{\text{proc}(c, w, \text{send } c e ; P) \text{ (c, det)-poised}}$
$\frac{(\text{PR:}\multimap)}{\text{proc}(c, w, y \leftarrow \text{recv } c ; P) \text{ (c, det)-poised}}$	$\frac{(\text{PR:Id})}{\text{proc}(c, w, c \leftrightarrow e) \text{ (c, } \top\text{)-poised}}$
$\frac{(\text{PR:Dist})}{\mathcal{C}_{i_0} (d, \kappa)\text{-poised}}$	$\frac{(\text{PR:Compose:H})}{\mathcal{O} (d, \kappa)\text{-poised}}$
$\frac{}{\text{proc}(e, \{\mathcal{C}_i : p_i\}_{i \in \mathcal{I}}) (d, \kappa)\text{-poised}}$	$\frac{(\text{PR:Compose:T})}{\mathcal{C} (d, \kappa)\text{-poised} \quad d \notin \text{FV}^L(\mathcal{O})}$
$\frac{}{(\mathcal{O} \parallel \mathcal{C}) (d, \kappa)\text{-poised}}$	$\frac{}{(\mathcal{O} \parallel \mathcal{C}) (d, \kappa)\text{-poised}}$

Fig. 10. Rules for (d, κ) -poised semantic objects.

LEMMA 2. *If $(\cdot) \Vdash^q \mathcal{C} :: \Gamma$, then at least one of the cases below holds:*

- (i) \mathcal{C} live,
- (ii) $\mathcal{C} (d, \kappa)$ -comm for some d, κ , or
- (iii) \mathcal{C} poised.

Finally, we can prove global progress of our type system.

$\frac{}{(\text{BL:1})}$ $\frac{}{\text{proc}(d, \text{wait } c ; Q) \text{ (c, det)-blocked}}$ $\frac{}{(\text{BL:}\&)}$ $\frac{}{\text{proc}(d, c.k ; Q) \text{ (c, det)-blocked}}$ $\frac{}{(\text{BL:}\&P)}$ $\frac{}{\text{proc}(d, c..k ; Q) \text{ (c, } \&P\text{)-blocked}}$ $\frac{}{(\text{BL:}\<)}$ $\frac{}{\text{proc}(d, \text{pay } c \{r\} ; Q) \text{ (c, det)-blocked}}$ $\frac{}{(\text{BL:}\rightarrow)}$ $\frac{}{\text{proc}(d, \text{send } c \ e ; Q) \text{ (c, det)-blocked}}$ $\frac{}{(\text{BL:COMPOSE:H})}$ $\frac{\mathcal{O} \text{ (d, } \kappa\text{)-blocked} \quad d \notin \text{FV}^R(\mathcal{C})}{(\mathcal{O} \parallel \mathcal{C}) \text{ (d, } \kappa\text{)-blocked}}$	$\frac{}{(\text{BL:}\oplus)}$ $\frac{}{\text{proc}(d, \text{case } c \ (\ell \Rightarrow Q_\ell)_{\ell \in L}) \text{ (c, det)-blocked}}$ $\frac{}{(\text{BL:}\oplus P)}$ $\frac{}{\text{proc}(d, \text{pcase } c \ (\ell \Rightarrow Q_\ell)_{\ell \in L}) \text{ (c, } \oplus P\text{)-blocked}}$ $\frac{}{(\text{BL:}\triangleright)}$ $\frac{}{\text{proc}(d, \text{get } c \ \{r\} ; Q) \text{ (c, det)-blocked}}$ $\frac{}{(\text{BL:}\otimes)}$ $\frac{}{\text{proc}(d, y \leftarrow \text{recv } c ; Q) \text{ (c, det)-blocked}}$ $\frac{}{(\text{BL:Dist})}$ $\frac{C_{i_0} \text{ (d, } \kappa\text{)-blocked}}{\text{proc}(e, \{C_i : p_i\}_{i \in \mathcal{I}}) \text{ (d, } \kappa\text{)-blocked}}$ $\frac{}{(\text{BL:COMPOSE:T})}$ $\frac{\mathcal{C} \text{ (d, } \kappa\text{)-blocked}}{(\mathcal{O} \parallel \mathcal{C}) \text{ (d, } \kappa\text{)-blocked}}$
--	---

Fig. 11. Rules for (d, κ) -blocked semantic objects.

$\frac{}{(\text{CM:Dist})}$ $\frac{C_{i_0} \text{ (d, } \kappa\text{)-comm}}{\text{proc}(e, \{C_i : p_i\}_{i \in \mathcal{I}}) \text{ (d, } \kappa\text{)-comm}}$	$\frac{}{(\text{CM:COMPOSE:H})}$ $\frac{\mathcal{O} \text{ (d, } \kappa\text{)-comm}}{(\mathcal{O} \parallel \mathcal{C}) \text{ (d, } \kappa\text{)-comm}}$	$\frac{}{(\text{CM:COMPOSE:T})}$ $\frac{\mathcal{C} \text{ (d, } \kappa\text{)-comm}}{(\mathcal{O} \parallel \mathcal{C}) \text{ (d, } \kappa\text{)-comm}}$
$\frac{}{(\text{CM:COMPOSE:C})}$ $\frac{\mathcal{O} \text{ (d, } \kappa\text{)-blocked} \quad \mathcal{C} \text{ (d, } \kappa')\text{-poised} \quad \kappa <: \kappa'}{(\mathcal{O} \parallel \mathcal{C}) \text{ (d, } \kappa\text{)-comm}}$		

Fig. 12. Rules for semantic objects with possible communication inside.

THEOREM 3. *If $(\cdot) \Vdash^q \mathcal{C} :: \Gamma$, then either*

- (i) $\mathcal{C} \mapsto \mathcal{C}'$ for some \mathcal{C}' , or $\mathcal{C} \xRightarrow{d, \kappa} \mathcal{C}'$ for some \mathcal{C}' , d, κ , or
- (ii) \mathcal{C} poised.

PROOF. Appeal to Lemmas 1 and 2. □

Expected work analysis. To reason about the *expected* amount of work done by a probabilistic system, we harness Markov-chain-based reasoning [Kaminski et al. 2016; Olmedo et al. 2016] to construct a stochastic process of system states. To construct the Markov chain, we have to “flatten” a nested-multiverse configuration to a *distribution* on non-nested configurations, i.e., sequences of processes $\mathcal{D} ::= \text{proc}(c_1, w_1, P_1) \parallel \dots \parallel \text{proc}(c_n, w_n, P_n)$. We formalize the “flattening” procedure via a *simulation* relation showed below.

$\frac{}{(\text{FL:Proc})}$ $\frac{}{\text{proc}(c, w, P) \approx \{\text{proc}(c, w, P) : 1\}}$	$\frac{}{(\text{FL:Dist})}$ $\frac{\forall i \in \mathcal{I}: C_i \approx \mu_i}{\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \approx \sum_{i \in \mathcal{I}} p_i \cdot \mu_i}$
$\frac{}{(\text{FL:COMPOSE})}$ $\frac{\mathcal{O} \approx \mu_1 \quad \mathcal{C} \approx \mu_2}{(\mathcal{O} \parallel \mathcal{C}) \approx \{(\mathcal{D}_1 \parallel \mathcal{D}_2 : \mu_1(\mathcal{D}_1) \cdot \mu_2(\mathcal{D}_2))\}_{\mathcal{D}_1 \in \text{dom}(\mu_1), \mathcal{D}_2 \in \text{dom}(\mu_2)}}$	

We then define the expected total work with respect to the Markov-chain semantics and prove that our system derives a sound *upper* bound on the expected work. We denote the total work done by a non-nested configuration $\mathcal{D} = \overline{\text{proc}(c_i, w_i, P_i)}$ by $\text{work}(\mathcal{D}) := \sum_i w_i$.

THEOREM 4. *Suppose that $(\cdot) \Vdash^q C :: \Gamma$. Then we can construct a Markov chain $\{\mathcal{D}_n\}_{n \in \mathbb{N}}$ such that*

- (i) there exists a sequence $\{C_n\}_{n \in \mathbb{N}}$ such that $C_0 = C$, and for each $n \in \mathbb{N}$, it holds that $(\cdot) \Vdash^q C_n :: \Gamma$, $C_n \approx \mathcal{D}_n$, and*
- (ii) for each $n \in \mathbb{N}$, it holds that $\mathbb{E}[\text{work}(\mathcal{D}_n)] \leq q$, where the expectation is computed with respect to the Markov chain.*

The expected total work for the executions starting from C can then be defined as $\text{etw}(C) := \lim_{n \rightarrow \infty} \mathbb{E}[\text{work}(\mathcal{D}_n)]$. As a corollary of the Monotone Convergence Theorem, it holds that $\text{etw}(C) \leq q$.

6 APPLICATIONS OF PROBABILISTIC SESSION TYPES

Probabilistic session types can be employed for a variety of diverse applications. In this work, we demonstrate examples from 3 categories: (i) implementing and inferring expected complexity of randomized distributed algorithms, (ii) verifying limiting distributions of Markov chains, and (iii) proving correctness of digital contracts.

6.1 Randomized Distributed Algorithms

Since session types support concurrent programming, we can implement and analyze randomized distributed algorithms in our language. In this paper, we present the randomized dining philosophers, the randomized synchronous leader election protocols and the dining cryptographers protocol.

Randomized Dining Philosophers. Dining philosophers [Dijkstra 1971; Hoare 1978] is a standard illustration of synchronization and deadlock problems in concurrent systems. The problem is formulated as five philosophers seated at a circular table with food in front of them. Forks are placed between each pair of adjacent philosophers. Each philosophers alternates between thinking and eating with the constraint that they need both left and right forks to eat. The fork is a shared resource used by both adjacent philosophers, and represented using the shared session type

$$\text{sfork} \triangleq \uparrow_L^S \oplus_P \{\text{available}^{0.4} : \downarrow_L^S \text{sfork}, \text{unavailable}^{0.6} : \downarrow_L^S \text{sfork}\}$$

The \uparrow_L^S type operator defines that `sfork` is a shared session type [Balzer and Pfenning 2017] that can be acquired by either philosopher. Once acquired, it sends a label describing its status. If the fork is available, it sends the label `available`, otherwise it sends the label `unavailable`. We describe this behavior with a probabilistic choice \oplus_P , and the actual probabilities of each label depends on the ratio expected amount of time spent thinking and eating. Here, we arbitrarily decide that the forks are available 40% of the time. Although we have only conducted a formal soundness theorem of probabilistic session types in the linear fragment [Das et al. 2018], we believe our results will extend to the shared fragment. Sharing in session types is largely orthogonal to probabilistic behavior since the two new type formers we introduce (\oplus_P and $\&_P$) only exist in the linear fragment which has no interaction with the shared fragment.

In 1981, Lehmann and Rabin [1981] proved that there is no fully distributed and symmetric *deterministic* algorithm for the dining philosophers problem that is *deadlock-free*. They also proposed a randomized deadlock-free algorithm for the same. The key idea is that each philosopher tosses a coin to decide whether they acquire the left or the right fork first. Since the coin tosses for each philosopher are independent random events, eventually some philosopher would obtain both forks. We implemented the randomized algorithm in our language using two processes.

```
decl thinking : (l : sfork) (r : sfork) |{*}- (phil : 1)
```

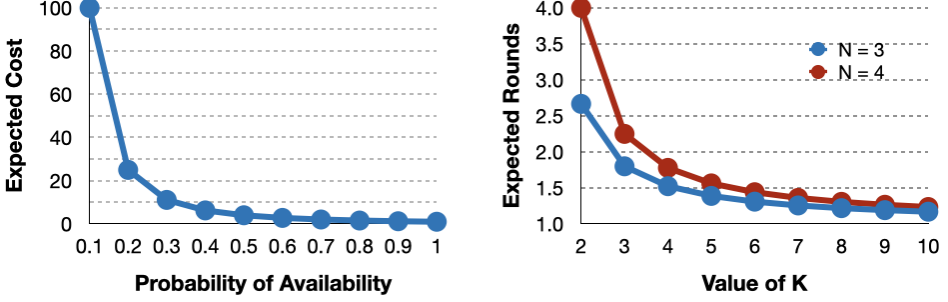


Fig. 13. (a) Expected cost of dining philosophers (y-axis) vs probability of availability of forks (x-axis), and (b) Expected number of rounds in leader election (y-axis) vs K (x-axis)

```
decl eating : (l : lfork) (r : lfork) |{*}- (phil : 1)
```

The type $\text{lfork} = \oplus_P \{\text{available}^{0.4} : \downarrow_L^S \text{sfork}, \text{unavailable}^{0.6} : \downarrow_L^S \text{sfork}\}$ represents an acquired fork. The thinking process uses two channels as arguments: the fork on the left and right and flips a coin. If the coin outputs H, they first acquire left fork, then the right fork and only if both are available, they transition to eating calling the same process. If the coin outputs T, they follow the same procedure except for acquiring the right fork first. If either of the forks is unavailable, they recurse back to thinking again.

Our language automatically infers the expected amount of time it takes for a philosopher to start eating. The $\{*\}$ on the turnstile for the thinking and eating processes signals the inference engine to compute the expected potential required to typecheck the process. In this example, we use the **flip** cost model that counts the expected number of flips. For the above probabilities, the inference engine returns the following potentials.

```
decl thinking : (l : sfork) (r : sfork) |{6.25}- (phil : 1)
```

```
decl eating : (l : lfork) (r : lfork) |{0}- (phil : 1)
```

Figure 13(a) describes the expected cost of the thinking process plotted against the probability of availability of forks. Thus, if the types of the shared fork and thinking process are

$$\text{sfork} \triangleq \uparrow_L^S \oplus_P \{\text{available}^p : \downarrow_L^S \text{sfork}, \text{unavailable}^{1-p} : \downarrow_L^S \text{sfork}\}$$

```
decl thinking : (l : sfork) (r : sfork) |{q}- (phil : 1)
```

then Figure 13(a) plots p and q on the x and y axes respectively. It is clear from Figure 13(a) that the expected cost is inversely proportional to the availability of forks, which matches the expected behavior of the algorithm.

Synchronous Leader Election. A leader election protocol operates on a network of processes that communicate with each other to designate a *unique* process among them as the leader. Such protocols have diverse applications since the leader can organize task distribution, monitor process co-ordination, and gather and broadcast messages.

In 1990, [Itai and Rodeh \[1990\]](#) proved that if the processes are indistinguishable, then there exists no *deterministic* protocol to elect a leader. They also proposed a randomized protocol for leader election in a *ring network* which proceeds in rounds. In each round, each process (independently) chooses a random number in the range $\{1, \dots, K\}$ for some parameter K as an *id*. The processes then pass their ids around the ring. If there is a *unique maximum id*, then that process is elected as the leader. Otherwise, the processes initiate a new round. This protocol terminates with probability 1 because eventually the random numbers chosen by the processes will have a unique maximum.

We have implemented this protocol in our language which automatically infers its expected cost. In this protocol, we have used a special cost model that counts the number of rounds. Since we can only represent constant probabilities, the protocol has been implemented with a fixed number of processes and K . Figure 13(b) plots the expected number of rounds vs K . We have implemented this protocol for 2 ring networks with 3 and 4 processes, respectively as showed in Figure 13(b). Note that the probability of obtaining a unique maximum is directly proportional to the number of processes and inversely proportional to K . Thus, the expected rounds decreases as K increases for a fixed network. Also, for a fixed K , increasing the number of processes in the ring increases the expected number of rounds. Both these observations are confirmed by Figure 13.

Dining Cryptographers. This is a standard protocol [Chaum 1988] that demonstrates transfer of messages that are unconditionally and cryptographically secure with sender and recipient untraceability. It is often applied to performing secure multi-party computation. The problem scenario contains three cryptographers seated at a circular table for dinner. The waiter informs them that the dinner is paid for by either one of the cryptographers or the NSA (National Security Agency). The cryptographers want to respect their right to make anonymous payments, but still want to know whether the bill was paid by the NSA or not.

The protocol operates in two stages. In the first stage, each cryptographer flips an *unbiased coin* and informs the cryptographer on the right of the outcome. Each cryptographer then compares the outcome of their own coin toss with the informed coin toss. In the second stage, each cryptographer publicly announces a value which is either *i)* ‘agree’ if the two coin tosses matched, or *ii)* ‘disagree’ if the two coin tosses do not match. Except if a cryptographer paid the bill, they publicly announce the complement value, i.e. ‘agree’ if the coin tosses did not match, and ‘disagree’ otherwise. Finally, an even number of ‘agree’s indicates that NSA paid the bill, and an odd number indicates one of the cryptographer paid. Most importantly, the protocol does not reveal which cryptographer actually paid the bill (if one of them did).

Crucial to the correctness of the protocol is the use of an *unbiased coin*. We can ensure this with a probabilistic session type for the shared coin used in this protocol defined as

$$\begin{aligned} \text{scoin} &\triangleq \uparrow_L^S \oplus_P \{H^{0.5} : \downarrow_L^S \text{scoin}, T^{0.5} : \downarrow_L^S \text{scoin}\} \\ \text{outcome} &\triangleq \oplus_P \{\text{agree}^{0.5} : 1, \text{disagree}^{0.5} : 1\} \end{aligned}$$

The coin is represented using a shared type so that it can be shared by adjacent cryptographers. The \uparrow_L^S denotes a shared type, and the coin guarantees to return H and T with equal probability. Once it sends the toss value, it transitions back to the shared scoin type using a \downarrow_L^S operator. The type outcome denotes the value that is publicly announced by the cryptographer, it can be **agree** or **disagree** with equal probability. The cryptographer process is then declared as

```
decl cryptographer : (left : scoin), (my : scoin) |{*}- (c : outcome)
```

The type of the cryptographer process shows that it uses two shared channels: left denotes the shared coin of the cryptographer on the left, while my denotes the cryptographer’s own coin. Finally, the process offers $c : \text{outcome}$ which means it will send one of the two outcomes and then terminate.

Our inference engine automatically computes the cost for the cryptographer process. Since our analysis is parametric in the cost model, the programmer is free to choose their own. Under the **flip** cost model, its expected potential is 1, while under the **send** cost model, its expected potential is 2. This corroborates our intuition, since the process flips one coin, and sends 2 messages (outcome ‘agree’/‘disagree’ and close).




Fig. 14. Markov chain with 3 webpages A, M and N

6.2 Markov Chains

We have already seen in Section 2 that our language is adept at representing and analyzing Markov chains. One of the most common problems studied about Markov chains is their *asymptotic behavior*. This involves studying the fraction of time spent in each state of a Markov chain. The *limiting distribution* of a Markov chain M is a vector $\bar{\pi}$ where π_i denotes the fraction of time spent in state i . A chain is often described using a transition probability matrix P such that P_{ij} denotes the probability of transitioning from state i to state j . Then, the limiting distribution satisfies the following equations

$$\bar{\pi} \cdot P = \bar{\pi} \quad \text{and} \quad \sum_i \pi_i = 1$$

These equations can be verified by our type system, as we will demonstrate through several examples. Thus, we can verify whether a certain distribution $\bar{\pi}$ is a limiting distribution for a Markov chain M .

Google's PageRank algorithm. The PageRank algorithm [Page et al. 1999] was designed at Google to rank web pages in their search engine results. The algorithm represents each webpage as a state in a giant Markov chain. And we draw an edge from state i to state j if there is a link on page i leading to page j . Next, we need to assign probabilities on each edge. For simplicity, if a state has k outgoing links, each is marked with probability $1/k$. The limiting distribution of such a chain then denotes the fraction of time a user spends on each page. Hence, the pages are ranked based on their limiting probabilities in decreasing order.

As an illustration, Figure 14 presents a simple network borrowed from prior work [Harchol-Balter 2013] containing 3 webpages named A, M and N with the corresponding edge probabilities. The limiting distribution for this chain is known to be $\pi_A = 0.4$, $\pi_M = 0.2$, $\pi_N = 0.4$.

We describe how to implement and verify this distribution in our language. First, the limiting distribution is represented with a probabilistic session type named `limit`.

$$\text{limit} \triangleq \oplus_P \{A^{0.4} : 1, M^{0.2} : 1, N^{0.4} : 1\}$$

The probability of each label exactly matches the limiting probability of the corresponding state. The transition probability matrix is represented using a process

```

decl transition : (in : limit) |- (out : limit)
proc out <- transition in =
  case in ( A => flip {0.5} ( H => out.N ; wait in ; close out
                           | T => out.M ; wait in ; close out )
    | M => out.A ; wait in ; close out
    | N => flip {0.5} ( H => out.A ; wait in ; close out
                     | T => out.N ; wait in ; close out ) )

```

This transition process exactly implements the equation $\bar{\pi} \cdot P = \bar{\pi}$. We case analyze on the input channel `in`, where each branch denotes the state the chain is currently in. In branch `A`, with prob. 0.5, we transition to state `N` represented by `out.N` and with prob. 0.5, we transition to state `M` represented by `out.M`. In branch `M`, since we always transition to state `A`, we send `out.A`. Finally,

state N transitions to A with prob. 0.5 and back to N with prob. 0.5, as represented in the H and T branches by $\text{out}.A$ and $\text{out}.N$ respectively. Finally, we terminate each branch.

The type system automatically computes the probability of outputting each label by taking the weighted sum of each branch. Because the input and output types are equal, we conclude that the limit type indeed represents the limiting distribution. Furthermore, the validity of type limit ensures $\sum_i \pi_i = 1$. We have implemented several standard Markov chains taken from prior work [Harchol-Balter 2013] such as probabilistic weather prediction, random walks, natural numbers, machine repair, etc. and verified their limiting distribution. Finally, note that our LP solver cannot infer the probabilities for the type limit. Since limit is both the input and output type, the constraints generated by our typing rules are non-linear. In the future, we plan to use more advanced solvers to solve non-linear constraints.

6.3 Digital Contracts

Binary session types have also been employed in representing digital contracts [Das et al. 2019] such as auctions, lotteries, bank accounts, etc. We can use probabilistic session types to inject probabilistic behavior into such contracts. We describe here one such example to model slot machines.

Slot Machines. The core idea behind slots is that any player can use a *ticket* to play *once* on a slot. And the player wins with a certain probability p and loses otherwise. If the player wins, they win the entire money stored in the machine. Remarkably, we can use potential to represent money! Thus, a player pays one unit of potential to play the slots, and all the potential stored inside the slot machine is paid to the player when they win the slots.

$$\text{slot} \triangleq \uparrow_L^S \triangleleft^1 \oplus_P \{ \text{won}^{0.2} : \triangleright^* \downarrow_L^S \text{slot}, \text{lost}^{0.8} : \downarrow_L^S \text{slot} \}$$

The type slot represents the interface to a slot machine. To allow multiple players, the type is shared: the \uparrow_L^S represents that the channel must be acquired to play. Once acquired, the player must deposit the ticket by paying 1 unit of potential, as represented with \triangleleft^1 . Then, the type transitions to a probabilistic internal choice, denoting that the player can win with prob. 0.2. Thus, the player is *guaranteed a 20% chance of winning*. If the player wins, the type sends the **won** label followed by an unknown ($*$) amount of potential. The $*$ indicates that we would like the type system to infer how much potential the player wins. On the other hand, if the player loses, the type only sends the **lost** label. Then, in either case, the type detaches with the \downarrow_L^S operator issuing a release. The slot machine is represented using the machine process as

```
decl machine : . |{*}- (sl : slot)
proc sl <- machine =
  ll <- accept sl ;
  get ll {1} ;
  flip {0.2} ( H => ll.won ;
              pay ll {*} ;
              sl <- detach ll ;
              sl <- machine
            | T => ll.lost ;
              sl <- detach ll ;
              sl <- machine )
```

The process offers channel $sl : \text{slot}$ and does not use any channels. The process initiates with accepting an acquire request creating a fresh linear channel ll where messages are exchanged. It then receives 1 unit of potential and flips with prob. 0.2. In the H branch, it sends the label **won** followed by sending $*$ units of potential. The process then detaches from the player consuming the

linear channel ll and recovering the shared channel sl and recurses. In the T branch, the process sends the **lost** label, detaches from the client and recurses.

The inference engine automatically computes the potential to be paid to a player who wins. It produces the following annotation

$$\text{slot} \triangleq \uparrow_L^S \triangleleft^1 \oplus_P \{ \text{won}^{0.2} : \triangleright^5 \downarrow_L^S \text{slot}, \text{lost}^{0.8} : \downarrow_L^S \text{slot} \}$$

Thus, the player wins 5 times the price of a ticket. This matches our expectation as the winning probability is $0.2 = 1/5$. In general, the expected winnings of a slot machine with winning probability p can be calculated to be $1/p$. This is confirmed in our language for any fixed constant p . In conclusion, probabilistic session types statically guarantee the winning probability and also determine the expected winnings for digital contracts.

7 IMPLEMENTATION AND EVALUATION

We have implemented an open-source prototype for PRast in OCaml (7622 lines of code). The lexer and parser (601 lines of code) for PRast are implemented using Menhir [Pottier and Régis-Gianas 2019], an LR(1) parser generator for OCaml. A program in PRast is a sequence of mutually recursive type and process definitions.

Type Reconstruction. We implemented a *bi-directional type checker* [Pierce and Turner 2000] for PRast (4024 lines of code) specifically focusing on the quality of error messages. The programmer provides the initial type for each process in the declaration, and the intermediate types are reconstructed while type checking the corresponding definition. This aids in localizing the source of the error as the program location where type reconstruction fails.

An important aspect of the type checking algorithm is type reconstruction resulting from the *non-determinism* in the rules for flip and pcase. To typecheck a probabilistic branch, we need to *guess* the types of each channel in each branch (see Figure 5). This problem is exacerbated when such branches are nested. Consider the unbiased process again that involves such a nesting from Section 2.

$$\frac{\frac{(b : 1) \vdash c..false ; \dots :: (c : A_1) \quad (b : 1) \vdash c..true ; \dots :: (c : A_2) \quad A = 0.5 \cdot A_1 +^R 0.5 \cdot A_2}{(b : 1) \vdash \text{flip } 0.5 (H \Rightarrow c..false ; \dots \mid T \Rightarrow c..true ; \dots) :: (c : A)}}{(b : \text{pbool}) \vdash \text{pcase } b (\text{true} \Rightarrow \text{flip } 0.5 (H \Rightarrow \dots \mid T \Rightarrow \dots) \mid \text{false} \Rightarrow \text{flip } 0.5 (H \Rightarrow \dots \mid T \Rightarrow \dots)) :: (c : \text{ubool})}$$

We show a part of the derivation tree of the unbiased process (false branch not shown). Although we know the initial type $c : \text{ubool}$ (conclusion at the bottom), we need to guess its intermediate type in the true and false branches. Suppose we guess type A for c in the true branch and similarly type B in the false branch (not shown). We would obtain the constraint $\text{ubool} = 0.6 \cdot A +^R 0.4 \cdot B$ taking the prob. of each branch into account. Then, we again need to typecheck a flip expression. So, we again guess types A_1 and A_2 in the H and T branches (resp. B_1 and B_2 for B) respectively. Then, we obtain the constraint $A = 0.5 \cdot A_1 +^R 0.5 \cdot A_2$ as shown in the derivation. The outcome of the type checking of this process would depend on the satisfaction of these constraints.

Our type checker solves this issue using a 2-phase reconstruction algorithm. We initialize the program by replacing all $*$ annotations in all the type and process definitions by variables. Then, in the first phase of type checking, all prob. values are ignored and the remaining typing constraints are checked. In this phase, we also use the prob. values from the type of each probabilistic channel to fill in the prob. of each branch in a pcase expression.

In the second phase, we use a *bottom-up* approach to guess the type of each probabilistic channel in each branch. For instance, in the derivation above, consider the left premise on the top. Since we send label **false** on c , the type A_1 must be $\oplus_P \{ \text{true}^0 : 1, \text{false}^1 : 1 \}$. Similarly, from the second premise, we infer that A_2 must be $\oplus_P \{ \text{true}^1 : 1, \text{false}^0 : 1 \}$. And the third premise shows how to compute type A from types A_1 and A_2 . In general, applying the typing rules generate linear

Program	LOC	Defs	Procs	T (ms)	Vars	Cons	I (ms)
3 die	37	3	3	0.301	24	72	2.953
6 die	109	7	7	0.339	54	160	4.925
exp. trials	10	1	1	0.319	8	24	2.830
fair coin	17	1	1	0.313	20	54	2.964
pagerank	26	1	1	0.324	34	105	3.054
repair	22	2	1	0.343	39	118	2.924
rnd walk	27	1	2	0.043	32	96	3.466
din. phil.	94	1	5	0.361	135	412	3.612
leader	161	0	18	0.341	126	360	3.337
din. crypto.	30	1	1	0.345	49	151	2.871
lossy chan.	18	2	1	0.329	19	59	3.165
slots	17	1	1	0.451	21	58	3.351
lottery	16	1	1	0.342	19	52	2.816
nats	42	6	3	0.356	48	137	3.134

Table 3. Evaluation of PRast. LOC = lines of code; Defs = #type definitions; Procs = #process definitions; T (ms) = type checking time in ms; Vars = #potential variables generated during type checking; Cons = #constraints generated during type checking; I (ms) = potential inference time in ms.

constraints on the probability variables which are collected by the type checker. These constraints are then shipped to an off-the-shelf LP solver called Coin-Or. The LP solver either solves these equations, or returns that they are infeasible. In the former case, we obtain the solution and substitute them back in the typing derivation. In the latter case, we report a type checking failure.

Potential Inference. We have implemented an inference engine to automatically compute the expected cost of programs in PRast (821 lines of code). Since the exact potential annotations depend on the cost assigned to each operation and are difficult to predict statically, we found inference to be extremely useful to make PRast practically applicable.

Using ideas from existing techniques for type inference for AARA [Hoffmann et al. 2017; Hofmann and Jost 2003], we reduce the reconstruction of potential annotations to linear optimization. To this end, the inference engine again relies on the Coin-Or LP solver. The programmer can indicate unknown potential using $*$ in the program code. Thus, resource-aware session types can be marked with \triangleright^* and \triangleleft^* , and process definitions can be marked with $\{|*\}$ – on the turnstile.

The inference engine first iterates over the program and substitutes the $*$ annotations with potential variables. Then, the bidirectional typing rules are applied, approximately checking the program (modulo potential annotations) while also generating linear constraints for potential (see the rules for flip , $\oplus_P L$ and $\otimes_P R$). Finally, these constraints are shipped to the LP solver, which minimizes the value of the potential annotations to achieve tight bounds. The LP solver either returns that the constraints are infeasible, or returns a satisfying assignment, which is then substituted into the program. The pretty printer (527 lines of code) then prints the final program for the programmer to verify the potential annotations.

Evaluation. All the examples presented so far have been implemented and type checked in the PRast prototype. In addition, we have implemented several other benchmarks that we briefly describe below. Table 3 contains a compilation of our experiments with these programs and the prototype implementation. The experiments were run on an Intel Core i5 2.7 GHz processor with 16 GB 1867 MHz DDR3 memory. It presents the program name, its lines of code (LOC), the number of type (Defs) and process definitions (Procs), the type checking time (T (ms)), number of potential variables introduced (Vars), number of potential constraints that were generated while type checking (Cons) and the time the LP solver took to infer their values (I (ms)).

The program **3 die** is 3-faced die implementation presented in Section 2 and **6 die** is the standard 6-faced die implementation [Knuth and Yao 1976]. Similarly, **fair coin** contains a process that recursively flips a biased coin to produce a fair coin. The probabilistic annotations on the process type guarantees that the process uses a *biased coin* and produces a *fair coin*. The inference engine computes the expected number of flips needed. The **lossy chan.** example implements a channel from distributed systems that drops messages with a certain probability. We can automatically infer the expected number of messages a sender needs to send so that the recipient receives it. The lottery contract **lottery** guarantees a certain winning probability in its session type. The program **exp. trials**: recursively flips a coin until it outputs H.

The **repair** program implements a Markov chain representing a faulty machine. The limiting distribution verified by PRast estimates the fraction of time the machine spends in repair. Similarly, **rnd walk** and **weather** are Markov chains describing a random walk along a 2D line and probabilistic weather patterns, respectively. We can infer the expected time for the random walker to reach home and verify the limiting distribution that estimates the expected fraction of rainy and sunny days. The program **nats** implements Probabilistic natural numbers that send *successor* and *zero* with a fixed probability. We implemented standard functions like add, double, etc. to study their expected behavior. The programs **din. phil** for randomized dining philosophers, **leader** for synchronous leader election, **din. crypto.** for dining cryptographers, **slots** for the slot machine contract, and **pagerank** for the PageRank algorithm have been described in detail in Section 6.

8 RELATED WORK

We classify the related work into five categories.

Probabilistic Session Types. Aman and Ciobanu [2019] proposed a typing system extending multiparty session types [Honda et al. 2008] with probabilistic internal choice and non-deterministic external choice. Their session typing discipline contains probabilistic intervals as opposed to PRast, where probabilities are exact. Inverso et al. [2020] developed a system with probabilistic binary session types. Their system does not support non-probabilistic internal/external choices and channel passing, whereas PRast is a conservatory extension of intuitionistic session types [Caires and Pfenning 2010]. A distinguishing feature of PRast from all the aforementioned works is that we automatically infer expected cost.

Probabilistic Process Algebras. Probabilities were introduced in process algebras [Bergstra and Klop 1984] by a probabilistic internal choice operator and extended with parallel composition [Andova 1999]. Herescu and Palamidessi [2000] later proposed an extension of the asynchronous π -calculus with a notion of random choice distinguishing between probabilistic choice internal to a process and non-deterministic external choice made by an adversarial scheduler. They further use these techniques to prove probabilistic correctness of the leader election protocol under any possible scheduler. Other extensions to model time [Hansson and Fredlund 1994] and performance [Hillston 1996] have also been proposed working on the same principle of a probabilistic choice operator. In contrast to PRast, none of these works enhance the type system with probabilities.

Semantics of Probabilistic Languages. Several denotational models combining probabilistic and non-deterministic choices have been developed [Jones 1989; Mislove et al. 2004; Tix et al. 2009; Varacca 2002; Varacca and Winskel 2006; Wang et al. 2019b], and some of them are focused on probabilistic concurrency [Mislove 2000; Varacca 2003; Varacca and Yoshida 2007]. In the development of PRast, we use an operational semantic model. Trace-based operational semantics have been used to analyze probabilistic concurrent programs [Hart et al. 1983; Tassarotti and Harper 2019]. There, the semantics maps a concurrent program to a distribution of execution traces.

Our approach is different from those techniques, in the sense that they investigate each execution trace separately and connect them in the final phase of the analysis, whereas our nested-multiverse semantics accounts for correlations among executions in different “universes.”

Reasoning About Probabilistic Programs. There exist several works on automatic expected cost analysis of sequential (imperative) probabilistic programs [Chatterjee et al. 2016; Kura et al. 2019; Ngo et al. 2018; Wang et al. 2019a]. They can derive symbolic polynomial bounds and can be seen as an automation of Kozen’s weakest pre-expectation calculus [Kaminski et al. 2016; Kozen 1981]. An automated type-based variant of this idea has been introduced recently [Wang et al. 2020a] in the context of automatic amortized resource analysis [Hoffmann et al. 2017; Hofmann and Jost 2003]. The novelty of this work, is an automatic analysis for a probabilistic language with concurrency. It builds on previous work on work analysis for (deterministic) session types [Das et al. 2018].

We are not aware of any other automated rule-based system for deriving resource bounds for concurrent probabilistic programs. However, there are multiple systems that can be used for manually deriving expected cost bounds [Hansson and Jonsson 1994; Tassarotti and Harper 2018, 2019]. More broadly, model and reasoning about probabilistic programs has been extensively studied since the 80s [Kozen 1981, 1985; McIver and Morgan 2005; Sharir et al. 1984]. Recent work on modeling and analyzing probabilistic networks [Foster et al. 2016; Gehr et al. 2018; Smolka et al. 2019] can be viewed as reasoning systems for probabilistic message passing systems. However, the work on networks focuses on finite state systems and global properties. In contrast, the contribution of this article is the integration of (local) probability distributions in session types and the automatic expected resource analysis for message-passing processes.

Probabilistic Model Checking. Most closely related to PRast are other works on verification and complexity analysis of randomized algorithms. The probabilistic model checker PRISM [Kwiatkowska et al. 2011] supports analyzing discrete- and continuous-time Markov chains [Kwiatkowska et al. 2007a], Markov decision processes [Forejt et al. 2011] and probabilistic timed automata [Kwiatkowska et al. 2007b], as well as analyzing randomized distributed algorithms [Norman 2004]. Instead of using type systems, it provides a state-based language and a specification language (that subsumes standard temporal logics) to specify the model and property to be checked, respectively. It employs state-of-the-art symbolic data structures such as Binary Decision Diagrams (BDDs) and Multi-Terminal BDDs, a discrete-even simulation engine, and analysis techniques such as quantitative abstraction refinement and symmetry reduction. It has also been applied for model checking π -calculus [Norman et al. 2007] including Chaum [1988]’s dining cryptographers protocol. Bertrand et al. [2019] extend threshold automata to model randomized algorithms parameterized by the number of processes and failures under round-rigid schedules where no process can initiate round $r + 1$ until all processes complete round r . In contrast to these works where the specification needs to be defined separately, PRast unifies implementation and verification using an enhanced type system. Another distinguishing feature of PRast is that the linear fragment guarantees *deadlock freedom* and a *confluence* property, i.e., the final configuration would be the same under any adversarial scheduler. Finally, types enable a compositional analysis of different components instead of a whole program analysis and bounds can be symbolic.

9 CONCLUSION

In this article, we presented PRast, a probabilistic concurrent language relying on novel *probabilistic session types*. We also introduced a novel nested-multiverse semantics to prove session fidelity, correctness of expected bounds, and probability consistency. We employed them to implement and

verify correctness of Markov chains, infer expected cost of randomized distributed algorithms and analyze expected behavior of digital contracts.

One promising future direction is representing symbolic probabilities on the choice operators. Currently, we only allow constant prob. annotations on the labels, but many distributed algorithms rely on choosing a random number in the interval $\{1, \dots, K\}$ for a variable K . Our type system is also currently limited to producing linear expected bounds. We plan to extend the type system to handle higher-degree polynomial bounds. Randomized programs also often have logarithmic expected bounds, so it would be interesting to infer such bounds as well.

REFERENCES

- Bogdan Aman and Gabriel Ciobanu. 2019. Probabilities in Session Types. *Electronic Proceedings in Theoretical Computer Science* 303 (Sep 2019), 92–106. <https://doi.org/10.4204/eptcs.303.7>
- Suzana Andova. 1999. Process Algebra with Probabilistic Choice. In *Formal Methods for Real-Time and Probabilistic Systems*, Joost-Pieter Katoen (Ed.). Springer Berlin Heidelberg, Berlin, Heidelberg, 111–129.
- Martin Avanzini, Ugo Dal Lago, and Alexis Ghyselen. 2019. Type-Based Complexity Analysis of Probabilistic Functional Programs. In *Logic in Computer Science (LICS'19)*. <https://doi.org/10.1109/LICS.2019.8785725>
- Stephanie Balzer and Frank Pfenning. 2017. Manifest Sharing with Session Types. *Proc. ACM Program. Lang.* 1, ICFP, Article 37 (Aug. 2017), 29 pages. <https://doi.org/10.1145/3110281>
- J.A. Bergstra and J.W. Klop. 1984. Process algebra for synchronous communication. *Information and Control* 60, 1 (1984), 109 – 137. [https://doi.org/10.1016/S0019-9958\(84\)80025-X](https://doi.org/10.1016/S0019-9958(84)80025-X)
- Nathalie Bertrand, Igor Konnov, Marijana Lazic, and Josef Widder. 2019. Verification of Randomized Consensus Algorithms Under Round-Rigid Adversaries. In *30th International Conference on Concurrency Theory (CONCUR 2019) (Leibniz International Proceedings in Informatics (LIPIcs), Vol. 140)*, Wan Fokkink and Rob van Glabbeek (Eds.). Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik, Dagstuhl, Germany, 33:1–33:15. <https://doi.org/10.4230/LIPIcs.CONCUR.2019.33>
- Johannes Borgström, Ugo Dal Lago, Andrew D. Gordon, and Marcin Szymczak. 2016. A Lambda-Calculus Foundation for Universal Probabilistic Programming. In *Int. Conf. on Functional Programming (ICFP'16)*. <https://doi.org/10.1145/2951913.2951942>
- Luís Caires and Frank Pfenning. 2010. Session Types as Intuitionistic Linear Propositions. In *Proceedings of the 21st International Conference on Concurrency Theory (CONCUR 2010)*, P.Gastin and F.Laroussinie (Eds.). Springer LNCS 6269, Paris, France, 222–236.
- Luís Caires, Frank Pfenning, and Bernardo Toninho. 2014. Linear Logic Propositions as Session Types. *Mathematical Structures in Computer Science* 760 (11 2014).
- Simon Castellan and Hugo Paquet. 2019. Probabilistic Programming Inference via Intensional Semantics. In *European Symp. on Programming (ESOP'19)*. https://doi.org/10.1007/978-3-030-17184-1_12
- Ilario Cervesato and Andre Scedrov. 2009. Relating state-based and process-based concurrency through linear logic (full-version). *Information and Computation* 207, 10 (2009), 1044 – 1077. <https://doi.org/10.1016/j.ic.2008.11.006> Special issue: 13th Workshop on Logic, Language, Information and Computation (WoLLIC 2006).
- Krishnendu Chatterjee, Hongfei Fu, and Amir Kafshdar Goharshady. 2016. Termination Analysis of Probabilistic Programs Through Positivstellensatz's. In *Computer Aided Verif. (CAV'16)*. https://doi.org/10.1007/978-3-319-41528-4_1
- David Chaum. 1988. The Dining Cryptographers Problem: Unconditional Sender and Recipient Untraceability. *J. Cryptology* 1 (1988), 65–75. <https://doi.org/10.1007/BF00206326>
- Ankush Das, Stephanie Balzer, Jan Hoffmann, Frank Pfenning, and Ishani Santurkar. 2019. Resource-Aware Session Types for Digital Contracts. arXiv:1902.06056 [cs.PL]
- Ankush Das, Jan Hoffmann, and Frank Pfenning. 2018. Work Analysis with Resource-Aware Session Types. In *Proceedings of the 33rd Annual ACM/IEEE Symposium on Logic in Computer Science (Oxford, United Kingdom) (LICS '18)*. ACM, New York, NY, USA, 305–314. <https://doi.org/10.1145/3209108.3209146>
- Ankush Das and Frank Pfenning. 2020a. Rast: Resource-Aware Session Types with Arithmetic Refinements (System Description). In *5th International Conference on Formal Structures for Computation and Deduction (FSCD 2020) (Leibniz International Proceedings in Informatics (LIPIcs), Vol. 167)*, Zena M. Ariola (Ed.). Schloss Dagstuhl–Leibniz-Zentrum für Informatik, Dagstuhl, Germany, 33:1–33:17. <https://doi.org/10.4230/LIPIcs.FSCD.2020.33>
- Ankush Das and Frank Pfenning. 2020b. Session Types with Arithmetic Refinements. In *31st International Conference on Concurrency Theory (CONCUR 2020) (Leibniz International Proceedings in Informatics (LIPIcs), Vol. 171)*, Igor Konnov and Laura Kovács (Eds.). Schloss Dagstuhl–Leibniz-Zentrum für Informatik, Dagstuhl, Germany, 13:1–13:18. <https://doi.org/10.4230/LIPIcs.CONCUR.2020.13>

- Ankush Das and Frank Pfenning. 2020c. Verified Linear Session-Typed Concurrent Programming. In *Proceedings of the 22nd International Symposium on Principles and Practice of Declarative Programming* (Bologna, Italy) (PPDP '20). Association for Computing Machinery, New York, NY, USA, Article 7, 15 pages. <https://doi.org/10.1145/3414080.3414087>
- E.W. Dijkstra. 1971. Hierarchical ordering of sequential processes. *Acta Informatica* 1, 2 (1971), 115–138. <https://doi.org/10.1007/BF00289519>
- Vojtěch Forejt, Marta Kwiatkowska, Gethin Norman, and David Parker. 2011. *Automated Verification Techniques for Probabilistic Systems*. Springer Berlin Heidelberg, Berlin, Heidelberg, 53–113. https://doi.org/10.1007/978-3-642-21455-4_3
- Nate Foster, Dexter Kozen, Konstantinos Mamouras, Mark Reitblatt, and Alexandra Silva. 2016. Probabilistic netkat. In *European Symposium on Programming*. Springer, 282–309.
- Simon Gay and Malcolm Hole. 2005. Subtyping for session types in the pi calculus. *Acta Informatica* 42, 2 (01 Nov 2005), 191–225. <https://doi.org/10.1007/s00236-005-0177-z>
- Timon Gehr, Sasa Misailovic, Petar Tsankov, Laurent Vanbever, Pascal Wiesmann, and Martin Vechev. 2018. Bayonet: probabilistic inference for networks. *ACM SIGPLAN Notices* 53, 4 (2018), 586–602.
- Jean-Yves Girard. 1987. Linear Logic. *Theoretical Computer Science* 50 (1987), 1–102.
- J. Y. Girard and Y. Lafont. 1987. Linear logic and lazy computation. In *TAPSOFT '87*, Hartmut Ehrig, Robert Kowalski, Giorgio Levi, and Ugo Montanari (Eds.). Springer Berlin Heidelberg, Berlin, Heidelberg, 52–66.
- Hans Hansson and Bengt Jonsson. 1994. A Logic for Reasoning about Time and Reliability. *Formal Aspects of Computing* 6 (1994), 102–111.
- Hans A. Hansson and Lars-Ake Fredlund. 1994. *Time and Probability in Formal Design of Distributed Systems*. Elsevier Science Inc., USA.
- Mor Harchol-Balter. 2013. *Performance Modeling and Design of Computer Systems: Queueing Theory in Action* (1st ed.). Cambridge University Press, USA.
- Sergiu Hart, Micha Sharir, and Amir Pnueli. 1983. Termination of Probabilistic Concurrent Program. *Trans. on Prog. Lang. and Syst.* 5, 3 (July 1983). <https://doi.org/10.1145/2166.357214>
- Oltea Mihaela Herescu and Catuscia Palamidessi. 2000. Probabilistic Asynchronous π -Calculus. In *Foundations of Software Science and Computation Structures*, Jerzy Tiuryn (Ed.). Springer Berlin Heidelberg, Berlin, Heidelberg, 146–160.
- Jane Hillston. 1996. *A Compositional Approach to Performance Modelling*. Cambridge University Press, USA.
- C. A. R. Hoare. 1978. Communicating Sequential Processes. *Commun. ACM* 21, 8 (Aug. 1978), 666–677. <https://doi.org/10.1145/359576.359585>
- Jan Hoffmann, Ankush Das, and Shu-Chun Weng. 2017. Towards Automatic Resource Bound Analysis for OCaml. In *Proceedings of the 44th ACM SIGPLAN Symposium on Principles of Programming Languages* (Paris, France) (POPL 2017). Association for Computing Machinery, New York, NY, USA, 359–373. <https://doi.org/10.1145/3009837.3009842>
- Martin Hofmann and Steffen Jost. 2003. Static Prediction of Heap Space Usage for First-Order Functional Programs. In *30th Symposium on Principles of Programming Languages* (POPL '03). 185–197.
- Kohei Honda. 1993. Types for dyadic interaction. In *CONCUR'93*, Eike Best (Ed.). Springer Berlin Heidelberg, Berlin, Heidelberg, 509–523.
- Kohei Honda, Vasco T. Vasconcelos, and Makoto Kubo. 1998. Language primitives and type discipline for structured communication-based programming. In *Programming Languages and Systems*, Chris Hankin (Ed.). Springer Berlin Heidelberg, Berlin, Heidelberg, 122–138.
- Kohei Honda, Nobuko Yoshida, and Marco Carbone. 2008. Multiparty Asynchronous Session Types. In *Proceedings of the 35th Annual ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages* (San Francisco, California, USA) (POPL '08). ACM, New York, NY, USA, 273–284. <https://doi.org/10.1145/1328438.1328472>
- Omar Inverso, Hernán Melgratti, Luca Padovani, Catia Trubiani, and Emilio Tuosto. 2020. Probabilistic Analysis of Binary Sessions. In *31st International Conference on Concurrency Theory (CONCUR 2020) (Leibniz International Proceedings in Informatics (LIPIcs), Vol. 171)*, Igor Konnov and Laura Kovács (Eds.). Schloss Dagstuhl–Leibniz-Zentrum für Informatik, Dagstuhl, Germany, 14:1–14:21. <https://doi.org/10.4230/LIPIcs.CONCUR.2020.14>
- Alon Itai and Michael Rodeh. 1990. Symmetry breaking in distributed networks. *Information and Computation* 88, 1 (1990), 60 – 87. [https://doi.org/10.1016/0890-5401\(90\)90004-2](https://doi.org/10.1016/0890-5401(90)90004-2)
- Claire Jones. 1989. *Probabilistic Nondeterminism*. Ph.D. Dissertation. University of Edinburgh.
- Benjamin Lucien Kaminski, Joost-Pieter Katoen, Christoph Matheja, and Federico Olmedo. 2016. Weakest Precondition Reasoning for Expected Run–Times of Probabilistic Programs. In *European Symp. on Programming (ESOP'16)*. https://doi.org/10.1007/978-3-662-49498-1_15
- Donald E. Knuth and Andrew Chi-Chih Yao. 1976. The complexity of nonuniform random number generation.
- Dexter Kozen. 1981. Semantics of Probabilistic Programs. *J. Comput. Syst. Sci.* 22, 3 (June 1981). [https://doi.org/10.1016/0022-0000\(81\)90036-2](https://doi.org/10.1016/0022-0000(81)90036-2)

- Dexter Kozen. 1985. A Probabilistic PDL. *J. Comput. Syst. Sci.* 30, 2 (1985), 162–178. [https://doi.org/10.1016/0022-0000\(85\)90012-1](https://doi.org/10.1016/0022-0000(85)90012-1)
- Satoshi Kura, Natsuki Urabe, and Ichiro Hasuo. 2019. Tail Probability for Randomized Program Runtimes via Martingales for Higher Moments. In *Tools and Algs. for the Construct. and Anal. of Syst. (TACAS'19)*. https://doi.org/10.1007/978-3-030-17465-1_8
- Marta Kwiatkowska, Gethin Norman, and David Parker. 2007a. *Stochastic Model Checking*. Springer Berlin Heidelberg, Berlin, Heidelberg, 220–270. https://doi.org/10.1007/978-3-540-72522-0_6
- Marta Kwiatkowska, Gethin Norman, and David Parker. 2011. PRISM 4.0: Verification of Probabilistic Real-Time Systems. In *Computer Aided Verification*, Ganesh Gopalakrishnan and Shaz Qadeer (Eds.). Springer Berlin Heidelberg, Berlin, Heidelberg, 585–591.
- Marta Kwiatkowska, Gethin Norman, Jeremy Sproston, and Fuzhi Wang. 2007b. Symbolic model checking for probabilistic timed automata. *Information and Computation* 205, 7 (2007), 1027 – 1077. <https://doi.org/10.1016/j.ic.2007.01.004>
- Daniel Lehmann and Michael O. Rabin. 1981. On the Advantages of Free Choice: A Symmetric and Fully Distributed Solution to the Dining Philosophers Problem. In *Proceedings of the 8th ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages* (Williamsburg, Virginia) (POPL '81). Association for Computing Machinery, New York, NY, USA, 133–138. <https://doi.org/10.1145/567532.567547>
- Annabelle K. McIver and Carroll C. Morgan. 2005. *Abstraction, Refinement and Proof for Probabilistic Systems*. Springer Science+Business Media, Inc. <https://doi.org/10.1007/b138392>
- Annabelle K. McIver, Tahiry M. Rabehaja, and Georg Struth. 2016. Probabilistic Rely-Guarantee Calculus. *Theor. Comp. Sci.* 655, B (December 2016). <https://doi.org/10.1016/j.tcs.2016.01.016>
- Michael W. Mislove. 2000. Nondeterminism and Probabilistic Choice: Obeying the Laws. In *Int. Conf. on Concurrency Theory (CONCUR'00)*. https://doi.org/10.1007/3-540-44618-4_26
- Michael W. Mislove, Joël Ouaknine, and James Worrell. 2004. Axioms for Probability and Nondeterminism. *Electr. Notes Theor. Comp. Sci.* 96 (June 2004). <https://doi.org/10.1016/j.entcs.2004.04.019>
- Van Chan Ngo, Quentin Carbonneaux, and Jan Hoffmann. 2018. Bounded Expectations: Resource Analysis for Probabilistic Programs. In *Prog. Lang. Design and Impl. (PLDI'18)*. <https://doi.org/10.1145/3192366.3192394>
- Gethin Norman. 2004. *Analysing Randomized Distributed Algorithms*. Springer Berlin Heidelberg, Berlin, Heidelberg, 384–418. https://doi.org/10.1007/978-3-540-24611-4_11
- G. Norman, C. Palamidessi, D. Parker, and P. Wu. 2007. Model checking the probabilistic pi-calculus. In *Fourth International Conference on the Quantitative Evaluation of Systems (QEST 2007)*. 169–178.
- Federico Olmedo, Benjamin Lucien Kaminski, Joost-Pieter Katoen, and Christoph Matheja. 2016. Reasoning about Recursive Probabilistic Programs. In *Logic in Computer Science (LICS'16)*. <https://doi.org/10.1145/2933575.2935317>
- Lawrence Page, Sergey Brin, Rajeev Motwani, and Terry Winograd. 1999. *The PageRank Citation Ranking: Bringing Order to the Web*. Technical Report 1999-66. Stanford InfoLab. <http://ilpubs.stanford.edu:8090/422/> Previous number = SIDL-WP-1999-0120.
- Frank Pfenning and Dennis Griffith. 2015. Polarized Substructural Session Types. In *Foundations of Software Science and Computation Structures*, Andrew Pitts (Ed.). Springer Berlin Heidelberg, Berlin, Heidelberg, 3–22.
- Benjamin C. Pierce and David N. Turner. 2000. Local Type Inference. *ACM Trans. Program. Lang. Syst.* 22, 1 (Jan. 2000), 1–44. <https://doi.org/10.1145/345099.345100>
- Francois Pottier and Yann Régis-Gianas. 2019. *Menhir Reference Manual*.
- Micha Sharir, Amir Pnueli, and Sergiu Hart. 1984. Verification of Probabilistic Programs. *SIAM J. Comput.* 13, 2 (1984), 292–314. <https://doi.org/10.1137/0213021>
- Steffen Smolka, Praveen Kumar, David M Kahn, Nate Foster, Justin Hsu, Dexter Kozen, and Alexandra Silva. 2019. Scalable Verification of Probabilistic Networks. In *Proceedings of the 40th ACM SIGPLAN Conference on Programming Language Design and Implementation*. 190–203.
- RE Tarjan. 1985. Amortized computational complexity. *SIAM J. Algebraic Discrete Methods* 6, 2 (1985), 306–318.
- Joseph Tassarotti and Robert Harper. 2018. Verified Tail Bounds for Randomized Programs. In *Interactive Theorem Proving - 9th International Conference, ITP 2018, Held as Part of the Federated Logic Conference, FloC 2018, Oxford, UK, July 9-12, 2018, Proceedings (Lecture Notes in Computer Science, Vol. 10895)*, Jeremy Avigad and Assia Mahboubi (Eds.). Springer, 560–578. https://doi.org/10.1007/978-3-319-94821-8_33
- Joseph Tassarotti and Robert Harper. 2019. A Separation Logic for Concurrent Randomized Programs. *Proc. ACM Program. Lang.* 3, POPL, Article 64 (Jan. 2019), 30 pages. <https://doi.org/10.1145/3290377>
- Regina Tix, Klaus Keimel, and Gordon D. Plotkin. 2009. Semantic Domains for Combining Probability and Non-Determinism. *Electr. Notes Theor. Comp. Sci.* 222 (February 2009). <https://doi.org/10.1016/j.entcs.2009.01.002>
- Daniele Varacca. 2002. The Powerdomain of Indexed Valuations. In *Logic in Computer Science (LICS'02)*. <https://doi.org/10.1109/LICS.2002.1029838>

- Daniele Varacca. 2003. *Probability, Nondeterminism and Concurrency: Two Denotational Models for Probabilistic Computation*. Ph.D. Dissertation. University of Aarhus.
- Daniele Varacca and Glynn Winskel. 2006. Distributing Probability over Nondeterminism. *Math. Struct. Comp. Sci.* 16, 1 (February 2006). <https://doi.org/10.1017/S0960129505005074>
- Daniele Varacca and Nobuko Yoshida. 2007. Probabilistic π -Calculus and Event Structures. *Electronic Notes in Theoretical Computer Science* 190, 3 (2007), 147 – 166. <https://doi.org/10.1016/j.entcs.2007.07.009> Proceedings of the Fifth Workshop on Quantitative Aspects of Programming Languages (QAPL 2007).
- Philip Wadler. 2012. Propositions as Sessions. In *Proceedings of the 17th International Conference on Functional Programming (ICFP 2012)*. ACM Press, Copenhagen, Denmark, 273–286.
- Di Wang, Jan Hoffmann, and Thomas Reps. 2019b. A Denotational Semantics for Low-Level Probabilistic Programs with Nondeterminism. *Electr. Notes Theor. Comp. Sci.* 347 (November 2019). <https://doi.org/10.1016/j.entcs.2019.09.016>
- Di Wang, David M. Kahn, and Jan Hoffmann. 2020a. Raising Expectations: Automating Expected Cost Analysis with Types.
- Di Wang, David M. Kahn, and Jan Hoffmann. 2020b. Raising Expectations: Automating Expected Cost Analysis with Types. *Proc. ACM Program. Lang.* 4, ICFP (August 2020). <https://doi.org/10.1145/3408992>
- Peixin Wang, Hongfei Fu, Amir Kafshdar Goharshady, Krishnendu Chatterjee, Xudong Qin, and Wenjun Shi. 2019a. Cost Analysis of Nondeterministic Probabilistic Programs. In *Prog. Lang. Design and Impl. (PLDI'19)*. <https://doi.org/10.1145/3314221.3314581>
- David Williams. 1991. *Probability with Martingales*. Cambridge University Press. <https://doi.org/10.1017/CBO9780511813658>

A TECHNICAL DETAILS OF THE META THEORY

A.1 Proof of Preservation

We start by assuming several standard results for session types (Propositions 5 to 9).

PROPOSITION 5. *The substitutions below are type-preserving and thus admissible:*

- (i) *If $\Delta \Vdash^q P :: (x : A)$, then for any fresh y , it holds that $\Delta \Vdash^q P[y/x] :: (y : A)$.*
- (ii) *If $\Delta, (x : A) \Vdash^q P :: (z : C)$, then for any fresh y , it holds that $\Delta, (y : A) \Vdash^q P[y/x] :: (z : C)$.*

PROPOSITION 6. *If $\Delta \Vdash^q (C_1 \parallel \text{proc}(c, \mathcal{E}_c \langle d \rangle) \parallel C_2 \parallel \text{proc}(d, \mathcal{E}_d) \parallel C_3) :: \Gamma$, then $\Delta \Vdash^q (C_1 \parallel \text{proc}(c, \mathcal{E}_c \langle d \rangle) \parallel \text{proc}(d, \mathcal{E}_d) \parallel C_2 \parallel C_3) :: \Gamma$.*

PROPOSITION 7. *If $\Delta \Vdash^q (C_1 \parallel C_2 \parallel C_3) :: \Gamma$, then there exist Δ', q', Γ' such that $\Delta' \Vdash^{q'} C_2 :: \Gamma'$.*

PROPOSITION 8. *If $\Delta \Vdash^q (C_1 \parallel C_2 \parallel C_3) :: \Gamma$ and $\Delta' \Vdash^{q'} C_2 :: \Gamma'$, then for any C'_2 such that $\Delta' \Vdash^{q'} C'_2 :: \Gamma'$, it holds that $\Delta \Vdash^q (C_1 \parallel C'_2 \parallel C_3) :: \Gamma$.*

PROPOSITION 9. *If $\Delta \Vdash^q C :: \Gamma$, then for all $c \in \text{dom}(\Gamma)$, there exists exactly one $\text{proc}(c, \mathcal{E})$ for some \mathcal{E} , in C .*

The lemma below extends the rule (T:COMPOSE) to prepend multiple semantic objects to a configuration.

LEMMA 3. *If $\Delta_1, \Delta' \Vdash^{q_1} C_1 :: \Gamma$ and $\Delta_2 \Vdash^{q_2} C_2 :: (\Delta, \Delta')$, then $\Delta_1, \Delta_2 \Vdash^{q_1+q_2} (C_1 \parallel C_2) :: (\Delta, \Gamma)$.*

PROOF. By induction on the derivation of $\Delta_1, \Delta' \Vdash^{q_1} C_1 :: \Gamma$. □

Now we are able to prove preservation for single-process operational rules.

THEOREM 10 (PRESERVATION, PART I OF THEOREM 2). *If $\Delta \Vdash^q C :: \Gamma$ and $C \mapsto C'$, then $\Delta \Vdash^q C' :: \Gamma$.*

PROOF. By induction on the derivation of $C \mapsto C'$. By Propositions 7 and 8, it suffices to consider the atomic rewriting rules. Then we proceed by inversion on $\Delta \Vdash^q C :: \Gamma$.

Case:

(E:FLIP)

$$\frac{}{\text{proc}(c, w, \text{flip } p \mid (H \Rightarrow P_H \mid T \Rightarrow P_T)) \mapsto \text{proc}(c, \{\text{proc}(c, w, P_H) : p, \text{proc}(c, w, P_T) : 1 - p\})}$$

By inversion on the typing judgment, we have

$$\frac{\Delta_H \Vdash^{q_H} P_H :: (c : A_H) \quad \Delta_T \Vdash^{q_T} P_T :: (c : A_T) \quad \Delta = p \cdot \Delta_H +^L (1 - p) \cdot \Delta_T \quad A = p \cdot A_H +^R (1 - p) \cdot A_T \quad q - w = p \cdot q_H + (1 - p) \cdot q_T}{\Delta \Vdash^q \text{proc}(c, w, \text{flip } p \mid (H \Rightarrow P_H \mid T \Rightarrow P_T)) :: (c : A)}$$

Thus, by (T:PROC), we have $\Delta_H \Vdash^{q_H+w} \text{proc}(c, w, P_H) :: (c : A_H)$, $\Delta_T \Vdash^{q_T+w} \text{proc}(c, w, P_T) :: (c : A_T)$. Then we conclude by (T:DIST), and the fact that $p \cdot (q_H + w) + (1 - p) \cdot (q_T + w) = (p \cdot q_H + (1 - p) \cdot q_T) + w = (q - w) + w = q$.

Case:

(E:WORK)

$$\frac{}{\text{proc}(c, w, \text{work } \{r\} ; P) \mapsto \text{proc}(c, w + r, P)}$$

By inversion on the typing judgment, we have

$$\frac{\Delta \Vdash^{q-r} P :: (c : A)}{\Delta \Vdash^q \text{proc}(c, w, \text{work } \{r\} ; P) :: (c : A)}$$

Thus, by (T:PROC), we have $\Delta \Vdash^q \text{proc}(c, w + r, P) :: (c : A)$.

Case:

$$\text{(E:DIST)} \quad \frac{C_{i_0} \mapsto C'_{i_0}}{\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \mapsto \text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I} \setminus \{i_0\}} + \{C'_{i_0} : p_{i_0}\})}$$

By inversion on the typing judgment, we have

$$\frac{\forall i \in \mathcal{I} : \Delta_i \Vdash^{q_i} C_i :: (c : A_i) \quad \sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_i = \Delta \quad \sum_{i \in \mathcal{I}}^R p_i \cdot A_i = A \quad \sum_{i \in \mathcal{I}} p_i \cdot q_i = q}{\Delta \Vdash^q \text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) :: (c : A)}$$

By induction hypothesis, we have $\Delta_{i_0} \Vdash^{q_{i_0}} C'_{i_0} :: (c : A_{i_0})$.

Then we conclude by (T:DIST).

Case:

$$\text{(E:DEF)} \quad \frac{\overline{y'} : B \Vdash^r f = P_f :: (x' : C) \in \Sigma \quad b \text{ fresh}}{\text{proc}(c, w, x \leftarrow f \bar{d} ; Q) \mapsto \text{proc}(c, w, Q[b/x]) \parallel \text{proc}(b, 0, P_f[b/x', \bar{d}/\bar{y'}])}$$

By inversion on the typing judgment, we have

$$\frac{\overline{y'} : B \Vdash^r f = P_f :: (x' : C) \in \Sigma \quad \Delta', (x : C) \Vdash^{q-r} Q :: (c : A)}{\Delta', \bar{d} : B \Vdash^q \text{proc}(c, w, x \leftarrow f \bar{d} ; Q) :: (c : A)}$$

Thus, by Proposition 5 and (T:PROC), we have $\Delta', (b : C) \Vdash^{q-r} \text{proc}(c, w, Q[b/x]) :: (c : A)$, as well as $\bar{d} : B \Vdash^r \text{proc}(b, 0, P_f[b/x', \bar{d}/\bar{y'}]) :: (b : C)$.

Then we conclude by (T:COMPOSE).

□

THEOREM 11 (PRESERVATION, PART II OF THEOREM 2). *If $\Delta \Vdash^q C :: \Gamma$ and $C \xRightarrow{d, \kappa} C'$, then $\Delta \Vdash^q C' :: \Gamma$.*

PROOF. By induction on the derivation of $C \xRightarrow{d, \kappa} C'$. By Propositions 6 to 9, it suffices to consider the atomic rewriting rules. Then we proceed by inversion of $\Delta \Vdash^q C :: \Gamma$.

Case:

$$\text{(C:SDIST:R)} \quad \frac{\text{proc}(c, \{(\text{proc}(c, w, Q) \parallel C_i) : p_i\}_{i \in \mathcal{I}}) \xRightarrow{d, \kappa} C'}{\text{proc}(c, w, Q) \parallel \text{proc}(d, \{C_i : p_i\}_{i \in \mathcal{I}}) \xRightarrow{d, \kappa} C'}$$

By inversion on the typing judgment, we have

$$\frac{\begin{array}{c} \forall i \in \mathcal{I} : \Delta_{2,i} \Vdash^{q_{2,i}} C_i :: (d : B_i) \\ \Delta_2 = \sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_{2,i} \\ B = \sum_{i \in \mathcal{I}}^R p_i \cdot B_i \\ q_2 = \sum_{i \in \mathcal{I}} p_i \cdot q_{2,i} \end{array}}{\Delta_1, \bar{d} : B \Vdash^{q_1} \text{proc}(c, w, Q) :: (c : A) \quad \Delta_2 \Vdash^{q_2} \text{proc}(d, \{C_i : p_i\}_{i \in \mathcal{I}}) :: (d : B)} \\ \hline \Delta_1, \Delta_2 \Vdash^{q_1+q_2} (\text{proc}(c, w, Q) \parallel \text{proc}(d, \{C_i : p_i\}_{i \in \mathcal{I}})) :: (c : A)$$

We proceed by inversion on $B = \sum_{i \in \mathcal{I}}^R p_i \cdot B_i$.

- If $B \neq \oplus_P \{\dots\}$, then $B_i = B$ and $\Delta_1, \Delta_{2,i} \stackrel{q_1+q_{2,i}}{\Vdash} (\text{proc}(c, w, Q) \parallel \mathcal{C}_i) :: (c : A)$ for all $i \in \mathcal{I}$.

Then we derive $\Delta_1, \Delta_2 \stackrel{q_1+q_2}{\Vdash} \text{proc}(c, \{(\text{proc}(c, w, Q) \parallel \mathcal{C}_i) : p_i\}_{i \in \mathcal{I}}) :: (c : A)$ by (T:DIST).

- Otherwise, suppose that $B = \oplus_P \{\ell^{p'_\ell} : B_\ell\}_{\ell \in L}$, and $B_i = \oplus_P \{\ell^{p_{\ell,i}} : B_\ell\}_{\ell \in L}$ for $i \in \mathcal{I}$, such that for each $\ell \in L$, it holds that $p'_\ell = \sum_{i \in \mathcal{I}} p_i \cdot p_{\ell,i}$.

In this case, Q must be a probabilistic case expression $\text{pcase } d \ (\ell \Rightarrow Q_\ell)_{\ell \in L}$.

By inversion on the typing judgment, we have

$$\frac{\begin{array}{c} \forall \ell \in L : \Delta_{1,\ell}, (d : B_\ell) \stackrel{q_{1,\ell}}{\Vdash} Q_\ell :: (c : A_\ell) \\ \hline \sum_{\ell \in L}^L p'_\ell \cdot \Delta_{1,\ell} = \Delta_1 \quad \sum_{\ell \in L}^R p'_\ell \cdot A_\ell = A \quad \sum_{\ell \in L} p'_\ell \cdot q_{1,\ell} = q_1 - w \end{array}}{\Delta_1, (d : \oplus_P \{\ell^{p'_\ell} : B_\ell\}_{\ell \in L}) \stackrel{q_1}{\Vdash} \text{proc}(c, w, \text{pcase } d \ (\ell \Rightarrow Q_\ell)_{\ell \in L}) :: (c : A)}$$

Thus, for all $i \in \mathcal{I}$, define $\Delta'_{1,i} := \sum_{\ell \in L}^L p_{\ell,i} \cdot \Delta_{1,\ell}$, $A'_i := \sum_{\ell \in L}^R p_{\ell,i} \cdot A_\ell$, $q'_{1,i} := \sum_{\ell \in L} p_{\ell,i} \cdot q_{1,\ell} + w$.

By $(\oplus_P L)$ and (T:PROC), we have $\Delta'_{1,i}, (d : B_i) \stackrel{q'_{1,i}}{\Vdash} \text{proc}(c, w, Q) :: (c : A'_i)$.

Then by (T:COMPOSE), we have $\Delta'_{1,i}, \Delta_{2,i} \stackrel{q'_{1,i}+q_{2,i}}{\Vdash} (\text{proc}(c, w, Q) \parallel \mathcal{C}_i) :: (c : A'_i)$.

Then we derive $\Delta_1, \Delta_2 \stackrel{q_1+q_2}{\Vdash} \text{proc}(c, \{(\text{proc}(c, w, Q) \parallel \mathcal{C}_i) : p_i\}_{i \in \mathcal{I}}) :: (c : A)$ by (T:DIST), and the fact that

$$\begin{aligned} \sum_{i \in \mathcal{I}}^L p_i \cdot (\Delta'_{1,i}, \Delta_{2,i}) &= \sum_{i \in \mathcal{I}}^L p_i \cdot \sum_{\ell \in L}^L p_{\ell,i} \cdot \Delta_{1,\ell}, \Delta_2 \\ &= \sum_{\ell \in L}^L (\sum_{i \in \mathcal{I}} p_i \cdot p_{\ell,i}) \cdot \Delta_{1,\ell}, \Delta_2 \\ &= \sum_{\ell \in L}^L p'_\ell \cdot \Delta_{1,\ell}, \Delta_2 \\ &= \Delta_1, \Delta_2, \\ \sum_{i \in \mathcal{I}}^R p_i \cdot A'_i &= \sum_{i \in \mathcal{I}}^R p_i \cdot \sum_{\ell \in L}^R p_{\ell,i} \cdot A_\ell \\ &= \sum_{\ell \in L}^R (\sum_{i \in \mathcal{I}} p_i \cdot p_{\ell,i}) \cdot A_\ell \\ &= \sum_{\ell \in L}^R p'_\ell \cdot A_\ell \\ &= A, \\ \sum_{i \in \mathcal{I}} p_i \cdot (q'_{1,i} + q_{2,i}) &= \sum_{i \in \mathcal{I}} p_i \cdot (\sum_{\ell \in L} p_{\ell,i} \cdot q_{1,\ell} + w) + q_2 \\ &= \sum_{\ell \in L} (\sum_{i \in \mathcal{I}} p_i \cdot p_{\ell,i}) \cdot q_{1,\ell} + w + q_2 \\ &= \sum_{\ell \in L} p'_\ell \cdot q_{1,\ell} + w + q_2 \\ &= q_1 - w + w + q_2 \\ &= q_1 + q_2. \end{aligned}$$

Then, by induction hypothesis, we conclude that $\Delta_1, \Delta_2 \stackrel{q_1+q_2}{\Vdash} \mathcal{C}' :: (c : A)$.

Case:

$$\begin{array}{c} \text{(C:SDIST:L)} \\ \hline \text{proc}(c, \{(\mathcal{C}_i \parallel \text{proc}(d, w, P)) : p_i\}_{i \in \mathcal{I}}) \stackrel{d, \kappa}{\Longrightarrow} \mathcal{C}' \\ \hline \text{proc}(c, \{\mathcal{C}_i : p_i\}_{i \in \mathcal{I}}) \parallel \text{proc}(d, w, P) \stackrel{d, \kappa}{\Longrightarrow} \mathcal{C}' \end{array}$$

By inversion on the typing judgment, we have

$$\begin{array}{c}
 \forall i \in \mathcal{I} : \Delta_{1,i}, (d : B_i) \Vdash^{q_{1,i}} C_i :: (c : A_i) \\
 \Delta_1 = \sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_{1,i} \quad B = \sum_{i \in \mathcal{I}}^L p_i \cdot B_i \\
 A = \sum_{i \in \mathcal{I}}^R p_i \cdot A_i \\
 q_1 = \sum_{i \in \mathcal{I}} p_i \cdot q_{1,i} \\
 \hline
 \Delta_1, (d : B) \Vdash^{q_1} \text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) :: (c : A) \quad \Delta_2 \Vdash^{q_2} \text{proc}(d, w, P) :: (d : B) \\
 \hline
 \Delta_1, \Delta_2 \Vdash^{q_1+q_2} \text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \parallel \text{proc}(d, w, P) :: (c : A)
 \end{array}$$

We proceed by inversion on $B = \sum_{i \in \mathcal{I}}^L p_i \cdot B_i$.

- If $B \neq \&_P\{\dots\}$, then $B_i = B$ and $\Delta_{1,i}, \Delta_2 \Vdash^{q_{1,i}+q_2} (C_i \parallel \text{proc}(d, w, P)) :: (c : A_i)$ for all $i \in \mathcal{I}$.

Then we derive $\Delta_1, \Delta_2 \Vdash^{q_1+q_2} \text{proc}(c, \{(C_i \parallel \text{proc}(d, w, P)) : p_i\}_{i \in \mathcal{I}}) :: (c : A)$ by (T:DIST).

- Otherwise, suppose that $B = \&_P\{\ell^{p'_\ell} : B_\ell\}_{\ell \in L}$, and $B_i = \&_P\{\ell^{p_{\ell,i}} : B_\ell\}_{\ell \in L}$ for $i \in \mathcal{I}$, such that for each $\ell \in L$, it holds that $p'_\ell = \sum_{i \in \mathcal{I}} p_i \cdot p_{\ell,i}$.

In this case, P must be a probabilistic case expression $\text{pcase } d \ (\ell \Rightarrow P_\ell)_{\ell \in L}$, or a forwarding expression $d \leftrightarrow e$.

– By inversion on the typing judgment, we have

$$\begin{array}{c}
 \forall \ell \in L : \Delta_{2,\ell} \Vdash^{q_{2,\ell}} P_\ell :: (c : B_\ell) \quad \sum_{\ell \in L}^L p'_\ell \cdot \Delta_{2,\ell} = \Delta_2 \quad \sum_{\ell \in L} p'_\ell \cdot q_{2,\ell} = q_2 - w \\
 \hline
 \Delta_2 \Vdash^{q_2} \text{proc}(d, w, \text{pcase } d \ (\ell \Rightarrow P_\ell)_{\ell \in L}) :: (d : \&_P\{\ell^{p'_\ell} : B_\ell\}_{\ell \in L})
 \end{array}$$

Thus, for all $i \in \mathcal{I}$, define $\Delta'_{2,i} := \sum_{\ell \in L}^L p_{\ell,i} \cdot \Delta_{2,\ell}$, $q'_{2,i} := \sum_{\ell \in L} p_{\ell,i} \cdot q_{2,\ell} + w$.

By $(\&_P R)$ and (T:PROC), we have $\Delta'_{2,i} \Vdash^{q'_{2,i}} \text{proc}(d, w, P) :: (d : B_i)$.

Then by Lemma 3, we have $\Delta_{1,i}, \Delta'_{2,i} \Vdash^{q_{1,i}+q'_{2,i}} (C_i \parallel \text{proc}(d, w, P)) :: (c : A_i)$.

Then we derive $\Delta_1, \Delta_2 \Vdash^{q_1+q_2} \text{proc}(c, \{(C_i \parallel \text{proc}(d, w, P)) : p_i\}_{i \in \mathcal{I}}) :: (c : A)$ by (T:DIST), and the fact that

$$\begin{aligned}
 \sum_{i \in \mathcal{I}}^L p_i \cdot (\Delta_{1,i}, \Delta'_{2,i}) &= \Delta_1, \sum_{i \in \mathcal{I}}^L p_i \cdot \sum_{\ell \in L}^L p_{\ell,i} \cdot \Delta_{2,\ell} \\
 &= \Delta_1, \sum_{\ell \in L}^L (\sum_{i \in \mathcal{I}} p_i \cdot p_{\ell,i}) \cdot \Delta_{2,\ell} \\
 &= \Delta_1, \sum_{\ell \in L}^L p'_\ell \cdot \Delta_{2,\ell} \\
 &= \Delta_1, \Delta_2, \\
 \sum_{i \in \mathcal{I}} p_i \cdot (q_{1,i} + q'_{2,i}) &= q_1 + \sum_{i \in \mathcal{I}} p_i \cdot (\sum_{\ell \in L} p_{\ell,i} \cdot q_{2,\ell} + w) \\
 &= q_1 + \sum_{\ell \in L} (\sum_{i \in \mathcal{I}} p_i \cdot p_{\ell,i}) \cdot q_{2,\ell} + w \\
 &= q_1 + \sum_{\ell \in L} p'_\ell \cdot q_{2,\ell} + w \\
 &= q_1 + q_2 - w + w \\
 &= q_1 + q_2.
 \end{aligned}$$

– By inversion on the typing judgment, we have

$$\begin{array}{c}
 (e : \&_P\{\ell^{p'_\ell} : B_\ell\}_{\ell \in L}) \overset{0}{\Vdash} d \leftrightarrow e :: (d : \&_P\{\ell^{p'_\ell} : B_\ell\}_{\ell \in L}) \\
 \hline
 (e : \&_P\{\ell^{p'_\ell} : B_\ell\}_{\ell \in L}) \overset{w}{\Vdash} \text{proc}(d, w, d \leftrightarrow e) :: (d : \&_P\{\ell^{p'_\ell} : B_\ell\}_{\ell \in L})
 \end{array}$$

Thus, for all $i \in \mathcal{I}$, define $\Delta'_{2,i} := (e : B_i)$, $q'_{2,i} := w$.

By (id) and (T:PROC), we have $\Delta'_{2,i} \Vdash^{q'_{2,i}} \text{proc}(d, w, P) :: (d : B_i)$.

Then by Lemma 3, we have $\Delta_{1,i}, \Delta'_{2,i} \Vdash^{q_{1,i}+q'_{2,i}} (C_i \parallel \text{proc}(d, w, P)) :: (c : A_i)$.

Then we derive $\Delta_1, (e : B) \Vdash^{q_1+w} \text{proc}(c, \{(C_i \parallel \text{proc}(d, w, P)) : p_i\}_{i \in \mathcal{I}}) :: (c : A)$ by (T:DIST), and the fact that

$$\begin{aligned} \sum_{i \in \mathcal{I}}^L p_i \cdot (\Delta_{1,i}, \Delta'_{2,i}) &= \Delta_1, (e : \sum_{i \in \mathcal{I}}^L p_i \cdot B_i) \\ &= \Delta_1, (e : B), \\ \sum_{i \in \mathcal{I}} p_i \cdot (q_{1,i} + q'_{2,i}) &= q_1 + \sum_{i \in \mathcal{I}} p_i \cdot w \\ &= q_1 + w. \end{aligned}$$

Then, by induction hypothesis, we conclude that $\Delta_1, \Delta_2 \Vdash^{q_1+q_2} C' :: (c : A)$.

Case:

$$\begin{array}{c} \text{(C:BDIST:D)} \\ \text{proc}(c, \{(C_i \parallel C'_j) : p_i \cdot p'_j\}_{i \in \mathcal{I}, j \in \mathcal{J}}) \xRightarrow{d, \text{det}} C'' \\ \hline \text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \parallel \text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}}) \xRightarrow{d, \text{det}} C'' \end{array}$$

By inversion on the typing judgement, we have

$$\begin{array}{c} \forall i \in \mathcal{I} : \Delta_{1,i}, (d : B_{1,i}) \Vdash^{q_{1,i}} C_i :: (c : A_i) \quad \forall j \in \mathcal{J} : \Delta_{2,j} \Vdash^{q_{2,j}} C'_j :: (d : B_{2,j}) \\ \Delta_1 = \sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_{1,i} \quad B = \sum_{i \in \mathcal{I}}^L p_i \cdot B_{1,i} \quad \Delta_2 = \sum_{j \in \mathcal{J}}^L p'_j \cdot \Delta_{2,j} \\ A = \sum_{i \in \mathcal{I}}^R p_i \cdot A_i \quad B = \sum_{j \in \mathcal{J}}^R p'_j \cdot B_{2,j} \\ q_1 = \sum_{i \in \mathcal{I}} p_i \cdot q_{1,i} \quad q_2 = \sum_{j \in \mathcal{J}} p'_j \cdot q_{2,j} \\ \hline \Delta_1, (d : B) \Vdash^{q_1} \text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) :: (c : A) \quad \Delta_2 \Vdash^{q_2} \text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}}) :: (d : B) \\ \hline \Delta_1, \Delta_2 \Vdash^{q_1+q_2} \text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \parallel \text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}}) :: (c : A) \end{array}$$

Because $B \neq \oplus_P \{\dots\}$ and $B \neq \otimes_P \{\dots\}$, we have $B_{1,i} = B$ for all $i \in \mathcal{I}$, $B_{2,j} = B$ for all $j \in \mathcal{J}$, by shallow weighted sums.

Thus for all $i \in \mathcal{I}$, $j \in \mathcal{J}$, we have $\Delta_{1,i}, \Delta_{2,j} \Vdash^{q_{1,i}+q_{2,j}} (C_i \parallel C'_j) :: (c : A_i)$ by Lemma 3.

Then we derive $\Delta_1, \Delta_2 \Vdash^{q_1+q_2} \text{proc}(c, \{(C_i \parallel C'_j) : p_i \cdot p'_j\}_{i \in \mathcal{I}, j \in \mathcal{J}}) :: (c : A)$ by (T:DIST), and the fact that

$$\begin{aligned} \sum_{i \in \mathcal{I}, j \in \mathcal{J}}^L (p_i \cdot p'_j) \cdot (\Delta_{1,i}, \Delta_{2,j}) &= \sum_{i \in \mathcal{I}, j \in \mathcal{J}}^L (p_i \cdot p'_j) \cdot \Delta_{1,i}, \sum_{i \in \mathcal{I}, j \in \mathcal{J}}^L (p_i \cdot p'_j) \cdot \Delta_{2,j} \\ &= \sum_{j \in \mathcal{J}}^L p'_j \cdot \sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_{1,i}, \sum_{i \in \mathcal{I}}^L p_i \cdot \sum_{j \in \mathcal{J}}^L p'_j \cdot \Delta_{2,j} \\ &= \sum_{j \in \mathcal{J}}^L p'_j \cdot \Delta_1, \sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_2 \\ &= \Delta_1, \Delta_2, \\ \sum_{i \in \mathcal{I}, j \in \mathcal{J}}^R (p_i \cdot p'_j) \cdot A_i &= \sum_{j \in \mathcal{J}}^R p'_j \cdot \sum_{i \in \mathcal{I}}^R p_i \cdot A_i \\ &= \sum_{j \in \mathcal{J}}^R p'_j \cdot A \\ &= A, \\ \sum_{i \in \mathcal{I}, j \in \mathcal{J}} (p_i \cdot p'_j) \cdot (q_{1,i} + q_{2,j}) &= \sum_{i \in \mathcal{I}, j \in \mathcal{J}} (p_i \cdot p'_j) \cdot q_{1,i} + \sum_{i \in \mathcal{I}, j \in \mathcal{J}} (p_i \cdot p'_j) \cdot q_{2,j} \\ &= \sum_{j \in \mathcal{J}} p'_j \cdot \sum_{i \in \mathcal{I}} p_i \cdot q_{1,i} + \sum_{i \in \mathcal{I}} p_i \cdot \sum_{j \in \mathcal{J}} p'_j \cdot q_{2,j} \\ &= \sum_{j \in \mathcal{J}} p'_j \cdot q_1 + \sum_{i \in \mathcal{I}} p_i \cdot q_2 \\ &= q_1 + q_2. \end{aligned}$$

Then, by induction hypothesis, we conclude that $\Delta_1, \Delta_2 \Vdash^{q_1+q_2} C'' :: (c : A)$.

Case:

$$\begin{array}{c} \text{(C:BDIST:R)} \\ \frac{\text{proc}(c, \{(\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \parallel C'_j) : p'_j\}_{j \in \mathcal{J}}) \xRightarrow{d, \&P} C''}{\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \parallel \text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}}) \xRightarrow{d, \&P} C''} \end{array}$$

By inversion on the typing judgement, we have

$$\begin{array}{c} \forall j \in \mathcal{J} : \Delta_{2,j} \stackrel{q_{2,j}}{\Vdash} C'_j :: (d : B_{2,j}) \\ \Delta_2 = \sum_{j \in \mathcal{J}}^L p'_j \cdot \Delta_{2,j} \\ B = \sum_{j \in \mathcal{J}}^R p'_j \cdot B_{2,j} \\ q_2 = \sum_{j \in \mathcal{J}} p'_j \cdot q_{2,j} \\ \hline \Delta_1, (d : B) \stackrel{q_1}{\Vdash} \text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) :: (c : A) \quad \Delta_2 \stackrel{q_2}{\Vdash} \text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}}) :: (d : B) \\ \hline \Delta_1, \Delta_2 \stackrel{q_1+q_2}{\Vdash} \text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \parallel \text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}}) :: (c : A) \end{array}$$

Because $B = \&P\{\ell^{p'_\ell} : B_\ell\}_{\ell \in L}$, we know that $B_{2,j} = B$ for all $j \in \mathcal{J}$.

Thus, for each $j \in \mathcal{J}$, by (T:COMPOSE), we have $\Delta_1, \Delta_{2,j} \stackrel{q_1+q_{2,j}}{\Vdash} (\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \parallel C'_j) :: (c : A)$.

Then we derive $\Delta_1, \Delta_2 \stackrel{q_1+q_2}{\Vdash} \text{proc}(c, \{(\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \parallel C'_j) : p'_j\}_{j \in \mathcal{J}}) :: (c : A)$ by (T:DIST).

Thus, by induction hypothesis, we conclude that $\Delta_1, \Delta_2 \stackrel{q_1+q_2}{\Vdash} C'' :: (c : A)$.

Case:

$$\begin{array}{c} \text{(C:BDIST:L)} \\ \frac{\text{proc}(c, \{(C_i \parallel \text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}})) : p_i\}_{i \in \mathcal{I}}) \xRightarrow{d, \oplus P} C''}{\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \parallel \text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}}) \xRightarrow{d, \oplus P} C''} \end{array}$$

By inversion on the typing judgement, we have

$$\begin{array}{c} \forall i \in \mathcal{I} : \Delta_{1,i}, (d : B_{1,i}) \stackrel{q_{1,i}}{\Vdash} C_i :: (c : A_i) \\ \Delta_1 = \sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_{1,i} \quad B = \sum_{i \in \mathcal{I}}^L p_i \cdot B_{1,i} \\ A = \sum_{i \in \mathcal{I}}^R p_i \cdot A_i \\ q_1 = \sum_{i \in \mathcal{I}} p_i \cdot q_{1,i} \\ \hline \Delta_1, (d : B) \stackrel{q_1}{\Vdash} \text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) :: (c : A) \quad \Delta_2 \stackrel{q_2}{\Vdash} \text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}}) :: (d : B) \\ \hline \Delta_1, \Delta_2 \stackrel{q_1+q_2}{\Vdash} \text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \parallel \text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}}) :: (c : A) \end{array}$$

Because $B = \oplus P\{\ell^{p'_\ell} : B_\ell\}_{\ell \in L}$, we know that $B_{1,i} = B$ for all $i \in \mathcal{I}$.

Thus, for each $i \in \mathcal{I}$, by Lemma 3, we have $\Delta_{1,i}, \Delta_2 \stackrel{q_{1,i}+q_2}{\Vdash} (C_i \parallel \text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}})) :: (c : A_i)$.

Then we derive $\Delta_1, \Delta_2 \stackrel{q_1+q_2}{\Vdash} \text{proc}(c, \{(C_i \parallel \text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}})) : p_i\}_{i \in \mathcal{I}}) :: (c : A)$ by (T:DIST).

Thus, by induction hypothesis, we conclude that $\Delta_1, \Delta_2 \stackrel{q_1+q_2}{\Vdash} C'' :: (c : A)$.

Case:

$$\begin{array}{c} \text{(C:DIST)} \\ \frac{C_{i_0} \xRightarrow{d, \kappa} C'_{i_0}}{\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \xRightarrow{d, \kappa} \text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I} \setminus \{i_0\}} \# \{C'_{i_0} : p_{i_0}\})} \end{array}$$

Appeal to induction hypothesis and (T:DIST).

Case:

(C:⊕_P)

$$\text{proc}(c, w_c, \text{pcase } d (\ell \Rightarrow Q_\ell)_{\ell \in L}) \parallel \text{proc}(d, w_d, d..k ; P) \xRightarrow{d, \oplus_P} \text{proc}(c, w_c, Q_k) \parallel \text{proc}(d, w_d, P)$$

By inversion on the typing judgment, we have

$$\frac{\Delta_1, (d : B_k) \Vdash^{q_1 - w_c} Q_k :: (c : A)}{\frac{\Delta_1, (d : \oplus_P \{\ell^{P_\ell} : B_\ell\}_{\ell \in L}) \Vdash^{q_1} \text{proc}(c, w_c, \text{pcase } d (\ell \Rightarrow Q_\ell)_{\ell \in L}) :: (c : A)}{p_k = 1 \quad p_j = 0 \ (j \neq k) \quad \Delta_2 \Vdash^{q_2 - w_d} P :: (d : B_k)}}{\Delta_2 \Vdash^{q_2} \text{proc}(d, w_d, d..k ; P) :: (d : \oplus_P \{\ell^{P_\ell} : B_\ell\}_{\ell \in L})}}{\Delta_1, \Delta_2 \Vdash^{q_1 + q_2} (\text{proc}(c, w_c, \text{pcase } d (\ell \Rightarrow Q_\ell)_{\ell \in L}) \parallel \text{proc}(d, w_d, d..k ; P)) :: (c : A)}$$

By (T:PROC), we have $\Delta_1, (d : B_k) \Vdash^{q_1} \text{proc}(c, w_c, Q_k) :: (c : A)$ and $\Delta_2 \Vdash^{q_2} \text{proc}(d, w_d, P) :: (d : B_k)$. Then we conclude by (T:COMPOSE).

Case:

(C:⊗_P)

$$\text{proc}(c, w_c, d..k ; Q) \parallel \text{proc}(d, w_d, \text{pcase } d (\ell \Rightarrow P_\ell)_{\ell \in L}) \xRightarrow{d, \otimes_P} \text{proc}(c, w_c, Q) \parallel \text{proc}(d, w_d, P_k)$$

By inversion on the typing judgment, we have

$$\frac{p_k = 1 \quad p_j = 0 \ (j \neq k) \quad \Delta_1, (c : B_k) \Vdash^{q_1 - w_c} Q :: (d : A)}{\frac{\Delta_1, (d : \otimes_P \{\ell^{P_\ell} : B_\ell\}_{\ell \in L}) \Vdash^{q_1} \text{proc}(c, w_c, d..k ; Q) :: (c : A)}{\Delta_2 \Vdash^{q_2 - w_d} P_k :: (d : B_k)}}{\Delta_2 \Vdash^{q_2} \text{proc}(d, w_d, \text{pcase } d (\ell \Rightarrow P_\ell)_{\ell \in L}) :: (d : \otimes_P \{\ell^{P_\ell} : B_\ell\}_{\ell \in L})}}{\Delta_1, \Delta_2 \Vdash^{q_1 + q_2} (\text{proc}(c, w_c, d..k ; Q) \parallel \text{proc}(d, w_d, \text{pcase } d (\ell \Rightarrow P_\ell)_{\ell \in L})) :: (c : A)}$$

By (T:PROC), we have $\Delta_1, (d : B_k) \Vdash^{q_1} \text{proc}(c, w_c, Q) :: (c : A)$ and $\Delta_2 \Vdash^{q_2} \text{proc}(d, w_d, P_k) :: (d : B_k)$. Then we conclude by (T:COMPOSE).

Case:

(C:⊕)

$$\text{proc}(c, w_c, \text{case } d (\ell \Rightarrow Q_\ell)_{\ell \in L}) \parallel \text{proc}(d, w_d, d..k ; P) \xRightarrow{d, \det} \text{proc}(c, w_c, Q_k) \parallel \text{proc}(d, w_d, P)$$

By inversion on the typing judgment, we have

$$\frac{\Delta_1, (d : B_k) \Vdash^{q_1 - w_c} Q_k :: (c : A)}{\frac{\Delta_1, (d : \oplus \{\ell : B_\ell\}_{\ell \in L}) \Vdash^{q_1} \text{proc}(c, w_c, \text{case } d (\ell \Rightarrow Q_\ell)_{\ell \in L}) :: (c : A)}{\Delta_2 \Vdash^{q_2 - w_d} P :: (d : B_k)}}{\Delta_2 \Vdash^{q_2} \text{proc}(d, w_d, d..k ; P) :: (d : \oplus \{\ell : B_\ell\}_{\ell \in L})}}{\Delta_1, \Delta_2 \Vdash^{q_1 + q_2} (\text{proc}(c, w_c, \text{case } d (\ell \Rightarrow Q_\ell)_{\ell \in L}) \parallel \text{proc}(d, w_d, d..k ; P)) :: (c : A)}$$

By (T:PROC), we have $\Delta_1, (d : B_k) \Vdash^{q_1} \text{proc}(c, w_c, Q_k) :: (c : A)$ and $\Delta_2 \Vdash^{q_2} \text{proc}(d, w_d, P) :: (d : B_k)$. Then we conclude by (T:COMPOSE).

Case:

(C:⊗)

$$\text{proc}(c, w_c, d..k ; Q) \parallel \text{proc}(d, w_d, \text{case } d (\ell \Rightarrow P_\ell)_{\ell \in L}) \xRightarrow{d, \det} \text{proc}(c, w_c, Q) \parallel \text{proc}(d, w_d, P_k)$$

By inversion on the typing judgment, we have

$$\frac{\frac{\Delta_1, (c : B_k) \Vdash^{q_1 - w_c} Q :: (d : A)}{\Delta_1, (d : \&\{\ell : B_\ell\}_{\ell \in L}) \Vdash^{q_1} \text{proc}(c, w_c, d.k ; Q) :: (c : A)} \quad \frac{\Delta_2 \Vdash^{q_2 - w_d} P_k :: (d : B_k)}{\Delta_2 \Vdash^{q_2} \text{proc}(d, w_d, \text{case } d (\ell \Rightarrow P_\ell)_{\ell \in L}) :: (d : \&\{\ell : B_\ell\}_{\ell \in L})}}{\Delta_1, \Delta_2 \Vdash^{q_1 + q_2} (\text{proc}(c, w_c, d.k ; Q) \parallel \text{proc}(d, w_d, \text{case } d (\ell \Rightarrow P_\ell)_{\ell \in L})) :: (c : A)}$$

By (T:PROC), we have $\Delta_1, (d : B_k) \Vdash^{q_1} \text{proc}(c, w_c, Q) :: (c : A)$ and $\Delta_2 \Vdash^{q_2} \text{proc}(d, w_d, P_k) :: (d : B_k)$. Then we conclude by (T:COMPOSE).

Case:

(C:1)

$$\frac{}{\text{proc}(c, w_c, \text{wait } d ; Q) \parallel \text{proc}(d, w_d, \text{close } d) \xrightarrow{d, \text{det}} \text{proc}(c, w_c + w_d, Q)}$$

By inversion on the typing judgement, we have

$$\frac{\frac{\Delta \Vdash^{q_1 - w_c} Q :: (c : A)}{\Delta, (d : 1) \Vdash^{q_1} \text{proc}(c, w_c, \text{wait } d ; Q) :: (c : A)} \quad \frac{(\cdot) \Vdash^0 \text{close } d :: (d : 1)}{(\cdot) \Vdash^{w_d} \text{proc}(d, w_d, \text{close } d) :: (d : 1)}}{\Delta \Vdash^{q_1 + w_d} (\text{proc}(c, w_c, \text{wait } d ; Q) \parallel \text{proc}(d, w_d, \text{close } d)) :: (c : A)}$$

By (T:PROC), we have $\Delta \Vdash^{q_1 + w_d} \text{proc}(c, w_c + w_d, Q) :: (c : A)$.

Case:

(C:ID)

$$\frac{\text{proc}(c, w_c, Q\langle d \rangle) \text{ (d, } \kappa \text{)-blocked}}{\text{proc}(c, w_c, Q\langle d \rangle) \parallel \text{proc}(d, w_d, d \leftrightarrow e) \xrightarrow{d, \kappa} \text{proc}(c, w_c + w_d, Q\langle d \rangle[e/d])}$$

By inversion on the typing judgment, we have

$$\frac{\frac{\Delta_1, (d : B) \Vdash^{q_1 - w_c} Q\langle d \rangle :: (c : A)}{\Delta_1, (d : B) \Vdash^{q_1} \text{proc}(c, w_c, Q\langle d \rangle) :: (c : A)} \quad \frac{(e : B) \Vdash^0 d \leftrightarrow e :: (d : B)}{(e : B) \Vdash^{w_d} \text{proc}(d, w_d, d \leftrightarrow e) :: (d : B)}}{\Delta_1, (e : B) \Vdash^{q_1 + w_d} (\text{proc}(c, w_c, Q\langle d \rangle) \parallel \text{proc}(d, w_d, d \leftrightarrow e)) :: (c : A)}$$

By Proposition 5 and (T:PROC), we have $\Delta_1, (e : B) \Vdash^{q_1 + w_d} \text{proc}(c, w_c + w_d, Q\langle d \rangle[e/d]) :: (c : A)$.

Case:

(C:▷)

$$\frac{}{\text{proc}(c, w_c, \text{get } d \{r\} ; Q) \parallel \text{proc}(d, w_d, \text{pay } d \{r\} ; P) \xrightarrow{d, \text{det}} \text{proc}(c, w_c, Q) \parallel \text{proc}(d, w_d, P)}$$

By inversion on the typing judgment, we have

$$\frac{\frac{\Delta_1, (d : B) \Vdash^{q_1 - w_c + r} Q :: (c : A)}{\Delta_1, (d : \triangleright^r B) \Vdash^{q_1} \text{proc}(c, w_c, \text{get } d \{r\} ; Q) :: (c : A)} \quad \frac{\Delta_2 \Vdash^{q_2 - w_d - r} P :: (d : B)}{\Delta_2 \Vdash^{q_2} \text{proc}(d, w_d, \text{pay } d \{r\} ; P) :: (d : \triangleright^r B)}}{\Delta_1, \Delta_2 \Vdash^{q_1 + q_2} (\text{proc}(c, w_c, \text{get } d \{r\} ; Q) \parallel \text{proc}(d, w_d, \text{pay } d \{r\} ; P)) :: (c : A)}$$

By (T:PROC), we have $\Delta_1, (d : B) \Vdash^{q_1 + r} \text{proc}(c, w_c, Q) :: (c : A)$ and $\Delta_2 \Vdash^{q_2 - r} \text{proc}(d, w_d, P) :: (d : B)$. Then we conclude by (T:COMPOSE).

Case:

(C:⋄)

$$\text{proc}(c, w_c, \text{pay } d \{r\} ; Q) \parallel \text{proc}(d, w_d, \text{get } d \{r\} ; P) \xRightarrow{d, \text{det}} \text{proc}(c, w_c, Q) \parallel \text{proc}(d, w_d, P)$$

By inversion on the typing judgment, we have

$$\frac{\Delta_1, (d : B) \beta^{1-w_c-r} Q :: (c : A)}{\Delta_1, (d : \text{⋄}^r B) \Vdash^{q_1} \text{proc}(c, w_c, \text{pay } d \{r\} ; Q) :: (c : A)} \quad \frac{\Delta_2 \beta^{2-w_d+r} P :: (d : B)}{\Delta_2 \Vdash^{q_2} \text{proc}(d, w_d, \text{get } d \{r\} ; P) :: (d : \text{⋄}^r B)}$$

$$\Delta_1, \Delta_2 \Vdash^{q_1+q_2} (\text{proc}(c, w_c, \text{pay } d \{r\} ; Q) \parallel \text{proc}(d, w_d, \text{get } d \{r\} ; P)) :: (c : A)$$

By (T:PROC), we have $\Delta_1, (d : B) \Vdash^{q_1-r} \text{proc}(c, w_c, Q) :: (c : A)$ and $\Delta_2 \Vdash^{q_2+r} \text{proc}(d, w_d, P) :: (d : B)$. Then we conclude by (T:COMPOSE).

Case:

(C:⊗)

$$\text{proc}(c, w_c, y \leftarrow \text{recv } d ; Q) \parallel \text{proc}(d, w_d, \text{send } d e ; P) \xRightarrow{d, \text{det}} \text{proc}(c, w_c, Q[e/y]) \parallel \text{proc}(d, w_d, P)$$

By inversion on the typing judgment, we have

$$\frac{\Delta_1, (y : B), (d : C) \beta^{1-w_c} Q :: (c : A)}{\Delta_1, (d : B \otimes C) \Vdash^{q_1} \text{proc}(c, w_c, y \leftarrow \text{recv } d ; Q) :: (c : A)} \quad \frac{\Delta_2 \beta^{2-w_d} P :: (d : C)}{\Delta_2, (e : B) \Vdash^{q_2} \text{proc}(d, w_d, \text{send } d e ; P) :: (d : B \otimes C)}$$

$$\Delta_1, \Delta_2, (e : B) \Vdash^{q_1+q_2} (\text{proc}(c, w_c, y \leftarrow \text{recv } d ; Q) \parallel \text{proc}(d, w_d, \text{send } d e ; P)) :: (c : A)$$

By (T:PROC) and Proposition 5, we have $\Delta_1, (e : B), (d : C) \Vdash^{q_1} \text{proc}(c, w_c, Q[e/y]) :: (c : A)$ and $\Delta_2 \Vdash^{q_2} \text{proc}(d, w_d, P) :: (d : C)$.

Then we conclude by (T:COMPOSE).

Case:

(C:→)

$$\text{proc}(c, w_c, \text{send } d e ; Q) \parallel \text{proc}(d, w_d, y \leftarrow \text{recv } d ; P) \xRightarrow{d, \text{det}} \text{proc}(c, w_c, Q) \parallel \text{proc}(d, w_d, P[e/y])$$

By inversion on the typing judgment, we have

$$\frac{\Delta_1, (d : C) \beta^{1-w_c} Q :: (c : A)}{\Delta_1, (d : B \rightarrow C), (e : B) \Vdash^{q_1} \text{proc}(c, w_c, \text{send } d e ; Q) :: (c : A)} \quad \frac{\Delta_2, (y : B) \beta^{2-w_d} P :: (d : C)}{\Delta_2 \Vdash^{q_2} \text{proc}(d, w_d, y \leftarrow \text{recv } d ; P) :: (d : B \rightarrow C)}$$

$$\Delta_1, \Delta_2, (e : B) \Vdash^{q_1+q_2} (\text{proc}(c, w_c, \text{send } d e ; Q) \parallel \text{proc}(d, w_d, y \leftarrow \text{recv } d ; P)) :: (c : A)$$

By (T:PROC) and Proposition 5, we have $\Delta_1, (d : C) \Vdash^{q_1} \text{proc}(c, w_c, Q) :: (c : A)$ and $\Delta_2, (e : B) \Vdash^{q_2} \text{proc}(d, w_d, P[e/y]) :: (d : C)$.

Then we conclude by (T:COMPOSE).

□

A.2 Proof of Global Progress

The $\text{FV}(\cdot)$ function collects *free* session variables and it is defined as follows:

$$\begin{aligned}
 \text{FV}^R(\text{proc}(c, w, P)) &:= \{c\} \\
 \text{FV}^R(\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}})) &:= \bigcup_{i \in \mathcal{I}} \text{FV}^R(C_i) \\
 \text{FV}^R(\mathcal{O} \parallel \mathcal{C}) &:= (\text{FV}^R(\mathcal{O}) \cup \text{FV}^R(\mathcal{C})) \setminus \text{FV}^L(\mathcal{O}) \\
 \text{FV}^L(\text{proc}(c, w, P)) &:= \text{FV}(P) \setminus \{c\} \\
 \text{FV}^L(\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}})) &:= \bigcup_{i \in \mathcal{I}} \text{FV}^L(C_i) \\
 \text{FV}^L(\mathcal{O} \parallel \mathcal{C}) &:= (\text{FV}^L(\mathcal{O}) \cup \text{FV}^L(\mathcal{C})) \setminus \text{FV}^R(\mathcal{C})
 \end{aligned}$$

First we prove a basic property of the $\text{FV}(\cdot)$ function.

PROPOSITION 12. *If $\Delta \Vdash^q \mathcal{C} :: \Gamma$, then $\text{FV}^L(\mathcal{C}) = \text{dom}(\Delta)$ and $\text{FV}^R(\mathcal{C}) = \text{dom}(\Gamma)$.*

PROOF. By induction on the derivation of $\Delta \Vdash^q \mathcal{C} :: \Gamma$. □

We can now prove that a live configuration can make a single-process execution step.

LEMMA 4. *If \mathcal{C} live, then there exists \mathcal{C}' such that $\mathcal{C} \mapsto \mathcal{C}'$.*

PROOF. By induction on the derivation of \mathcal{C} live. The analysis for (L:FLIP), (L:WORK), (L:DEF) is straightforward.

Case:

$$\frac{\text{(L:DIST)} \quad \mathcal{C}_{i_0} \text{ live}}{\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \text{ live}}$$

By induction hypothesis, we know that $\mathcal{C}_{i_0} \mapsto \mathcal{C}'_{i_0}$ for some \mathcal{C}'_{i_0} .

Then we conclude by (E:DIST) that $\mathcal{C} \mapsto \text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I} \setminus \{i_0\}} \# \{\mathcal{C}'_{i_0} : p_{i_0}\})$.

Case:

$$\frac{\text{(L:COMPOSE:H)} \quad \mathcal{O} \text{ live}}{(\mathcal{O} \parallel \mathcal{C}') \text{ live}}$$

By induction hypothesis, we know that $\mathcal{O} \mapsto \mathcal{D}$ for some \mathcal{D} .

Then $\mathcal{C} \mapsto \mathcal{D} \parallel \mathcal{C}'$ by multiset rewriting.

Case:

$$\frac{\text{(L:COMPOSE:T)} \quad \mathcal{C}' \text{ live}}{(\mathcal{O} \parallel \mathcal{C}') \text{ live}}$$

By induction hypothesis, we know that $\mathcal{C}' \mapsto \mathcal{C}''$ for some \mathcal{C}'' .

Then $\mathcal{C} \mapsto \mathcal{O} \parallel \mathcal{C}''$ by multiset rewriting. □

We prove two propositions Propositions 13 and 14 to construct a communication execution step between a (d, κ) -poised configuration and a (d, κ) -blocked configuration (Lemma 5).

PROPOSITION 13. *If \mathcal{C} (d, κ) -poised and $\Delta \Vdash^q \mathcal{C} :: \Gamma$, then $d \in \text{dom}(\Gamma)$ and $\kappa \succ \|\Gamma(d)\|$.*

PROOF. By induction on the derivation of \mathcal{C} (d, κ) -poised, followed by inversion on $\Delta \Vdash^q \mathcal{C} :: \Gamma$.

Case:

(T:DIST)

$$\frac{\text{(PR:DIST)} \quad \mathcal{C}_{i_0} (d, \kappa)\text{-poised}}{\text{proc}(e, \{\mathcal{C}_i : p_i\}_{i \in \mathcal{I}}) (d, \kappa)\text{-poised}} \quad \frac{\begin{array}{c} \forall i \in \mathcal{I} : \Delta_i \Vdash^{q_i} \mathcal{C}_i :: (e : C_i) \\ \Sigma_{i \in \mathcal{I}}^L p_i \cdot \Delta_i = \Delta \quad \Sigma_{i \in \mathcal{I}}^R p_i \cdot C_i = C \quad \Sigma_{i \in \mathcal{I}} p_i \cdot q_i = q \end{array}}{\Delta \Vdash^q \text{proc}(e, \{\mathcal{C}_i : p_i\}_{i \in \mathcal{I}}) :: (e : C)}$$

In this case, $\mathcal{C} = \text{proc}(e, \{\mathcal{C}_i : p_i\}_{i \in \mathcal{I}})$, $\Gamma = (e : C)$.

By induction hypothesis with \mathcal{C}_{i_0} , we know that $d = e$ and $\kappa = |\mathcal{C}_{i_0}| = |\mathcal{C}|$.

Case:

(T:COMPOSE)

$$\frac{\text{(PR:COMPOSE:H)} \quad \mathcal{O} (d, \kappa)\text{-poised}}{(\mathcal{O} \parallel \mathcal{C}_2) (d, \kappa)\text{-poised}} \quad \frac{\begin{array}{c} \Delta_1, \Omega \Vdash^{q_1} \mathcal{O} :: (c : A) \quad \Delta_2 \Vdash^{q_2} \mathcal{C}_2 :: (\Gamma', \Omega) \end{array}}{\Delta_1, \Delta_2 \Vdash^{q_1+q_2} (\mathcal{O} \parallel \mathcal{C}_2) :: (\Gamma', (c : A))}$$

In this case, $\mathcal{C} = (\mathcal{O} \parallel \mathcal{C}_2)$, $\Delta = (\Delta_1, \Delta_2)$, $\Gamma = (\Gamma', (c : A))$, $q = q_1 + q_2$.

By induction hypothesis with \mathcal{O} , we know that $d = c$ and $\kappa = |\mathcal{A}|$.

Case:

(T:COMPOSE)

$$\frac{\text{(PR:COMPOSE:T)} \quad \mathcal{C}_2 (d, \kappa)\text{-poised} \quad d \notin \text{FV}^L(\mathcal{O})}{(\mathcal{O} \parallel \mathcal{C}_2) (d, \kappa)\text{-poised}} \quad \frac{\begin{array}{c} \Delta_1, \Omega \Vdash^{q_1} \mathcal{O} :: (c : A) \quad \Delta_2 \Vdash^{q_2} \mathcal{C}_2 :: (\Gamma', \Omega) \end{array}}{\Delta_1, \Delta_2 \Vdash^{q_1+q_2} (\mathcal{O} \parallel \mathcal{C}_2) :: (\Gamma', (c : A))}$$

In this case, $\mathcal{C} = (\mathcal{O} \parallel \mathcal{C}_2)$, $\Delta = (\Delta_1, \Delta_2)$, $\Gamma = (\Gamma', (c : A))$, $q = q_1 + q_2$.

By induction hypothesis with \mathcal{C}_2 , we know that $d \in \text{dom}(\Gamma', \Omega)$ and $\kappa = |(\Gamma', \Omega)(d)|$.

Because $d \notin \text{FV}^L(\mathcal{O})$, we have $d \notin \text{dom}(\Omega)$ by Proposition 12. Thus $d \in \text{dom}(\Gamma')$.

□

PROPOSITION 14. If $\mathcal{C} (d, \kappa)$ -blocked and $\Delta \Vdash^q \mathcal{C} :: \Gamma$, then $d \in \text{dom}(\Delta)$ and $\kappa = |\Delta(d)|$.

PROOF. By induction on the derivation of $\mathcal{C} (d, \kappa)$ -blocked, followed by inversion on $\Delta \Vdash^q \mathcal{C} :: \Gamma$. □

LEMMA 5. If $\mathcal{C} = (\mathcal{C}_1 \parallel \mathcal{C}_2)$ such that $\mathcal{C}_1 (d, \kappa)$ -blocked, $\mathcal{C}_2 (d, \kappa)$ -poised (or $\mathcal{C}_2 (d, \top)$ -poised), $\Delta_1, \Delta', (d : B) \Vdash^{q_1} \mathcal{C}_1 :: \Gamma_1$, $\Delta_2 \Vdash^{q_2} \mathcal{C}_2 :: (\Gamma_2, \Delta', (d : B))$, and $\kappa = |B|$, then $\mathcal{C} \xRightarrow{d, \kappa} \mathcal{C}'$ for some \mathcal{C}' .

PROOF. By nested induction on $\mathcal{C}_1 (d, \kappa)$ -blocked and $\mathcal{C}_2 (d, \kappa)$ -poised, followed by inversion on the typing judgments.

Case:

(T:DIST)

$$\frac{\text{(BL:DIST)} \quad \mathcal{C}_{1, i_0} (d, \kappa)\text{-blocked}}{\text{proc}(c, \{\mathcal{C}_{1, i} : p_i\}_{i \in \mathcal{I}}) (d, \kappa)\text{-blocked}} \quad \frac{\begin{array}{c} \forall i \in \mathcal{I} : \Delta_{1, i}, (d : B_i) \Vdash^{q_{1, i}} \mathcal{C}_{1, i} :: (c : A_i) \\ \Sigma_{i \in \mathcal{I}}^L p_i \cdot \Delta_{1, i} = \Delta_1 \quad \Sigma_{i \in \mathcal{I}}^L p_i \cdot B_i = B \\ \Sigma_{i \in \mathcal{I}}^R p_i \cdot A_i = A \quad \Sigma_{i \in \mathcal{I}} p_i \cdot q_{1, i} = q_1 \end{array}}{\Delta_1, (d : B) \Vdash^{q_1} \text{proc}(c, \{\mathcal{C}_{1, i} : p_i\}_{i \in \mathcal{I}}) :: (c : A)}$$

(T:DIST)

$$\frac{\text{(PR:DIST)} \quad \mathcal{C}'_{2, j_0} (d, \kappa)\text{-poised}}{\text{proc}(d, \{\mathcal{C}'_{2, j} : p'_j\}_{j \in \mathcal{J}}) (d, \kappa)\text{-poised}} \quad \frac{\begin{array}{c} \forall j \in \mathcal{J} : \Delta_{2, j} \Vdash^{q_{2, j}} \mathcal{C}'_{2, j} :: (d : B'_j) \\ \Sigma_{j \in \mathcal{J}}^L p'_j \cdot \Delta_{2, j} = \Delta_2 \\ \Sigma_{j \in \mathcal{J}}^R p'_j \cdot B'_j = B \quad \Sigma_{j \in \mathcal{J}} p'_j \cdot q_{2, j} = q_2 \end{array}}{\Delta_2 \Vdash^{q_2} \text{proc}(d, \{\mathcal{C}'_{2, j} : p'_j\}_{j \in \mathcal{J}}) :: (d : B)}$$

In this case, $\mathcal{C}_1 = \text{proc}(c, \{\mathcal{C}_{1, i}\}_{i \in \mathcal{I}})$, $\mathcal{C}_2 = \text{proc}(d, \{\mathcal{C}'_{2, j} : p'_j\}_{j \in \mathcal{J}})$, $\Delta' = (\cdot)$, $\Gamma_1 = (c : A)$, $\Gamma_2 = (\cdot)$.

By case analysis on κ .

- If $\kappa = \text{det}$, then we know that $B \neq \oplus_P\{\dots\}$ and $B \neq \&_P\{\dots\}$.

Thus, $B_i = B$ for $i \in \mathcal{I}$ and $B'_j = B$ for $j \in \mathcal{J}$.

Then by induction hypothesis with $\mathcal{C}_{1,i_0}, \mathcal{C}'_{2,j_0}$, we know that $(\mathcal{C}_{1,i_0} \parallel \mathcal{C}'_{2,j_0}) \xRightarrow{d, \text{det}} \mathcal{D}$ for some \mathcal{D} .

By (C:DIST) and (C:BDIST:D), we conclude that $\mathcal{C} \xRightarrow{d, \text{det}} \text{proc}(c, \{(\mathcal{C}_{1,i} \parallel \mathcal{C}'_{2,j}) : p_i \cdot p'_j\}_{i \in \mathcal{I}, j \in \mathcal{J} : i \neq i_0 \vee j \neq j_0} \# \{\mathcal{D} : p_{i_0} \cdot p'_{j_0}\})$.

- If $\kappa = \oplus_P$, then we know that $B = \oplus_P\{\dots\}$.

Thus, $B_i = B$ for all $i \in \mathcal{I}$.

Then by induction hypothesis with $\mathcal{C}_{1,i_0}, \mathcal{C}'_2$, we know that $(\mathcal{C}_{1,i_0} \parallel \mathcal{C}_2) \xRightarrow{d, \oplus_P} \mathcal{D}$ for some \mathcal{D} .

By (C:DIST) and (C:BDIST:L), we conclude that $\mathcal{C} \xRightarrow{d, \oplus_P} \text{proc}(c, \{(\mathcal{C}_{1,i} \parallel \mathcal{C}_2) : p_i\}_{i \in \mathcal{I} \setminus \{i_0\}} \# \{\mathcal{D} : p_{i_0}\})$.

- If $\kappa = \&_P$, then we know that $B = \&_P\{\dots\}$.

Thus, $B'_j = B$ for all $j \in \mathcal{J}$.

Then by induction hypothesis with $\mathcal{C}_1, \mathcal{C}'_{2,j_0}$, we know that $(\mathcal{C}_1 \parallel \mathcal{C}'_{2,j_0}) \xRightarrow{d, \&_P} \mathcal{D}$ for some \mathcal{D} .

By (C:DIST) and (C:BDIST:R), we conclude that $\mathcal{C} \xRightarrow{d, \&_P} \text{proc}(c, \{(\mathcal{C}_1 \parallel \mathcal{C}'_{2,j}) : p'_j\}_{j \in \mathcal{J} \setminus \{j_0\}} \# \{\mathcal{D} : p'_{j_0}\})$.

Case:

$$\frac{\text{(BL:COMPOSE:H)} \quad \mathcal{O}_1 (d, \kappa)\text{-blocked} \quad d \notin \text{FV}^R(\mathcal{C}'_1)}{(\mathcal{O}_1 \parallel \mathcal{C}'_1) (d, \kappa)\text{-blocked}} \quad \frac{\text{(T:COMPOSE)} \quad \Delta_{11}, \Delta'_1, \Omega, (d : B) \Vdash^{q_{11}} \mathcal{O}_1 :: (c : A) \quad \Delta_{12}, \Delta'_2 \Vdash^{q_{12}} \mathcal{C}'_1 :: (\Gamma'_1, \Omega)}{\Delta_{11}, \Delta_{12}, \Delta'_1, \Delta'_2, (d : B) \Vdash^{q_{11}+q_{12}} (\mathcal{O}_1 \parallel \mathcal{C}'_1) :: (\Gamma'_1, (c : A))}$$

In this case, $\mathcal{C}_1 = (\mathcal{O}_1 \parallel \mathcal{C}'_1)$, $\Delta_1 = (\Delta_{11}, \Delta_{12})$, $\Delta' = (\Delta'_1, \Delta'_2)$, $\Gamma_1 = (\Gamma'_1, (c : A))$, $q_1 = q_{11} + q_{12}$.

By Proposition 14 with \mathcal{O}_1 , Proposition 12, and $d \notin \text{FV}^R(\mathcal{C}'_1)$, d can only be placed in the way showed above.

By induction hypothesis with $\mathcal{O}_1, \mathcal{C}_2$, we know that $(\mathcal{O}_1 \parallel \mathcal{C}_2) \xRightarrow{d, \kappa} \mathcal{D}$ for some \mathcal{D} .

Then $\mathcal{C} \xRightarrow{d, \kappa} \mathcal{C}'_1 \parallel \mathcal{D}$ by multiset rewriting.

Case:

$$\frac{\text{(BL:COMPOSE:T)} \quad \mathcal{C}'_1 (d, \kappa)\text{-blocked}}{(\mathcal{O}_1 \parallel \mathcal{C}'_1) (d, \kappa)\text{-blocked}} \quad \frac{\text{(T:COMPOSE)} \quad \Delta_{11}, \Delta'_1, \Omega \Vdash^{q_{11}} \mathcal{O}_1 :: (c : A) \quad \Delta_{12}, \Delta'_2, (d : B) \Vdash^{q_{12}} \mathcal{C}'_1 :: (\Gamma'_1, \Omega)}{\Delta_{11}, \Delta_{12}, \Delta'_1, \Delta'_2, (d : B) \Vdash^{q_{11}+q_{12}} (\mathcal{O}_1 \parallel \mathcal{C}'_1) :: (\Gamma'_1, (c : A))}$$

In this case, $\mathcal{C}_1 = (\mathcal{O}_1 \parallel \mathcal{C}'_1)$, $\Delta_1 = (\Delta_{11}, \Delta_{12})$, $\Delta' = (\Delta'_1, \Delta'_2)$, $\Gamma_1 = (\Gamma'_1, (c : A))$, $q_1 = q_{11} + q_{12}$.

By Proposition 14 with \mathcal{C}'_1 , d can only be placed in the way showed above.

By induction hypothesis with $\mathcal{C}'_1, \mathcal{C}_2$, we know that $(\mathcal{C}'_1 \parallel \mathcal{C}_2) \xRightarrow{d, \kappa} \mathcal{D}$ for some \mathcal{D} .

Then $\mathcal{C} \xRightarrow{d, \kappa} \mathcal{O}_1 \parallel \mathcal{D}$ by multiset rewriting.

Case:

$$\begin{array}{c}
 \text{(BL:}\dots\text{)} \quad \dots \\
 \hline
 \text{proc}(c, w, Q\langle d \rangle) \text{ } (d, \kappa)\text{-blocked}
 \end{array}
 \quad
 \begin{array}{c}
 \text{(T:}\dots\text{)} \quad \dots \\
 \hline
 \Delta_1, \Delta', (d : B) \Vdash^{q_1} \text{proc}(c, w, Q\langle d \rangle) :: (c : A)
 \end{array}$$

$$\begin{array}{c}
 \text{(PR:COMPOSE:H)} \\
 \mathcal{O}_2 \text{ } (d, \kappa)\text{-poised} \\
 \hline
 (\mathcal{O}_2 \parallel \mathcal{C}'_2) \text{ } (d, \kappa)\text{-poised}
 \end{array}
 \quad
 \begin{array}{c}
 \text{(T:COMPOSE)} \\
 \Delta_{21}, \Omega \Vdash^{q_{21}} \mathcal{O}_2 :: (d : B) \quad \Delta_{22} \Vdash^{q_{22}} \mathcal{C}'_2 :: (\Gamma_2, \Delta', \Omega) \\
 \hline
 \Delta_{21}, \Delta_{22} \Vdash^{q_{21}+q_{22}} (\mathcal{O}_2 \parallel \mathcal{C}'_2) :: (\Gamma_2, \Delta', (d : B))
 \end{array}$$

In this case, $\mathcal{C}_1 = \text{proc}(c, w, Q\langle d \rangle)$, $\mathcal{C}_2 = (\mathcal{O}_2 \parallel \mathcal{C}'_2)$, $\Gamma_1 = (c : A)$, $\Delta_2 = (\Delta_{21}, \Delta_{22})$, $q_2 = q_{21} + q_{22}$. By Proposition 13 with \mathcal{O}_2 , d can only be placed in the way showed above.

By induction hypothesis with $\mathcal{C}_1, \mathcal{O}_2$, we know that $(\mathcal{C}_1 \parallel \mathcal{O}_2) \xRightarrow{d, \kappa} \mathcal{D}$ for some \mathcal{D} .

Then $\mathcal{C} \xRightarrow{d, \kappa} \mathcal{D} \parallel \mathcal{C}'_2$ by multiset rewriting.

Case: We consider the case where \mathcal{C}_1 is a leaf and \mathcal{C}_2 is a sequence of objects.

•

$$\begin{array}{c}
 \text{(BL:}\dots\text{)} \quad \dots \\
 \hline
 \text{proc}(c, w, Q\langle d \rangle) \text{ } (d, \kappa)\text{-blocked}
 \end{array}
 \quad
 \begin{array}{c}
 \text{(T:}\dots\text{)} \quad \dots \\
 \hline
 \Delta'', (d : B), (e : C) \Vdash^{q_1} \text{proc}(c, w, Q\langle d \rangle) :: (c : A)
 \end{array}$$

$$\begin{array}{c}
 \text{(PR:COMPOSE:T)} \\
 \mathcal{C}'_2 \text{ } (d, \kappa)\text{-poised} \quad d \notin \text{FV}^L(\mathcal{O}_2) \\
 \hline
 (\mathcal{O}_2 \parallel \mathcal{C}'_2) \text{ } (d, \kappa)\text{-poised}
 \end{array}
 \quad
 \begin{array}{c}
 \text{(T:COMPOSE)} \\
 \Delta_{21}, \Omega \Vdash^{q_{21}} \mathcal{O}_2 :: (e : C) \quad \Delta_{22} \Vdash^{q_{22}} \mathcal{C}'_2 :: (\Gamma_2, \Delta'', (d : B), \Omega) \\
 \hline
 \Delta_{21}, \Delta_{22} \Vdash^{q_{21}+q_{22}} (\mathcal{O}_2 \parallel \mathcal{C}'_2) :: (\Gamma_2, \Delta'', (d : B), (e : C))
 \end{array}$$

In this case, $\mathcal{C}_1 = \text{proc}(c, w, Q\langle d \rangle)$, $\mathcal{C}_2 = (\mathcal{O}_2 \parallel \mathcal{C}'_2)$, $\Delta' = (\Delta'', (e : C))$, $\Gamma_1 = (c : A)$, $\Delta_2 = (\Delta_{21}, \Delta_{22})$, $q_2 = q_{21} + q_{22}$.

By Proposition 13 with \mathcal{C}'_2 , Proposition 12, and $d \notin \text{FV}^L(\mathcal{O}_2)$, d can only be placed in the way showed above.

By induction hypothesis with $\mathcal{C}_1, \mathcal{C}'_2$, we know that $(\mathcal{C}_1 \parallel \mathcal{C}'_2) \xRightarrow{d, \kappa} \mathcal{D}$ for some \mathcal{D} .

Then $\mathcal{C} \xRightarrow{d, \kappa} \mathcal{D} \parallel \mathcal{O}_2$ by multiset rewriting.

•

$$\begin{array}{c}
 \text{(BL:}\dots\text{)} \quad \dots \\
 \hline
 \text{proc}(c, w, Q\langle d \rangle) \text{ } (d, \kappa)\text{-blocked}
 \end{array}
 \quad
 \begin{array}{c}
 \text{(T:}\dots\text{)} \quad \dots \\
 \hline
 \Delta', (d : B) \Vdash^{q_1} \text{proc}(c, w, Q\langle d \rangle) :: (c : A)
 \end{array}$$

$$\begin{array}{c}
 \text{(PR:COMPOSE:T)} \\
 \mathcal{C}'_2 \text{ } (d, \kappa)\text{-poised} \quad d \notin \text{FV}^L(\mathcal{O}_2) \\
 \hline
 (\mathcal{O}_2 \parallel \mathcal{C}'_2) \text{ } (d, \kappa)\text{-poised}
 \end{array}
 \quad
 \begin{array}{c}
 \text{(T:COMPOSE)} \\
 \Delta_{21}, \Omega \Vdash^{q_{21}} \mathcal{O}_2 :: (e : C) \quad \Delta_{22} \Vdash^{q_{22}} \mathcal{C}'_2 :: (\Gamma'_2, \Delta'', (d : B), \Omega) \\
 \hline
 \Delta_{21}, \Delta_{22} \Vdash^{q_{21}+q_{22}} (\mathcal{O}_2 \parallel \mathcal{C}'_2) :: (\Gamma'_2, \Delta', (d : B), (e : C))
 \end{array}$$

In this case, $\mathcal{C}_1 = \text{proc}(c, w, Q\langle d \rangle)$, $\mathcal{C}_2 = (\mathcal{O}_2 \parallel \mathcal{C}'_2)$, $\Gamma_1 = (c : A)$, $\Delta_2 = (\Delta_{21}, \Delta_{22})$, $\Gamma_2 = (\Gamma'_2, (e : C))$, $q_2 = q_{21} + q_{22}$.

By Proposition 13 with \mathcal{C}'_2 , Proposition 12, and $d \notin \text{FV}^L(\mathcal{O}_2)$, d can only be placed in the way showed above.

By induction hypothesis with $\mathcal{C}_1, \mathcal{C}'_2$, we know that $(\mathcal{C}_1 \parallel \mathcal{C}'_2) \xRightarrow{d, \kappa} \mathcal{D}$ for some \mathcal{D} .

Then $\mathcal{C} \xRightarrow{d, \kappa} \mathcal{D} \parallel \mathcal{O}_2$ by multiset rewriting.

□

As a direct corollary of Lemma 5, the lemma below states the result with the (d, κ) -comm relation.

LEMMA 6. *If $(\cdot) \Vdash^q \mathcal{C} :: \Gamma$ and $\mathcal{C} (d, \kappa)$ -comm, then $\mathcal{C} \xRightarrow{d, \kappa} \mathcal{C}'$ for some \mathcal{C}' .*

PROOF. By induction on the derivation of $\mathcal{C} (d, \kappa)$ -comm, followed by inversion on $(\cdot) \Vdash^q \mathcal{C} :: \Gamma$.

Case:

$$\frac{\text{(CM:DIST)} \quad \mathcal{C}_{i_0} (d, \kappa)\text{-comm}}{\text{proc}(e, \{\mathcal{C}_i : p_i\}_{i \in \mathcal{I}}) (d, \kappa)\text{-comm}}$$

$$\frac{\text{(T:DIST)} \quad \forall i \in \mathcal{I} : (\cdot) \Vdash^{q_i} \mathcal{C}_i :: (e : A_i) \quad \sum_{i \in \mathcal{I}}^R p_i \cdot A_i = A \quad \sum_{i \in \mathcal{I}} p_i \cdot q_i = q}{(\cdot) \Vdash^q \text{proc}(e, \{\mathcal{C}_i : p_i\}_{i \in \mathcal{I}}) :: (e : A)}$$

By induction hypothesis, we know that $\mathcal{C}_{i_0} \xRightarrow{d, \kappa} \mathcal{C}'_{i_0}$ for some \mathcal{C}'_{i_0} .

Then we conclude by (C:DIST) that $\mathcal{C} \xRightarrow{d, \kappa} \text{proc}(e, \{\mathcal{C}_i : p_i\}_{i \in \mathcal{I} \setminus \{i_0\}} \# \{\mathcal{C}'_{i_0} : p_{i_0}\})$.

Case:

$$\frac{\text{(CM:COMPOSE:C)} \quad \mathcal{O} (d, \kappa)\text{-blocked} \quad \mathcal{C}_2 (d, \kappa)\text{-poised}}{(\mathcal{O} \parallel \mathcal{C}_2) (d, \kappa)\text{-comm}}$$

$$\frac{\text{(T:COMPOSE)} \quad \Delta' \Vdash^{q_1} \mathcal{O} :: (c : A) \quad (\cdot) \Vdash^{q_2} \mathcal{C}_2 :: (\Gamma, \Delta')}{(\cdot) \Vdash^{q_1+q_2} (\mathcal{O} \parallel \mathcal{C}_2) :: (\Gamma, (c : A))}$$

By Proposition 14 with \mathcal{O} , we know that $d \in \text{dom}(\Delta')$ and $\kappa = |\Delta'(d)|$. Then appeal to Lemma 5. \square

Now, we prove Proposition 15 and Lemma 7 to bridge the gap between well-typed configurations and the status-characterizing relations.

PROPOSITION 15. *If $\Delta \Vdash^q \mathcal{C} :: \Gamma$ and \mathcal{C} poised, then for all d in $\text{dom}(\Gamma)$, it holds that $\mathcal{C} (d, |\Gamma(d)|)$ -poised (or $\mathcal{C} (d, \top)$ -poised).*

PROOF. By induction on the derivation of $\Delta \Vdash^q \mathcal{C} :: \Gamma$, followed by inversion on \mathcal{C} poised. \square

LEMMA 7. *If $\Delta \Vdash^q \mathcal{C} :: \Gamma$, then at least one of the cases below holds:*

- (i) \mathcal{C} live,
- (ii) $\mathcal{C} (d, \kappa)$ -comm for some d, κ , or
- (iii) $\mathcal{C} (d, |\Delta(d)|)$ -blocked for some $d \in \text{dom}(\Delta)$, or
- (iv) \mathcal{C} poised.

PROOF. By induction on the derivation of $\Delta \Vdash^q \mathcal{C} :: \Gamma$.

Case:

$$\frac{\text{(T:PROC)} \quad \Delta \Vdash^{-w} P :: (c : A)}{\Delta \Vdash^q \text{proc}(c, w, P) :: (c : A)}$$

By a case analysis on P , we can conclude that either $\text{proc}(c, w, P)$ live, $\text{proc}(c, w, P) (d, |\Delta(d)|)$ -blocked for some $d \in \text{dom}(\Delta)$, or $\text{proc}(c, w, P)$ poised.

Case:

$$\frac{\text{(T:DIST)} \quad \forall i \in \mathcal{I} : \Delta_i \Vdash^{q_i} C_i :: (c : A_i) \quad \Sigma_{i \in \mathcal{I}}^L p_i \cdot \Delta_i = \Delta \quad \Sigma_{i \in \mathcal{I}}^R p_i \cdot A_i = A \quad \Sigma_{i \in \mathcal{I}} p_i \cdot q_i = q}{\Delta \Vdash^q \text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) :: (c : A)}$$

We can apply induction hypothesis on all C_i 's. If all C_i 's are poised, then C itself is poised by (P:DIST).

Otherwise, there exists i_0 such that C_{i_0} is not poised.

- If C_{i_0} live, then C live by (L:DIST).
- If $C_{i_0} (d, \kappa)$ -comm for some d, κ , then $C (d, \kappa)$ -comm by (CM:DIST).
- If $C_{i_0} (d, |\Delta_{i_0}(d)|)$ -blocked for some $d \in \text{dom}(\Delta_{i_0})$, then $C (d, |\Delta(d)|)$ -blocked by (BL:DIST).

Case:

$$\frac{\text{(T:COMPOSE)} \quad \Delta_1, \Delta' \Vdash^{q_1} \mathcal{O} :: (c : A) \quad \Delta_2 \Vdash^{q_2} C_2 :: (\Gamma, \Delta')}{\Delta_1, \Delta_2 \Vdash^{q_1+q_2} (\mathcal{O} \parallel C_2) :: (\Gamma, (c : A))}$$

We can apply induction hypothesis on \mathcal{O} and C_2 .

- If \mathcal{O} live or C_2 live, then C live by (L:COMPOSE:H) or (L:COMPOSE:T).
- If $\mathcal{O} (d, \kappa)$ -comm or $C_2 (d, \kappa)$ -comm for some d, κ , then $C (d, \kappa)$ -comm by (CM:COMPOSE:H) or (CM:COMPOSE:T).
- If $C_2 (d, |\Delta_2(d)|)$ -blocked for some $d \in \text{dom}(\Delta_2)$, then $C (d, |\Delta_2(d)|)$ -blocked by (BL:COMPOSE:T).
- If $\mathcal{O} (d, |\Delta_1(d)|)$ -blocked for some $d \in \text{dom}(\Delta_1)$, then $C (d, |\Delta_1(d)|)$ -blocked by (BL:COMPOSE:H) and $d \notin \text{FV}^R(C_2)$ (because $d \notin \text{dom}(\Gamma, \Delta')$ and Proposition 12).
- If $\mathcal{O} (d, |\Delta'(d)|)$ -blocked for some $d \in \text{dom}(\Delta')$ and C_2 poised, then by Proposition 15, we have $C_2 (d, |\Delta'(d)|)$ -poised, thus we conclude by (CM:COMPOSE:C) that $C (d, |\Delta'(d)|)$ -comm.
- If both \mathcal{O} and C_2 are poised, then C itself is poised by (P:COMPOSE).

□

Finally, we can formulate and prove *global progress* of this type system.

LEMMA 8. If $(\cdot) \Vdash^q C :: \Gamma$, then at least one of the cases below holds:

- C live,
- $C (d, \kappa)$ -comm for some d, κ , or
- C poised.

PROOF. Appeal to Lemma 7.

□

THEOREM 16 (GLOBAL PROGRESS). If $(\cdot) \Vdash^q C :: \Gamma$, then either

- $C \mapsto C'$ for some C' , or $C \xRightarrow{d, \kappa} C'$ for some C', d, κ , or
- C poised.

PROOF. Appeal to Lemmas 4, 6 and 8.

□

A.3 Expected Work Analysis

Non-nested configurations are defined by

$$\mathcal{D} ::= \text{proc}(c_1, w_1, P_1) \parallel \cdots \parallel \text{proc}(c_n, w_n, P_n)$$

We develop a *distribution*-based [Borgström et al. 2016; Kozen 1981] small-step operational semantics on non-nested configurations, based on a *synchronous* semantics for resource-aware

session types [Balzer and Pfenning 2017; Das et al. 2018]. The semantics should also be seen as a collection of *multiset-rewriting rules* [Cervesato and Scedrov 2009]. The table below lists the rules for this semantics.

(S:⊕p)	$\text{proc}(c, w_c, c..k ; P), \text{proc}(d, w_d, \text{pcase } c (\ell \Rightarrow Q_\ell)_{\ell \in L}) \xrightarrow{\text{det}} \text{proc}(c, w_c, P), \text{proc}(d, w_d, Q_k)$
(S:⊗p)	$\text{proc}(c, w_c, \text{pcase } c (\ell \Rightarrow P_\ell)_{\ell \in L}), \text{proc}(d, w_d, c..k ; Q) \xrightarrow{\text{det}} \text{proc}(c, w_c, P_k), \text{proc}(d, w_d, Q)$
(S:1)	$\text{proc}(c, w_c, \text{close } c), \text{proc}(d, w_d, \text{wait } c ; Q) \xrightarrow{\text{det}} \text{proc}(d, w_c + w_d, Q)$
(S:ID)	$\text{proc}(c, w_c, c \leftarrow e), \text{proc}(d, w_d, Q\langle c \rangle) \xrightarrow{\text{det}} \text{proc}(d, w_c + w_d, Q\langle c \rangle[e/c])$
(S:DEF)	$\text{proc}(c, w, x \leftarrow f \bar{d} ; Q) \xrightarrow{\text{det}} \text{proc}(b, 0, P_f[b/x', \bar{d}/\bar{y}']), \text{proc}(c, w, Q[b/x])$ for $\bar{y}' : \bar{B} \not\vdash f = P_f :: (x' : A) \in \Sigma$ and b fresh
(S:⊗)	$\text{proc}(c, w_c, \text{send } c e ; P), \text{proc}(d, w_d, y \leftarrow \text{recv } c ; Q) \mapsto \text{proc}(c, w_c, P), \text{proc}(d, w_d, Q[e/y])$
(S:→)	$\text{proc}(c, w_c, y \leftarrow \text{recv } c ; P), \text{proc}(d, w_d, \text{send } c e ; Q) \mapsto \text{proc}(c, w_c, P[e/y]), \text{proc}(d, w_d, Q)$
(S:⊕)	$\text{proc}(c, w_c, c.k ; P), \text{proc}(d, w_d, \text{case } c (\ell \Rightarrow Q_\ell)_{\ell \in L}) \mapsto \text{proc}(c, w_c, P), \text{proc}(d, w_d, Q_k)$
(S:⊗)	$\text{proc}(c, w_c, \text{case } c (\ell \Rightarrow P_\ell)_{\ell \in L}), \text{proc}(d, w_d, c.k ; Q) \mapsto \text{proc}(c, w_c, P_k), \text{proc}(d, w_d, Q)$
(S:⊢)	$\text{proc}(c, w_c, \text{pay } c \{r\} ; P), \text{proc}(d, w_d, \text{get } c \{r\} ; Q) \xrightarrow{\text{det}} \text{proc}(c, w_c, P), \text{proc}(d, w_d, Q)$
(S:↵)	$\text{proc}(c, w_c, \text{get } c \{r\} ; P), \text{proc}(d, w_d, \text{pay } c \{r\} ; Q) \xrightarrow{\text{det}} \text{proc}(c, w_c, P), \text{proc}(d, w_d, Q)$
(S:WORK)	$\text{proc}(c, w, \text{work } \{r\} ; P) \xrightarrow{\text{det}} \text{proc}(c, w + r, P)$

(SP:DET) $\mathcal{D} \xrightarrow{\text{prob}} \delta(\mathcal{D}')$ for $\mathcal{D} \xrightarrow{\text{det}} \mathcal{D}'$ and $\delta(\cdot)$ is the Dirac distribution

(SP:FLIP) $\text{proc}(c, w_c, \text{flip } p (H \Rightarrow Q_H \mid T \Rightarrow Q_T)) \xrightarrow{\text{prob}} p \cdot \delta(\text{proc}(c, w_c, Q_H)) + (1 - p) \cdot \delta(\text{proc}(c, w_c, Q_T))$

We now lift the configuration-to-distribution relation $\xrightarrow{\text{prob}}$ to a distribution-to-distribution relation \Rightarrow as follows:

$$\frac{\mu = \{\mathcal{D}_i : p_i\}_{i \in \mathcal{I}} \quad \exists i_0 \in \mathcal{I} : \mathcal{D}_{i_0} \xrightarrow{\text{prob}} \mu'_{i_0}}{\mu \Rightarrow \{\mathcal{D}_i : p_i\}_{i \in \mathcal{I} \setminus \{i_0\}} + p_{i_0} \cdot \mu'_{i_0}} \quad \frac{\mu = \{\mathcal{D}_i : p_i\}_{i \in \mathcal{I}} \quad \forall i \in \mathcal{I} : \mathcal{D}_i \text{ poised}}{\mu \Rightarrow \mu}$$

We first prove the potential is still an upper bound on the expected work after we “flatten” a multiverse semantic object.

LEMMA 9. If $\mathcal{C} \approx \mu, \Delta \Vdash^q \mathcal{C} :: \Gamma$, then $\mathbb{E}_{\mathcal{D} \sim \mu}[\text{work}(\mathcal{D})] \leq q$, where $\text{work}(\overline{\text{proc}(c_i, w_i, P_i)}) := \sum_i w_i$.

PROOF. By induction on the derivation of $\mathcal{C} \approx \mu$, followed by inversion on $\Delta \Vdash^q \mathcal{C} :: \Gamma$.

Case:

$$\frac{\text{(FL:PROC)}}{\text{proc}(c, w, P) \approx \delta(\text{proc}(c, w, P))} \quad \frac{\text{(T:PROC)}}{\Delta \not\vdash^{q-w} P :: (c : A)} \quad \frac{}{\Delta \Vdash^q \text{proc}(c, w, P) :: (c : A)}$$

By $q - w \geq 0$, we conclude that $q \geq w = \mathbb{E}_{\mathcal{D} \sim \delta(\text{proc}(c, w, P))}[\text{work}(\mathcal{D})]$.

Case:

$$\frac{\text{(FL:DIST)}}{\forall i \in \mathcal{I} : \mathcal{C}_i \approx \mu_i} \quad \frac{\text{(T:DIST)}}{\Delta \Vdash^q \text{proc}(c, \{\mathcal{C}_i : p_i\}_{i \in \mathcal{I}}) :: (c : A)} \quad \frac{\forall i \in \mathcal{I} : \Delta_i \Vdash^{q_i} \mathcal{C}_i :: (c : A_i) \quad \sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_i = \Delta \quad \sum_{i \in \mathcal{I}}^R p_i \cdot A_i = A \quad \sum_{i \in \mathcal{I}} p_i \cdot q_i = q}{\Delta \Vdash^q \text{proc}(c, \{\mathcal{C}_i : p_i\}_{i \in \mathcal{I}}) :: (c : A)}$$

By induction hypothesis, for each $i \in \mathcal{I}$, we have $\mathbb{E}_{\mathcal{D} \sim \mu_i}[\text{work}(\mathcal{D})] \leq q_i$.

Thus

$$\begin{aligned} \mathbb{E}_{\mathcal{D} \sim \sum_{i \in \mathcal{I}} p_i \cdot \mu_i}[\text{work}(\mathcal{D})] &= \sum_{i \in \mathcal{I}} p_i \cdot \mathbb{E}_{\mathcal{D} \sim \mu_i}[\text{work}(\mathcal{D})] \\ &\leq \sum_{i \in \mathcal{I}} p_i \cdot q_i \\ &= q. \end{aligned}$$

Case:

$$\frac{(\text{FL:COMPOSE}) \quad \mathcal{O} \approx \mu_1 \quad \mathcal{C} \approx \mu_2}{(\mathcal{O} \parallel \mathcal{C}) \approx (\mu_1 \otimes \mu_2) \gg \lambda(\mathcal{D}_1, \mathcal{D}_2) \cdot \delta(\mathcal{D}_1 \parallel \mathcal{D}_2)} \quad \frac{(\text{T:COMPOSE}) \quad \Delta_1, \Delta' \Vdash^{q_1} \mathcal{O} :: (c : A) \quad \Delta_2 \Vdash^{q_2} \mathcal{C} :: (\Gamma, \Delta')}{\Delta_1, \Delta_2 \Vdash^{q_1+q_2} (\mathcal{O} \parallel \mathcal{C}) :: (\Gamma, (c : A))}$$

By induction hypothesis, we have $\mathbb{E}_{\mathcal{D} \sim \mu_1}[\text{work}(\mathcal{D})] \leq q_1$ and $\mathbb{E}_{\mathcal{D} \sim \mu_2}[\text{work}(\mathcal{D})] \leq q_2$.
Let $\mu := (\mu_1 \otimes \mu_2) \gg \lambda(\mathcal{D}_1, \mathcal{D}_2) \cdot \delta(\mathcal{D}_1 \parallel \mathcal{D}_2)$. Thus

$$\begin{aligned} \mathbb{E}_{\mathcal{D} \sim \mu}[\text{work}(\mathcal{D})] &= \mathbb{E}_{\mathcal{D}_1 \sim \mu_1, \mathcal{D}_2 \sim \mu_2}[\text{work}(\mathcal{D}_1) + \text{work}(\mathcal{D}_2)] \\ &= \mathbb{E}_{\mathcal{D}_1 \sim \mu_1}[\text{work}(\mathcal{D}_1)] + \mathbb{E}_{\mathcal{D}_2 \sim \mu_2}[\text{work}(\mathcal{D}_2)] \\ &\leq q_1 + q_2 \\ &= q. \end{aligned}$$

□

Then we prove that the simulation relation preserves the evaluation relation.

LEMMA 10 (SIMULATION). *If $\mathcal{C} \approx \mu$, $\mathcal{C}' \approx \mu'$, and $\mathcal{C} \mapsto \mathcal{C}'$ or $\mathcal{C} \xRightarrow{d, \kappa} \mathcal{C}'$, then $\mu \Rightarrow \mu'$.*

PROOF. By induction on the derivation of $\mathcal{C} \mapsto \mathcal{C}'$ or $\mathcal{C} \xRightarrow{d, \kappa} \mathcal{C}'$.

Case:

$$\frac{(\text{E:FLIP})}{\text{proc}(c, w, \text{flip } p \ (H \Rightarrow P_H \mid T \Rightarrow P_T)) \mapsto \text{proc}(c, \{\text{proc}(c, w, P_H) : p, \text{proc}(c, w, P_T) : 1 - p\})}$$

In this case, $\mu = \delta(\text{proc}(c, w, \text{flip } p \ (H \Rightarrow P_H \mid T \Rightarrow P_T)))$ and $\mu' = p \cdot \delta(\text{proc}(c, w, P_H)) + (1 - p) \cdot \delta(\text{proc}(c, w, P_T))$.

Then we conclude by (SP:FLIP).

Case:

$$\frac{(\text{E:DIST}) \quad C_{i_0} \mapsto C'_{i_0}}{\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \mapsto \text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I} \setminus \{i_0\}} \# \{C'_{i_0} : p_{i_0}\})}$$

By inversion on the simulation relations, we know that $\mu = \sum_{i \in \mathcal{I}} p_i \cdot \mu_i$ where $\text{cal} C_i \approx \mu_i$ for each $i \in \mathcal{I}$, and $\mu' = \sum_{i \in \mathcal{I} \setminus \{i_0\}} p_i \cdot \mu_i + p_{i_0} \cdot \mu'_{i_0}$ where $C'_{i_0} \approx \mu'_{i_0}$.

By induction hypothesis, we know that $\mu_{i_0} \Rightarrow \mu'_{i_0}$, i.e., there exists some \mathcal{D} in the domain of μ_{i_0}

that can make a step under the $\xrightarrow{\text{prob}}$ relation.

Thus, we can add to both sides of $\mu_{i_0} \Rightarrow \mu'_{i_0}$ and conclude that $\sum_{i \in \mathcal{I} \setminus \{i_0\}} p_i \cdot \mu_i + p_{i_0} \cdot \mu_{i_0} \Rightarrow \sum_{i \in \mathcal{I} \setminus \{i_0\}} p_i \cdot \mu_i + p_{i_0} \cdot \mu'_{i_0}$.

Case:

$$\frac{(\text{C:BDIST:D}) \quad \text{proc}(c, \{(C_i \parallel C'_j) : p_i \cdot p'_j\}_{i \in \mathcal{I}, j \in \mathcal{J}}) \xRightarrow{d, \text{det}} C''}{\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \parallel \text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}}) \xRightarrow{d, \text{det}} C''}$$

In this case, let $C_i \approx \mu_i$ for each $i \in \mathcal{I}$ and $C'_j \approx \mu'_j$ for each $j \in \mathcal{J}$, then

$$\begin{aligned} \text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \parallel \text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}}) &\approx (\sum_{i \in \mathcal{I}} p_i \cdot \mu_i) \otimes (\sum_{j \in \mathcal{J}} p'_j \cdot \mu'_j) \gg \lambda(\mathcal{D}_1, \mathcal{D}_2) \cdot \delta(\mathcal{D}_1 \parallel \mathcal{D}_2) \\ &= \sum_{i \in \mathcal{I}, j \in \mathcal{J}} (p_i \cdot p'_j) \cdot (\mu_i \otimes \mu'_j) \gg \lambda(\mathcal{D}_1, \mathcal{D}_2) \cdot \delta(\mathcal{D}_1 \parallel \mathcal{D}_2), \end{aligned}$$

$$\text{proc}(c, \{(C_i \parallel C'_j) : p_i \cdot p'_j\}_{i \in \mathcal{I}, j \in \mathcal{J}}) \approx \sum_{i \in \mathcal{I}, j \in \mathcal{J}} (p_i \cdot p'_j) \cdot (\mu_i \otimes \mu'_j) \gg \lambda(\mathcal{D}_1, \mathcal{D}_2) \cdot \delta(\mathcal{D}_1 \parallel \mathcal{D}_2),$$

thus, by induction hypothesis, we conclude that $\mu \Rightarrow \mu'$.

Case:

(C:BDIST:R)

$$\frac{\text{proc}(c, \{(\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \parallel C'_j) : p'_j\}_{j \in \mathcal{J}}) \xrightarrow{d, \otimes_P} C''}{\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \parallel \text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}}) \xrightarrow{d, \otimes_P} C''}$$

In this case, let $C_i \approx \mu_i$ for each $i \in \mathcal{I}$ and $C'_j \approx \mu'_j$ for each $j \in \mathcal{J}$, then

$$\begin{aligned} \text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \parallel \text{proc}(d, \{C'_j : p'_j\}_{j \in \mathcal{J}}) &\approx (\sum_{i \in \mathcal{I}} p_i \cdot \mu_i) \otimes (\sum_{j \in \mathcal{J}} p'_j \cdot \mu'_j) \ggg \lambda(\mathcal{D}_1, \mathcal{D}_2). \delta(\mathcal{D}_1 \parallel \mathcal{D}_2) \\ &= \sum_{i \in \mathcal{I}, j \in \mathcal{J}} (p_i \cdot p'_j) \cdot (\mu_i \otimes \mu'_j) \ggg \lambda(\mathcal{D}_1, \mathcal{D}_2). \delta(\mathcal{D}_1 \parallel \mathcal{D}_2), \\ \text{proc}(c, \{(\text{proc}(c, \{C_i : p_i\}_{i \in \mathcal{I}}) \parallel C'_j) : p'_j\}_{j \in \mathcal{J}}) &\approx \sum_{j \in \mathcal{J}} p'_j \cdot ((\sum_{i \in \mathcal{I}} p_i \cdot \mu_i) \otimes \mu'_j \ggg \lambda(\mathcal{D}_1, \mathcal{D}_2). \delta(\mathcal{D}_1 \parallel \mathcal{D}_2)) \\ &= \sum_{j \in \mathcal{J}} p'_j \cdot (\sum_{i \in \mathcal{I}} p_i \cdot (\mu_i \otimes \mu'_j \ggg \lambda(\mathcal{D}_1, \mathcal{D}_2). \delta(\mathcal{D}_1 \parallel \mathcal{D}_2))) \\ &= \sum_{i \in \mathcal{I}, j \in \mathcal{J}} (p_i \cdot p'_j) \cdot (\mu_i \otimes \mu'_j) \ggg \lambda(\mathcal{D}_1, \mathcal{D}_2). \delta(\mathcal{D}_1 \parallel \mathcal{D}_2), \end{aligned}$$

thus, by induction hypothesis, we conclude that $\mu \Rightarrow \mu'$.

□

Let us fix some initial configuration \mathcal{C} such that $(\cdot) \Vdash^q \mathcal{C} :: \Gamma$. By fixing a scheduler to resolve nondeterminism and thinking the configuration-to-distribution relation $\xrightarrow{\text{prob}}$ as a kernel, we can construct a Markov chain $\{\mathcal{D}_n\}_{n \in \mathbb{N}}$ on configurations. Note that by Lemma 10, there exists a sequence of *hidden* states $\{C_n\}_{n \in \mathbb{N}}$ such that $C_n \approx \mu_n$ where μ_n is the distribution of configurations after n steps in the Markov chain. Also, by Theorems 10, 11 and 16, we know that $(\cdot) \Vdash^q C_n :: \Gamma$ for all $n \in \mathbb{N}$. Therefore, by Lemma 9, we know that $\mathbb{E}_{\mathcal{D} \sim \mu_n}[\text{work}(\mathcal{D})] \leq q$ for all $n \in \mathbb{N}$. Define $Q_n := \text{work}(\mathcal{D}_n)$ for each $n \in \mathbb{N}$. Because work is nonnegative, $\{Q_n\}_{n \in \mathbb{N}}$ forms a nonnegative, monotone, integer-valued stochastic process such that $\mathbb{E}[Q_n] \leq q$ for all $n \in \mathbb{N}$, with respect to the Markov chain $\{\mathcal{D}_n\}_{n \in \mathbb{N}}$.

Let T be the *termination time*, i.e., $T(\omega) := \inf\{\omega_n \text{ poised} \mid n \in \mathbb{N}\}$ a random variable on the Markov chain $\{\mathcal{D}_n\}_{n \in \mathbb{N}}$. Then the random variable $Q_T := \lambda\omega.Q_{T(\omega)}$ represents the total work conductions by the execution trace ω . Thus, the *expected total work* can be defined by $\mathbb{E}[Q_T]$. Define $Q_n^T := \lambda\omega.Q_{\min(T(\omega), n)}$ for $n \in \mathbb{N}$. Then we have $Q_T = \lim_{n \rightarrow \infty} Q_n^T$ and $Q_n^T \leq Q_n$ by the monotonicity of $\{Q_n\}_{n \in \mathbb{N}}$. Therefore, by *Monotone Convergence Theorem* [Williams 1991], we conclude that $\mathbb{E}[Q_T] = \lim_{n \rightarrow \infty} \mathbb{E}[Q_n^T] \leq q$, i.e., the expected total work is upper-bounded by q .

A.4 A Partially Successful Attempt

In this section, we present a *partially successful* approach to developing the meta-theory of PRast. This approach is able to handle probabilistic internal and external choices, termination and forwarding, spawning, and potential passing. However, this approach would *fail*, if we add either standard internal and external choices, or channel passing, to the feature set. Note that this approach is *not* a conservative extension of resource-aware session types [Das et al. 2018].

The weighted sums are inductively (and differently from the version in the nested-multiverse development) defined on the structure of the types:

$$\begin{aligned} \sum_{i \in \mathcal{I}}^R p_i \cdot \otimes_P \{\ell^{p'_\ell} : A_{\ell, i}\}_{\ell \in L} &:= \otimes_P \{\ell^{p'_\ell} : \sum_{i \in \mathcal{I}}^R p_i \cdot A_{\ell, i}\}_{\ell \in L} \\ \sum_{i \in \mathcal{I}}^R p_i \cdot \otimes_P \{\ell^{p_{\ell, i}} : A_\ell\}_{\ell \in L} &:= \otimes_P \{\ell^{\sum_{i \in \mathcal{I}} p_i \cdot p_{\ell, i}} : A_\ell\}_{\ell \in L} \\ \sum_{i \in \mathcal{I}}^R p_i \cdot \otimes_P \{\ell^{p'_\ell} : A_{\ell, i}\}_{\ell \in L} &:= \otimes_P \{\ell^{p'_\ell} : \sum_{i \in \mathcal{I}}^R p_i \cdot A_{\ell, i}\}_{\ell \in L} \\ \sum_{i \in \mathcal{I}}^R p_i \cdot \mathbf{1} &:= \mathbf{1} \\ \sum_{i \in \mathcal{I}}^R p_i \cdot (\triangleright^r A_i) &:= \triangleright^r (\sum_{i \in \mathcal{I}}^R p_i \cdot A_i) \\ \sum_{i \in \mathcal{I}}^R p_i \cdot (\triangleleft^r A_i) &:= \triangleleft^r (\sum_{i \in \mathcal{I}}^R p_i \cdot A_i) \end{aligned}$$

$$\begin{aligned}
\Sigma_{i \in \mathcal{I}}^L p_i \cdot \oplus \{ \ell^{p'_\ell} : A_{\ell,i} \}_{\ell \in L} &:= \oplus \{ \ell^{p'_\ell} : \Sigma_{i \in \mathcal{I}}^L p_i \cdot A_{\ell,i} \}_{\ell \in L} \\
\Sigma_{i \in \mathcal{I}}^L p_i \cdot \& \{ \ell^{p'_\ell} : A_{\ell,i} \}_{\ell \in L} &:= \& \{ \ell^{p'_\ell} : \Sigma_{i \in \mathcal{I}}^L p_i \cdot A_{\ell,i} \}_{\ell \in L} \\
\Sigma_{i \in \mathcal{I}}^L p_i \cdot \& \{ \ell^{p_{\ell,i}} : A_\ell \}_{\ell \in L} &:= \& \{ \ell^{\Sigma_{i \in \mathcal{I}} p_i \cdot p_{\ell,i}} : A_\ell \}_{\ell \in L} \\
\Sigma_{i \in \mathcal{I}}^L p_i \cdot \mathbf{1} &:= \mathbf{1} \\
\Sigma_{i \in \mathcal{I}}^L p_i \cdot (\triangleright^r A_i) &:= \triangleright^r (\Sigma_{i \in \mathcal{I}}^L p_i \cdot A_i) \\
\Sigma_{i \in \mathcal{I}}^L p_i \cdot (\triangleleft^r A_i) &:= \triangleleft^r (\Sigma_{i \in \mathcal{I}}^L p_i \cdot A_i)
\end{aligned}$$

We first prove a key property for weighted sums.

PROPOSITION 17. *If $A = \Sigma_{i \in \mathcal{I}}^R p_i \cdot A_i$ and $A = \Sigma_{\ell \in L}^L p'_\ell \cdot A'_\ell$, then there exists $\{A_{\ell,i}\}_{\ell \in L, i \in \mathcal{I}}$ such that $A'_\ell = \Sigma_{i \in \mathcal{I}}^R p_i \cdot A_{\ell,i}$ for $\ell \in L$ and $A_i = \Sigma_{\ell \in L}^L p'_\ell \cdot A_{\ell,i}$ for $i \in \mathcal{I}$.*

PROOF. By induction on the structure of A . We show the proof for two representative cases.

- $A = \oplus \{j^{q_j} : B_j\}_{j \in \mathcal{J}}$:

By $A = \Sigma_{\ell \in L}^L p'_\ell \cdot A'_\ell$, we know that $A'_\ell = \oplus \{j^{q_j} : B_{j,\ell}\}_{j \in \mathcal{J}}$ for each $\ell \in L$ such that $B_j = \Sigma_{\ell \in L}^L p'_\ell \cdot B_{j,\ell}$ for each $j \in \mathcal{J}$.

We proceed by case analysis on $A = \Sigma_{i \in \mathcal{I}}^R p_i \cdot A_i$.

- If $A_i = \oplus \{j^{q_{j,i}} : B_j\}_{j \in \mathcal{J}}$ for each $i \in \mathcal{I}$ such that $q_j = \Sigma_{i \in \mathcal{I}} p_i \cdot q_{j,i}$ for each $j \in \mathcal{J}$:

Define $A_{\ell,i} := \oplus \{j^{q_{j,i}} : B_{j,\ell}\}_{j \in \mathcal{J}}$ for each $\ell \in L$ and $i \in \mathcal{I}$.

Then for each $\ell \in L$,

$$\Sigma_{i \in \mathcal{I}}^R p_i \cdot A_{\ell,i} = \oplus \{j^{\Sigma_{i \in \mathcal{I}} p_i \cdot q_{j,i}} : B_{j,\ell}\}_{j \in \mathcal{J}} = \oplus \{j^{q_j} : B_{j,\ell}\}_{j \in \mathcal{J}} = A'_\ell,$$

and for each $i \in \mathcal{I}$,

$$\Sigma_{\ell \in L}^L p'_\ell \cdot A_{\ell,i} = \oplus \{\ell^{q_{j,i}} : \Sigma_{\ell \in L}^L p'_\ell \cdot B_{j,\ell}\}_{j \in \mathcal{J}} = \oplus \{\ell^{q_j} : B_j\}_{j \in \mathcal{J}} = A_i.$$

- If $A_i = \oplus \{j^{q_j} : B_{j,i}\}_{j \in \mathcal{J}}$ for each $i \in \mathcal{I}$ such that $B_j = \Sigma_{i \in \mathcal{I}}^R p_i \cdot B_{j,i}$ for each $j \in \mathcal{J}$:

For each $j \in \mathcal{J}$, by induction hypothesis, there exists $\{B_{j,\ell,i}\}_{\ell \in L, i \in \mathcal{I}}$ such that $B_{j,\ell} = \Sigma_{i \in \mathcal{I}}^R p_i \cdot B_{j,\ell,i}$ for $\ell \in L$ and $B_{j,i} = \Sigma_{\ell \in L}^L p'_\ell \cdot B_{j,\ell,i}$ for $i \in \mathcal{I}$.

Define $A_{\ell,i} := \oplus \{j^{q_j} : B_{j,\ell,i}\}_{j \in \mathcal{J}}$ for each $\ell \in L$ and $i \in \mathcal{I}$.

Then for each $\ell \in L$,

$$\Sigma_{i \in \mathcal{I}}^R p_i \cdot A_{\ell,i} = \oplus \{j^{q_j} : \Sigma_{i \in \mathcal{I}}^R p_i \cdot B_{j,\ell,i}\}_{j \in \mathcal{J}} = \oplus \{j^{q_j} : B_{j,\ell}\}_{j \in \mathcal{J}} = A'_\ell,$$

and for each $i \in \mathcal{I}$,

$$\Sigma_{\ell \in L}^L p'_\ell \cdot A_{\ell,i} = \oplus \{j^{q_j} : \Sigma_{\ell \in L}^L p'_\ell \cdot B_{j,\ell,i}\}_{j \in \mathcal{J}} = \oplus \{j^{q_j} : B_{j,i}\}_{j \in \mathcal{J}} = A_i.$$

- $A = \triangleright^r B$:

By $A = \Sigma_{\ell \in L}^L p'_\ell \cdot A'_\ell$, we know that $A'_\ell = \triangleright^r B'_\ell$ for each $\ell \in L$ such that $B = \Sigma_{\ell \in L}^L p'_\ell \cdot B'_\ell$.

By $A = \Sigma_{i \in \mathcal{I}}^R p_i \cdot A_i$, we know that $A_i = \triangleright^r B_i$ for each $i \in \mathcal{I}$ such that $B = \Sigma_{i \in \mathcal{I}}^R p_i \cdot B_i$.

By induction hypothesis, there exists $\{B_{\ell,i}\}_{\ell \in L, i \in \mathcal{I}}$ such that $B'_\ell = \Sigma_{i \in \mathcal{I}}^R p_i \cdot B_{\ell,i}$ for $\ell \in L$ and $B_i = \Sigma_{\ell \in L}^L p'_\ell \cdot B_{\ell,i}$ for $i \in \mathcal{I}$.

We conclude by defining $A_{\ell,i} := \triangleright^r B_{\ell,i}$ for each $\ell \in L$ and $i \in \mathcal{I}$. □

Then, we show that in the type derivation, if one type in the context is a weighted sum of a type distribution, then we can re-derive a type judgment for each type in the support of the distribution.

LEMMA 11. *If $\Delta, (x : A) \not\vdash P :: (z : C)$ and $A = \Sigma_{i \in \mathcal{I}}^R p_i \cdot A_i$, then there exist $\{\Delta_i\}_{i \in \mathcal{I}}$, $\{C_i\}_{i \in \mathcal{I}}$, and $\{q_i\}_{i \in \mathcal{I}}$ such that*

- for all $i \in \mathcal{I}$, $\Delta_i, (x : A_i) \not\models^i P :: (z : C_i)$, and
- $\Sigma_{i \in \mathcal{I}}^L p_i \cdot \Delta_i = \Delta$, $\Sigma_{i \in \mathcal{I}}^R p_i \cdot C_i = C$, $\Sigma_{i \in \mathcal{I}} p_i \cdot q_i = q$.

PROOF. By induction on the derivation of $\Delta, (x : A) \not\models^i P :: (z : C)$.
(flip)

$$\frac{A = \Sigma_{\ell \in L}^L p'_\ell \cdot A'_\ell \quad p'_H = p' \quad p'_T = 1 - p' \quad L = \{H, T\} \quad \Delta = \Sigma_{\ell \in L}^L p'_\ell \cdot \Delta_\ell}{C = \Sigma_{\ell \in L}^R p'_\ell \cdot C_\ell \quad q = \Sigma_{\ell \in L} p'_\ell \cdot q_\ell \quad \forall \ell \in L: \Delta_\ell, (x : A'_\ell) \not\models^{\ell'} Q_\ell :: (z : C_\ell)}$$

- $\Delta, (x : A) \not\models^i \text{flip } p' (H \Rightarrow Q_H \mid T \Rightarrow Q_T) :: (z : C)$
Because $A = \Sigma_{i \in \mathcal{I}}^R p_i \cdot A_i$ and $A = \Sigma_{\ell \in L}^L p'_\ell \cdot A'_\ell$, by Proposition 17, there exists $\{A_{\ell,i}\}_{\ell \in L, i \in \mathcal{I}}$ such that $A'_\ell = \Sigma_{i \in \mathcal{I}}^R p_i \cdot A_{\ell,i}$ for $\ell \in L$ and $A_i = \Sigma_{\ell \in L}^L p'_\ell \cdot A_{\ell,i}$ for $i \in \mathcal{I}$.
By induction hypothesis, for each $\ell \in L$, there exist $\{\Delta_{\ell,i}\}_{i \in \mathcal{I}}$, $\{C_{\ell,i}\}_{i \in \mathcal{I}}$, and $\{q_{\ell,i}\}_{i \in \mathcal{I}}$ such that
– for all $i \in \mathcal{I}$, $\Delta_{\ell,i}, (x : A_{\ell,i}) \not\models^{\ell,i} Q_\ell :: (z : C_{\ell,i})$, and
– $\Sigma_{i \in \mathcal{I}}^L p_i \cdot \Delta_{\ell,i} = \Delta_\ell$, $\Sigma_{i \in \mathcal{I}}^R p_i \cdot C_{\ell,i} = C_\ell$, $\Sigma_{i \in \mathcal{I}} p_i \cdot q_{\ell,i} = q_\ell$.
For each $i \in \mathcal{I}$, define $\Delta_i := \Sigma_{\ell \in L}^L p'_\ell \cdot \Delta_{\ell,i}$, $C_i := \Sigma_{\ell \in L}^R p'_\ell \cdot C_{\ell,i}$, $q_i := \Sigma_{\ell \in L} p'_\ell \cdot q_{\ell,i}$.
Then $\Delta_i, (x : A_i) \not\models^i \text{flip } p' (H \Rightarrow Q_H \mid T \Rightarrow Q_T) :: (z : C_i)$.
We conclude by the following:

$$\begin{aligned} \Sigma_{i \in \mathcal{I}}^L p_i \cdot \Delta_i &= \Sigma_{i \in \mathcal{I}}^L p_i \cdot \Sigma_{\ell \in L}^L p'_\ell \cdot \Delta_{\ell,i} \\ &= \Sigma_{\ell \in L}^L p'_\ell \cdot \Sigma_{i \in \mathcal{I}}^L p_i \cdot \Delta_{\ell,i} \\ &= \Sigma_{\ell \in L}^L p'_\ell \cdot \Delta_\ell \\ &= \Delta, \end{aligned}$$

$$\begin{aligned} \Sigma_{i \in \mathcal{I}}^R p_i \cdot C_i &= \Sigma_{i \in \mathcal{I}}^R p_i \cdot \Sigma_{\ell \in L}^R p'_\ell \cdot C_{\ell,i} \\ &= \Sigma_{\ell \in L}^R p'_\ell \cdot \Sigma_{i \in \mathcal{I}}^R p_i \cdot C_{\ell,i} \\ &= \Sigma_{\ell \in L}^R p'_\ell \cdot C_\ell \\ &= C, \end{aligned}$$

$$\begin{aligned} \Sigma_{i \in \mathcal{I}} p_i \cdot q_i &= \Sigma_{i \in \mathcal{I}} p_i \cdot \Sigma_{\ell \in L} p'_\ell \cdot q_{\ell,i} \\ &= \Sigma_{\ell \in L} p'_\ell \cdot \Sigma_{i \in \mathcal{I}} p_i \cdot q_{\ell,i} \\ &= \Sigma_{\ell \in L} p'_\ell \cdot q_\ell \\ &= q. \end{aligned}$$

($\oplus P L =$)

$$\frac{\Delta = \Sigma_{\ell \in L}^L p'_\ell \cdot \Delta_\ell \quad C = \Sigma_{\ell \in L}^R p'_\ell \cdot C_\ell \quad q = \Sigma_{\ell \in L} p'_\ell \cdot q_\ell \quad \forall \ell \in L: \Delta_\ell, (x : A'_\ell) \not\models^{\ell'} Q_\ell :: (z : C_\ell)}{\Delta, (x : \oplus \{\ell^{p'_\ell} : A'_\ell\}_{\ell \in L}) \not\models^i \text{pcase } x (\ell \Rightarrow Q_\ell)_{\ell \in L} :: (z : C)}$$

- $\Delta, (x : \oplus \{\ell^{p'_\ell} : A'_\ell\}_{\ell \in L}) \not\models^i \text{pcase } x (\ell \Rightarrow Q_\ell)_{\ell \in L} :: (z : C)$

By the definition of sharing, we know that

- If $A_i = \oplus_P \{\ell^{p'_{\ell,i}} : A'_{\ell,i}\}_{\ell \in L}$ for each $i \in \mathcal{I}$ such that

$$\begin{aligned} \oplus_P \{\ell^{p'_{\ell,i}} : A'_{\ell,i}\}_{\ell \in L} &= \Sigma_{i \in \mathcal{I}}^R p_i \cdot (\oplus_P \{\ell^{p'_{\ell,i}} : A'_{\ell,i}\}_{\ell \in L}) = \oplus_P \{\ell^{\Sigma_{i \in \mathcal{I}} p_i \cdot p'_{\ell,i}} : A'_{\ell,i}\}_{\ell \in L} \\ \implies \forall \ell \in L: p'_\ell &= \Sigma_{i \in \mathcal{I}} p_i \cdot p'_{\ell,i}. \end{aligned}$$

For each $i \in \mathcal{I}$, define $\Delta_i := \Sigma_{\ell \in L}^L p'_{\ell,i} \cdot \Delta_\ell$, $C_i := \Sigma_{\ell \in L}^R p'_{\ell,i} \cdot C_\ell$, $q_i := \Sigma_{\ell \in L} p'_{\ell,i} \cdot q_\ell$.

Then $\Delta_i, (x : A_i) \not\models^i \text{pcase } x (\ell \Rightarrow Q_\ell)_{\ell \in L} :: (z : C_i)$.

We conclude by the following:

$$\begin{aligned} \Sigma_{i \in \mathcal{I}}^L p_i \cdot \Delta_i &= \Sigma_{i \in \mathcal{I}}^L p_i \cdot \Sigma_{\ell \in L}^L p'_{\ell,i} \cdot \Delta_\ell \\ &= \Sigma_{\ell \in L}^L (\Sigma_{i \in \mathcal{I}} p_i \cdot p'_{\ell,i}) \cdot \Delta_\ell \end{aligned}$$

$$\begin{aligned}
&= \Sigma_{\ell \in L}^L p'_\ell \cdot \Delta_\ell \\
&= \Delta, \\
\Sigma_{i \in \mathcal{I}}^R p_i \cdot C_i &= \Sigma_{i \in \mathcal{I}}^R p_i \cdot \Sigma_{\ell \in L}^R p'_{\ell,i} \cdot C_\ell \\
&= \Sigma_{\ell \in L}^R (\Sigma_{i \in \mathcal{I}} p_i \cdot p'_{\ell,i}) \cdot C_\ell \\
&= \Sigma_{\ell \in L}^R p'_\ell \cdot C_\ell \\
&= C, \\
\Sigma_{i \in \mathcal{I}} p_i \cdot q_i &= \Sigma_{i \in \mathcal{I}} p_i \cdot \Sigma_{\ell \in L} p'_{\ell,i} \cdot q_\ell \\
&= \Sigma_{\ell \in L} (\Sigma_{i \in \mathcal{I}} p_i \cdot p'_{\ell,i}) \cdot q_\ell \\
&= \Sigma_{\ell \in L} p'_\ell \cdot q_\ell \\
&= q.
\end{aligned}$$

– If $A_i = \oplus_P \{\ell^{p'_\ell} : A_{\ell,i}\}_{\ell \in L}$ for each $i \in \mathcal{I}$ such that

$$\begin{aligned}
&\oplus_P \{\ell^{p'_\ell} : A'_\ell\}_{\ell \in L} = \Sigma_{i \in \mathcal{I}}^R p_i \cdot (\oplus_P \{\ell^{p'_\ell} : A_{\ell,i}\}_{\ell \in L}) = \oplus_P \{\ell^{p'_\ell} : \Sigma_{i \in \mathcal{I}}^R p_i \cdot A_{\ell,i}\}_{\ell \in L} \\
&\implies \forall \ell \in L : A'_\ell = \Sigma_{i \in \mathcal{I}}^R p_i \cdot A_{\ell,i}.
\end{aligned}$$

By induction hypothesis, for each $\ell \in L$, there exist $\{\Delta_{\ell,i}\}_{i \in \mathcal{I}}$, $\{C_{\ell,i}\}_{i \in \mathcal{I}}$, and $\{q_{\ell,i}\}_{i \in \mathcal{I}}$ such that

- * for all $i \in \mathcal{I}$, $\Delta_{\ell,i}, (x : A_{\ell,i}) \stackrel{\mathcal{P}_{\ell,i}}{Q_\ell} :: (z : C_{\ell,i})$, and
- * $\Sigma_{i \in \mathcal{I}}^L p_i \cdot \Delta_{\ell,i} = \Delta_\ell$, $\Sigma_{i \in \mathcal{I}}^R p_i \cdot C_{\ell,i} = C_\ell$, $\Sigma_{i \in \mathcal{I}} p_i \cdot q_{\ell,i} = q_\ell$.

For each $i \in \mathcal{I}$, define $\Delta_i := \Sigma_{\ell \in L}^L p'_\ell \cdot \Delta_{\ell,i}$, $C_i := \Sigma_{\ell \in L}^R p'_\ell \cdot C_{\ell,i}$, $q_i := \Sigma_{\ell \in L} p'_\ell \cdot q_{\ell,i}$.

Then $\Delta_i, (x : A_i) \stackrel{\mathcal{P}_i}{\text{pcase } x (\ell \Rightarrow Q_\ell)_{\ell \in L}} :: (z : C_i)$.

We conclude by the following:

$$\begin{aligned}
\Sigma_{i \in \mathcal{I}}^L p_i \cdot \Delta_i &= \Sigma_{i \in \mathcal{I}}^L p_i \cdot \Sigma_{\ell \in L}^L p'_\ell \cdot \Delta_{\ell,i} \\
&= \Sigma_{\ell \in L}^L p'_\ell \cdot \Sigma_{i \in \mathcal{I}}^L p_i \cdot \Delta_{\ell,i} \\
&= \Sigma_{\ell \in L}^L p'_\ell \cdot \Delta_\ell \\
&= \Delta, \\
\Sigma_{i \in \mathcal{I}}^R p_i \cdot C_i &= \Sigma_{i \in \mathcal{I}}^R p_i \cdot \Sigma_{\ell \in L}^R p'_\ell \cdot C_{\ell,i} \\
&= \Sigma_{\ell \in L}^R p'_\ell \cdot \Sigma_{i \in \mathcal{I}}^R p_i \cdot C_{\ell,i} \\
&= \Sigma_{\ell \in L}^R p'_\ell \cdot C_\ell \\
&= C, \\
\Sigma_{i \in \mathcal{I}} p_i \cdot q_i &= \Sigma_{i \in \mathcal{I}} p_i \cdot \Sigma_{\ell \in L} p'_\ell \cdot q_{\ell,i} \\
&= \Sigma_{\ell \in L} p'_\ell \cdot \Sigma_{i \in \mathcal{I}} p_i \cdot q_{\ell,i} \\
&= \Sigma_{\ell \in L} p'_\ell \cdot q_\ell \\
&= q.
\end{aligned}$$

$(\oplus_P L \neq)$

$$\frac{\Delta = \Sigma_{\ell \in L}^L p'_\ell \cdot \Delta_\ell \quad A = \Sigma_{\ell \in L}^L p'_\ell \cdot A'_\ell \quad C = \Sigma_{\ell \in L}^R p'_\ell \cdot C_\ell \quad q = \Sigma_{\ell \in L} p'_\ell \cdot q_\ell \quad \forall \ell \in L : \Delta_\ell, (x : A'_\ell), (y : B_\ell) \stackrel{\mathcal{P}_\ell}{Q_\ell} :: (z : C_\ell)}{\Delta, (x : A), (y : \oplus_P \{\ell^{p'_\ell} : B_\ell\}_{\ell \in L}) \stackrel{\mathcal{P}}{\text{pcase } y (\ell \Rightarrow Q_\ell)_{\ell \in L}} :: (z : C)}$$

- Because $A = \Sigma_{i \in \mathcal{I}}^R p_i \cdot A_i$ and $A = \Sigma_{\ell \in L}^L p'_\ell \cdot A'_\ell$, by Proposition 17, there exists $\{A_{\ell,i}\}_{\ell \in L, i \in \mathcal{I}}$ such that $A'_\ell = \Sigma_{i \in \mathcal{I}}^R p_i \cdot A_{\ell,i}$ for $\ell \in L$ and $A_i = \Sigma_{\ell \in L}^L p'_\ell \cdot A_{\ell,i}$ for $i \in \mathcal{I}$.

By induction hypothesis, for each $\ell \in L$, there exist $\{\Delta_{\ell,i}\}_{i \in \mathcal{I}}$, $\{B_{\ell,i}\}_{i \in \mathcal{I}}$, $\{C_{\ell,i}\}_{i \in \mathcal{I}}$, and $\{q_{\ell,i}\}_{i \in \mathcal{I}}$ such that

- for all $i \in \mathcal{I}$, $\Delta_{\ell,i}, (x : A_{\ell,i}), (y : B_{\ell,i}) \stackrel{\theta_{\ell,i}}{\vdash} Q_{\ell} :: (z : C_{\ell,i})$, and
- $\sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_{\ell,i} = \Delta_{\ell}$, $\sum_{i \in \mathcal{I}}^L p_i \cdot B_{\ell,i} = B_{\ell}$, $\sum_{i \in \mathcal{I}}^R p_i \cdot C_{\ell,i} = C_{\ell}$, $\sum_{i \in \mathcal{I}} p_i \cdot q_{\ell,i} = q_{\ell}$.

For each $i \in \mathcal{I}$, define $\Delta_i := \sum_{\ell \in L}^L p'_{\ell} \cdot \Delta_{\ell,i}$, $C_i := \sum_{\ell \in L}^R p'_{\ell} \cdot C_{\ell,i}$, $q_i := \sum_{\ell \in L} p'_{\ell} \cdot q_{\ell,i}$.

Then $\Delta_i, (x : A_i), (y : \oplus_P \{\ell^{p'_{\ell}} : B_{\ell,i}\}_{\ell \in L}) \stackrel{\theta_i}{\vdash} \text{pcase } y (\ell \Rightarrow Q_{\ell})_{\ell \in L} :: (z : C_i)$.

We conclude by the following:

$$\begin{aligned} \sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_i &= \sum_{i \in \mathcal{I}}^L p_i \cdot \sum_{\ell \in L}^L p'_{\ell} \cdot \Delta_{\ell,i} \\ &= \sum_{\ell \in L}^L p'_{\ell} \cdot \sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_{\ell,i} \\ &= \sum_{\ell \in L}^L p'_{\ell} \cdot \Delta_{\ell} \\ &= \Delta, \\ \sum_{i \in \mathcal{I}}^L p_i \cdot \oplus_P \{\ell^{p'_{\ell}} : B_{\ell,i}\}_{\ell \in L} &= \oplus_P \{\ell^{p'_{\ell}} : \sum_{i \in \mathcal{I}}^L p_i \cdot B_{\ell,i}\}_{\ell \in L} \\ &= \oplus_P \{\ell^{p'_{\ell}} : B_{\ell}\}_{\ell \in L}, \\ \sum_{i \in \mathcal{I}}^R p_i \cdot C_i &= \sum_{i \in \mathcal{I}}^R p_i \cdot \sum_{\ell \in L}^R p'_{\ell} \cdot C_{\ell,i} \\ &= \sum_{\ell \in L}^R p'_{\ell} \cdot \sum_{i \in \mathcal{I}}^R p_i \cdot C_{\ell,i} \\ &= \sum_{\ell \in L}^R p'_{\ell} \cdot C_{\ell} \\ &= C, \\ \sum_{i \in \mathcal{I}} p_i \cdot q_i &= \sum_{i \in \mathcal{I}} p_i \cdot \sum_{\ell \in L} p'_{\ell} \cdot q_{\ell,i} \\ &= \sum_{\ell \in L} p'_{\ell} \cdot \sum_{i \in \mathcal{I}} p_i \cdot q_{\ell,i} \\ &= \sum_{\ell \in L} p'_{\ell} \cdot q_{\ell} \\ &= q. \end{aligned}$$

($\oplus_P R$)

$$\frac{p'_k = 1 \quad p'_j = 0 \ (j \neq k) \quad \Delta, (x : A) \stackrel{\theta}{\vdash} P :: (z : C_k)}{\Delta, (x : A) \stackrel{\theta}{\vdash} P :: (z : C_k)}$$

- $\Delta, (x : A) \stackrel{\theta}{\vdash} (z..k ; P) :: (z : \oplus_P \{\ell^{p'_{\ell}} : C_{\ell}\}_{\ell \in L})$
By induction hypothesis, there exist $\{\Delta_i\}_{i \in \mathcal{I}}$, $\{C_{k,i}\}_{i \in \mathcal{I}}$, and $\{q_i\}_{i \in \mathcal{I}}$ such that
- for all $i \in \mathcal{I}$, $\Delta_i, (x : A_i) \stackrel{\theta_i}{\vdash} P :: (z : C_{k,i})$, and
- $\sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_i = \Delta$, $\sum_{i \in \mathcal{I}}^R p_i \cdot C_{k,i} = C_k$, $\sum_{i \in \mathcal{I}} p_i \cdot q_i = q$.

Then for each $i \in \mathcal{I}$, $\Delta_i, (x : A_i) \stackrel{\theta_i}{\vdash} (z..k ; P) :: (z : \oplus_P \{\ell^{p'_{\ell}} : C_{\ell,i}\}_{\ell \in L})$, where $C_{j,i} := C_j$ for $j \neq k$.

We conclude by the following:

$$\begin{aligned} \sum_{i \in \mathcal{I}}^R p_i \cdot \oplus_P \{\ell^{p'_{\ell}} : C_{\ell,i}\}_{\ell \in L} &= \oplus_P \{\ell^{p'_{\ell}} : \sum_{i \in \mathcal{I}}^R p_i \cdot C_{\ell,i}\}_{\ell \in L} \\ &= \oplus_P \{\ell^{p'_{\ell}} : C_{\ell}\}_{\ell \in L}. \end{aligned}$$

($\otimes_P R$)

$$\frac{\Delta = \sum_{\ell \in L}^L p'_{\ell} \cdot \Delta_{\ell} \quad A = \sum_{\ell \in L}^L p'_{\ell} \cdot A'_{\ell} \quad q = \sum_{\ell \in L} p'_{\ell} \cdot q_{\ell} \quad \forall \ell \in L : \Delta_{\ell}, (x : A_{\ell}) \stackrel{\theta_{\ell}}{\vdash} P_{\ell} :: (z : C_{\ell})}{\Delta, (x : A) \stackrel{\theta}{\vdash} \text{pcase } z (\ell \Rightarrow P_{\ell})_{\ell \in L} :: (z : \otimes_P \{\ell^{p'_{\ell}} : C_{\ell}\}_{\ell \in L})}$$

- $\Delta, (x : A) \stackrel{\theta}{\vdash} \text{pcase } z (\ell \Rightarrow P_{\ell})_{\ell \in L} :: (z : \otimes_P \{\ell^{p'_{\ell}} : C_{\ell}\}_{\ell \in L})$
Because $A = \sum_{i \in \mathcal{I}}^R p_i \cdot A_i$ and $A = \sum_{\ell \in L}^L p'_{\ell} \cdot A'_{\ell}$, by Proposition 17, there exists $\{A_{\ell,i}\}_{\ell \in L, i \in \mathcal{I}}$ such that $A'_{\ell} = \sum_{i \in \mathcal{I}}^R p_i \cdot A_{\ell,i}$ for $\ell \in L$ and $A_i = \sum_{\ell \in L}^L p'_{\ell} \cdot A_{\ell,i}$ for $i \in \mathcal{I}$.
By induction hypothesis, for each $\ell \in L$, there exist $\{\Delta_{\ell,i}\}_{i \in \mathcal{I}}$, $\{C_{\ell,i}\}_{i \in \mathcal{I}}$, and $\{q_{\ell,i}\}_{i \in \mathcal{I}}$ such that
 - for all $i \in \mathcal{I}$, $\Delta_{\ell,i}, (x : A_{\ell,i}) \stackrel{\theta_{\ell,i}}{\vdash} P_{\ell} :: (z : C_{\ell,i})$, and
 - $\sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_{\ell,i} = \Delta_{\ell}$, $\sum_{i \in \mathcal{I}}^R p_i \cdot C_{\ell,i} = C_{\ell}$, $\sum_{i \in \mathcal{I}} p_i \cdot q_{\ell,i} = q_{\ell}$.
- For each $i \in \mathcal{I}$, define $\Delta_i := \sum_{\ell \in L}^L p'_{\ell} \cdot \Delta_{\ell,i}$, $q_i := \sum_{\ell \in L} p'_{\ell} \cdot q_{\ell,i}$.

Then $\Delta_i, (x : A_i) \stackrel{\theta^i}{\text{pcase}} z (\ell \Rightarrow P_\ell)_{\ell \in L} :: (z : \&_{\mathcal{P}}\{\ell^{p'_\ell} : C_{\ell,i}\}_{\ell \in L})$.

We conclude by the following:

$$\begin{aligned}
 \Sigma_{i \in \mathcal{I}}^L p_i \cdot \Delta_i &= \Sigma_{i \in \mathcal{I}}^L p_i \cdot \Sigma_{\ell \in L}^L p'_\ell \cdot \Delta_{\ell,i} \\
 &= \Sigma_{\ell \in L}^L p'_\ell \cdot \Sigma_{i \in \mathcal{I}}^L p_i \cdot \Delta_{\ell,i} \\
 &= \Sigma_{\ell \in L}^L p'_\ell \cdot \Delta_\ell \\
 &= \Delta, \\
 \Sigma_{i \in \mathcal{I}}^R p_i \cdot \&_{\mathcal{P}}\{\ell^{p'_\ell} : C_{\ell,i}\}_{\ell \in L} &= \&_{\mathcal{P}}\{\ell^{p'_\ell} : \Sigma_{i \in \mathcal{I}}^R p_i \cdot C_{\ell,i}\}_{\ell \in L} \\
 &= \&_{\mathcal{P}}\{\ell^{p'_\ell} : C_\ell\}_{\ell \in L}, \\
 \Sigma_{i \in \mathcal{I}} p_i \cdot q_i &= \Sigma_{i \in \mathcal{I}} p_i \cdot \Sigma_{\ell \in L} p'_\ell \cdot q_{\ell,i} \\
 &= \Sigma_{\ell \in L} p'_\ell \cdot \Sigma_{i \in \mathcal{I}} p_i \cdot q_{\ell,i} \\
 &= \Sigma_{\ell \in L} p'_\ell \cdot q_\ell \\
 &= q.
 \end{aligned}$$

($\&_{\mathcal{P}}L=$)

$$\frac{p'_k = 1 \quad p'_j = 0 \ (j \neq k) \quad \Delta, (x : A'_k) \stackrel{\theta}{Q} :: (z : C)}{\bullet \quad \Delta, (x : \&_{\mathcal{P}}\{\ell^{p'_\ell} : A'_\ell\}_{\ell \in L}) \stackrel{\theta}{Q} (x..k ; Q) :: (z : C)}$$

By the definition of sharing, we know that $A_i = \&_{\mathcal{P}}\{\ell^{p'_\ell} : A_{\ell,i}\}_{\ell \in L}$ for each $i \in \mathcal{I}$ such that

$$\begin{aligned}
 \&_{\mathcal{P}}\{\ell^{p'_\ell} : A'_\ell\}_{\ell \in L} &= \Sigma_{i \in \mathcal{I}}^R p_i \cdot (\&_{\mathcal{P}}\{\ell^{p'_\ell} : A_{\ell,i}\}_{\ell \in L}) = \&_{\mathcal{P}}\{\ell^{p'_\ell} : \Sigma_{i \in \mathcal{I}}^R p_i \cdot A_{\ell,i}\}_{\ell \in L} \\
 \implies \forall \ell \in L : A'_\ell &= \Sigma_{i \in \mathcal{I}}^R p_i \cdot A_{\ell,i}.
 \end{aligned}$$

By induction hypothesis, there exist $\{\Delta_i\}_{i \in \mathcal{I}}$, $\{C_i\}_{i \in \mathcal{I}}$, and $\{q_i\}_{i \in \mathcal{I}}$ such that

- for all $i \in \mathcal{I}$, $\Delta_i, (x : A_{k,i}) \stackrel{\theta^i}{Q} :: (z : C_i)$, and
- $\Sigma_{i \in \mathcal{I}}^L p_i \cdot \Delta_i = \Delta$, $\Sigma_{i \in \mathcal{I}}^R p_i \cdot C_i = C$, $\Sigma_{i \in \mathcal{I}} p_i \cdot q_i = q$.

Then for each $i \in \mathcal{I}$, $\Delta_i, (x : \&_{\mathcal{P}}\{\ell^{p'_\ell} : A_{\ell,i}\}_{\ell \in L}) \stackrel{\theta^i}{Q} (x..k ; Q) :: (z : C_i)$.

($\&_{\mathcal{P}}L \neq$)

$$\frac{p'_k = 1 \quad p'_j = 0 \ (j \neq k) \quad \Delta, (x : A), (y : B_k) \stackrel{\theta}{Q} :: (z : C)}{\bullet \quad \Delta, (x : A), (y : \&_{\mathcal{P}}\{\ell^{p'_\ell} : B_\ell\}_{\ell \in L}) \stackrel{\theta}{Q} (y..k ; Q) :: (z : C)}$$

By induction hypothesis, there exist $\{\Delta_i\}_{i \in \mathcal{I}}$, $\{B_{k,i}\}_{i \in \mathcal{I}}$, $\{C_i\}_{i \in \mathcal{I}}$, and $\{q_i\}_{i \in \mathcal{I}}$ such that

- for all $i \in \mathcal{I}$, $\Delta_i, (x : A_i), (y : B_{k,i}) \stackrel{\theta^i}{Q} :: (z : C_i)$, and
- $\Sigma_{i \in \mathcal{I}}^L p_i \cdot \Delta_i = \Delta$, $\Sigma_{i \in \mathcal{I}}^L p_i \cdot B_{k,i} = B_k$, $\Sigma_{i \in \mathcal{I}}^R p_i \cdot C_i = C$, $\Sigma_{i \in \mathcal{I}} p_i \cdot q_i = q$.

Then for each $i \in \mathcal{I}$, $\Delta_i, (x : A_i), (y : \&_{\mathcal{P}}\{\ell^{p'_\ell} : B_{\ell,i}\}_{\ell \in L}) \stackrel{\theta^i}{Q} (y..k ; Q) :: (z : C_i)$, where $B_{j,i} := B_j$ for $j \neq k$.

We conclude by the following:

$$\begin{aligned}
 \Sigma_{i \in \mathcal{I}}^L p_i \cdot \&_{\mathcal{P}}\{\ell^{p'_\ell} : B_{\ell,i}\}_{\ell \in L} &= \&_{\mathcal{P}}\{\ell^{p'_\ell} : \Sigma_{i \in \mathcal{I}}^L p_i \cdot B_{\ell,i}\}_{\ell \in L} \\
 &= \oplus_{\mathcal{P}}\{\ell^{p'_\ell} : B_\ell\}_{\ell \in L}.
 \end{aligned}$$

($1L=$)

$$\frac{\Delta \stackrel{\theta}{Q} :: (z : C)}{\bullet \quad \Delta, (x : 1) \stackrel{\theta}{Q} (\text{wait } x ; Q) :: (z : C)}$$

- $\Delta, (x : 1) \stackrel{\theta}{Q} (\text{wait } x ; Q) :: (z : C)$

By the definition of sharing, we know that $A_i = 1$ for each $i \in \mathcal{I}$.

For each $i \in \mathcal{I}$, define $\Delta_i := \Delta$, $C_i := C$, $q_i := q$.

(1L#)

$$\Delta, (x : A) \stackrel{\theta}{\vdash} Q :: (z : C)$$

- $\Delta, (x : A), (y : 1) \stackrel{\theta}{\vdash} (\text{wait } y ; Q) :: (z : C)$

By induction hypothesis, there exist $\{\Delta_i\}_{i \in \mathcal{I}}$, $\{C_i\}_{i \in \mathcal{I}}$, and $\{q_i\}_{i \in \mathcal{I}}$ such that

- for all $i \in \mathcal{I}$, $\Delta_i, (x : A_i) \stackrel{\theta^i}{\vdash} Q :: (z : C_i)$, and
- $\sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_i = \Delta$, $\sum_{i \in \mathcal{I}}^R p_i \cdot C_i = C$, $\sum_{i \in \mathcal{I}} p_i \cdot q_i = q$.

Then for each $i \in \mathcal{I}$, $\Delta_i, (x : A_i), (y : 1) \stackrel{\theta^i}{\vdash} (\text{wait } y ; Q) :: (z : C_i)$.

(id)

- $(x : A) \stackrel{\emptyset}{\vdash} (z \leftrightarrow x) :: (z : A)$

For each $i \in \mathcal{I}$, we have $(x : A_i) \stackrel{\emptyset}{\vdash} (z \leftrightarrow x) :: (z : A_i)$.

Then we conclude by the assumption that $A = \sum_{i \in \mathcal{I}}^R p_i \cdot A_i$.

(spawn \in)

$$(x' : A), \overline{y'} : \overline{B} \stackrel{\theta}{\vdash} f = P_f :: (t' : D) \in \Sigma \quad \Delta, (t : D) \stackrel{\tau}{\vdash} Q :: (z : C)$$

- $\Delta, (x : A), \overline{y} : \overline{B} \stackrel{\theta^{+r}}{\vdash} (t \leftarrow f \ x \ \overline{y} ; Q) :: (z : C)$

By induction hypothesis, there exist $\{B_i\}_{i \in \mathcal{I}}$, $\{D_i\}_{i \in \mathcal{I}}$, and $\{q_i\}_{i \in \mathcal{I}}$ such that

- for all $i \in \mathcal{I}$, $(x' : A_i), \overline{y'} : \overline{B_i} \stackrel{\theta^i}{\vdash} P_f :: (t' : D_i)$, and
- $\sum_{i \in \mathcal{I}}^L p_i \cdot \overline{B_i} = \overline{B}$, $\sum_{i \in \mathcal{I}}^R p_i \cdot D_i = D$, $\sum_{i \in \mathcal{I}} p_i \cdot q_i = q$.

Again, by induction hypothesis, there exist $\{\Delta_i\}_{i \in \mathcal{I}}$, $\{C_i\}_{i \in \mathcal{I}}$, and $\{r_i\}_{i \in \mathcal{I}}$ such that

- for all $i \in \mathcal{I}$, $\Delta_i, (t : D_i) \stackrel{\tau^i}{\vdash} Q :: (z : C_i)$, and
- $\sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_i = \Delta$, $\sum_{i \in \mathcal{I}}^R p_i \cdot C_i = C$, $\sum_{i \in \mathcal{I}} p_i \cdot r_i = r$.

Then for each $i \in \mathcal{I}$, $\Delta_i, (x : A_i), \overline{y} : \overline{B_i} \stackrel{\theta^{i+r_i}}{\vdash} (t \leftarrow f \ x \ \overline{y} ; Q) :: (z : C_i)$.

We conclude by the following:

$$\begin{aligned} \sum_{i \in \mathcal{I}} p_i \cdot (q_i + r_i) &= \sum_{i \in \mathcal{I}} p_i \cdot q_i + \sum_{i \in \mathcal{I}} p_i \cdot r_i \\ &= q + r. \end{aligned}$$

(spawn \notin)

$$\overline{y'} : \overline{B} \stackrel{\theta}{\vdash} f = P_f :: (t' : D) \in \Sigma \quad \Delta, (x : A), (t : D) \stackrel{\tau}{\vdash} Q :: (z : C)$$

- $\Delta, (x : A), \overline{y} : \overline{B} \stackrel{\theta^{+r}}{\vdash} (t \leftarrow f \ \overline{y} ; Q) :: (z : C)$

By induction hypothesis, there exist $\{\Delta_i\}_{i \in \mathcal{I}}$, $\{D_i\}_{i \in \mathcal{I}}$, $\{C_i\}_{i \in \mathcal{I}}$, and $\{r_i\}_{i \in \mathcal{I}}$ such that

- for all $i \in \mathcal{I}$, $\Delta_i, (x : A_i), (t : D_i) \stackrel{\tau^i}{\vdash} Q :: (z : C_i)$, and
- $\sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_i = \Delta$, $\sum_{i \in \mathcal{I}}^L p_i \cdot D_i = D$, $\sum_{i \in \mathcal{I}}^R p_i \cdot C_i = C$, $\sum_{i \in \mathcal{I}} p_i \cdot r_i = r$.

By Lemma 12, there exist $\{\overline{B_i}\}_{i \in \mathcal{I}}$ and $\{q_i\}_{i \in \mathcal{I}}$ such that

- for all $i \in \mathcal{I}$, $(x' : A_i), \overline{y'} : \overline{B_i} \stackrel{\theta^i}{\vdash} P_f :: (t' : D_i)$, and
- $\sum_{i \in \mathcal{I}}^L p_i \cdot \overline{B_i} = \overline{B}$, $\sum_{i \in \mathcal{I}} p_i \cdot q_i = q$.

Then for each $i \in \mathcal{I}$, $\Delta_i, (x : A_i), \overline{y} : \overline{B_i} \stackrel{\theta^{i+r_i}}{\vdash} (t \leftarrow f \ \overline{y} ; Q) :: (z : C_i)$.

We conclude by the following:

$$\begin{aligned} \sum_{i \in \mathcal{I}} p_i \cdot (q_i + r_i) &= \sum_{i \in \mathcal{I}} p_i \cdot q_i + \sum_{i \in \mathcal{I}} p_i \cdot r_i \\ &= q + r. \end{aligned}$$

(▷R)

$$\Delta, (x : A) \stackrel{\theta^{-r}}{\vdash} P :: (z : C)$$

- $\Delta, (x : A) \stackrel{\theta}{\vdash} (\text{pay } z \{r\} ; P) :: (z : \triangleright^r C)$

By induction hypothesis, there exist $\{\Delta_i\}_{i \in \mathcal{I}}$, $\{C_i\}_{i \in \mathcal{I}}$, and $\{q_i\}_{i \in \mathcal{I}}$ such that

- for all $i \in \mathcal{I}$, $\Delta_i, (x : A_i) \stackrel{\theta^i}{\vdash} P :: (z : C_i)$, and
- $\sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_i = \Delta$, $\sum_{i \in \mathcal{I}}^R p_i \cdot C_i = C$, $\sum_{i \in \mathcal{I}} p_i \cdot q_i = q - r$.

Then for each $i \in \mathcal{I}$, $\Delta_i, (x : A_i) \not\models^{i+r} (\text{pay } z \{r\} ; P) :: (z : \triangleright^r C_i)$.
We conclude by the following:

$$\begin{aligned} \sum_{i \in \mathcal{I}}^R p_i \cdot (\triangleright^r C_i) &= \triangleright^r (\sum_{i \in \mathcal{I}}^R p_i \cdot C_i) \\ &= \triangleright^r C, \\ \sum_{i \in \mathcal{I}} p_i \cdot (q_i + r) &= \sum_{i \in \mathcal{I}} p_i \cdot q_i + r \\ &= (q - r) + r \\ &= q. \end{aligned}$$

($\triangleright L =$)

$$\frac{\Delta, (x : A) \not\models^{+r} Q :: (z : C)}{\Delta, (x : \triangleright^r A) \not\models (\text{get } x \{r\} ; Q) :: (z : C)}$$

- $\Delta, (x : \triangleright^r A) \not\models (\text{get } x \{r\} ; Q) :: (z : C)$
By induction hypothesis, there exist $\{\Delta_i\}_{i \in \mathcal{I}}$, $\{C_i\}_{i \in \mathcal{I}}$, and $\{q_i\}_{i \in \mathcal{I}}$ such that
 - for all $i \in \mathcal{I}$, $\Delta_i, (x : A_i) \not\models^{i+r} Q :: (z : C_i)$, and
 - $\sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_i = \Delta$, $\sum_{i \in \mathcal{I}}^R p_i \cdot C_i = C$, $\sum_{i \in \mathcal{I}} p_i \cdot q_i = q + r$.

Then for each $i \in \mathcal{I}$, $\Delta_i, (x : \triangleright^r A_i) \not\models^{i-r} (\text{get } x \{r\} ; Q) :: (z : C_i)$.
We conclude by the following:

$$\begin{aligned} \sum_{i \in \mathcal{I}} p_i \cdot (q_i - r) &= \sum_{i \in \mathcal{I}} p_i \cdot q_i - r \\ &= (q + r) - r \\ &= q. \end{aligned}$$

($\triangleright L \neq$)

$$\frac{\Delta, (x : A), (y : B) \not\models^{+r} Q :: (z : C)}{\Delta, (x : A), (y : \triangleright^r B) \not\models (\text{get } y \{r\} ; Q) :: (z : C)}$$

- $\Delta, (x : A), (y : \triangleright^r B) \not\models (\text{get } y \{r\} ; Q) :: (z : C)$
By induction hypothesis, there exist $\{\Delta_i\}_{i \in \mathcal{I}}$, $\{B_i\}_{i \in \mathcal{I}}$, $\{C_i\}_{i \in \mathcal{I}}$, and $\{q_i\}_{i \in \mathcal{I}}$ such that
 - for all $i \in \mathcal{I}$, $\Delta_i, (x : A_i), (y : B_i) \not\models^{i+r} Q :: (z : C_i)$, and
 - $\sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_i = \Delta$, $\sum_{i \in \mathcal{I}}^L p_i \cdot B_i = B$, $\sum_{i \in \mathcal{I}}^R p_i \cdot C_i = C$, $\sum_{i \in \mathcal{I}} p_i \cdot q_i = q + r$.
- Then for each $i \in \mathcal{I}$, $\Delta_i, (x : A_i), (y : \triangleright^r B_i) \not\models^{i-r} (\text{get } x \{r\} ; Q) :: (z : C_i)$.
We conclude by the following:

$$\begin{aligned} \sum_{i \in \mathcal{I}}^L p_i \cdot (\triangleright^r B_i) &= \triangleright^r (\sum_{i \in \mathcal{I}}^L p_i \cdot B_i) \\ &= \triangleright^r B, \\ \sum_{i \in \mathcal{I}} p_i \cdot (q_i - r) &= \sum_{i \in \mathcal{I}} p_i \cdot q_i - r \\ &= (q + r) - r \\ &= q. \end{aligned}$$

($\triangleleft R$)

$$\frac{\Delta, (x : A) \not\models^{+r} P :: (z : C)}{\Delta, (x : A) \not\models (\text{get } z \{r\} ; P) :: (z : \triangleleft^r C)}$$

- $\Delta, (x : A) \not\models (\text{get } z \{r\} ; P) :: (z : \triangleleft^r C)$
By induction hypothesis, there exist $\{\Delta_i\}_{i \in \mathcal{I}}$, $\{C_i\}_{i \in \mathcal{I}}$, and $\{q_i\}_{i \in \mathcal{I}}$ such that
 - for all $i \in \mathcal{I}$, $\Delta_i, (x : A_i) \not\models^{i+r} P :: (z : C_i)$, and
 - $\sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_i = \Delta$, $\sum_{i \in \mathcal{I}}^R p_i \cdot C_i = C$, $\sum_{i \in \mathcal{I}} p_i \cdot q_i = q + r$.
- Then for each $i \in \mathcal{I}$, $\Delta_i, (x : A_i) \not\models^{i-r} (\text{get } z \{r\} ; P) :: (z : \triangleleft^r C_i)$.
We conclude by the following:

$$\begin{aligned} \sum_{i \in \mathcal{I}}^R p_i \cdot (\triangleleft^r C_i) &= \triangleleft^r (\sum_{i \in \mathcal{I}}^R p_i \cdot C_i) \\ &= \triangleleft^r C, \end{aligned}$$

$$\begin{aligned}
 \sum_{i \in \mathcal{I}} p_i \cdot (q_i - r) &= \sum_{i \in \mathcal{I}} p_i \cdot q_i - r \\
 &= (q + r) - r \\
 &= q.
 \end{aligned}$$

($\triangleleft L =$)

$$\frac{\Delta, (x : A) \not\vdash^{q-r} Q :: (z : C)}{\Delta, (x : \triangleleft^r A) \not\vdash^{q-r} (\text{pay } x \{r\} ; Q) :: (z : C)}$$

- $\Delta, (x : \triangleleft^r A) \not\vdash^{q-r} (\text{pay } x \{r\} ; Q) :: (z : C)$

By induction hypothesis, there exist $\{\Delta_i\}_{i \in \mathcal{I}}, \{C_i\}_{i \in \mathcal{I}}, \{q_i\}_{i \in \mathcal{I}}$ such that

- for all $i \in \mathcal{I}$, $\Delta_i, (x : A_i) \not\vdash^{q_i} Q :: (z : C_i)$, and
- $\sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_i = \Delta$, $\sum_{i \in \mathcal{I}}^R p_i \cdot C_i = C$, $\sum_{i \in \mathcal{I}} p_i \cdot q_i = q - r$.

Then for each $i \in \mathcal{I}$, $\Delta_i, (x : \triangleleft^r A_i) \not\vdash^{q_i+r} (\text{pay } x \{r\} ; Q) :: (z : C)$.

We conclude by the following:

$$\begin{aligned}
 \sum_{i \in \mathcal{I}} p_i \cdot (q_i + r) &= \sum_{i \in \mathcal{I}} p_i \cdot q_i + r \\
 &= (q - r) + r \\
 &= q.
 \end{aligned}$$

($\triangleleft L \neq$)

$$\frac{\Delta, (x : A), (y : B) \not\vdash^{q-r} Q :: (z : C)}{\Delta, (x : A), (y : \triangleleft^r B) \not\vdash^{q-r} Q :: (z : C)}$$

- $\Delta, (x : A), (y : \triangleleft^r B) \not\vdash^{q-r} Q :: (z : C)$

By induction hypothesis, there exist $\{\Delta_i\}_{i \in \mathcal{I}}, \{B_i\}_{i \in \mathcal{I}}, \{C_i\}_{i \in \mathcal{I}}, \{q_i\}_{i \in \mathcal{I}}$ such that

- for all $i \in \mathcal{I}$, $\Delta_i, (x : A_i), (y : B_i) \not\vdash^{q_i} Q :: (z : C_i)$, and
- $\sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_i = \Delta$, $\sum_{i \in \mathcal{I}}^L p_i \cdot B_i = B$, $\sum_{i \in \mathcal{I}}^R p_i \cdot C_i = C$, $\sum_{i \in \mathcal{I}} p_i \cdot q_i = q - r$.

Then for each $i \in \mathcal{I}$, $\Delta_i, (x : A_i), (y : \triangleleft^r B_i) \not\vdash^{q_i+r} (\text{pay } y \{r\} ; Q) :: (z : C)$.

We conclude by the following:

$$\begin{aligned}
 \sum_{i \in \mathcal{I}}^L p_i \cdot (\triangleleft^r B_i) &= \triangleleft^r (\sum_{i \in \mathcal{I}}^L p_i \cdot B_i) \\
 &= \triangleleft^r B, \\
 \sum_{i \in \mathcal{I}} p_i \cdot (q_i + r) &= \sum_{i \in \mathcal{I}} p_i \cdot q_i + r \\
 &= (q - r) + r \\
 &= q.
 \end{aligned}$$

(work)

$$\frac{\Delta, (x : A) \not\vdash^{q-r} P :: (z : C)}{\Delta, (x : A) \not\vdash^{q-r} (\text{work } \{r\} ; P) :: (z : C)}$$

- $\Delta, (x : A) \not\vdash^{q-r} (\text{work } \{r\} ; P) :: (z : C)$

By induction hypothesis, there exist $\{\Delta_i\}_{i \in \mathcal{I}}, \{C_i\}_{i \in \mathcal{I}}$, and $\{q_i\}_{i \in \mathcal{I}}$ such that

- for all $i \in \mathcal{I}$, $\Delta_i, (x : A_i) \not\vdash^{q_i} P :: (z : C_i)$, and
- $\sum_{i \in \mathcal{I}}^L p_i \cdot \Delta_i = \Delta$, $\sum_{i \in \mathcal{I}}^R p_i \cdot C_i = C$, $\sum_{i \in \mathcal{I}} p_i \cdot q_i = q - r$.

Then for each $i \in \mathcal{I}$, $\Delta_i, (x : A_i) \not\vdash^{q_i+r} (\text{work } \{r\} ; P) :: (z : C_i)$.

We conclude by the following:

$$\begin{aligned}
 \sum_{i \in \mathcal{I}} p_i \cdot (q_i + r) &= \sum_{i \in \mathcal{I}} p_i \cdot q_i + r \\
 &= (q - r) + r \\
 &= q.
 \end{aligned}$$

□

LEMMA 12. If $\Delta \not\vdash^q P :: (x : A)$ and $A = \sum_{i \in \mathcal{I}}^L p_i \cdot A_i$, then there exist $\{\Delta_i\}_{i \in \mathcal{I}}$ and $\{q_i\}_{i \in \mathcal{I}}$ such that

- for all $i \in \mathcal{I}$, $\Delta_i \not\vdash^{q_i} P :: (x : A_i)$, and

- $\Sigma_{i \in \mathcal{I}}^L p_i \cdot \Delta_i = \Delta$, $\Sigma_{i \in \mathcal{I}} p_i \cdot q_i = q$.

PROOF. Similar to the proof of Lemma 11. \square

Now we lift the type judgments from expressions to processes, configurations, and distributions, as well as extend Lemmas 11 and 12 accordingly.

$$\frac{\Delta \not\models P :: (c : A)}{\Delta \stackrel{q+w}{\models} \text{proc}(c, w, P) :: (c : A)} \quad \frac{\begin{array}{c} x_1 : A_1, x_2 : A_2, \dots, x_n : A_n \stackrel{q}{\models} C :: (z : C) \\ \forall i \in \{1, 2, \dots, n\} : \Delta_i \stackrel{q_i}{\models} C_i :: (x_i : A_i) \end{array}}{\Delta_1, \Delta_2, \dots, \Delta_n \stackrel{q + \sum_{i=1}^n q_i}{\models} (C \ C_1 \ C_2 \ \dots \ C_n) :: (z : C)}$$

$$\frac{\mu = \{C_i : p_i\}_{i \in \mathcal{I}} \quad \forall i \in \mathcal{I} : \Delta_i \stackrel{q_i}{\models} C_i :: (x : A_i) \quad \Delta = \Sigma_{i \in \mathcal{I}}^L p_i \cdot \Delta_i \quad A = \Sigma_{i \in \mathcal{I}}^R p_i \cdot A_i \quad q = \Sigma_{i \in \mathcal{I}} p_i \cdot q_i}{\Delta \stackrel{q}{\models} \mu :: (x : A)}$$

COROLLARY 18. If $\Delta, (x : A) \stackrel{q}{\models} C :: (z : C)$ and $A = \Sigma_{i \in \mathcal{I}}^R p_i \cdot A_i$, then there exist $\{\Delta_i\}_{i \in \mathcal{I}}$, $\{C_i\}_{i \in \mathcal{I}}$, and $\{q_i\}_{i \in \mathcal{I}}$ such that

- for all $i \in \mathcal{I}$, $\Delta_i, (x : A_i) \stackrel{q_i}{\models} C_i :: (z : C_i)$, and
- $\Sigma_{i \in \mathcal{I}}^L p_i \cdot \Delta_i = \Delta$, $\Sigma_{i \in \mathcal{I}}^R p_i \cdot C_i = C$, $\Sigma_{i \in \mathcal{I}} p_i \cdot q_i = q$.

PROOF. By induction on the derivation of $\Delta, (x : A) \stackrel{q}{\models} C :: (z : C)$.

- $\frac{\Delta, (x : A) \not\models Q :: (c : C)}{\Delta, (x : A) \stackrel{q+w}{\models} \text{proc}(c, w, Q) :: (c : C)}$
Appeal to Lemma 11.
- $\frac{x_1 : B_1, x_2 : B_2, \dots, x_n : B_n \stackrel{q_0}{\models} C_0 :: (z : C) \quad \forall j \in \{1, 2, \dots, n\} : \Delta_j \stackrel{q_j}{\models} C_j :: (x_j : B_j)}{\Delta_1, \Delta_2, \dots, \Delta_n \stackrel{\sum_{j=0}^n q_j}{\models} (C_0 \ C_1 \ C_2 \ \dots \ C_n) :: (z : C)}$

WLOG let us assume $\Delta_1 = \Gamma, (x : A)$.

By induction hypothesis on $\Gamma, (x : A) \stackrel{q_1}{\models} C_1 :: (x_1 : B_1)$, there exist $\{\Gamma_i\}_{i \in \mathcal{I}}$, $\{B_{1,i}\}_{i \in \mathcal{I}}$, and $\{q_{1,i}\}_{i \in \mathcal{I}}$ such that

- for all $i \in \mathcal{I}$, $\Gamma_i, (x : A_i) \stackrel{q_{1,i}}{\models} C_1 :: (x_1 : B_{1,i})$, and
- $\Sigma_{i \in \mathcal{I}}^L p_i \cdot \Gamma_i = \Gamma$, $\Sigma_{i \in \mathcal{I}}^R p_i \cdot B_{1,i} = B_1$, $\Sigma_{i \in \mathcal{I}} p_i \cdot q_{1,i} = q_1$.

By induction hypothesis on the typing judgment for C_0 , there exist $\{B_{j,i}\}_{i \in \mathcal{I}}$ for each $j \neq 1$, $\{C_i\}_{i \in \mathcal{I}}$, and $\{q_{0,i}\}_{i \in \mathcal{I}}$ such that

- for all $i \in \mathcal{I}$, $x_1 : B_{1,i}, x_2 : B_{2,i}, \dots, x_n : B_{n,i} \stackrel{q_{0,i}}{\models} C_0 :: (z : C_i)$, and
- $\Sigma_{i \in \mathcal{I}}^L p_i \cdot B_{j,i} = B_j$ for each $j \neq 1$, $\Sigma_{i \in \mathcal{I}}^R p_i \cdot C_i = C$, $\Sigma_{i \in \mathcal{I}} p_i \cdot q_{0,i} = q_0$.

For each $j \neq 1$, by Corollary 19, there exist $\{\Delta_{j,i}\}_{i \in \mathcal{I}}$ and $\{q_{j,i}\}_{i \in \mathcal{I}}$ such that

- for all $i \in \mathcal{I}$, $\Delta_{j,i} \stackrel{q_{j,i}}{\models} C_j :: (x_j : B_{j,i})$, and
- $\Sigma_{i \in \mathcal{I}}^L p_i \cdot \Delta_{j,i} = \Delta_j$, $\Sigma_{i \in \mathcal{I}} p_i \cdot q_{j,i} = q_j$.

For each $i \in \mathcal{I}$, by the fact that

- $\Gamma_i, (x : A_i) \stackrel{q_{1,i}}{\models} C_1 :: (x_1 : B_{1,i})$,
- $x_1 : B_{1,i}, x_2 : B_{2,i}, \dots, x_n : B_{n,i} \stackrel{q_{0,i}}{\models} C_0 :: (z : C_i)$, and
- for each $j \neq 1$, $\Delta_{j,i} \stackrel{q_{j,i}}{\models} C_j :: (x_j : B_{j,i})$,

we derive

$$\Gamma_i, (x : A_i), \Delta_{2,i}, \dots, \Delta_{n,i} \stackrel{\sum_{j=0}^n q_{j,i}}{\models} (C_0 \ C_1 \ C_2 \ \dots \ C_n) :: (z : C_i).$$

We conclude by the following:

$$\Sigma_{i \in \mathcal{I}} p_i \cdot \Sigma_{j=0}^n q_{j,i} = \Sigma_{j=0}^n \Sigma_{i \in \mathcal{I}} p_i \cdot q_{j,i}$$

$$= \sum_{j=0}^n q_j.$$

□

COROLLARY 19. If $\Delta \Vdash^q C :: (x : A)$ and $A = \sum_{i \in \mathcal{I}} p_i \cdot A_i$, then there exist $\{\Delta_i\}_{i \in \mathcal{I}}$ and $\{q_i\}_{i \in \mathcal{I}}$ such that

- for all $i \in \mathcal{I}$, $\Delta_i \Vdash^{q_i} C :: (x : A_i)$, and
- $\sum_{i \in \mathcal{I}} p_i \cdot \Delta_i = \Delta$, $\sum_{i \in \mathcal{I}} p_i \cdot q_i = q$.

PROOF. Similar to the proof of Corollary 18, but appeal to Lemma 12. □

Finally, we can formulate and prove *preservation* of this type system.

THEOREM 20. If $\Delta \Vdash^q C :: (x : A)$ and $C \xrightarrow{\text{det}} C'$, then $\Delta \Vdash^q C' :: (x : A)$.

PROOF. Appeal to the preservation of resource-aware session types [Das et al. 2018]. □

THEOREM 21. If $\Delta \Vdash^q C :: (x : A)$ and $C \xrightarrow{\text{prob}} \mu'$, then $\Delta \Vdash^q \mu' :: (x : A)$.

PROOF. The deterministic case appeals to Theorem 20. For the probabilistic case, i.e., where one process in C evaluates a flip expression, we proceed by induction on the derivation of $\Delta \Vdash^q C :: (x : A)$. The intuition is to use Corollaries 18 and 19 to propagate the type adjustment on the tree. □

THEOREM 22 (PRESERVATION). If $\Delta \Vdash^q \mu :: (x : A)$ and $\mu \Rightarrow \mu'$, then $\Delta \Vdash^q \mu' :: (x : A)$.

PROOF. Appeal to Theorem 21. □

Note that in this approach, it is *unnecessary* to prove *global progress* of the type system. Instead, in the distribution-to-distribution semantics, we cannot make a step on a distribution if and only if all the configurations in the support of the distribution are poised. Then we can directly apply the global progress of resource-aware session types [Das et al. 2018].