

Bioinformatics

SimpleChrome: Encoding of Combinatorial Effects for Predicting Gene Expression

Wei Cheng¹, Ghulam Murtaza¹ and Aaron Wang^{1,*}

¹Computer Science Department, Brown University, Providence, RI, 02912, USA

*To whom correspondence should be addressed.

Abstract

With the breakthrough of recent state-of-the-art sequencing technology, genomics data sets have become ubiquitous. The emergence of large-scale data sets provides great opportunities for better understanding of genomics and one fundamental task is to understand gene regulation. Although each cell in the human body contains the same set of DNA information, gene expression controls the functions of these cells. There are two important factors that control the expression level of each gene: (1) Gene regulation such as histone modification can directly regulate gene expression. (2) Neighbor genes that are functional related or interact to each other can effect the gene expression level. Previous efforts tried to address the former using Attention-based model. To address the second problem, it requires incorporation of all potential related gene information into the model. Though modern machine learning and deep learning models were able to capture signals when applied to moderately sized data, they struggled to recover the underlying signals of the data due to the data's higher dimensionality. To remedy this issue, we present SimpleChrome, a deep learning model that learns the latent histone modification representations of genes. The features learned from the model allow us to better understand the combinatorial effects of cross-gene interactions and direct gene regulation on the target gene expression. The results of this paper show outstanding improvements on the predictive capabilities of downstream models and greatly relaxes the need for a large data set to learn a robust, generalized neural network. These results have immediate downstream effects in epigenomics research and drug development.

Supplementary Information: Code and data is available at <https://github.com/aaronwangj/SimpleChrome>

Contact: aaronjwang@brown.edu

1 Introduction

The human body has thousands of different cell types, ranging from muscle cells to brain cells, and even though these cells contain the same DNA, their roles differ drastically due to the differential expression levels of different genes within cells, leading to downstream changes in the cell's overall functions. These changes may affect which genes in the cell are expressed.

One critical factor of gene expression is the modification of histone proteins, bead-like structures that provide support to chromosomes. The cell uses these histone proteins to organize the DNA in a condensed state, controlling which parts of the DNA are "exposed" and thus allowed to express. Histone proteins are prone to chemical modification which may change which parts of the DNA are exposed and expressed. This is known as the Histone Code Hypothesis. Unlike genetic mutations, another source of gene expression modification, histone modifications

have shown to be potentially reversible, a powerful juxtaposition that has advanced the development of a new generation of targeted drugs that cure diseases resulting from reversible aberrant histone modifications. Recent advancements in sequencing technology have allowed researchers to quantify gene expression and histone modification, the latest and most comprehensive data set being REMC (Roadmap Epigenome Project). Initial studies to understand the combinatorial effects of histone modifications on gene expression experimentally validated that there exists a correlation between histone modifications and Gene expression. Following computational methods, most notably DeepChrome by Singh *et al.* (2016) and AttentiveChrome by Singh *et al.* (2017) that employ deep learning to learn complex combinatorial interactions outperform all the previous Machine Learning based methods. Even though these models show superior predictive performance, they only consider a limited amount of data around the Transcription Start Site (TSS) to perform their predictions and utilized complex models with many parameters. Previous literature has shown that neighbor genes

may also play important roles in determining the gene expression level as they may interact with each other in a functional related pathway. Unfortunately, including more potential candidate genes such as neighbor genes into conventional deep learning models would increase the number of input features significantly, hindering the power and computational sustainability of the model. To overcome this issue, we develop SimpleChrome and DeepNeighbors. DeepNeighbors is trained in two steps. First, it utilizes unsupervised learning to derive a lower dimensional representation of histone modifications for each gene as new input. In the second step, the representation of the target gene or the fused representations of both target gene and its neighbor genes is fed into a simple model for predicting gene expression. SimpleChrome refers to the first step of the training step only and does not include the neighboring genes for predicting gene expression. We showed that the representations learned by SimpleChrome can successfully preserve useful information of original data for predicting gene expression. We demonstrate that this can reduce required sample size and model complexity for achieving competitive prediction performance. We further showed that the neighbor genes do not contribute significantly for predicting gene expression, seen in the performance of DeepNeighbors.

2 Related Work

2.1 Previous Methods

Over the past decade, many researchers have developed machine learning and deep learning-based models to predict the effect of Histone Modifications (HMs) on gene expressions. These studies primarily use the REMC data set, which contains the intensity and location of HMs across the entire genome across 56 different cell types. Recent studies have attempted to model this either as a classification or a regression task. The studies that have attempted to model it as a classification task have applied a slew of different techniques. These techniques include Linear Regression by Karlic *et al.* (2010), SVM by Cheng *et al.* (2011), Random Forests by Dong *et al.* (2012), Rule-Based Learning by Ho *et al.* (2015), and Deep Learning by Singh *et al.* (2017, 2016). DeepChrome and AttentiveChrome are cell-specific gene expression prediction frameworks that outperform the previously published machine learning based techniques. DeepChrome utilizes CNNs to capture the histone marks' combinatorial interactions to autonomously learn the latent biological interactions. Whereas, AttentiveChrome uses a hierarchical attention-based model to understand the latent biological interactions between the HM to predict the gene expression. Similarly, other studies have tried to model the same problem as a regression task that includes SVR (Support Vector Regression) model by Cheng *et al.* (2011) and DeepDIFF (Attention Based). These models attempt to estimate the differential gene expression across different cell lines based on the HM's difference around the TSS (Transcription Start Site) and TTS (Transcription Termination Site). Though these models achieve greater performance, the models are much more complex and do not account for impact of neighbor genes.

2.2 Proposed ideas

Recent works have used the combination of gated neural networks with dual attention networks to predict chromatin accessibility from Guo *et al.* (2020a). As suggested by the authors, the gated network structure can stabilize variances and also avoid gradients vanishing and exploding and thus may converge to a better model. Beside, multiple embedding modules were also proposed by Guo *et al.* (2020b) to learn DNA representations which was shown with better performance compared with just RNN, or gated networks. Thus, learning more efficient embedding could be a potential improvement over existing models. In recent years, there were

many studies proposed to use generative models to learn input embeddings as the generative modeling captures the underlying mechanism of how the data is generated and could thus learn more useful information from them. Some well known models include Variational Autoencoders (VAEs), Generative Adversarial Networks (GANs) or their hybrid Adversarial Autoencoders (AAEs). Previous studies showed that using these models to first learn latent representations without labels and then use latent representations for downstream supervised tasks can significantly improve prediction accuracy, as seen by Yu and Lee (2019); Makhzani *et al.* (2016); Kingma *et al.* (2014). Therefore, we propose to combine generative models with previous techniques to improve performance.

3 Methods

3.1 Representation Learning and Autoencoders

We are given an input matrix \mathbf{X} with dimension of $N \times P$, where N denotes the number of samples and P indicates the number of features. As P becomes larger, input matrix \mathbf{X} becomes harder to work with for two main reasons. Firstly, storing and parsing the data in memory as well as passing and processing the data with the models can be computational expensive. Secondly, the objective of the model becomes harder to optimize and requires significantly larger N to derive an optimal solution. Hence, we are interested in converting \mathbf{X} into \mathbf{Z} with dimension of $N \times K$ where $K \ll P$. Each column of \mathbf{Z} is a lower dimension representation of the original data \mathbf{X} . Since the representations are supposed to preserve the essence of the original input and thus discard any redundant information within lower dimensions, downstream tasks such as predictions will greatly benefit. There exist multiple dimension reduction techniques in literature, specifically by Scholz *et al.* (2008); Kasun *et al.* (2016), such as Principle Component Analysis (PCA), Tensor Factorization, Singular Value Decomposition (SVD) which are based on linear transformations; while linear models are easier to interpret and compute, they will lose non-linearity in the original data. Hence, in this paper, we consider non-linear models such as Autoencoders.

An Autoencoder contains an encoder $f_{\theta}(\mathbf{x})$ and a decoder $g_{\phi}(\mathbf{z})$ parameterized with θ and ϕ , respectively. The encoder $f_{\theta}(\mathbf{x})$ takes one sample of original data \mathbf{x} as input and outputs a vector contains latent variables \mathbf{z} in a lower dimension. The decoder $g_{\phi}(\mathbf{z})$ takes the latent variables \mathbf{z} as input and outputs reconstructed data \mathbf{x}' with the same dimensions of \mathbf{x} . The intuition behind the Autoencoder is that fitting latent variables \mathbf{z} will enable better construction of \mathbf{x} . Thus, Autoencoders are often trained with the following objective,

$$\sum_{i=1}^N \|\mathbf{x}_i - g_{\phi}(f_{\theta}(\mathbf{x}_i))\|^2 + \lambda \sum_{\mathbf{w} \in \{\theta, \phi\}} \|\mathbf{w}\|_p, \quad (1)$$

where $\|\bullet\|^2$ denotes the mean square error and $\|\mathbf{w}\|_p$ denotes regularization on the weights \mathbf{w} of the model (with p denotes p -th norm). As the encoder and the decoder contains nonlinear activation function such as ReLU, sigmoid, etc, Autoencoders are powerful tools for learning lower dimensional representation of raw, non-linear data \mathbf{x} .

3.2 Generative Modeling and Variational Autoencoder

Generative Modeling has drawn a lot of attention in the deep learning field for the past several years. Unlike most black-box methods in deep learning, generative models aim to learn the underlying distribution of data $P(\mathbf{x})$ which enables better understanding of how the data is generated, thus benefiting downstream tasks such as representation learning, generating new samples, etc. Two of the most popular methods are Generative Adversarial Networks (GANs) by Goodfellow *et al.* (2014) and Variational

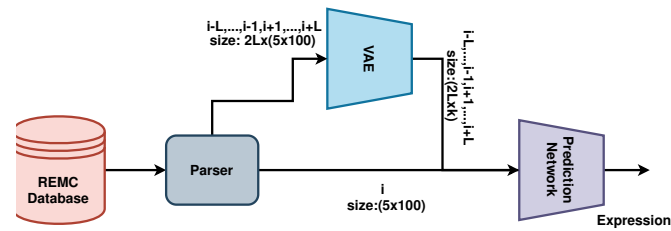


Fig. 1. Training process of DeepNeighbor: 1. Data are preprocessed and neighbor gene input matrices are transformed into lower dimension using VAE and concatenated into a matrix z . 2. z combines with x for the target gene and is fed into an MLP model for predicting gene expression.

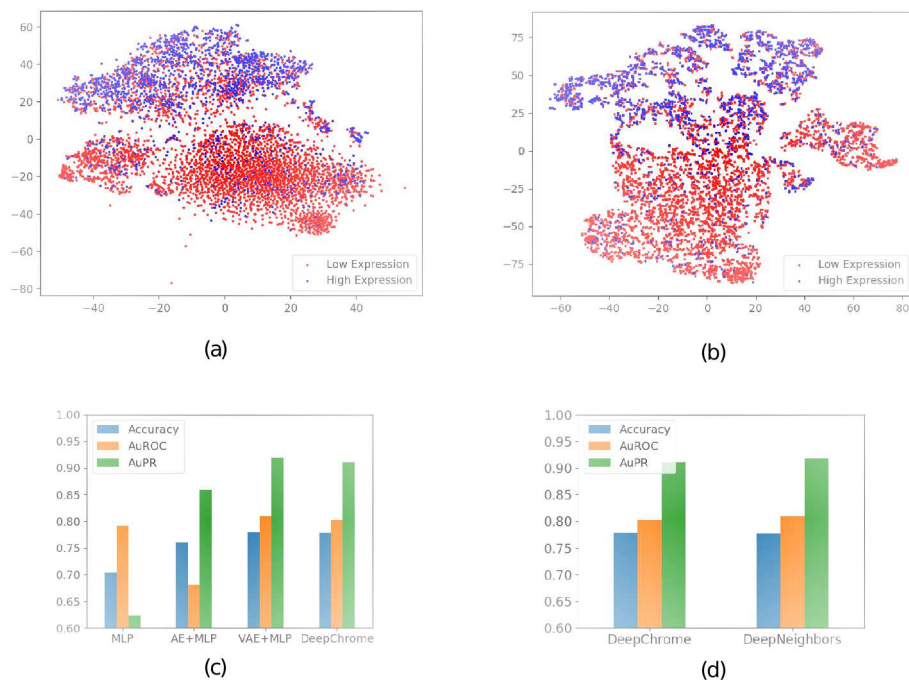


Fig. 2. Figure a and b shows the plot of t-SNE of encoder outputs. Figure c) compares the performance of Multi Layer Perceptron (with different data inputs) against DeepChrome. Figure d) compares the predictive performance of SimpleChrome against DeepChrome

Autoencoders (VAEs) by Kingma and Welling (2013). While GANs were shown to generate high quality samples, the lack of theoretical support and the difficulty in adversarial learning hinders its utilities in the field, as seen by Tolstikhin *et al.* (2017). In this paper, we focus on Variational Autoencoders (VAEs) which are easier to train and enjoy strong theoretical support from Bayesian inference.

Similar to the Autoencoder, a Variational Autoencoder has an encoder $f_\theta(x)$ and a decoder $g_\phi(z)$. An intuitive way to understand VAEs is such that while they aim to reconstruct inputs similar to vanilla Autoencoders, they also attempt to regularize the latent space z simultaneously. In brief, while the Autoencoders are assumed to only encode isolated points of x in the latent space, VAEs aim to derive a smooth latent space; more specifically, the goal of VAEs is to find a model that maximizes the marginal log-likelihood $\log p_\theta(x)$. While the marginal likelihood can be intractable in practice, Bayesian inference theory provides an alternative for practical optimization. According to Jensen's inequality, one can derive an Evidence Lower Bound (ELBO) of the marginal likelihood,

$$\log p_\theta(x) \geq \mathbb{E}[\log p_\theta(x|z)] - \text{KL}(q_\phi(z|x) || p_\theta(z)), \quad (2)$$

where $p_\theta(x|z)$ denotes the conditional likelihood (given latent variables) of reconstructed data output by the decoder. One can interpret this by treating the output of the decoder as a probabilistic distribution (i.e. a Gaussian distribution for continuous sample); $q_\phi(z|x)$ is the conditional posterior of latent variable z given an input x outputted by the encoder; $p_\theta(z)$ denotes the prior distribution which is commonly assumed to be standard Gaussian $\mathcal{N}(0, I)$; the last term on the right hand side is the Kullback–Leibler divergence (relative entropy) between two distributions. When the prior and conditional posterior are both Gaussian, the KL term has a closed-form solution that can be directly trained with a gradient-based method. While the expectation of the likelihood term can be hard to derive in practice, Kingma and Welling (2013) introduce a Stochastic Gradient Variational Bayes (SGVB) method to approximate the expectation to overcome such an issue. Hence, modern VAEs can be easily trained with gradient descent methods. As the latent variables are appropriately 'regularized' such that it maximizes the data probability, the latent variables should encode the inputs very well once the model converges.

3.3 Two-Step Training for Predicting Gene Expression

The training of the model can be dissected into two parts as shown in 1. In step one, we prepare relevant data and compress high dimensional data that may contain redundant information to lower dimensional representations. In step two, we consider two prediction models: i). A prediction model (i.e. Multilayer perceptron) that takes compressed data of the target gene as input. ii). A concatenation of target gene data with compressed neighbor genes data as input into the prediction model.

3.3.1 Data Preparation and Dimension Reduction

Following the work from Singh *et al.* (2016, 2017), we use five core Histone Modification marks for 56 different cell types derived from REMC database; these five HM marks are H3K27me3, H3K36ME3, H3K4me1, H3K4me3 and H3K9ME3. For each cell type, of which there are 19,802 genes in total, we follow previous works and divide them into training (6601 genes), validation (6601 genes), and testing (6600 genes). In this study, we also consider using even smaller training sizes (100 genes or 1000 genes randomly sampled from 6601). For each gene, the 10000 bp (+/- 5000) region around the TSS (Transcription Start Site) is divided into bins of size 100. For each bin, we calculate the frequency of each Histone Modification, which gives a 5 by 100 matrix for the target gene i . Similar to AttentiveChrome and DeepChrome, we formulate the gene expression prediction as a binary classification task. Each target gene is represented as a 5 by 100 matrix x_i , the raw input for predicting the gene expression level. As a first step, we used either a Autoencoder or Variational Autoencoder architecture to learn a lower dimension of $k = \{2, 5, 10\}$ latent representation (we find that $k = 10$ optimizes performance) z_i . Then, we consider using either i) z_i , or ii). x_i concatenated with $l = 20$ neighbor z_j as inputs into the prediction model. As a comparison, we also include prediction models that use x_i as inputs such as DeepChrome. Due to the limitation of computational source, we only randomly picked three cell lines out of 56 and report them as the results.

3.3.2 Baseline Models and Evaluation Metric

We evaluate our model primarily based on predictive performance against well-known, state-of-the-art deep learning models. Since DeepChrome and AttentiveChrome outperform previous machine learning methods by a statistically significant margin, we focus our efforts on comparing our performance against DeepChrome and AttentiveChrome. However, while the focus of this work is to improve predictive capabilities, we choose DeepChrome as our sole baseline because as shows similar (or better) performance compared to AttentiveChrome, while still being interpretable.

The first baseline is DeepChrome, and it takes x_i (5 by 100) as input matrix. We also included a two-layer MLP that takes x_i as input as a comparison as well.

For VAEs and AEs, we used a two layer convolution encoder (64 and 128 filters) with batch normalization and ReLU activation, followed by two dense layers (one for learning means and one for learning variances). The decoder first uses a dense layer and then two convolution transpose layers with a final *tanh* activation layer. The *tanh* function compresses all data into the range of -1 and 1, which is then normalized. The AE is trained with MSE as the reconstruction loss and the VAE has an additional KL divergence for regularization loss.

There are two main prediction models to evaluate, which are i). MLP, which uses z_i as input. For all MLPs, we simply used a two layer architecture with 50 and 20 hidden neurons and ReLU activations. ii) a CNN similar to DeepChrome that will take x_i and z_j of 20 neighbored genes, in which neighbored genes are chosen by prioritizing those with the smallest Euclidean distances to the target gene measured using latent variables z_i . The CNN has the same convolution layer as DeepChrome that takes x_i as input (50 filters with kernel size 10) and another convolution

layer that takes all z_j ($l = 20$ by $k = 10$) as input. Then, the output of these two convolution layers are concatenated and fed into a two layered MLP (same to DeepChrome) for prediction. All models are trained using the Adam optimizer with batch sizes of 100 and 10 epochs using training data or subsets of the training data.

4 Results

Model Specifications		Evaluation Metrics		
Model	Training Samples	Accuracy	AUROC	AUPRC
MLP + VAE	100	0.771	0.792	0.903
MLP + VAE	1000	0.780	0.808	0.914
MLP + VAE	All	0.780	0.809	0.919
MLP + Raw Data	100	0.647	0.774	0.608
MLP + Raw Data	1000	0.681	0.787	0.623
MLP + Raw Data	All	0.704	0.792	0.633
DeepChrome	100	0.730	0.802	0.908
DeepChrome	1000	0.776	0.803	0.912
DeepChrome	All	0.779	0.803	0.911
MLP + AE	100	0.751	0.672	0.672
MLP + AE	1000	0.752	0.678	0.859
MLP + AE	All	0.760	0.681	0.859

Fig. 3. This table summarizes Accuracy, AuROC and AuPR scores of different models with varying sample sizes.

We systematically evaluate the following questions: a.) Whether VAEs or Autoencoders can encode useful information from raw data for predicting gene expression. b.) What the difference in performance is with DeepChrome and SimpleChrome. c.) If models with encoded inputs learn faster and require less memory and data while maintaining equal performance.

To qualitatively evaluate (a), we use tSNE to visualize the clustering of all the genes in the test set. We first run tSNE using flattened x_i ; the plot is shown in Fig.2(a), which shows that genes with high expression and low expression seem to form two distinct clusters. We next run tSNE on z_i . We hypothesize that if VAEs or AEs can preserve useful information for predicting gene expression, then the tSNE results should preserve the distinct clusters. Indeed, as shown in Fig.2(b), one can see two clusters that are at least or even more distinct compared to Fig.2(a). As a quantitative evaluation, we compared the performance of prediction (measured by accuracy, AUROC, AUPR) of DeepChrome using x_i as input, MLP using x_i as input, with MLP using z_i from AE as input and MLP using z_i from VAE as input. As shown in Fig.2(c). DeepChrome and MLP utilizing latent variables z_i from VAE have similar performances overall while the AUPR of the latter is slightly better. Hence, we conclude that VAEs can better encode useful information than AEs.

To evaluate (b), we evaluate whether concatenating neighboring genetic information can better improve performance. Unfortunately, we did not see any improvement in performance overall, as the performance is statistically insignificant when compared to DeepChrome.

We found the most exciting results when evaluating (c). As introduced before, we hypothesized that generative modeling may have better performance when the sample size is limited. Thus, we sub-sampled 100 and 1000 samples for training all the previous models. The results are summarized in Fig.3. Surprisingly, we found out that MLP + VAE has similar and even better power when trained on only 100 or 1000 samples compared with DeepChrome using all 6601 training samples. The MLP model, with only 2 layers of 50 and 20 neurons, is much simpler and thus trains significantly faster compared to DeepChrome (Note: We tested the speed on the full data set using a MacBook Pro. MLP model with latent

variables takes less than 10 seconds while DeepChrome takes roughly one minute), yet maintained rivalling performance with less training data.

5 Conclusion

In this paper, we present a joint model system which attempts to include the histone modifications of spatially neighbored genes to improve the predictive capability in gene expression of existing state-of-the-art deep learning models. However, in our preliminary evaluation, we find that including the spatially neighboring genetic information brings at most negligible improvement in the predictive power of deep learning models. However, we show that our method of utilizing VAEs to encode the data set significantly improves the predictive capabilities of downstream models and greatly relaxes the requirements of a large data set to learn a robust, generalized model.

As an extension of our work, we intend to look at functionally relevant genes rather than solely spatially close genes. This novel representation of the cell would allow our model to potentially improve its predictive capabilities and use an attention style mechanism to provide insights into how and which proteins regulate gene expression. Furthermore, our training and evaluations were done on a single cell line (E004) due to the limited timeline of the project, and thus future work could experiment on other cell lines.

Acknowledgements

This work was conducted under Ritambhara Singh as part of the final course project for the graduate-level course Deep Learning in Genomics taught by Singh at Brown University. We appreciate the feedback from the instructor and our fellow students during the project's development.

References

- Cheng, C., Yan, K.-K., Yip, K. Y., Rozowsky, J., Alexander, R., Shou, C., and Gerstein, M. (2011). A statistical framework for modeling gene expression using chromatin features and application to modencode datasets. *Genome Biology*, **12**(2).
- Dong, X., Greven, M. C., Kundaje, A., Djebali, S., Brown, J. B., Cheng, C., Gingeras, T. R., Gerstein, M., Guigó, R., Birney, E., and et al. (2012). Modeling gene expression using chromatin features in various cellular contexts. *Genome Biology*, **13**(9).
- Goodfellow, I., Pouget-Abadie, J., Mirza, M., Xu, B., Warde-Farley, D., Ozair, S., Courville, A., and Bengio, Y. (2014). Generative adversarial nets. In *Advances in neural information processing systems*, pages 2672–2680.
- Guo, Y., Zhou, D., Li, W., Nie, R., Hou, R., and Zhou, C. (2020a). Attentive gated neural networks for identifying chromatin accessibility. *Neural Computing and Applications*, **32**(19), 15557–15571.
- Guo, Y., Zhou, D., Nie, R., Ruan, X., and Li, W. (2020b). Deepanf: A deep attentive neural framework with distributed representation for chromatin accessibility prediction. *Neurocomputing*, **379**, 305–318.
- Ho, B. H., Hassen, R. M. K., and Le, N. T. (2015). Combinatorial roles of dna methylation and histone modifications on gene expression. In Q. A. Dang, X. H. Nguyen, H. B. Le, V. H. Nguyen, and V. N. Q. Bao, editors, *Some Current Advanced Researches on Information and Computer Science in Vietnam*, pages 123–135. Cham. Springer International Publishing.
- Karlic, R., Chung, H.-R., Lasserre, J., Vlahovicek, K., and Vingron, M. (2010). Histone modification levels are predictive for gene expression. *Proceedings of the National Academy of Sciences*, **107**(7), 2926–2931.
- Kasun, L. L. C., Yang, Y., Huang, G.-B., and Zhang, Z. (2016). Dimension reduction with extreme learning machine. *IEEE transactions on Image Processing*, **25**(8), 3906–3918.
- Kingma, D. P. and Welling, M. (2013). Auto-encoding variational bayes. *arXiv preprint arXiv:1312.6114*.
- Kingma, D. P., Rezende, D. J., Mohamed, S., and Welling, M. (2014). Semi-supervised learning with deep generative models.
- Makhzani, A., Shlens, J., Jaitly, N., Goodfellow, I., and Frey, B. (2016). Adversarial autoencoders.
- Scholz, M., Fraunholz, M., and Selbig, J. (2008). Nonlinear principal component analysis: neural network models and applications. In *Principal manifolds for data visualization and dimension reduction*, pages 44–67. Springer.
- Singh, R., Lanchantin, J., Robins, G., and Qi, Y. (2016). Deepchrome: deep-learning for predicting gene expression from histone modifications. *Bioinformatics*, **32**(17), i639–i648.
- Singh, R., Lanchantin, J., Sekhon, A., and Qi, Y. (2017). Attend and predict: Understanding gene regulation by selective attention on chromatin. In *Advances in Neural Information Processing Systems*, pages 6769–6779.
- Tolstikhin, I., Bousquet, O., Gelly, S., and Schoelkopf, B. (2017). Wasserstein auto-encoders. *arXiv preprint arXiv:1711.01558*.
- Yu, H. and Lee, B. (2019). Zero-shot learning via simultaneous generating and learning.