

General Mechanism of Evolution Shared by Proteins and Words

Li-Min Wang¹, Hsing-Yi Lai^{1,†}, Sun-Ting Tsai^{2,‡}, Chen Siang Ng³, Shan-Jyun Wu¹,

Meng-Xue Tsai¹, Yi-Ching Su⁴, Daw-Wei Wang¹, and Tzay-Ming Hong^{1,*}

¹*Department of Physics, National Tsing Hua University, Hsinchu 30013, Taiwan, Republic of China*

²*Department of Physics and Institute for Physical Science and Technology,
University of Maryland, College Park, MD 20742, U.S.A.*

³*Institute of Molecular and Cellular Biology & Department of Life Science,
National Tsing Hua University, Hsinchu 30013, Taiwan, Republic of China*

⁴*Department of Linguistics, National Tsing Hua University, Hsinchu 30013, Taiwan, Republic of China*

(Dated: December 19, 2022)

Complex systems, such as life and languages, are governed by principles of evolution. The analogy and comparison between biology and linguistics[1–14] provide a computational foundation for characterizing and analyzing protein sequences, human corpora, and their evolution. However, no general mathematical formula has been proposed so far to illuminate the origin of quantitative hallmarks shared by life and language. Here we show several new statistical relationships shared by proteins and words, which inspire us to establish a general mechanism of evolution with explicit formulations that can incorporate both old and new characteristics. We found natural selection can be quantified via the entropic formulation by the principle of least effort to determine the sequence variation that survives in evolution. Besides, the origin of power law behavior and how changes in the environment stimulate the emergence of new proteins and words can also be explained via the introduction of function connection network. Our results demonstrate not only the correspondence between genetics and linguistics over their different hierarchies but also new fundamental physical properties for the evolution of complex adaptive systems. We anticipate our statistical tests can function as quantitative criteria to examine whether an evolution theory of sequence is consistent with the regularity of real data. In the meantime, their correspondence broadens the bridge to exchange existing knowledge, spurs new interpretations, and opens Pandora’s box to release several potentially revolutionary challenges. For example, does linguistic arbitrariness conflict with the dogma that structure determines function?

Understanding the universal characteristics of nature is one of the central problems in complex system sciences[15–21], such as power-law behavior, hierarchical organization, and diversification. These characteristics motivate scientists to pursue an ultimate goal: a unified theoretical framework or general mechanism for understanding various phenomena in different systems. Here, as a small step toward this goal, we establish a common mechanism that underlies two important complex systems: biology and linguistics.

Life and language share similar hallmarks. In academic terms, they are both sequential information arranged hierarchically with discrete and unblendable units[14], being heritable, and obeying Zipf’s law[1–5]. The hierarchy of life can be structured as amino acid \rightarrow protein domain \rightarrow protein \rightarrow ... higher level; while in language, it can be phoneme \rightarrow syllable \rightarrow word \rightarrow ... higher level. By combining small units into large units, the functions of a complex adaptive system are constructed. The diversification, i.e., simple to complex, is conditioned by evolution. Only a small fraction of all possible combinations is functional and survives in evolution, namely, the combination of units is not purely random. Then it rises a curial question: what is the underlying mechanism that determines the rule of combination?

Finding the analogy and comparison between biology and linguistics may act as the Rosetta Stone to decipher the language of life[1–6]. Notable examples of bioinformatic techniques that are grounded in linguistics

and natural language processing are[4–13] (i) AlphaFold2 and RoseTTAFold which leverage multi-sequence alignments to predict protein structure from the amino acid sequence[7, 8], (ii) a neural language model that predicts viral escape[6], (iii) the application of rules of language to describe the organization and evolution of protein and its domains[1–4], and (iv) probabilistic segmentation model to identify presumptive regulatory sites[5]. Reciprocally, linguists have also been inspired by biology to discover the secret of human language[14, 19, 22–25]. Famous instances include (i) the natural selection in languages[22, 23], (ii) the discussion of linguistic universal from the viewpoint of biolinguistics[14, 19, 24], (iii) the discovery that languages exhibit the signature of both gradual[22] and punctuational evolution[25].

Nevertheless, the analogy between biology and linguistics is still highly speculative. In biology, most researchers either merely apply linguistic techniques or just qualitatively describe their relationship. In linguistics, most studies of linguistic universal concern the relationship between words. On the other hand, a general quantitative mechanism of word formation has never been found. Both biology and linguistics stop short of providing common formulations with rigorous evidence. To obtain a general mechanism, we begin with the determination of the correspondence between genetics and linguistics[2, 3] (GLC) over different hierarchies.

TABLE I: Hierarchy for GLC is supported by qualitative or quantitative features. The GLC in this paper mainly focuses on the evolutionary mechanism for blocks and components. The function of a block is defined by its interaction with the environment. See METHOD for details and examples.

GLC Hierarchy	Life	Language	Common Features
Element	standard amino acid	phoneme	size of the set is one order of magnitude
Component	domain	syllagram	ρ_y , Eqs. (1, 5), $P(d_c)$
Block	protein	word	ρ_x , Eqs. (1, 6), $P(d_b)$
Individual	organism	person (speaker)	need functions to survive/communicate
Environment	ecological niche	community	affect the function connections in hierarchy

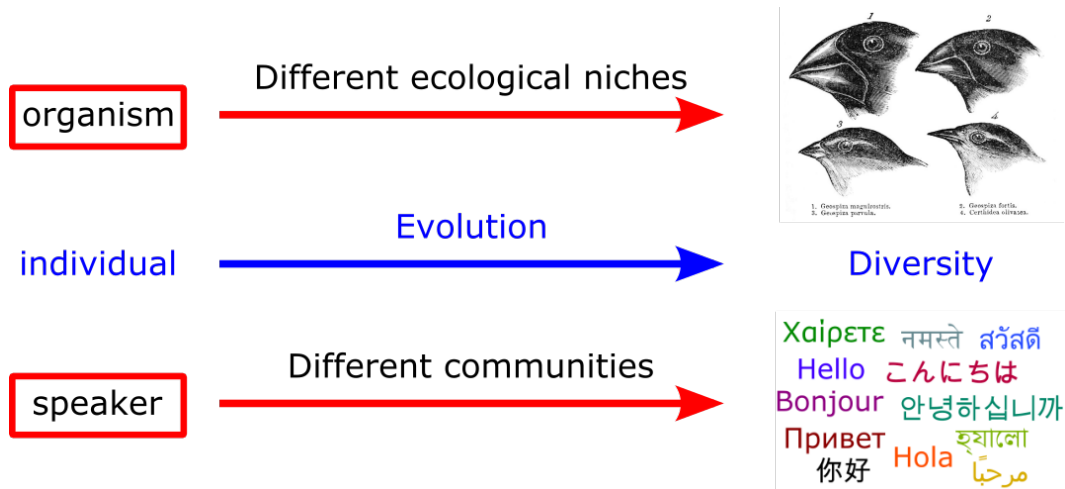


FIG. 1: Schematic of the common evolution framework according to GLC and Tab. I.

Genetics-Linguistics correspondence

The diversification of complex systems is governed by principles of evolution. An intuitive way to establish GLC starts from the macroscopic scale. To survive in different environments, an individual will evolve and lead to diversity. As shown in Fig. 1, the relation (individual, environment) becomes (organism, ecological niche) for life and (speaker, community) for language. In fact, the framework of GLC provides an alternative viewpoint on language evolution which comes from the interaction between individuals and environment, as opposed to between two individuals in communication model[19]. Note that the relation of (organism, ecological niche) in life does not correspond with that of (speaker, another speaker) in language within the framework of communication model. See METHOD for how the relation (individual, environment) affects the interpretation of mathematical formulations.

After establishing the macroscopic GLC, let us build the microscopic framework on heritably functional units which are subjected to selection. For genetics, we analyze the amino acid sequence (AAS). It is because once there is information on AAS, the structure of a protein can be found[7, 8], which conditions the molecular functions. While for linguistics, we focus on multilingual corpora

since they are ideal for quantitative analysis. At the same time, it is necessary to find the linguistic universal shared by spoken and written languages. So we will consider the unit of spoken form, then generalize such a unit to written form. See Supplementary Information, SI, for data construction and the role of gene in the first GLC.

The first GLC is standard amino acid \leftrightarrow phoneme as described in Tab. I, where “ \leftrightarrow ” denotes “corresponding to”. It is based on the fact that both AAS and corpora are formed by a set of finite elements whose size (cardinality) is about one order of magnitude. The AAS is formed by 20 kinds of standard amino acids, while for world languages[26], such as English and Mandarin (Chinese), the cardinalities of their phonemic inventories are also one order of magnitude[27]. See SI for more discussions.

The second GLC is domain \leftrightarrow syllagram. The latter is a newly introduced linguistic unit which will be defined in the next paragraph. Identification of this relation takes more evidence to substantiate. Intuitively, it comes from the combination of elements. In genetics, domain[3, 28, 29], i.e., the combination of amino acids, is a functional and evolutionary unit of proteins. Some researchers believe that domain is the “word of gene”[1, 4, 30] because its frequency-rank distribution (FRD) seems to obey an important statistical property

for word: Zipf's law[31, 32] $\rho_x = a/x^b$ where ρ_x denotes the frequency of occurrence of word whose rank is x , and $b \approx 1$. However, a simple and strong reason can refute this analogy. Unlike a sentence, which is rarely repeated in a piece of writing, a protein usually appears multiple times in AAS. So protein does not function as the sentence, neither does domain the word. As shown in Extended Fig. 7, both FRD of protein and word ρ_x fit power law, while those of domain and syllagram ρ_y follow a similar curve. This fact seems to imply that protein \leftrightarrow word is the third GLC.

In linguistics, syllable, namely, the combination of phonemes, is the phonological unit of words. If the second GLC is built on syllable, there is a problem: it can only be defined in spoken form[33]. To solve this issue, we define a new linguistic unit, syllagram, that can be a bridge connecting speaking and writing. A syllagram is defined as a unit in written form which represents the corresponding syllables in a word. For example in English, the syllagram "sy-" in "syllable" and "si-" in "silly" share the same pronunciation but are spelled by different letters. Similar examples can also be found in Mandarin. For instance, the syllagrams "敢" (dare) in "勇敢" and "趕" (hurry) in "趕車" have the same pronunciation [gǎn] but are of different written forms. See SI for more details about syllagram. As in Extended Fig. 7, the FRD of syllagram is different from that of word, which seems to assume that the second GLC would be domain \leftrightarrow syllagram.

In fact, it is not sufficient to uphold such assumptions for the second and third GLC because we have not checked how similar is the relation between domain and protein to that between syllagram and word, which cannot be manifested via FRD. In the following sections, we are going to verify our assumption upon closer scrutiny.

Rank-Rank Analysis and Scaling Structure

A key to verifying our assumption lies in the rank-rank distribution (RRD) which is used to graphically demonstrate how proteins/words are composed of domains/syllagrams. The prerequisite (see METHOD) of constructing RRD is to segment (protein, domain) from genome[11, 34], and (word, syllagram) from corpora (see SI). Now let us build the relationship between unit and subunit. For genetic data, let $(x, y) = (\text{rank of protein, rank of domain})$; while for linguistic data, $(x, y) = (\text{rank of word, rank of syllagram})$, where the ranks are determined by FRD (ρ_x, ρ_y) . Figure 2 exhibits the RRD in (a) the human genome, (b, c) Mandarin and English novels, while (d, e) exemplify the process of plotting RRD.

After inspecting RRD for the genomes of 201 organisms and 67 corpora (see SI for data), we find a universal phenomenon: the envelopes that comprise this structure, labeled as g_ℓ where ℓ denotes the ℓ -th curve (see the yellow curves in Extended Fig. 8), obey a scaling relation:

$$g_{\ell+1}(x)/g_\ell(x) = r_g \quad (1)$$

where r_g is a constant of ℓ and x , as verified in Extended Fig. 9. Besides, the soundness-clearness value (SC value, see SI for definition), an index to describe the goodness of scaling, is larger than 0.7 for most of our data. Thus, the scaling structure is evidence for the second and third GLC. We conjecture such a structure generally exists in different organisms and human languages. One cannot help but marvel at this structure which is not accidental. See SI for further discussion.

In addition to ρ_x, ρ_y , Eq. (1), and SC value, there are two other properties hidden behind RRD. We realize the data points $\vec{r} = (r_b, r_c)$ on RRD can be grouped into

$$\begin{aligned} D_y(R_c) &\equiv \{\vec{r} = (r_b, r_c) \mid r_c = R_c\} \\ D_x(R_b) &\equiv \{\vec{r} = (r_b, r_c) \mid r_b = R_b\} \end{aligned} \quad (2)$$

where $\vec{R} = (R_b, R_c)$ is the selected point. The set $D_y(R_c)$ indicates the words composed of the syllagram with rank R_c , while $D_x(R_b)$ indicates the syllagrams used in the word with rank R_b . The two hidden properties can be defined as

$$Allo(R_c) \equiv |D_y(R_c)| \quad (3)$$

$$Chain(R_b) \equiv \sum_{\vec{r} \in D_x(R_b)} Allo(r_c) \quad (4)$$

for $\vec{R} = (R_b, R_c)$ and $\vec{r} = (r_b, r_c)$, where $|D_y(R_c)|$ denotes the cardinality of $D_y(R_c)$. The allocation function $Allo(R_c)$ represents the ability to allocate a syllagram R_c to other words, while the chain function $Chain(R_b)$ indicates how a word R_b links to other words. See SI for examples.

By fitting real data for genomes and corpora, as in Extended Fig. 10, we observe that they satisfy two simple empirical relations:

$$Allo(y') = (-\alpha \ln y' + \beta)^2 \quad (5)$$

$$Chain(x') = -\gamma \ln x' + \omega \quad (6)$$

where $\vec{R}' = (x', y')$ is the new rank-rank vector depending on $(Chain, Allo)$ instead of (ρ_x, ρ_y) , and $\alpha, \beta, \gamma, \omega > 0$ are fitting parameters (see SI).

The $Chain$ and $Allo$ functions unveil the hidden interrelationship between protein/word and domain/syllagram, while ρ_x and ρ_y present their individual relationships. Combining these quantitative hallmarks, we provide more evidence to support our assumption that domain \leftrightarrow syllagram and protein \leftrightarrow word are the second and third GLC, respectively. In the next section, we will show further features of D_x and D_y .

Network Analysis

Network is a handy tool to describe the dynamical processes in complex systems[15–19, 35–38]. We realize

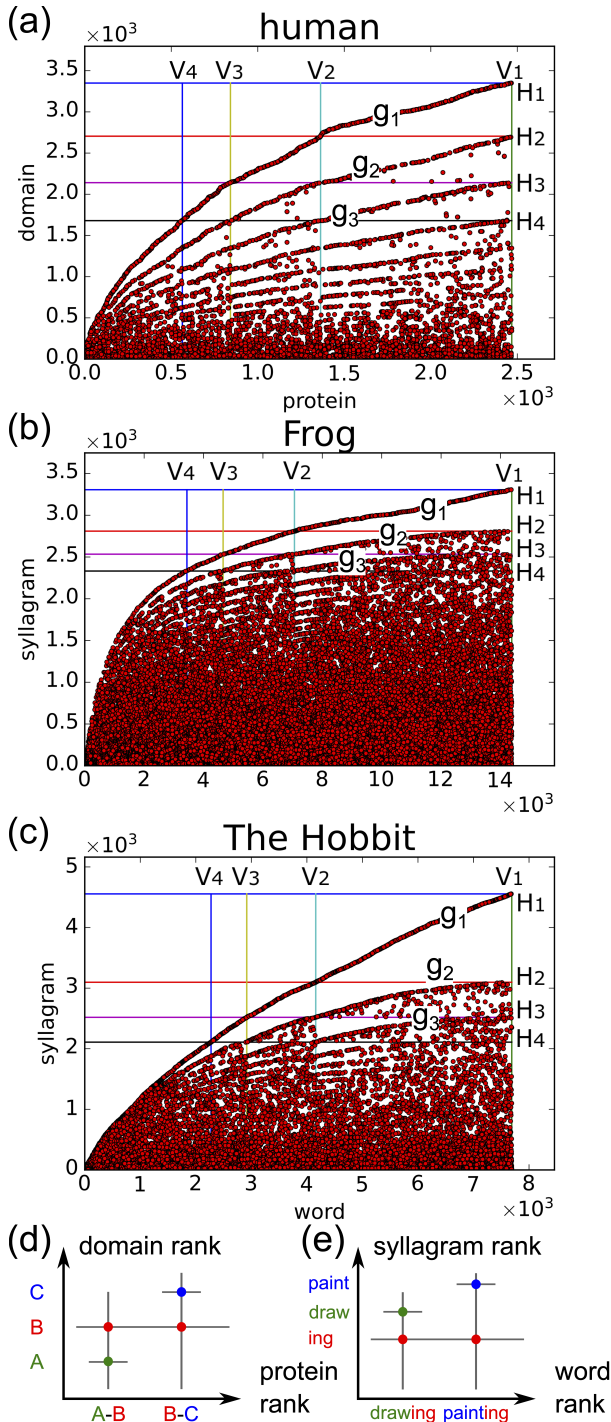


FIG. 2: Panels (a, b, c) are the RRD plot for Human, the novels Frog, and The Hobbit. Their construction is demonstrated schematically in panels (d, e). The introduction of vertical V_m and horizontal lines H_n is instrumental to facilitate the understanding of scaling structure. See SI for more details.

that D_x and D_y can be used to construct a multilayer network that contains two layers, protein/word G_b and domain/syllagram G_c , as in Extended Fig. 11. When-

ever two words/syllagrams appear in the same D_y/D_x , an edge e^b/e^c is assigned between them. Same for proteins/domains.

We checked that the features in Extended Fig. 11 are shared by different genomes and corpora (see SI). The degree distribution $P(d_\theta)$ denotes the number of vertices exhibiting d_θ edges, where $\theta = b$ for protein/word and c for domain/syllagram. The shifted power law[38] behavior we discovered for G_c not only agrees with previous research on protein sequences[37] but also exists in languages (see Supplementary Data).

With the aid of rank-rank and network analyses, we found many quantitative hallmarks shared by AAS and corpora: (i) frequency-rank distribution of protein/word obeys power law, (ii) rank-rank distribution exhibits the scaling structure, (iii) allocation and chain function, as expressed by Eqs. (5, 6), are new properties, and (iv) network of domain/syllagram obeys shifted power law. So far, these facts strongly uphold the existence of GLC in Tab. I. To build a common framework, we give collective nouns to different hierarchies of life and language. Now a critical question emerges: how to establish a general mechanism to reproduce all characteristics mentioned above for life and language? In the next section, we will show the key to answering these questions.

Block-Function Association and Function Connection

Both life and language would undergo the heritable diversification. To simulate AAS and corpora, our mechanism generates a sequence of blocks. Several “sequence variations” will be produced to simulate the genetic and linguistic variations. Then a quantitative version[39] of the principle of least effort[32] will be used to simulate the natural selection and determine whether a sequence variation is beneficial for survival/communication. The whole mechanism can be simulated through an evolutionary algorithm as in Fig. 3.

Now let us introduce our mechanism. Assume there are p blocks $\mathcal{B} = \{b_1, \dots, b_p\}$. Since both AAS and corpora are sequential information, they can be written as “Book”:

$$\text{Book}(b_1, \dots, b_p) = s_1 s_2 \dots s_q \quad (7)$$

where $\text{Book} : \mathcal{B}^p \rightarrow \mathcal{B}^q$ and $s_1, \dots, s_q \in \mathcal{B}$. For each block s_j , we denote its function, which is determined by the interaction between blocks and environment, as f_j . So that the functional representation of “Book” is

$$Fr(\text{Book}) = f_1 f_2 \dots f_q \quad (8)$$

that acts for the functions $\mathcal{F} = \{f_1, \dots, f_q\}$ for an individual (survival or communication[40–42]). The mapping $Fr : \mathcal{B}^q \rightarrow \mathcal{F}^q$ can specify the functions of Book. Combining Eqs. (7, 8), the function composition $Fr \circ \text{Book}$ can be described by an association matrix $\mathbf{A} : \mathcal{B}^p \rightarrow \mathcal{F}^q$ so-called block-function association (See METHOD).

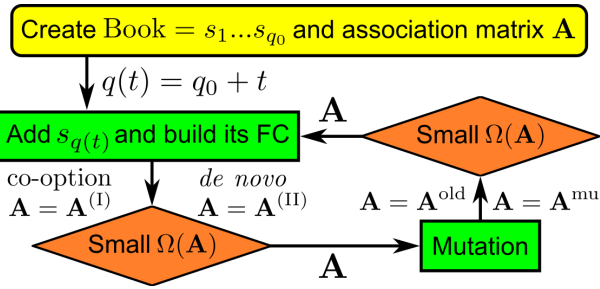


FIG. 3: Simple flowchart of the evolutionary algorithm in our mechanism of evolution. The Book denotes a sequence of proteins/words, as in Eq. (7). The step “Add $s_{q(t)}$ and build its FC” is the start of loop. It simulates the sequence variation that changes the length of Book $q(t)$. This loop will execute from $t = 1$ until $t = L - q_0$ where L is the final length of Book. The step “Small $\Omega(\mathbf{A})$ ” uses the principle of least effort to simulate natural selection. The step “Mutation” simulates the sequence variation which does not change $q(t)$. See METHOD for details and SI for the fast algorithm.

To “write” such a functional Book, the individual needs to pay two kinds of effort. The first is “individual effort” $\mathcal{H}_p(\mathcal{B})$. The fewer varieties of \mathcal{B} are, the less effort the individual needs to pay. This prompts the individual to produce fewer kinds of blocks. The second is “collective effort” $\mathcal{H}_q(\mathcal{F}|\mathcal{B})$. Once a block is produced, it is used to carry out some functions. If the block provides only a few functions, it can work more specifically and therefore decrease the collective effort for the individual.

The cost function of total effort is

$$\Omega_\lambda(\mathbf{A}) = \lambda \mathcal{H}_q(\mathcal{F}|\mathcal{B}) + (1 - \lambda) \mathcal{H}_p(\mathcal{B}) \quad (9)$$

where $0 \leq \lambda \leq 1$ is a predefined parameter decided by the system. When a sequence variation happens, the association matrix \mathbf{A} will be changed and revised $\Omega_\lambda(\mathbf{A})$. Comparing $\Omega_\lambda(\mathbf{A}^{\text{new}})$ with $\Omega_\lambda(\mathbf{A}^{\text{old}})$, we will pick out the smaller one since it has a better evolutionary advantage to survive/communicate according to the principle of least effort. In other words, a quantified criterion for natural selection is given by the principle of least effort. The above model will give power law for AAS and corpora (see METHOD for details), as shown in our simulation in Fig. 4(a) and the past research[39].

Equation (9) reveals two fundamental properties of a complex adaptive system: (i) Unification which comes from the fact that the individual chooses a block randomly instead of based on its function. This property is consistent with an important insight in linguistics: the existence of arbitrariness, which refers to the random choice of a signifier in languages; (ii) Diversification which originates from the specialization of blocks. Put differently, the molecular function in genetics is determined by the collective interaction between a protein and the ecological niche; while in linguistics, this property renders the convention of mapping from a signifier to signified hard to change.

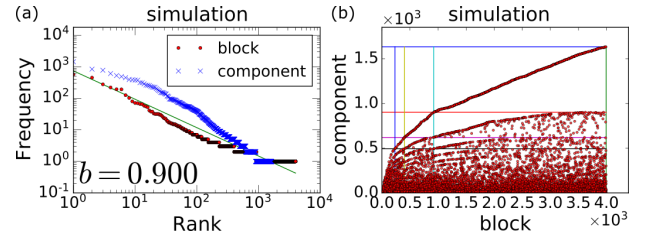


FIG. 4: (a) FRD and (b) RRD of our simulation exhibit scaling structure. The exponent b of FRD ρ_x can be varied by adjusting the mutation rate P_{mu} . As $b = 0.4 \sim 0.7$, the simulation behaves like life; while $b = 0.8 \sim 1$, it behaves like language. See METHOD and SI for details, and Extended Fig. 12 for parameters and other characteristics.

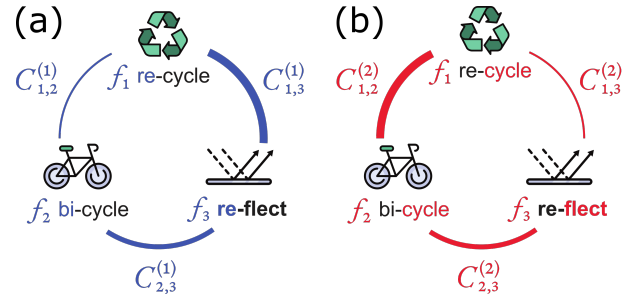


FIG. 5: The concepts, f_1 , f_2 , and f_3 , are connected via their first syllagram in (a) or second one in (b). The thicker line indicates a stronger FC. When words for f_1 and f_2 already exist, we want to come up with a new word for f_3 which is more likely to adopt the syllagram from the old word that exhibits a stronger connection. Here, f_3 may be associated with “reflect”.

Although the block-function association model successfully explains the origin of power law, it does not answer an essential question: how blocks are formed by their components? To answer this, we introduce function connection (FC), which is defined as the correlation between functions. The stronger FC between two functions is, the higher the possibility that they get similar components. For instance, the proteins in the same family are composed of similar domains and so have correlated functions. The concepts of “bi-cycle”, “re-cycle”, and “re-reflect” are correlated by their syllagram. The process to determine FC is comprehensive (see METHOD) and will be influenced by the position of block in Eq. (7), similarities between functions, logical connections, cultures, etc. In other words, the interaction between environment and blocks determines FC. As the evolutionary pressure mounts, the individual needs a new function f_{q+1} to survive. There are two situations: (I) conserved change, f_{q+1} does not affect old FCs between $f_j \in \{f_1, \dots, f_q\}$; (II) radical change, f_{q+1} affects old FCs. To show the simplest case that exhibits the hallmarks of evolution, we will exemplify our model in (I).

The FC originates from components of which the position is crucial. For instance, there is ap-ple but no

ple-ap in English. Another example can be found in order of domain combination[43]. We denote the FC for the component at k -position between f_μ and f_ν as $C_{\mu,\nu}^{(k)}$ (see METHOD). Let us use Fig. 5 to illustrate. Assume there were two existing words with the FCs for the first (blue) and second (red) syllagrams. Now the speaker wants to name a new concept f_3 with a 2-syllagram word. It would consist of either the old or new syllagram, so there are only two possible modes: (i) co-option[44]: assigning an old block s_1 or s_2 to the new function f_3 , and (ii) *de novo*: creating a new block that contains a new component to associate with the new function. If f_3 chooses (i) co-option, its block may be either bicycle or recycle; (ii) *de novo*, its block may be one of δ_1 -cycle, bi- δ_2 , re- δ_2 , or δ_1 - δ_2 where $\delta_1 \notin \{\text{bi, re}\}$ and $\delta_2 \notin \{\text{cycle}\}$ denotes new components. Since both co-option and *de novo* are sequence variations, we can apply Eq. (9) to determine which mode is better. The same model can also elucidate how a new protein is combined with domains. Via simulation (see Fig. 3 and Extended Fig. 6), we can reproduce all the quantitative features listed in Tab. I (see Fig. 4, Extended Fig. 12, and SI). See METHOD for mathematic details.

Component-Function Association Hypothesis

In this section, we propose a ‘‘component-function association’’ hypothesis as the evolution mechanism from the level of element to component. Recall that the first GLC is based on the fact that the cardinality of element inventory O_1 is one order of magnitude. For a component consisting of L_c elements, the number of possible combinations is about $O_1^{L_c}$. Imitating Eq. (7) with r components $\mathcal{C} = \{c_1, c_2, \dots, c_r\}$, a block can be represented as the sequence of components

$$\text{Block}(c_1, \dots, c_r) = I_1 I_2 \dots I_N \quad (10)$$

where $\text{Block} : \mathcal{C}^r \rightarrow \mathcal{C}^N$ and $I_1, \dots, I_N \in \mathcal{C}$. Similar to the FC network at component level in Extended Fig. 13, the content of component is affected by the FC network at the element level. The Eq. (9) from the principle of least effort can be used to decide the content of Block.

Similar mathematical structures follow the same physical principle: a functional sequence is neither the simplest nor the most complex. However, there are some differences between block-function and component-function associations. First, the length of Book in Eq. (7) is much longer than that of Eq. (10). The former can be infinite, but the latter not. A general mechanism to decide the length of Block is still unknown. Second, the number of elements in a component seems not to be randomly decided. Take the phoneme $\langle a \rangle$ whose International Phonetic Alphabet number is 304 415 as an example. There is no syllable pronounced as $[aa]$ because the vocal structure of phoneme $\langle a \rangle$ provides a syllable boundary. In other words, the natural structure of elements forces the

FC of some elements in certain positions to be always zero.

Conclusion

The analogy between biology and linguistics has been touted as the Rosetta stone to decipher the language of life and human[1–6, 14, 19, 22–25]. In this paper, we have two major contributions. First, the establishment of genetics-linguistics correspondence as in Tab. I reveals the quantitative characteristics shared by life and language (see SI and Supplementary Data for the analyses of 202 genomes of different organisms and 60 corpora of different languages). Several tools and independent statistical indices are proposed to describe the universal characteristics of life and language, such as organization between (protein, domain) and (word, syllagram), Zipf’s law for frequency of occurrence, and shifted-power law in network. They can be functioned as quantitative criteria to examine whether an evolution theory of sequence is consistent with the regularity of real data. Second, a mechanism of evolution is shared by the sequences of protein and word, for which the finding of universal regularities helps elucidate the origin of molecular functions as well as human cognition.

Our algorithm generates the sequence of proteins/words and simulates genetic/linguistic variations via the function connection networks. The entropic formulation quantifies the principle of least effort and natural selection and enables us to locate and explain the underlying mechanism for the origin of power law, the complexity of AAS/corpora, the composition of new protein/word, and all other characteristics of GLC (see METHOD and SI for details). Briefly, these feats are enabled by the fact that evolution obeys a fundamental principle: a functional sequence is neither the simplest nor the most complex. The framework of GLC not only interprets the universal properties of life and language, but also has the potential to be generalized to other complex systems with structural information, such as music[45]. Additionally, the GLC framework can be used to construct interpretable machine learning models and correct the errors inside black box machine learning models.

Author contributions

T.M.H. and L.M.W. prepared the manuscript. L.M.W., H.Y.L., and T.M.H. proposed the theoretical models. L.M.W. designed the statistical indices and dealt with algorithms and technical details. S.T.T. assisted with the design of formulations, collected and tested corpora, and helped revise the manuscript. C.S.N. provided the knowledge of genome and protein sequences and helped revise the manuscript. S.J.W. and M.X.T. designed the basic function of program. Y.C.S. provided

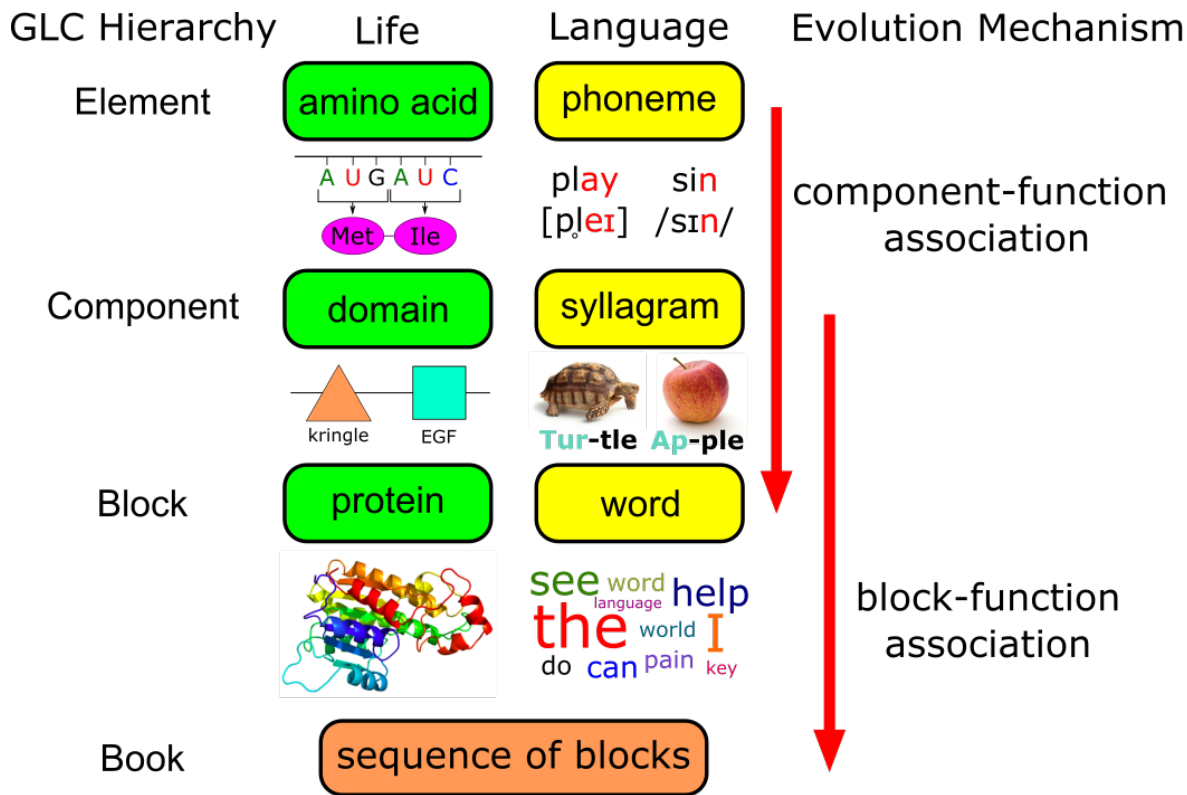


FIG. 6: A schematic that exhibits the evolution mechanism of different hierarchies.

the knowledge of linguistics. D.W.W. helped explain the scaling structure.

Competing interests

The authors declare no competing interests.

Code availability

Our codes are open and available in Wang, Li-Min & Wu, Shan-Jyun. Genetics-Linguistics-Correspondence, Open source project on GitHub: <https://github.com/godofhoe/Gene-Language-Correspondence>

[†] Present address: Department of Physics and Astronomy, University of California, Davis, Physics Building, 1 Shields Ave, Davis, CA 95616, U.S.A.

[‡] Present address: Department of Chemical Engineering, University of Michigan, Ann Arbor, MI 48109, U.S.A.

* ming@phys.nthu.edu.tw

- [1] Searls, David B. The language of genes. *Nature* **420**, 211 (2002); The Linguistics of DNA. *American Scientist* **80**, 579 (1992).
- [2] Ji, Sungchul. Isomorphism between cell and human languages: molecular, biological, bioinformatic and linguistic implications. *BioSystems* **44**, 17-39 (1997).
- [3] Gimona, M. Protein linguistics — a grammar for modular protein assembly? *Nat. Rev. Mol. Cell Biol.* **7**, 68 (2006).
- [4] Yu, Lijia *et al.* Grammar of protein domain architectures. *PNAS* **116**, 3636 (2019).
- [5] Bussemaker, H. J., Li, Hao, and Siggia, Eric D. Building a dictionary for genomes: Identification of presumptive regulatory sites by statistical analysis. *PNAS* **97**, 10096-10100 (2000).

- [6] Hie, B., Zhong, E. D., Berger, B., & Bryson, B. Learning the language of viral evolution and escape. *Science* **371**, 284-288 (2021).
- [7] Jumper, J., Evans, R., Pritzel, A. *et al.* Highly accurate protein structure prediction with AlphaFold. *Nature* **596**, 583–589 (2021).
- [8] Baek, M. *et al.* Accurate prediction of protein structures and interactions using a three-track neural network. *Science* **373**, 871-876 (2021)
- [9] Popovab, O., Segala, D.M., and Trifonovb, E.N. Linguistic complexity of protein sequences as compared to texts of human languages. *Biosystems* **38**, 65-74 (1996).
- [10] Yandell, Mark D. & Majoros, William H. Genomics and natural language processing. *Nat. Rev. Genet.* **3**, 601 (2002).
- [11] Hunter, Sarah *et al.* InterPro: the integrative protein signature database. *Nucleic Acids Res.* **37** (Database issue), D211 (2009).
- [12] Coin, L., Bateman, A., and Durbin, R. Enhanced protein domain discovery by using language modeling techniques

- from speech recognition. *PNAS* **100**, 4516-4520 (2003).
- [13] A. Rives *et al.* Biological structure and function emerge from scaling unsupervised learning to 250 million protein sequences. *PNAS* **118**, e2016239118 (2021).
- [14] Hauser, M. D., Chomsky, N. & Fitch, W. T. The faculty of language: What is it, who has it, and how does it evolve? *Science* **298**, 1569 (2002).
- [15] Stanley, H. E *et al.* Scale invariance and universality: organizing principles in complex systems. *Physica A* **281**, 60-68 (2000).
- [16] Wang, X. F. & Chen, G. Complex Networks: Small-World, Scale-Free and Beyond. *IEEE Circuits and Systems Magazine* **3**, 6 (2003).
- [17] Boccaletti, S. *et al.* Complex networks: Structure and dynamics. *Physics Reports* **424**, 175-308 (2006).
- [18] Barzel, B. & Barabási, A.-L. Universality in network dynamics. *Nat Phys.* **9**, 673-681 (2013).
- [19] Castellano, C., Fortunato, S. & Loreto, V. Statistical physics of social dynamics. *Rev. Mod. Phys.* **81**, 591-646 (2009).
- [20] Patel, A. D. Language, music, syntax and the brain, *Nature Neuroscience* **6**, 674-681 (2003).
- [21] Tao, T. E pluribus Unum: From complexity, universality. *Daedalus* **141**, 23-34 (2012).
- [22] Pinker, S. & Bloom, P. Natural language and natural selection. *Behavioral and Brain Sciences* **13**, 707 (1990).
- [23] Clark, R. & Roberts, I. A Computational Model of Language Learnability and Language Change. *Linguistic Inquiry*, **24**, 299-345 (1993).
- [24] Pinker, S. & Jackendoff, R. The faculty of language: what's special about it? *Cognition* **95**, 201 (2005).
- [25] Atkinson, Quentin D. *et al.* Languages Evolve in Punctational Bursts. *Science* **319**, 588 (2008).
- [26] de Mejía & Anne-Marie. Power, Prestige, and Bilingualism: International Perspectives on Elite Bilingual Education. *Multilingual Matters*. 47-49 (2002).
- [27] Crystal, D. The Cambridge Encyclopedia of Language (3rd ed.), p. 173., Cambridge (2010).
- [28] Doolittle, R. F. The multiplicity of domains in proteins. *Annu. Rev. Biochem.* **64**, 287 (1995).
- [29] Koonin, Eugene V., Wolf, Yuri I. & Karev, Georgy P. The structure of the protein universe and genome evolution. *Nature* **420**, 218 (2002).
- [30] Scaiewicz, Andrea & Levitt, Michael. The Language of the Protein Universe. *Curr. Opin. Genet. Dev.* **35**, 50 (2015).
- [31] Cavnar, W. B. & Trenkle, J. M. N-Gram-Based Text Categorization. Proceedings of SDAIR-94, 3rd Annual Symposium on Document Analysis and Information Retrieval, 161-175 (Las Vegas, NV, 1994).
- [32] Zipf, G. K. Human Behavior and the Principle of Least Effort (Addison-Wesley, Boston, 1949).
- [33] Randolph, Mark A. Syllable-based Constraints on Properties of English Sounds. Ph.D. thesis, MIT (1989).
- [34] Yates, Andrew D. *et al.* Ensembl 2020. *Nucleic Acids Res.* **48**, D682-D688 (2020).
- [35] Boccaletti, S. *et al.* The structure and dynamics of multilayer networks. *Physics Reports* **544**, 1 (2014).
- [36] Barabási, A.-L. & Albert, R., *Science* **286**, 509 (1999).
- [37] Wuchty, Stefan. Scale-Free Behavior in Protein Domain Networks. *Mol. Biol. Evol.* **18**, 1694-1702 (2001).
- [38] Eom, Y-H & Fortunato, S. Characterizing and Modeling Citation Dynamics. *PLoS ONE* **6**: e24926 (2011).
- [39] Ramon Ferrer i Cancho and Ricard V. Solé. Least effort and the origins of scaling in human language. *PNAS* **100**, 788-791 (2003).
- [40] Juliette Blevins. New Perspectives on English Sound Patterns: “Natural” and “Unnatural” in Evolutionary Phonology. *Journal of English Linguistics*. **34**, 6-25 (2006).
- [41] Ian Maddieson & Christophe Coupè. Human spoken language diversity and the acoustic adaptation hypothesis. *The Journal of the Acoustical Society of America* **138**, 1838-1838 (2015).
- [42] Terhi Honkola *et al.* Evolution within a language: environmental differences contribute to divergence of dialect groups. *BMC Evolutionary Biology* **18**, 132 (2018).
- [43] Bashtona, M. & Chothia, C. The geometry of domain combination in proteins. *J. Mol. Biol.* **315**, 927 (2002).
- [44] John R. True & Sean B. Carroll. Gene Co-Option in Physiological and Morphological Evolution. *Annu. Rev. Cell Dev. Biol.* **18**, 53-80 (2002).
- [45] Patel, A. D. Language, music, syntax and the brain. *Nature Neuroscience* **6**: 674-681 (2003).
- [46] Ma, W. Y. & Chen, K. J. Introduction to CKIP Chinese Word Segmentation System for the First International Chinese Word Segmentation Bakeoff. Proceedings of ACL, Second SIGHAN Workshop on Chinese Language Processing, 168-171. Retrieved from <http://ckipsvr.iis.sinica.edu.tw> (2003).
- [47] Tseng, H. H., Chang, P. C., Andrew, G., Jurafsky, D. & Manning, C. A Conditional Random Field Word Segmenter. In Fourth SIGHAN Workshop on Chinese Language Processing (2005).
- [48] Chang, P. C., Galley, M. & Manning, C. Optimizing Chinese Word Segmentation for Machine Translation Performance. In WMT (2008).
- [49] Hench, Christopher. Syllabipy, universal syllabification algorithms. Retrieved from <https://github.com/henchc/syllabipy> (2017).
- [50] Tsai, S. T. *et al.* Power-law ansatz in complex systems: Excessive loss of information. *Phys. Rev. E* **92**, 062925 (2015).

Acknowledgements

We gratefully acknowledge useful discussions with Chih-Yu Yeh, Lee-Wei Yang, Chia-Hung Yang, Ching-Yao Lai, Tsung-Han Kuo, En-Jui Kuo, Mao-Syun Wong, Von-Wun Soo, Chi-Fang Chen, Zhengning Yang, and financial support from MoST in Taiwan under Grants No. 105-2112-M007-008-MY3 and No. 108-2112-M007-011-MY3.

METHODS

A. Prerequisite

Before performing the rank-rank analysis, one needs to construct a text with segmented blocks and components. The details on how to construct a genome or linguistic data into Book can be found in SI. In this work, (i) InterPro[11] is used to classify protein and domain from Ensembl[34], (ii) several word segmentation systems[46–48] are employed for Mandarin texts, and (iii) syllabipy[49] is implemented to syllabify words from English texts.

B. Block-function association

Although the block-function association is a variant and generalization of the signal-object association[39], we introduced different assumptions and interpretations. Besides, the signal-object association model did not answer a fundamental problem: how does word formation originate? So we must elaborate on our model.

Considering a system with p blocks $\mathcal{B} = \{b_1, \dots, b_p\}$ and q functions $\mathcal{F} = \{f_1, \dots, f_q\}$. Each function is associated with some blocks and described by a binary matrix $\mathbf{A} = \{a_{ij}\}$ where $1 \leq i \leq p$ and $1 \leq j \leq q$. If the block b_i refers to the function f_j , $a_{ij} = 1$; otherwise $a_{ij} = 0$. As long as a block is in use, it is assumed to exhibit certain functions irrespective of whether they have been identified. So the probability of producing b_i is[39]

$$P(b_i) = \sum_{j=1}^q P(b_i, f_j) \quad (11)$$

where $P(b_i, f_j)$ is the joint probability of b_i and f_j . The definition of conditional probability gives

$$P(b_i, f_j) = P(f_j)P(b_i|f_j) \quad (12)$$

where $P(b_i|f_j)$ is defined as

$$P(b_i|f_j) = \frac{a_{ij}}{\omega_j} \quad (13)$$

and $\omega_j \equiv \sum_i a_{ij}$ denotes the number of “synonyms”[39] of f_j , i.e., different b_i for the same f_j . Note the block itself does not exhibit functions; instead, its collective interactions with environment define the function. Without the information of environment, we assume *a priori* probability $P(f_j) = 1/q$.

Now we need to ask whether this assumption is reasonable. Take Ref. [39] for example, it interprets \mathcal{F} as the objects of reference in a language. The fact that $P(f_j) = 1/q$ implies the community (environment) regards all objects of reference f_1, \dots, f_q are equally important. The above consequence is obviously unreasonable. Via *reductio ad absurdum*, we rule out the interpretation “ \mathcal{F} is the objects of reference”. Let us try another

one to test the assumption. As was described in Eqs. (7, 8), f_j denotes “the function of s_j ”, while the binary matrix $\mathbf{A} : \mathcal{B}^p \rightarrow \mathcal{F}^q$ refers to “the association matrix”. Since the position of s_j in a Book is unique, the probability of finding f_j is $P(f_j) = 1/q$ if someone randomly chooses a function in $Fr(\text{Book})$. Now the previous contradiction is resolved. The importance of the position of a block can be exemplified by the following instance: my “sister” hugs my friend’s “sister”. Although we use the same “sister”, their meanings (one kind of communication function) are different due to their distinct position in the context.

The complexity of a sequence comes from the different blocks it contains. The sequence is preferably to be simple as far as the individual effort is concerned. Such effort is measured by the entropy of block:

$$\mathcal{H}_p(\mathcal{B}) = - \sum_{i=1}^p P(b_i) \log_p P(b_i). \quad (14)$$

When a single block exhibits all functions, namely $P(b_i) = 1$, this effort is minimized. Because this effort only considers the production of blocks which is done by the individual, we called it “individual effort”.

In contrast, the sequence tends to be complex from the viewpoint of the collective effort which comes from the fact that, once b_i is produced, the individual will use it to carry out some functions. The collective effort for b_i is defined as

$$\mathcal{H}_q(\mathcal{F}|b_i) = - \sum_{j=1}^q P(f_j|b_i) \log_q P(f_j|b_i) \quad (15)$$

where $P(f_j|b_i) = P(b_i, f_j)/P(b_i)$; while for \mathcal{B} it is

$$\mathcal{H}_q(\mathcal{F}|\mathcal{B}) = \sum_{i=1}^p P(b_i) \mathcal{H}_q(\mathcal{F}|b_i). \quad (16)$$

Aware that a function is defined by the collective interaction between blocks and environment, we called $\mathcal{H}_q(\mathcal{F}|\mathcal{B})$ “collective effort” where the notation $\mathcal{F}|\mathcal{B}$ denotes the individual chose a block before choosing a function.

Combining the individual and collective efforts, the cost function can be defined as Eq. (9). When there are several sequence variations, i.e., changes of \mathbf{A} , we need to compare their $\Omega_\lambda(\mathbf{A})$ and select the smallest one. If their efforts are equal, we prefer the variation with a new block because such one has more functions to adapt to the environmental changes. This is so-called the quantified version of natural selection and the principle of least effort. One has to notice the minimization of Ω_λ is local, not global - finding out the best \mathbf{A} to minimize Ω_λ . Our theory classifies the sequence variation with only two possibilities: the length of Book q will be changed or unchanged. We will elaborate on this in Sec. D.

C. No synonym interpretation

Before discussing the sequence variation, let us explain how power law is related to the block-function association. The authors of Ref. [39] proposed that Zipf's law comes from the simulation result of Eq. (11), but they did not mention how to write a Book. If the length of Book equals L , the frequency of occurrence for b_i is

$$\rho(b_i) \sim L \times P(b_i) = \frac{L}{q} \sum_j \frac{a_{ij}}{\omega_j} \quad (17)$$

where ω_j is defined in Eq. (13). For a given Book, $\rho(b_i)$ must be an integer. There are two ways to obtain this result. (i) The L is large enough to include all possible synonyms. The sum $\sum_j a_{ij}/\omega_j$ can be expressed as a rational number with denominator D_i . The requirement that $\rho(b_i)$ must be an integer enforces $L \sim qD_i$. Considering all b_i , $L \sim q\prod_i D_i$ is obviously a number much bigger than a normal Book. Besides, $L \neq q$ is different from our interpretation of $P(f_i) = 1/q$ as Eq. (7). So this is infeasible; (ii) Follow the interpretation of $P(f_i) = 1/q$, $L = q$. The frequency of words in any Book must be an integer, so we necessitate $\omega_j = 1$, i.e., “no synonym”, and conclude

$$\rho(b_i) = \sum_j a_{ij} \quad (18)$$

is an integer. Using simulation as described in Fig. 3, we can see $\rho(b_i)$ exhibits the power law in Fig. 4. Besides, no synonym interpretation can greatly speed up our evolution algorithm (see SI for detail).

Is “no synonym” reasonable? The answer is yes. For genetics, if we replace one protein with another similar one, the molecular interaction between environment and protein must change although it may be too small to be detected. For language, similar words are used in slightly different contexts, such as “because” and “since”. These cases indicate we can state that “there is no synonym” if we consider f_j in a very rigorous standard. But in the real world, an individual may not be sensitive to the change of blocks with similar functions. Take “because” and “since” for instance. If a writer uses 100 “because” without a single “since”, the reading fluency is greatly reduced. But what about 50: 50 versus 49: 51? The difference is expected to be small. This implies the existence of “tolerance”, the definition of which will be elaborated in Sec. E.

D. Direction of evolution and mutation

There are two kinds of sequence variation: change the length of Book q or not. As the evolutionary pressure mounts, the size of Book and \mathcal{B} may change. In our algorithm, we denote the dynamical size of Book as $(p, q) = (p(t), q(t))$ where t is the time step and

$(p(0), q(0)) = (p_0, q_0)$. In the general case of evolution, both conserved and radical change may happen. It is too complex to analyze all possible evolutionary pathways (See SI for more discussion). But for the simplest case, we can assume “conserved increase” so that $q(t) = q_0 + t$ as in Fig. 3. To study the sequence variation, we need to construct the FC network. There are two operations as demonstration in Extended Fig. 13.

The first operation is to decide $N_q(t)$ - the number of components of $s_{q(t)}$ in Book. This can be achieved by choosing them based on the prior probability distribution \mathbb{P}_N which can be estimated by measuring real data. For instance, if we want to simulate the FC for a community derived from the following sentence: “the ham-burg-er con-tains let-tuce and ba-con”, the counts of components in a word $(\rho_1, \rho_2, \rho_3) = (2, 3, 1)$, where ρ_N denotes the number of blocks that contain N components. We then assume the prior probability distribution in this community $(\mathbb{P}_1, \mathbb{P}_2, \mathbb{P}_3) = (2, 3, 1)/6$. See SI for details about the importance of setting a “reasonable” prior probability distribution.

The second operation is to build FC network. Let $C^{(k)}(t)$ be the FC network for the component on k -position at time t . There are two definitions of position: (i) absolute and (ii) relative. Let us give an example. For two concepts associated with $s_\mu =$ “re-cycle” and $s_\nu =$ “re-flec-tion”, (i) if we adopt absolute position: $C_{\mu,\nu}^{(1)}$ denotes the FC between re in s_μ and re in s_ν , $C_{\mu,\nu}^{(2)}$ is the FC between cycle in s_μ and flec in s_ν , but $C_{\mu,\nu}^{(3)} = 0$ because s_μ does not have 3rd component; (ii) if we adopt relative position: $C_{\mu,\nu}^{(begin)}$ denotes the FC between re in s_μ and re in s_ν , $C_{\mu,\nu}^{(end)}$ connects cycle in s_μ and tion in s_ν , but $C_{\mu,\nu}^{(mid)} = 0$ since s_μ only has begin and end components. Note in both (i) and (ii), $C_{\mu,\nu}^{(k)}(t) = 0$ once s_μ or s_ν does not have the k -position component. To present the simplest result of function connection model, we assume $C_{\mu,\nu}^{(k)}(t) = C_{\nu,\mu}^{(k)}(t)$ are random numbers between 0 and 1. Although definition (ii) seems often in the real world, it is hard to define precisely. Thus, we shall adopt a definition (i) that can equally reproduce the features in GLC (see Fig. 4 and 12), but is comparatively easier to handle.

Now we need to determine the composition of $s_{q(t)}$. There are two modes (I) co-option and (II) *de novo*.

In (I) co-option, $f_{q(t)}$ will be associated with an old block s_j on Book where $1 \leq j \leq q(t-1)$. The probability that $f_{q(t)}$ uses s_j is:

$$P_{q,j}^{old}(t) = \frac{C_{q,j}(t)}{\sum_\mu C_{q,\mu}(t)} \quad (19)$$

where $C_{q,\mu}(t) \equiv \sum_{k=1}^{d(t)} C_{q,\mu}^{(k)}(t)$, $d(t) = \min(N_q^{[t]}, N_\mu^{[t]})$, $\forall 1 \leq \mu \leq q(t-1)$. If a certain block s_c is selected, the association matrix \mathbf{A} will require new elements

$$a_{i,q(t)} = \begin{cases} 1, & \text{if } b_i = s_c \\ 0, & \text{otherwise} \end{cases} \quad (20)$$

where $1 \leq i \leq p(t-1) = p(t)$. The size of \mathcal{B} does not change.

In (II) *de novo*, we need to consider the situation that $f_{q(t)}$ uses new components. For genetics, it may come from other organisms (transduction or conjugation), environments (transformation), or even non-coding DNA (*de novo* gene birth). For linguistics, it may come from other languages, sounds in nature, or even a sound that has never been used. To describe this, we can define a new quantity - effective connection z . The probability of “creating” the k^{th} component for $f_{q(t)}$ is:

$$P_{q,new}^{(k)}(t) = \frac{z}{z + \sum_{\mu} C_{q,\mu}^{(k)}(t)}. \quad (21)$$

We can also recombine existing components to form a new block $s_{q(t)}$ for $f_{q(t)}$. The probability that $f_{q(t)}$ uses a k^{th} component in s_j is:

$$P_{q,j}^{(k)}(t) = \frac{C_{q,j}^{(k)}(t)}{z + \sum_{\mu} C_{q,\mu}^{(k)}(t)} \quad (22)$$

where $P_{q,new}^{(k)}(t) + \sum_{j=1}^{q(t-1)} P_{q,j}^{(k)}(t) = 1$. The components at position k for $s_{q(t)}$ will be created on the basis of $P^{(k)}$ where $k = 1, 2, \dots, N_{q(t)}$. The association matrix \mathbf{A} will require additional elements

$$a_{p(t),j} = \begin{cases} 1, & \text{if } j = q(t) \\ 0, & \text{otherwise} \end{cases} \quad (23)$$

and $a_{i,q(t)} = 0 \forall 1 \leq i \leq p(t-1) = p(t) - 1$. The size of \mathcal{B} increases by one. In fact, there is a small probability that we “create” an already existing block b_j for $s_{q(t)}$. If so, \mathbf{A} will be changed according to Eq. (20) instead of Eq. (23). Since both (I) co-option and (II) *de novo* modify $\mathcal{B}^p \rightarrow \mathcal{F}^q$, the use of Eq. (9) for Fig. 3 will decide which mode is better. The above procedures lay out the recipe for function connection in sequence variation.

For the variation that does not affect $q(t)$, we incorporate it with mutation, that is, \mathbf{A} changes by chance. For instance, the usage of “flyer” has been replaced by “airplane”, and “thou” by “you”. To quantify this feature,

one can simply assign each f_j where $1 \leq j \leq q(t)$ a probability of occurrence P_{mu} for mutation. When mutation happens, there are three situations (see SI for detail): no change, a certain block is replaced by an existing one (co-option like mutation), and create a block to substitute the original one (*de novo* like mutation). To decide which case survives, we again employ the principle of least effort, as in Fig. 3.

In real evolution, mutation may repeat during a certain time step t . We introduce the repeat count of mutation τ to simulate this feature. After our algorithm completes execution for mutation of Book (from $j = 1 \sim q$), the repeat count of mutation τ will increase by one. By setting a maximum repeat count $T \geq \tau$, we can control the amount of mutation.

Our simulation exhibits the features of GLC for both life and language by adjusting P_{mu} and z . A higher P_{mu} renders the FRD of block ρ_x more resembling that of language, while a higher z causes the FRD of component ρ_y more curved. This result is consistent with the fact that evolution of language is much faster than that of life.

E. Tolerance of synonym

Now let us go back to the “no synonym” assumption. Having seen that f_j is related to FCs, we can define synonym in the usual sense as “if replacing b_l at s_j by another block b_q has little influence on its FCs, we accept b_q as the synonym of b_l at s_j ”. Mathematically, we can write down the change of FC for f_j as

$$\Delta f_j(b_q|b_l) \equiv \frac{\sum_{\alpha} (C_{q,\alpha} - C_{l,\alpha})^2}{\sum_{\beta} C_{l,\beta}^2}. \quad (24)$$

The definition of synonym is thus equivalent to requiring $\Delta f_j(b_q|b_l)$ smaller than tolerance T_f . It will be worthwhile to determine the value of T_f that depends on the interactions between individual and environment.

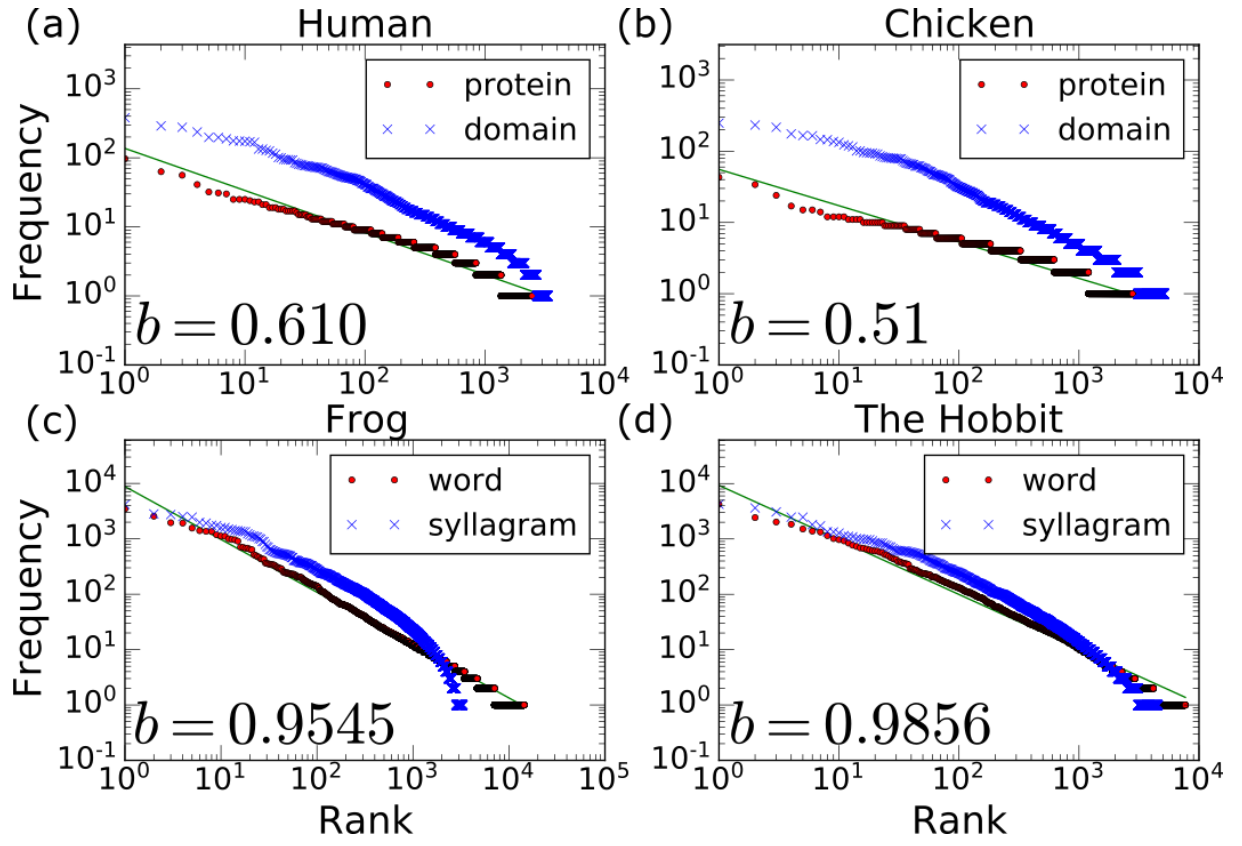


FIG. 7: The dotted/crossed (red/blue) curves in the log-log plots of (a, b) show FRD of protein/domain in the genome of human and chicken. Similarly, (c, d) are for word/syllagram in the Mandarin novel, Frog, and the English novel, The Hobbit. We fit the data with maximum likelihood estimate[50]. The fitting function is for the red points.

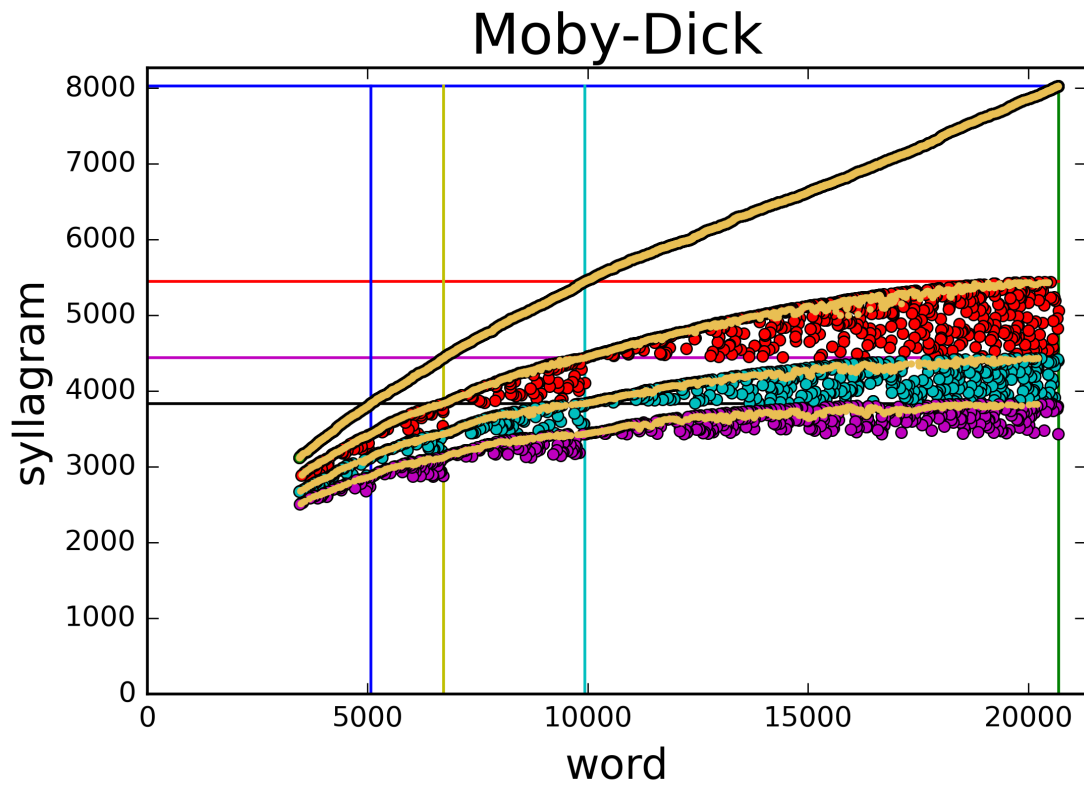


FIG. 8: Our de-noise algorithm can sketch out the scaling structure of RRD, as yellow points. Here we exemplify it for the English novel, Moby-Dick. The red, green, and purple points are “fog” of g_2 , g_3 , and g_4 . See SI for technical details.

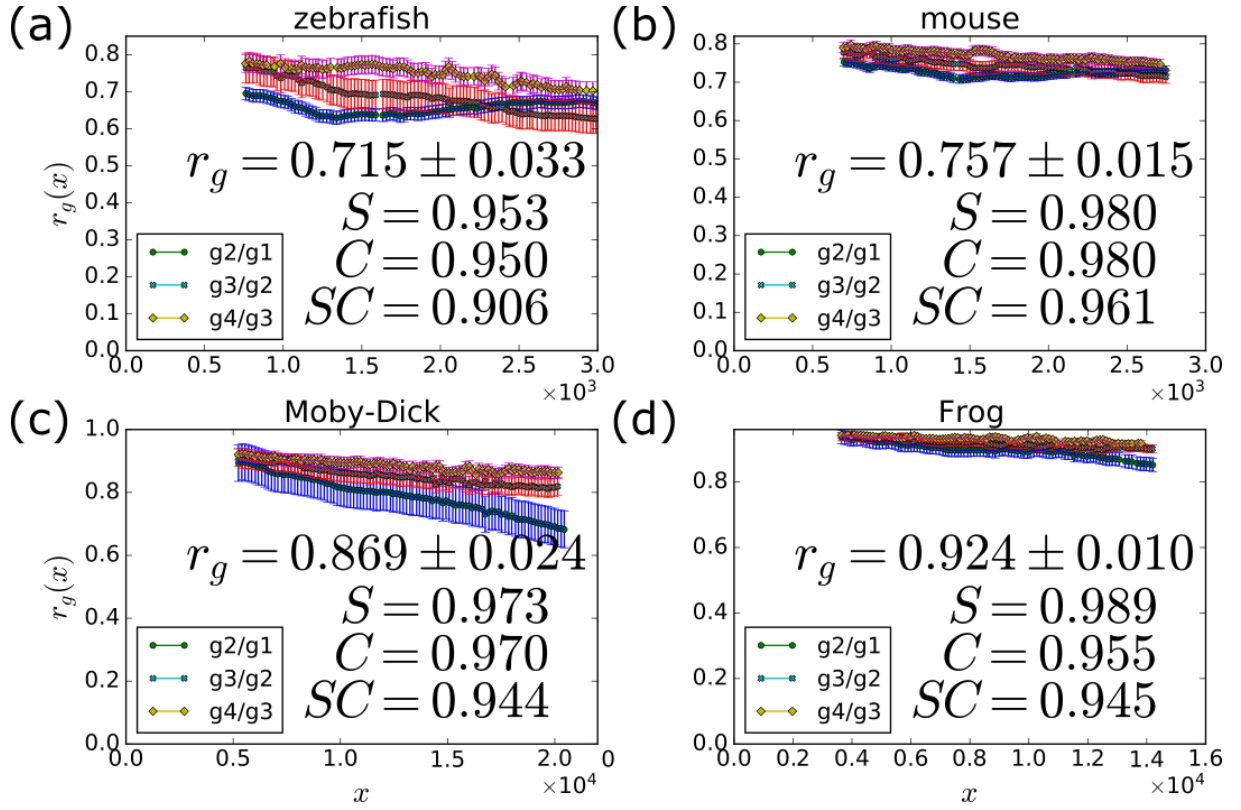


FIG. 9: These figures depict r_g with standard error σ_g . Panel (a) is for the zebrafish genome, (b) for the mouse genome, (c) for the English novel *Moby-Dick*, and (d) for the Mandarin novel *Frog*. Rigorous definitions of r_g and SC value, a measure of goodness of scaling, are given in SI. Note that we do not consider " g_2/g_1 " when calculating SC . See SI for technical details and reasons.

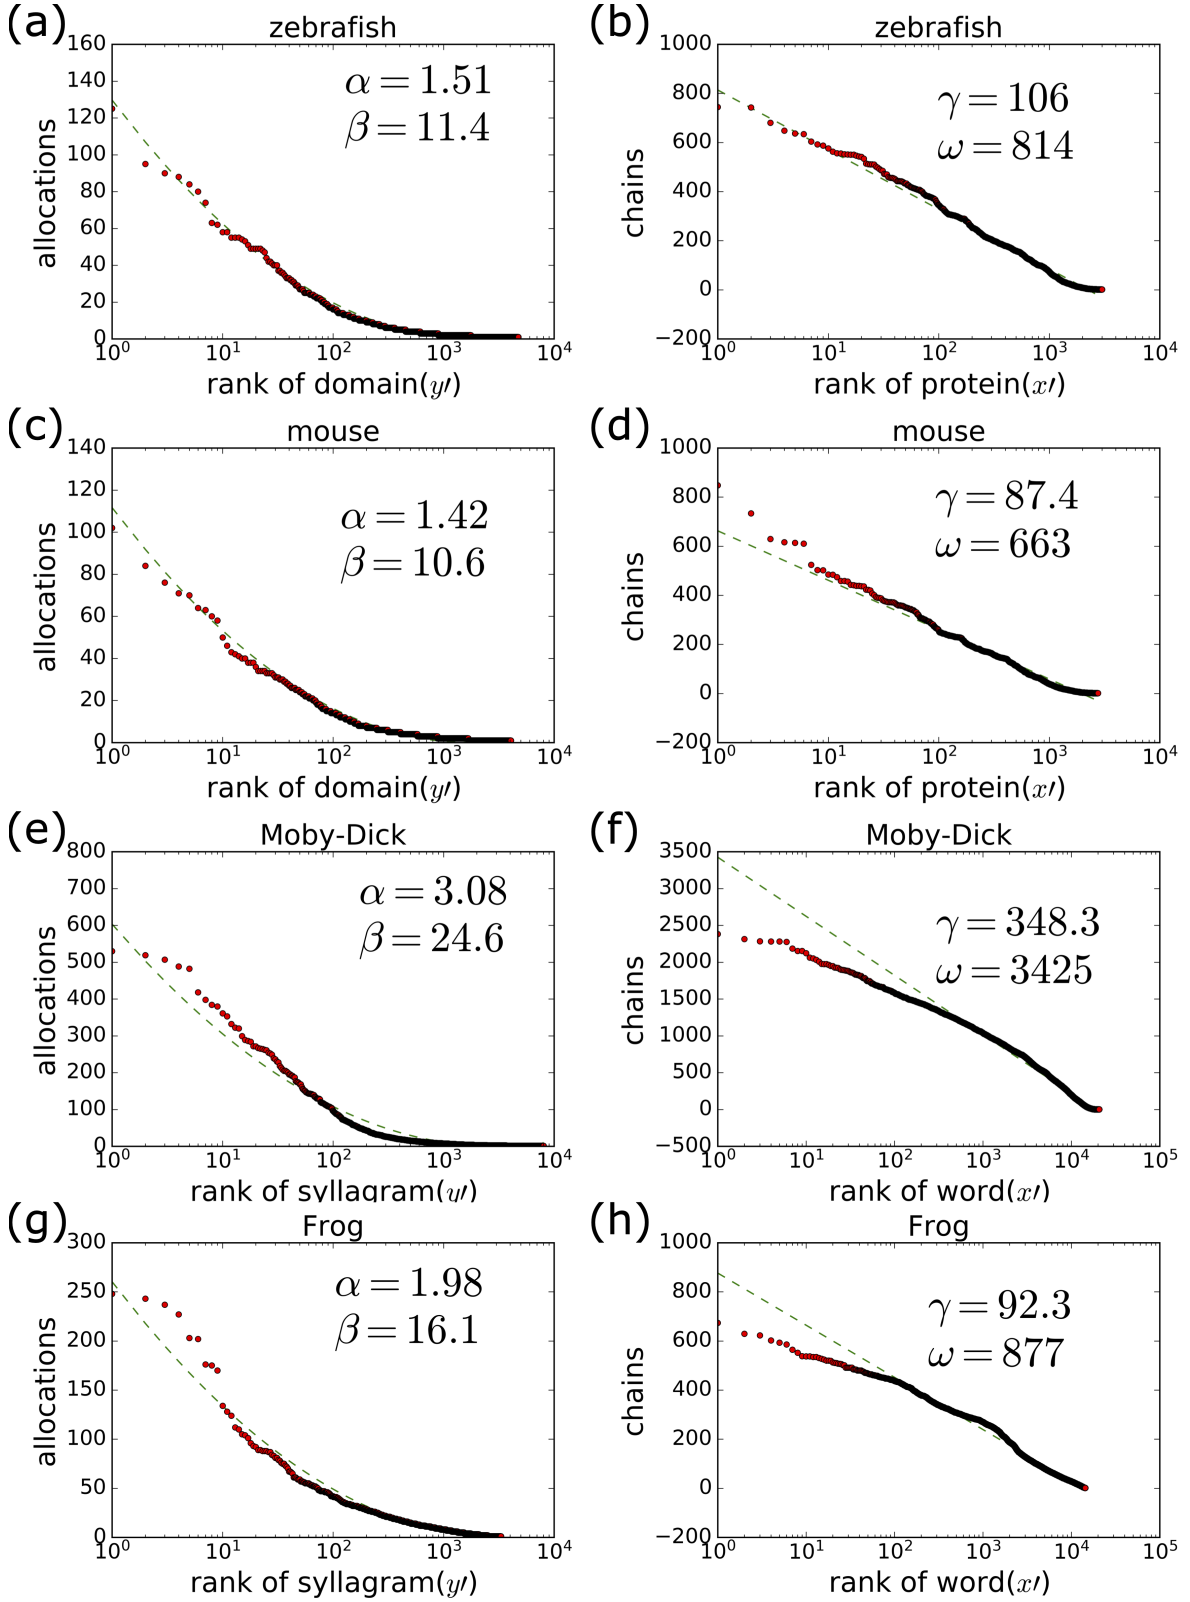


FIG. 10: Left figures depict *Allo*-rank plot, while right ones are for *Chain*-rank. Panels (a, b) are for the zebrafish genome, (c, d) for the mouse genome, (e, f) for English novel *Moby-Dick*, (g, h) for Mandarin novel *Frog*. Dashed lines are fitting curves, while fitting parameters α, β, γ , and ω are defined in Eq. (5, 6) and fitted via non-linear least squares. See SI for further information.

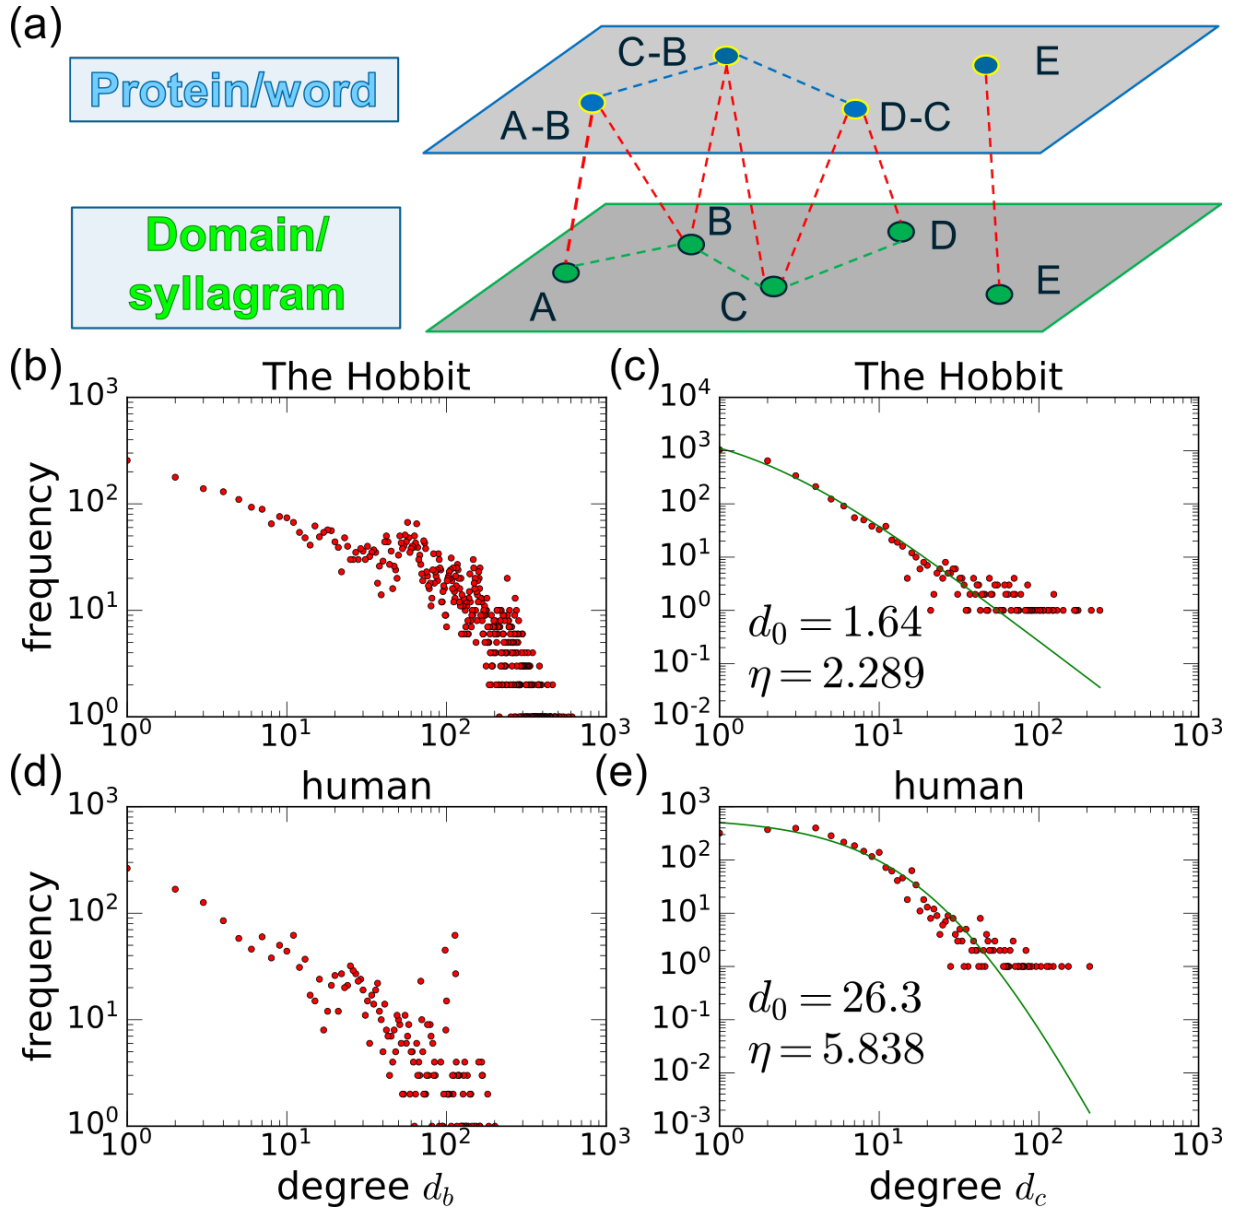


FIG. 11: The schematic of multilayer network for protein/word and domain/syllagram layers is in panel (a). Panels (b, c) show the degree distribution of (word, syllagram) in *The Hobbit*, while (d, e) show that of (protein, domain) in the human genome. The vertices with zero degrees have been excluded because they are presented as singularities. Note that (c, e) exhibit the feature of a shifted power law network[38] $P(d_c) \sim (d_c + d_0)^{-\eta}$. We fit the data with maximum likelihood estimate[50], see SI for details.

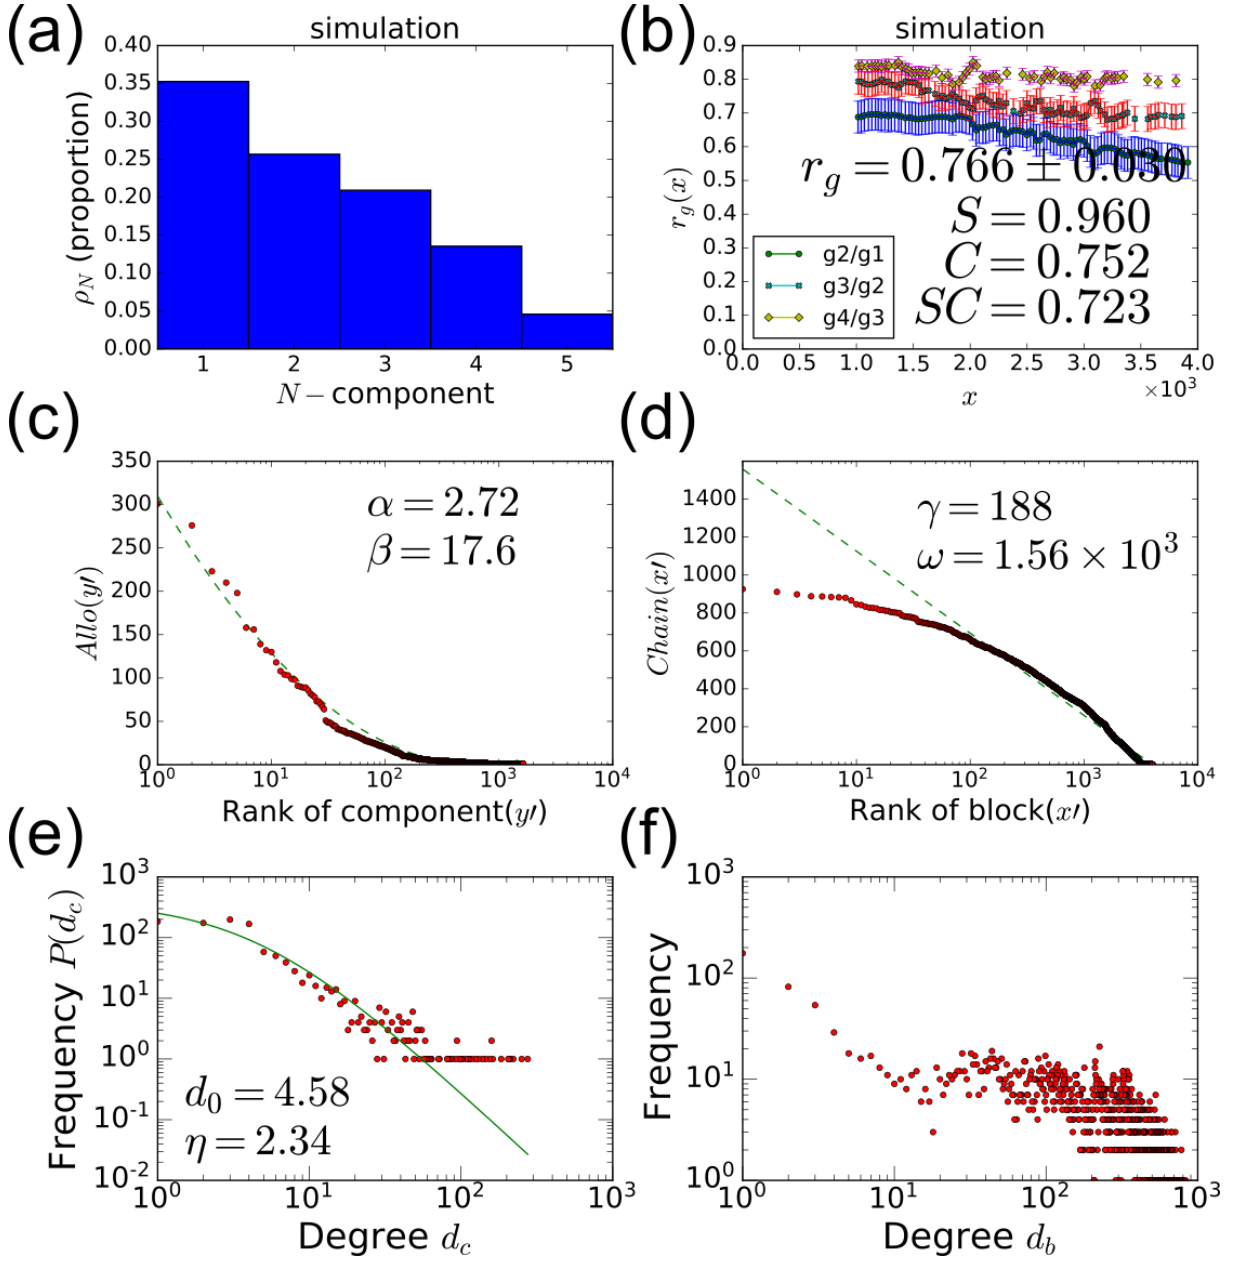


FIG. 12: Quantitative characteristics of a simulation sample: (a) Frequency distribution of the number of components in a block; (b) r_g , standard error, and SC value; (c) *Allo*-rank plot; (d) *Chain*-rank plot; Degree distribution of (e) components and (f) blocks. Parameters of this simulation: $L = 10000$, $z = 0.01L$, $\lambda = 0.495$, $P_{\text{mu}} = 0.0004$, $T = 3$, and the probabilities of creating a 1, 2, 3, 4, 5-component block are set as 0.15, 0.40, 0.25, 0.15, and 0.05, respectively

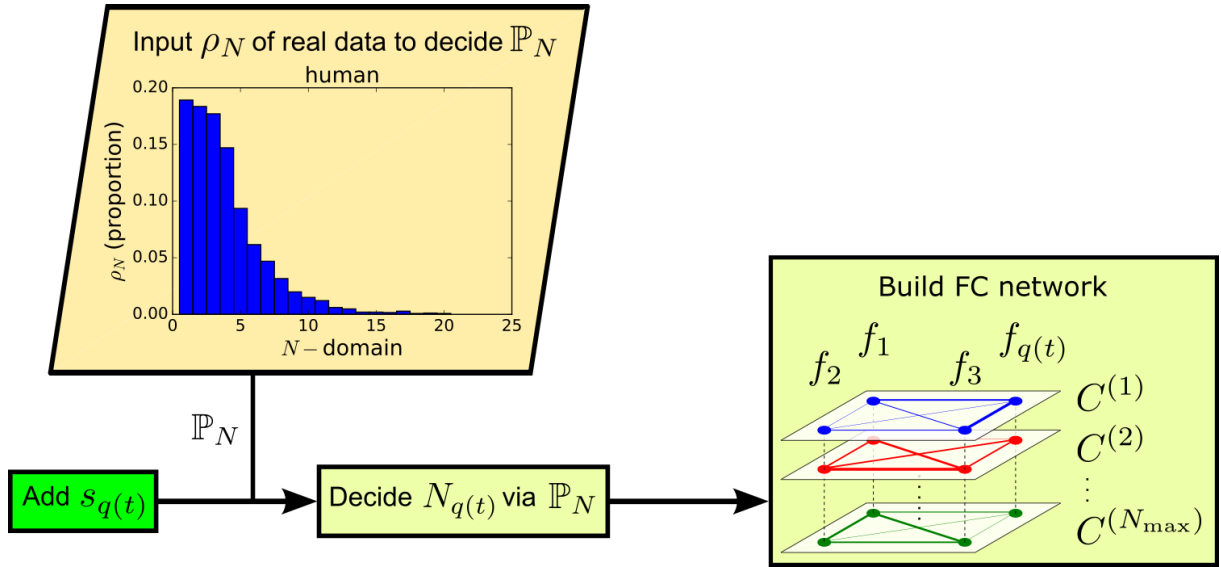


FIG. 13: The step “Add $s_{q(t)}$ and build its FC” in Fig. 3 includes three operations. First, “Add $s_{q(t)}$ ”: increase the length of Book. Second, “Decide $N_{q(t)}$ via \mathbb{P}_N ”: estimate the prior probability distribution \mathbb{P}_N from the counts of components in a word ρ_N for real data, then randomly choose $N_{q(t)}$, the number of components in $s_{q(t)}$, on the basis of \mathbb{P}_N . Third, “Build FC network”: construct the FC network at the component level for $f_{q(t)}$, where $C^{(k)}$ denotes the FC network for the component at k -position and $N_{\max} = \max\{N_1, N_2, \dots, N_{q(t)}\}$. Notice that once a block s_μ does not have a component at k -position, the FCs between f_μ and all other functions f_ν are set to 0, namely, $C_{\mu,\nu}^{(k)} = C_{\nu,\mu}^{(k)} = 0$. In general, $C^{(k)} = C^{(k)}(t)$ is a time-dependent network. It may change whenever $s_{q(t)}$ is added. But when discussing the “conserved increasing evolution”, the above three operations can be modified to accelerate the evolutionary algorithm. See SI for details about our simulation and faster algorithm.