

FDAPy: a Python package for functional data

Steven Golovkine*

January 28, 2021

Abstract

We introduce the **Python** package, **FDAPy**, as an implementation of functional data. This package provide modules for the analysis of such data. It includes classes for different dimensional data as well as irregularly sampled functional data. A simulation toolbox is also provided. It might be used to simulate different clusters of functional data. Some methodologies to handle these data are implemented, such as dimension reduction and clustering. New methods can be easily added. The package is publicly available on the Python Package Index and Github.

1 Introduction

With a large number of applications ranging from sports to automotive industry and healthcare, more and more phenomena produce observation entities in the form of a sequence of possibly vector-valued measurements recorded intermittently at several discrete points in time. Functional data analysis (FDA) considers such data as being values of the realizations of a stochastic process, recorded with some error, at discrete random times. The purpose of FDA is to study such trajectories, also called curves or functions. The concept of functional data can be linked to the study of time series data, as dense, usually regular samples of potentially non-smooth functions, or longitudinal data, as sparse and irregular samples of smooth function, or even image data, which can be represented as functions on two-dimensional domains.

In order to apply FDA to a real dataset, there is a need for appropriate softwares with up-to-date methodological implementation and easy addition of new theoretical developments. Currently, the most widely known software for FDA is the **R** package **fda** [17], based on work cited in [15, 16]. Usually, **R** packages for FDA are specific to one method. For example, one may cite **FDboost** [3] and **refund**[7] for regression and classification, **funFEM** [1], **funHDDC** [18] and **funLBM** [2] for clustering or **fdasrvf** [20] and **fdakma** [14] for functional data registration, *etc.* Most of these packages are built upon **fda**. However, in most packages, the functional data are restricted to univariate ones that are well

*Groupe Renault & CREST - UMR 9194, Rennes, France, steven.golovkine@ensai.fr

described by their coefficients in a given basis of functions. The `funData` package [11] has been recently released. It aims to provide a unified framework to handle univariate and multivariate functional data defined on different dimensional domains. Sparse functional data are also considered. The `MFPCA` [12] package is currently the only one built on top of the `funData` package. It implements multivariate functional principal components analysis (MFPCA) for data defined on different dimensional domains [10].

Concerning the **Python** community, there are only few packages that are related to FDA. One may cite `sktime` [13] and `tslearn` [19] that provide tools for the analysis of time series as a `scikit-learn` compatible API. Thus, they implement specific time series methods such as DTW-based ones or shapelets learning. The only one that develops specific methods for FDA is `scikit-fda` [4]. In particular, it implements diverse registration techniques as well as statistical data depths for functional data. However, most of the methods are for one-dimensional data and they only accept multivariate functional data defined on the same unidimensional domain.

The `FDapy` package implements methods to handle functional data in **Python** based on an object-oriented approach, in the spirit of `funData`. In particular, it provides classes to manipulate dense, irregularly and multivariate functional data defined on one or higher dimensional domains. A large simulation toolbox, based on basis decomposition, is provided. It allows parameters for different clusters simulation to be configured within the data. An implementation of MFPCA for data defined on different domains, as described in [10], is implemented. Moreover, the `fCUBT` algorithm [8], used to create partition in the data, is also available. All methods are implemented using the defined classes. The package is publicly available on Github¹ and the Python Package Index².

In the general case, the data consist of independent trajectories of a vector-valued stochastic process $X = (X^{(1)}, \dots, X^{(P)})^\top$, $P \geq 1$. For each $1 \leq p \leq P$, let $\mathcal{T}_p \subset \mathbb{R}^{d_p}$ with $d_p \geq 1$, as for instance, $\mathcal{T}_p = [0, 1]^{d_p}$. The realizations of each coordinate $X^{(p)} : \mathcal{T}_p \rightarrow \mathbb{R}$ are assumed to belong to $\mathcal{L}^2(\mathcal{T}_p)$, the Hilbert space of squared-integrable, real-valued functions defined on \mathcal{T}_p . Thus, X is a stochastic process indexed by $\mathbf{t} = (t_1, \dots, t_P)$ belonging to the P -fold Cartesian product $\mathcal{T} := \mathcal{T}_1 \times \dots \times \mathcal{T}_P$ and taking values in the P -fold Cartesian product space $\mathcal{H} := \mathcal{L}^2(\mathcal{T}_1) \times \dots \times \mathcal{L}^2(\mathcal{T}_P)$. In practice, realizations of functional data are only obtained on a finite grid and possibly with noise. Let us consider N curves $X_1, \dots, X_n, \dots, X_N$ generated as a random sample of the P -dimensional stochastic process X with continuous trajectories. For each $1 \leq n \leq N$, and given a vector of positive integers $\mathbf{M}_n = (M_n^{(1)}, \dots, M_n^{(P)}) \in \mathbb{R}^P$, let $T_{n,\mathbf{m}} = (T_{n,m_1}^{(1)}, \dots, T_{n,m_P}^{(P)})$, $1 \leq m_p \leq M_n^{(p)}$, $1 \leq p \leq P$, be the random observation times for the curve X_n . These times are obtained as independent copies of a variable \mathbf{T} taking values in \mathcal{T} . The vectors $\mathbf{M}_1, \dots, \mathbf{M}_N$ represent an independent sample of an integer-valued random vector \mathbf{M} with expectation $\boldsymbol{\mu}_M$. We assume that the realizations of X , \mathbf{M} and \mathbf{T} are mutually independent. The observations associated with a curve, or trajectory, X_n consist of the pairs $(Y_{n,\mathbf{m}}, T_{n,\mathbf{m}}) \in \mathbb{R}^P \times \mathcal{T}$

¹<https://github.com/StevenGolovkine/FDapy>

²<https://pypi.org/project/FDapy/>

where $\mathbf{m} = (m_1, \dots, m_P)$, $1 \leq m_p \leq M_n^{(p)}$, $1 \leq p \leq P$, and $Y_{n,\mathbf{m}}$ is defined as

$$Y_{n,\mathbf{m}} = X_n(T_{n,\mathbf{m}}) + \varepsilon_{n,\mathbf{m}}, \quad , 1 \leq n \leq N,$$

and $\varepsilon_{n,\mathbf{m}}$ are independent copies of a centered random vector $\varepsilon \in \mathbb{R}^P$ with finite variance. We use the notation $X_n(\mathbf{t})$ for the value at \mathbf{t} of the realization X_n of X . Univariate functional data refers to the case where $P = 1$.

The remainder of the paper is organized as follows. In Section 2, we introduce the classes for an object-oriented implementation of functional data. Section 3 describes the data we used as examples. In Section 4, we presents the creation and manipulation of functional data objects. Sections 5, 6 and 7 then demonstrate some methods that the package implements: the estimation of components, multivariate functional principal components analysis and the fCUBT algorithm used to find a partition of the sampled data.

2 Classes of functional data

The representation of functional data is done using two classes, that both extend an abstract class `FunctionalData`:

1. Class `DenseFunctionalData` represents dense functional data of arbitrary dimension (one for curves, two for images, *etc.*) on a common set of observation points t_1, \dots, t_M for all observations. It may have missing values within the data.
2. Class `IrregularFunctionalData` represents irregularly sampled data of arbitrary dimension on different sets of observation points. The number and the location of the sampling points vary between observations. It must not have missing values within the data.

Finally, the implementation of the class `MultivariateFunctionalData` is different because it does not extend the class `FunctionalData` but the `UserList` one. Thus, an instance of `MultivariateFunctionalData` is defined as a list of P elements from the `DenseFunctionalData` and/or `IrregularFunctionalData` classes that may be defined on different dimensional domains (*e.g.* curves and images). A diagram of the classes is given in Figure 1.

Remark 1 *In practice, the difference between dense and irregularly sampled functional data can be tricky. By design, dense functional data are assumed to be sampled on the complete grid $\mathcal{T} = \{t_1, \dots, t_M\}$ and measurement errors may exist. Taking data from sensors as an example, observations are recorded at a given sampling rate and are timestamped but some anomalies may happen during the recording process. While for an irregularly sampled functional data, we assume that the curves are observed at different sampling points with potentially different numbers of points. This is usually the case in medical studies such as growth curves analysis because one cannot expect that the individuals are measured at the exact same time.*

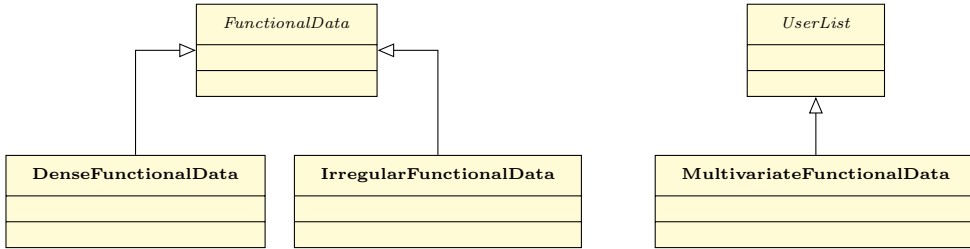


Figure 1: Representation of the main classes

The `DenseFunctionalData` and `IrregularFunctionalData` classes represent the data in a similar way: the instance variable `argvals` contains the sampling points and the instance variable `values` represents the data. In the case of dense functional data, the `argvals` is a dictionary where each entry contains a **numpy** array that represents the common sampling points for a given dimension, while `values` is a **numpy** array containing the observations. In the case of one-dimensional data sampled on a grid with M points, `argvals` contains only one entry as an array of shape $(M,)$ and `values` is an array of dimension (N, M) where each row is an observation. For two-dimensional observations with $M^{(1)} \times M^{(2)}$ sampling points, `argvals` contains two entries, the first being an array of shape $(M^{(1)},)$ and the second an array of shape $(M^{(2)},)$ and `values` is an array of dimension $(N, M^{(1)}, M^{(2)})$ where the first coordinate gives the observation. The higher dimensional data are represented by adding an entry in the `argvals` dictionary and a dimension in the `values` array. For irregularly sampled functional data, both `argvals` and `values` are dictionaries. The entries of `argvals` are dictionaries where each entry consists of the sampling points for a particular observation. In a similar way, each entry of the `values` dictionary represents an observation. For one-dimensional irregularly sampled functional data, `argvals` contains one entry which is a dictionary of size N containing the sampling points as array of shape $(M_n,), 1 \leq n \leq N$ and `values` is a dictionary with N entries containing the observations as arrays of shape $(M_n,), 1 \leq n \leq N$. For higher dimensions, each entry of the `argvals` dictionary represents a dimension of the process and contains another dictionary with N entries for the sampling points. Likewise, the `values` dictionary has N entries and every one of them is an array of shape $(M_n^{(1)}, M_n^{(2)}, \dots), 1 \leq n \leq N$.

Finally, the `MultivariateFunctionalData` class inherits from the `UserList` class, and thus gathers P instances of `DenseFunctionalData` and/or `IrregularFunctionalData` as a list. As a result, this class has access to all the methods applicable to lists such as `append`, `extend`, `pop`, *etc.* Given a specific dataset, instances of the different classes are called `DenseFunctionalData`, `IrregularFunctionalData` or `MultivariateFunctionalData` objects. In the following, the generic term, *functional data object*, will refer to instances of all the three classes.

3 Data used in the examples

We will consider two datasets in the code examples. The first one will be the **Canadian weather** data, which is presented in the textbook by Ramsay and Silverman [15] and available in their **R** package `fda` [17]. The second dataset is the **CD4 cell count** dataset, used in [6], and available in the **R** package `refund` [7]. As both examples are one-dimensional data, higher dimensional datasets, in particular images ones, will be simulated using the simulation toolbox provided in the package.

The **Canadian weather** dataset contains daily recording of the temperature (in degree Celsius) and the precipitation (in millimeters) for $N = 35$ Canadian cities spread across the country and averaged over the years 1960 to 1994. The daily temperature data will be used as an example of `DenseFunctionalData` defined on a one-dimensional domain. We will add the daily precipitation records to the temperature ones in order to create a `MultivariateFunctionalData` object with elements defined on different one-dimensional domains ($\mathcal{T}_1 = [1, 364]$ for the temperature and $\mathcal{T}_2 = [1, 363]$ for the precipitation).

From the MACS (Multicenter AIDS Cohort Study), the **CD4 cell count** dataset collects the number of CD4 cells per milliliter of blood of $N = 366$ participants. CD4 cells are a particular type of white blood cell and are key components of the immune system. HIV attacks the CD4 cells in the patient's blood. Thus, the count of CD4 cells can be viewed as a measure of the disease progression. For this dataset, the number of CD4 cells are measured roughly twice a year and centered at the time of seroconversion, which is the time that HIV becomes detectable. For every individual, the number of measurements varies between 1 to 11 over a period of 18 months before and 42 months after seroconversion. The sampling points are different between observations. We will use this dataset as an example of `IrregularFunctionalData`.

4 Manipulation of functional data objects

With the help of the two example datasets, this section will present how to create and manipulate a functional data object. In particular, we review the different instance variables used to extract information from the data. We also present methods to modify and plot functional data objects. General methods, such as the computation of the mean or covariance, for `MultivariateFunctionalData` objects usually call the corresponding methods for each individual and concatenate the results appropriately. For all the code examples, we assume that the correct functions from the **FDAPy** package are loaded as well as the packages `numpy` and `pandas` using the following code snippet:

```
1 import numpy as np
2 import pandas as pd
```

4.1 Creation of objects

Assuming the Canadian temperature data is stored in a *temperature.csv* file and the Canadian precipitation data in a *precipitation.csv* file, the following code loads the data into **pandas** dataframes and creates **DenseFunctionalData** instances from them. We explicitly named the dimension of the observation.

```
1 temperature = pd.read_csv('temperature.csv', index_col=0)
2
3 argvals = pd.factorize(temperature.columns)[0]
4 values = np.array(temperature)
5 dailyTemp = DenseFunctionalData({'input_dim_0': argvals},
6                                 values)
7
8 precipitation = pd.read_csv('precipitation.csv', index_col=0)
9
10 argvals = pd.factorize(precipitation.columns)[0]
11 values = np.array(precipitation)
12 dailyPrec = DenseFunctionalData({'input_dim_0': argvals},
13                                 values)
```

Given multiple functional data objects, the creation of **MultivariateFunctionalData** instances is done by passing a list of objects to the constructor method.

```
1 canadWeather = MultivariateFunctionalData([dailyTemp,
2                                           dailyPrec])
```

The construction of an **IrregularFunctionalData** instance is similar, except that the dictionaries for **argvals** and **values** must contain an entry for each observation of the data. We consider that the CD4 cell count data are stored in a *cd4.csv* file containing a matrix representing the CD4 counts for each patient on the common grid of all sampling points and the missing values are coded as **NA**. Thus, the following code extracts only the non-missing values for each patient and construct an instance of **IrregularFunctionalData**.

```
1 cd4 = pd.read_csv('cd4.csv', index_col=0)
2
3 all_argvals = cd4.columns.astype(np.int64)
4 argvals = {idx: np.array(all_argvals[~np.isnan(row)])
5            for idx, row in enumerate(cd4.values)}
6 values = {idx: row[~np.isnan(row)]
7          for idx, row in enumerate(cd4.values)}
8 cd4counts = IrregularFunctionalData({'input_dim_0': argvals},
```

Remark 2 *Two loaders are included within the package: `read_csv` and `read_ts`. These methods can be used to load already well formatted data from `csv` or `ts` files. In particular, the `ts` files are, in particular, used in the UEA & UCR Time Series Classification Repository³. These functions are wrapper functions of the above code snippets. Nonetheless, multivariate functional data cannot be imported in this way.*

Basic information about the functional data object is printed on the standard output when the object is called in the command line. For example, for the temperature dataset, the output will be:

```
1 dailyTemp
```

```
Univariate functional data object with 35 observations on a 1-dimensional support.
```

The outputs are similar for instances of the other types of functional data objects.

For dense and irregular functional objects, a subset of the data can be extracted using the convenient way to substract objects provided in **Python**. For example, in order to get the observations from 5 to 12 from the temperature data, we may write:

```
1 dailyTemp[5:13]
```

```
Univariate functional data object with 8 observations on a 1-dimensional support.
```

Note that this will not work with `MultivariateFunctionalData` instances. This subsetting method will instead return the univariate functional data in the list. However, an iterator through the observations of the multivariate functional data is provided as the `get_obs` method.

In regards to Remark 1, we implement functions to convert `DenseFunctionalData` instances into `IrregularFunctionalData` instances and to do the reverse operation. The missing values are coded with `np.nan`. The code is thus written:

```
1 dailyTemp.as_irregular() # dense to irregular
2 cd4.as_dense() # irregular to dense
```

³<http://www.timeseriesclassification.com/index.php>

4.2 Access to the instance variables

The functional data classes come with multiple instance variables. In **Python**, they can usually be accessed using `instance_name.variable_name`. We will present some of them in the following. Note that, some variables cannot be accessed directly for multivariate functional data and have to be retrieved by looping through its univariate elements.

Of course, the `argvals` and `values` are accessible using `dailyTemp.argvals` and `dailyTemp.values` and show what the user gave to the object constructor. Furthermore, we provide a variable `argvals_stand` with the same shape as `argvals` but with normalized sampling points. The instance variables are the following:

- `n_obs` – number of observations in the object.
- `n_points` – number of sampling points in the object for each dimension as a dictionary. For the multivariate functional data object, it should be a list of P entries. In the case of `IrregularFunctionalData`, the returned number is the mean number of sampling points per observation.
- `n_dim` – input dimension of the functional data (one for curves, two for images, *etc.*). For `MultivariateFunctionalData` objects, is expressed as a list.
- `range_obs` – minimum and maximum values of the observations as a tuple.
- `range_points` – minimum and maximum values of the sampling points as a tuple. The calculation is based on the variable `argvals`.

4.3 Plotting

Basic plotting methods for functional data objects are provided in the package. They are built upon the **matplotlib** package. We assume the package is loaded with

```
1 import matplotlib.pyplot as plt
```

The `plot` method returns an instance of **Axes** from the **matplotlib** library. Thus, all the plotting options relative to ticks, frames and so on, are modifiable using this instance of **Axes**. Customization of the graph parameters, such as colors, linetypes or linewidths for example, can be made by passing the arguments as inputs to the function. The following snippet is used to plot all the temperature curves for all the Canadian weather station data (represented as a `DenseFunctionalData` object),

```
1 _ = plot(dailyTemp)
2 plt.xlabel('Days')
3 plt.ylabel('Temperature')
4 plt.title('Daily_Temperature_Data')
5 plt.show()
```

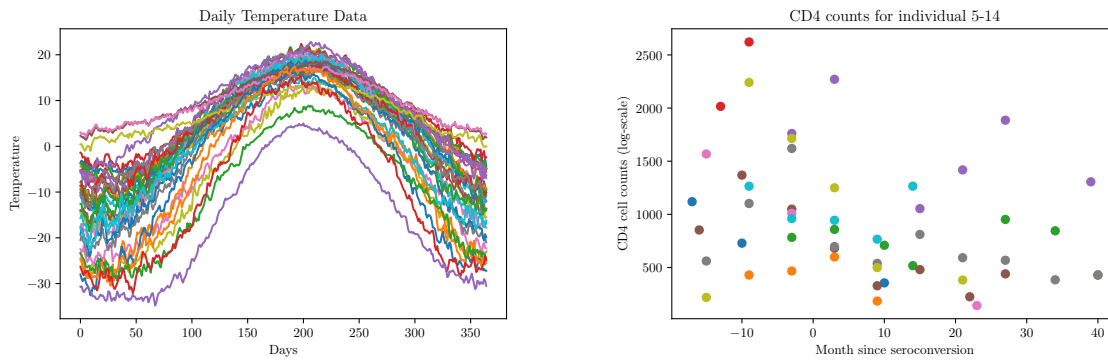



Figure 2: Results of the `plot` method for functional data object.

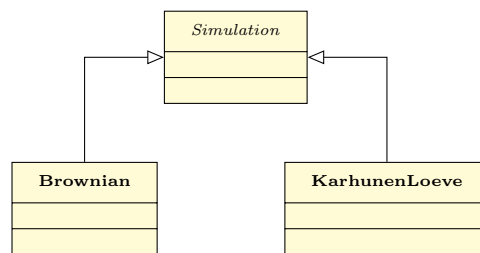


Figure 3: Links between classes in the simulation toolbox.

while a plot of the CD4 cell counts for 10 patients on the log-scale (represented as an `IrregularFunctionalData` object) is given by

```

1 _ = plot(cd4counts[5:15])
2 plt.xlabel('Month since seroconversion')
3 plt.ylabel('CD4 cell counts (log-scale)')
4 plt.title('CD4 counts for individual 5-14')
5 plt.show()

```

The plots are shown in Figure 2.

4.4 Data simulation

Simulation functions are implemented in order to test new methodological developments. The data can be simulated using a truncated version of the Karhunen-Loève representation (class `KarhunenLoeve`) as well as diverse Brownian motions (class `Brownian`) that inherits from the `Simulation` class (see Figure 3). An element of the `Simulation` class have two principal instance variables: `basis` that contains the used basis and `data` that contains the simulated observation (after running the fonction `new()`).

For Brownian motions, three types are implemented: `standard`, `fractional` and `geometric`. For example, we can simulate $N = 10$ realizations of a fractional Brownian

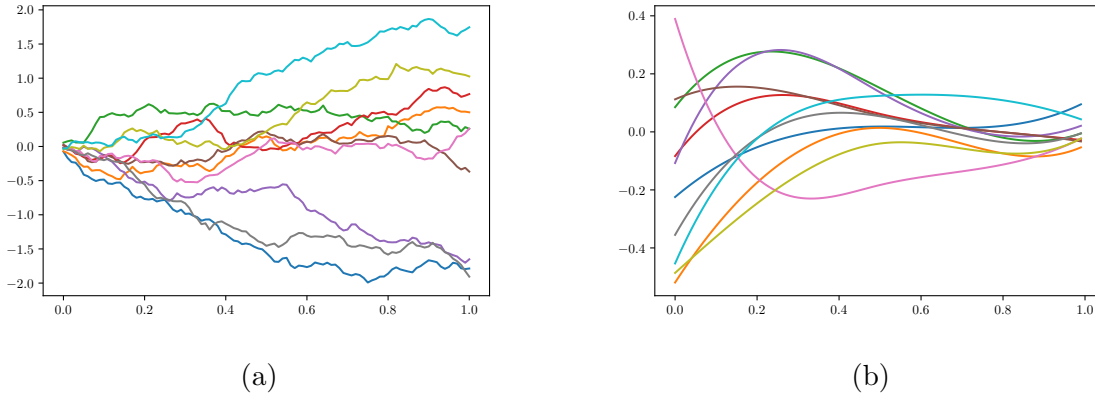


Figure 4: Example of simulated data. (a) Brownian motion. (b) Karhunen-Loève expansion

motion on the one-dimensional observation grid $\{0, 0.01, \dots, 1\}$ with a Hurst parameter equal to 0.7 using

```

1 brownian = Brownian(name='fractional')
2 brownian.new(n_obs=10, argvals=np.linspace(0, 1, 101),
3             hurst=0.7)

```

The process X has a Karhunen-Loève decomposition. Each of its realizations can be represented using this decomposition, truncated at J coefficients:

$$X_n(t) = \mu(t) + \sum_{j=1}^J \xi_{j,n} \phi_j(t), \quad t \in \mathcal{T}, \quad n = 1, \dots, N,$$

with a common mean function μ and an orthonormal basis of functions $\{\phi_j\}_{j=1, \dots, J}$. The coefficient $\xi_{j,n}$ are realizations of random Gaussian variables ξ_j such that $\mathbb{E}(\xi_j) = 0$ and $\text{Var}(\xi_j) = \lambda_j$ with eigenvalues $\lambda_j \geq 0$ that decrease towards 0. Multiple orthonormal bases are implemented: Legendre polynomials, eigenfunctions of a Wiener process, Fourier series and B-splines basis. The variance of the coefficients can have a linear or exponential decrease or be the eigenvalues of a Wiener process. The user can set their own. New bases can easily be added.

For example, we can simulate $N = 10$ curves on $\mathcal{T} = [0, 1]$, using 5 eigenfunctions from a B-splines basis on \mathcal{T} and eigenvalues with exponential decrease:

```

1 kl = KarhunenLoeve(name='bsplines', n_functions=5)
2 kl.new(n_obs=10, argvals=np.linspace(0, 1, 101),
3        cluster_std='exponential')

```

Figure 4 presents a plot of the simulated Brownian motions and those from the Karhunen-Loève decomposition. The simulation of two dimensional data is based on the tensor product of basis functions. Simulation for higher dimensional data is not implemented.

We also added methods to generate noisy observations as well as sparse data. Note that, these functions are only implemented on instances of `Simulation`. The `add_noise` function adds pointwise noise to the observations. Both homoscedastic and heteroscedastic noise are implemented. If a single scalar is given as a parameter to the function, homoscedastic noise will be simulated. For the heteroscedastic case, lambda functions and vectors of size `n_points` can be supplied by the user. The noisy data are stored in the instance variable `noisy_data`. For example, to add random noise with variance $\sigma^2 = 0.05$, we run

```
1 kl.add_noise(var_noise=0.05)
```

and, for heteroscedastic noise with variance defined by $x \rightarrow \sqrt{1 + |x|}$,

```
1 kl.add_noise(var_noise=lambda x: np.sqrt(1 + np.abs(x)))
```

The function `sparsify` randomly removes sampling points from the observation. Precisely, we randomly generate the number of sampling points to retain for each observation and then randomly select the sampling points to remove from each observation. The sparse data are stored in the instance variable `sparse_data`. For example, to randomly remove 50% of the sampling points (more or less 5%) on the Brownian simulated data, we run

```
1 brownian.sparsify(percentage=0.5, epsilon=0.05)
```

Figure 5 presents a plot of the noisy and sparse versions of the Karhunen-Loève simulated data.

4.4.1 Clusters simulation

Let K be a positive integer, and let Z be a discrete random variable taking values in the range $\{1, \dots, K\}$ such that

$$\mathbb{P}(Z = k) = p_k \quad \text{with} \quad p_k > 0 \quad \text{and} \quad \sum_{k=1}^K p_k = 1.$$

The variable Z represents the cluster membership of the realizations of the process. We consider that the stochastic process follows a functional mixture model with K compo-

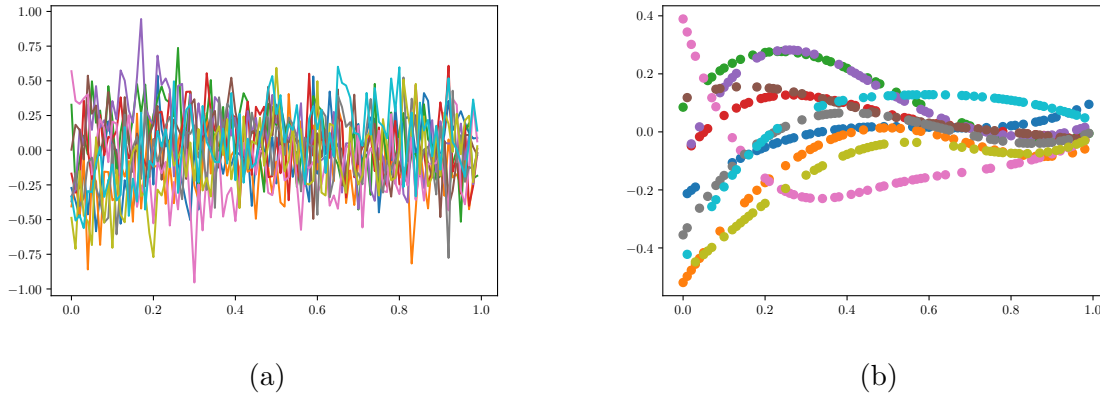


Figure 5: Results for the `add_noise` and `sparsify` functions on the Karhunen-Loève simulated data. (a) Noisy data. (b) Sparse data.

nents, that is, it allows for the following decomposition:

$$X(t) = \sum_{k=1}^K \mu_k(t) \mathbf{1}_{\{Z=k\}} + \sum_{j \geq 1} \xi_j \phi_j(t), \quad t \in \mathcal{T},$$

where

- μ_1, \dots, μ_K are the mean curves per cluster.
- $\{\phi_j\}_{j \geq 1}$ is an orthonormal basis of functions.
- $\xi_j, j \geq 1$ are real-valued random variables which are conditionally independent given Z . For each $1 \leq k \leq K$, $\xi_j | Z = k \sim \mathcal{N}(0, \sigma_{kj}^2)$.

For example, we can generate $N = 10$ realizations of two clusters using 3 eigenfunctions with given coefficients with

```

1 N = 10
2 n_features = 3
3 n_clusters = 2
4 centers = np.array([[2, -1], [-0.5, 1.5], [0, 0]])
5 cluster_std = np.array([[2, 1], [0.5, 1], [1, 1]])
6
7 simu = KarhunenLoeve('wiener', n_functions=n_features)
8 simu.new(n_obs=N, n_clusters=n_clusters,
9         centers=centers, cluster_std=cluster_std)

```

Figure 6 shows the plot of the simulated data corresponding to the previous code snippet.

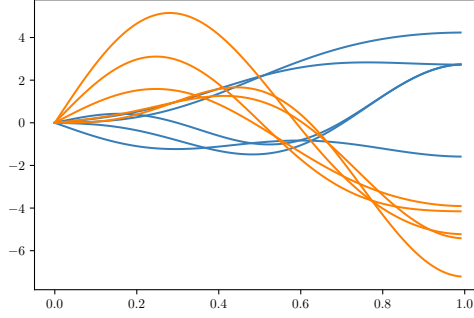


Figure 6: Simulation of data with two clusters. Each color represents a cluster.

5 Parameters estimation

5.1 Curves denoising

Considering the model defined in (1), we assume that $P = 1$ and for the sake of readability, we omit the superscript. The objective is to estimate the function $X_n(\cdot)$ using the available sample points. Thus, we consider local polynomial smoothers [5]. This type of estimators crucially depends on a tuning parameter, the bandwidth.

Let $\mathbf{d} \geq 0$ be an integer and $t_0 \in \mathcal{T}$ be the evaluation points for the estimation of X_n . For any $u \in \mathbb{R}$, we consider the vector $U(u) = (1, u, \dots, u^{\mathbf{d}/\mathbf{d}!})$ and note that $U_h(\cdot) = U(\cdot/h)$. Let $K : \mathbb{R} \rightarrow \mathbb{R}$ be a positive kernel and define $K_h(\cdot) = h^{-1}K(\cdot/h)$. Moreover, we define:

$$\vartheta_{M_n, h} := \arg \min_{\vartheta \in \mathbb{R}^{\mathbf{d}+1}} \sum_{m=1}^{M_n} \{Y_{n,m} - \vartheta^\top U_h(T_{n,m} - t_0)\}^2 K_h(T_{n,m} - t_0),$$

where h is the bandwidth. The vector $\vartheta_{M_n, h}$ satisfies the normal equations $A\vartheta_{M_n, h} = a$ with

$$A = A_{M_n, h} = \frac{1}{M_n} \sum_{m=1}^{M_n} U_h(T_{n,m} - t_0) U_h^\top(T_{n,m} - t_0) K_h(T_{n,m} - t_0)$$

$$a = a_{M_n, h} = \frac{1}{M_n} \sum_{m=1}^{M_n} Y_{n,m} U_h(T_m^{(n)} - t_0) K_h(T_m^{(n)} - t_0).$$

Let λ be the smallest eigenvalue of the matrix A and note that, whenever $\lambda > 0$, we have $\vartheta_{M_n, h} = A^{-1}a$. With at hand an estimation of the bandwidth \hat{h} , the local polynomial estimator of $\hat{X}^{(n)}(t_0)$ of order \mathbf{d} is given by:

$$\hat{X}^{(n)}(t_0) = U^\top(0)\hat{\vartheta}, \quad \text{where} \quad \hat{\vartheta} = \vartheta_{M_n, \hat{h}}.$$

If $\mathbf{d} = 0$, we are in the particular case of the Nadaraya-Watson estimator. The Gaussian, Epanechnikov, tri-cube and bi-square kernels are implemented and others can

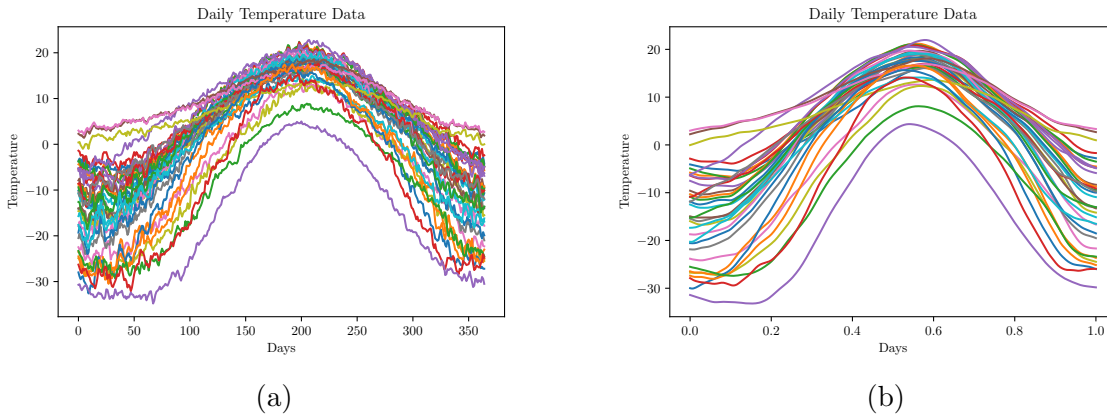


Figure 7: (a) Curve and (b) smoothed estimation for the Canadian Temperature data.

be added in a modular way. We propose an estimate of the bandwidth h that is based on the regularity of the underlying function [9].

For example, if we want to smooth the daily temperature curves using a local polynomial smoother with an estimate of bandwidth at $t_0 = 0.5$ and a neighborhood of 2 points, we run:

```

1 dailyTemp_smooth = dailyTemp.smooth(points=0.5,
2                                     neighborhood=2)

```

Figure 7 presents the plot of the smoothed temperature data compared to the original ones.

5.2 Mean and covariance estimation

In this section, we develop estimators for the mean and the covariance functions of a component $X^{(p)}, 1 \leq p \leq P$ from the process X . These estimators might be used to compute estimators of eigenvalues and eigenfunctions of $X^{(p)}$ for the Karhunen-Loève expansion.

Let $\widehat{X}_n^{(p)}$ be a suitable nonparametric estimator of the curve $X_n^{(p)}$ applied with the $M_n^{(p)}$ pairs $(Y_{n,m_p}^{(p)}, T_{n,m_p}^{(p)}), n = 1, \dots, N_0$, as for instance a local polynomial estimator such as that presented in the previous subsection. With at hand the $\widehat{X}_n^{(p)}$'s tuned for the mean function estimation, we define

$$\widehat{\mu}_N^{(p)}(t_p) = \frac{1}{N} \sum_{n=1}^N \widehat{X}_n^{(p)}(t_p), \quad t_p \in \mathcal{T}_p.$$

For example, the code snippet for the estimation of the mean curve of the daily temperature curves using local linear smoother with bandwidth equal to 0.05 is

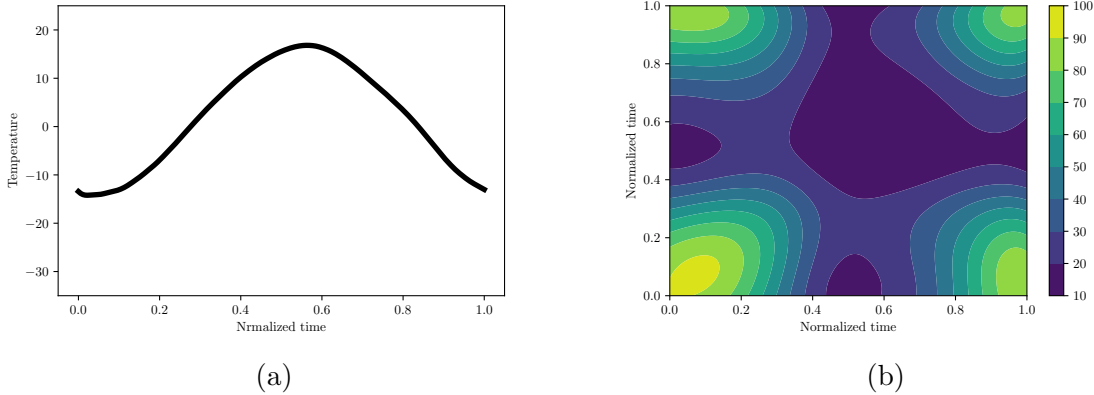


Figure 8: (a) Mean and (b) covariance estimation for the Canadian Temperature data.

```

1 mean_temp = dailyTemp.mean(smooth='LocalLinear',
2                             bandwidth=0.05)

```

For the covariance function, following [21], we distinguish the diagonal from the non-diagonal points. With at hand the $\widehat{X}_n^{(p)}$'s tuned for the covariance function estimation,

$$\widehat{C}_{p,p}(s_p, t_p) = \frac{1}{N} \sum_{n=1}^N \widehat{X}_n^{(p)}(s_p) \widehat{X}_n^{(p)}(t_p) - \widehat{\mu}_N^{(p)}(s_p) \widehat{\mu}_N^{(p)}(t_p), \quad s_p, t_p \in \mathcal{T}_p, \quad s_p \neq t_p.$$

The diagonal of the covariance is then estimated using two-dimensional kernel smoothing with $\widehat{C}_{p,p}(s_p, t_p), s_p \neq t_p$ as input data. See [21] for the details.

```

1 cov_temp = dailyTemp.covariance(smooth='GAM')

```

6 MFPCA

The `FDapy` package implements MFPCA for data defined on potentially different domains, developed by Happ and Greven [10]. The implementation of the method is build upon the functional data classes defined in the package. After giving a short review of the methodology in Section 6.1, we explain how to effectively use it in Section 6.2. For theoretical details, please refer to [10].

6.1 Methodological background

Following Happ and Greven [10], the multivariate components for X are computed by plugging in the univariate components computed from each component $X^{(p)}$. These estimations are done as the follows.

1. Perform a univariate fPCA on each of the components of X separately. For a component $X^{(p)}$, the eigenfunctions and eigenvectors are computed as a matrix analysis of the estimated covariance $\widehat{C}_{p,p}$. This results in a set of eigenfunctions $(\widehat{\rho}_1^{(p)}, \dots, \widehat{\rho}_{J^{(p)}}^{(p)})$ associated with a set of eigenvalues $(\widehat{\lambda}_1^{(p)}, \dots, \widehat{\lambda}_{J^{(p)}}^{(p)})$ for a given truncation integer $J^{(p)}$. The univariate scores for a realization $X_n^{(p)}$ of $X^{(p)}$ are then given by $\widehat{\mathbf{c}}_{j,n}^{(p)} = \langle \widehat{X}_n^{(p)}, \widehat{\rho}_j^{(p)} \rangle$, $1 \leq j \leq J^{(p)}$.
2. Define the matrix $\mathcal{Z} \in \mathbb{R}^{N_0 \times J_+}$, $J_+ = \sum_{p=1}^P J^{(p)}$, where each row stacks the scores for each components for a unique observation $(\widehat{\mathbf{c}}_{1,n}^{(1)}, \dots, \widehat{\mathbf{c}}_{J^{(1)},n}^{(1)}, \dots, \widehat{\mathbf{c}}_{1,n}^{(P)}, \dots, \widehat{\mathbf{c}}_{J^{(P)},n}^{(P)})$. Define $\mathbf{Z} \in \mathbb{R}^{J_+ \times J_+}$ such that $\mathbf{Z} = (N_0 - 1)^{-1} \mathcal{Z}^\top \mathcal{Z}$.
3. An eigenanalysis of the matrix \mathbf{Z} is performed and leads to the eigenvectors $\widehat{\mathbf{v}}_j$ and eigenvalues $\widehat{\lambda}_j$.
4. Finally, the multivariate eigenfunctions are estimated with

$$\widehat{\varphi}_j^{(p)}(t_p) = \sum_{j'=1}^{J^{(p)}} [\widehat{\mathbf{v}}_j]_{j'}^{(p)} \widehat{\rho}_{j'}^{(p)}(t_p), \quad t_p \in \mathcal{T}_p, \quad 1 \leq j \leq J_+, \quad 1 \leq p \leq P.$$

and the multivariate scores with

$$\widehat{\mathbf{c}}_{j,n} = \mathcal{Z}_{n,\cdot} \widehat{\mathbf{v}}_j, \quad 1 \leq n \leq N_0, \quad 1 \leq j \leq J_+.$$

The multivariate Karhunen-Loève expansion of the process X is thus

$$\widehat{X}_n(\mathbf{t}) = \widehat{\mu}_{N_0}(\mathbf{t}) + \sum_{j=1}^J \widehat{\mathbf{c}}_{j,n} \widehat{\varphi}_j(\mathbf{t}), \quad \mathbf{t} \in \mathcal{T}.$$

where $\widehat{\mu}_{N_0}(\cdot) = (\widehat{\mu}_{N_0}^{(1)}(\cdot), \dots, \widehat{\mu}_{N_0}^{(P)}(\cdot))$ is the vector of the estimated mean functions.

6.2 Implementation

The implementation of the MFPCA is based on the MFPCA class. Hence, we construct an object of class MFPCA specifying the number of eigencomponents that we want. The computation of the eigenelements is performed using the `fit` method, and the scores are then calculated using the `transform` method. Given scores, the inverse transformation to the functional space is done using the `inverse_transform` method. The triptych `fit`, `transform` and `fit_transform` is based on the implementation choice of `sklearn`.

6.2.1 MFPCA for the Canadian Weather data

In this example, we perform a MFPCA for the bivariate Canadian Weather data. We expand each univariate element using an univariate FPCA with a number of components

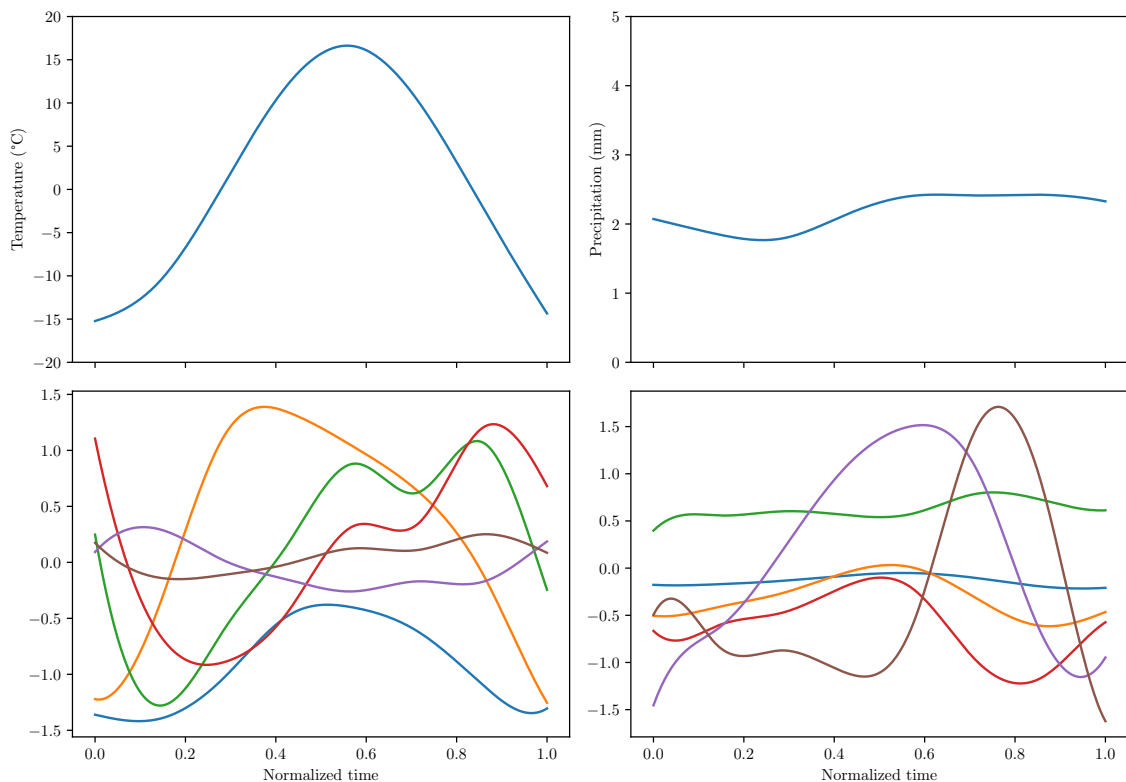


Figure 9: Results of the MFPCA for the Canadian Weather data. The first row represents the mean functions of the temperature (left) and precipitation (right) data. The second row corresponds to the bivariate eigenfunctions found for 99% of explained variance.

that explain 99% of the variance within the data. The number of components are specified in a list in the `MFPCA` constructor. The `method` parameter in the `fit` method indicates how the univariate scores are computed. Here, we use numerical integration to derive them.

```
1 fpca = MFPCA(n_components=[0.99, 0.99])
2 fpca.fit(canadWeather, method='NumInt')
```

The scores are computed using the `transform` function:

```
1 scores = fpca.transform(data=canadWeather)
```

The eigenvalues are stored as instance variables. We remark the rapid decrease of the eigenvalues. Hence, we only need a few eigencomponents to explain most of the variance within the data.

```
1 fpca.eigenvalues
```

```
array([4.36e+01, 4.62e+00, 1.20e+00, 5.76e-01, 1.14e-01, 2.61e-02])
```

6.2.2 Implemented univariate basis expansion

MFPCA is based on the univariate basis expansion of each of the components of the process. Currently, only two basis expansions are implemented. New bases can easily be added to the package. All univariate basis expansions should implemented the methods: `fit`, used to compute the elements of the basis, `transform`, to compute the scores of the observations within the basis, and `fit_transform`, to return the observations in the functional space given their scores. The implemented bases are:

- **UFPCA** – Univariate Functional Principal Components Analysis for data on one dimensional domains. This basis was used in the Canadian Weather example. Multiple smoothing methods are implemented for the estimation of the mean and the covariance (see Section 5), such as local polynomial estimation or GAM with penalized B-splines. The scores are computed using numerical integration. Considering sparse functional data, one may also used the PACE algorithm [21]. The main argument to build an instance of the class `UFPCA` is `n_comp` which can be the proportion of variance explained by the principal components, if `n_comp < 1`, or the number of principal components to computed, if `n_comp ≥ 1`.
- **FCP-TPA** – Functional Candecomp/Parafac Tensor Power Algorithm for data on two dimensional domains. This algorithm is used to find a basis decomposition of image data. Consider N realizations of a stochastic process X defined on $S_x \times S_y$, the data can be represented as a tensor \mathbf{X} in $\mathbb{R}^{N \times S_x \times S_y}$. A Candecomp/Parafac representation of the data is assumed:

$$\mathbf{X} = \sum_{j=1}^J \lambda_j u_j \otimes v_j \otimes w_j,$$

where λ_j is scalar, $u_j \in \mathbb{R}^N$, $v_j \in \mathbb{R}^{S_x}$ and $w_j \in \mathbb{R}^{S_y}$ are vectors and \otimes denotes the outer product. In addition, the outer product $v_j \otimes w_j$ can be interpreted as the j th eigenimage evaluated on the same grid points as the original data. Moreover, the vector $\lambda_j v_j$ is the score vector gathering the observations projected onto the eigenimage $v_j \otimes w_j$. Our implementation is adapted from the function `FCP_TPA` of the **R** package `MFPCA` [12]. The main argument, to build an instance of the class `FCPTPA`, is `n_comp` which is the number of principal components to computed.

7 fCUBT

The `FDapy` package implements `fCUBT` for the clustering of functional data objects defined on potentially different domains, developed by [8]. The implementation of the method is build upon the functional data classes defined in the package. After giving a short review of the methodology in Section 7.1, we explain how to effectively use it in Section 7.2. For a detailed description, please refer to [8].

7.1 Methodological background

Let \mathcal{S} be a sample of realizations of the process X . We consider the problem of learning a partition \mathcal{U} such that every element U of \mathcal{U} gathers similar elements of \mathcal{S} . The partition \mathcal{U} is built as a tree \mathfrak{T} defined using a top-down procedure by recursive splitting. Each node of the tree \mathfrak{T} is denoted by $\mathfrak{S}_{\mathfrak{d},j}$.

7.1.1 Growing

At each stage, a node (\mathfrak{d}, j) is possibly split into two subnodes in a four step procedure:

1. A MFPCA, with n_{comp} components, is conducted on the elements of $\mathfrak{S}_{\mathfrak{d},j}$. It results in a set of eigenvalues $\Lambda_{\mathfrak{d},j}$ associated with a set of eigenfunctions $\Phi_{\mathfrak{d},j}$.
2. The matrix of scores $C_{\mathfrak{d},j}$ is then defined with the columns built with the projections of the elements of $\mathfrak{S}_{\mathfrak{d},j}$ onto the elements of $\Phi_{\mathfrak{d},j}$.
3. For each $K = 1, \dots, K_{\text{max}}$, we fit a GMM to the columns of the matrix $C_{\mathfrak{d},j}$. The resulting models are denoted as $\{\mathcal{M}_1, \dots, \mathcal{M}_{K_{\text{max}}}\}$. Considering the BIC, we determine

$$\widehat{K}_{\mathfrak{d},j} = \arg \max_{K=1, \dots, K_{\text{max}}} \text{BIC}(\mathcal{M}_K)$$

4. If $\widehat{K}_{\mathfrak{d},j} > 1$, we split $\mathfrak{S}_{\mathfrak{d},j}$ using the model \mathcal{M}_2 , which is a mixture of two Gaussian vectors. Otherwise, the node is considered to be a terminal node and the construction of the tree is stopped for this node.

The recursive procedure continues downwards until one of the following stopping rules are satisfied: there are less than `minsize` observations in the node or the estimation $\widehat{K}_{\mathfrak{d},j}$ of the number of clusters in the mode is equal to 1. When the algorithm ends, a label is assigned to each leaf (terminal node). The resulting tree is referred to as the maximal binary tree.

7.1.2 Joining

In this step, the idea is to join terminal nodes which do not necessarily share the same direct ancestor.

1. Build the graph $\mathcal{G} = (V, E)$ where

$$V = \{\mathfrak{S}_{\mathfrak{d},j}, 0 \leq j < 2^{\mathfrak{d}}, 0 \leq \mathfrak{d} < \mathfrak{D} \mid \mathfrak{S}_{\mathfrak{d},j} \text{ is a terminal node}\}, \quad \text{and}$$

$$E = \left\{ (\mathfrak{S}_{\mathfrak{d},j}, \mathfrak{S}_{\mathfrak{d}',j'}) \mid \mathfrak{S}_{\mathfrak{d},j}, \mathfrak{S}_{\mathfrak{d}',j'} \in V, \mathfrak{S}_{\mathfrak{d},j} \neq \mathfrak{S}_{\mathfrak{d}',j'} \text{ and } \widehat{K}_{(\mathfrak{d},j) \cup (\mathfrak{d}',j')} = 1 \right\}.$$

2. Let $(\mathfrak{S}_{\mathfrak{d},j}, \mathfrak{S}_{\mathfrak{d}',j'})$ be the edge with the maximum BIC value. Remove this edge then and replace the associated vertex by $\mathfrak{S}_{\mathfrak{d},j} \cup \mathfrak{S}_{\mathfrak{d}',j'}$.
3. Continue the procedure by applying the step **1.** with $\{V \setminus \{\mathfrak{S}_{\mathfrak{d},j}, \mathfrak{S}_{\mathfrak{d}',j'}\}\} \cup \{\mathfrak{S}_{\mathfrak{d},j} \cup \mathfrak{S}_{\mathfrak{d}',j'}\}$.

The procedure continues until the set V is reduced to a unique element or the set E is the empty set.

7.2 Implementation

The implementation of the `fCUBT` is based on the `fCUBT` class. Hence, we construct an object of `fCUBT` class specifying the root node of the tree which contains a sample of data. The growth of the tree is performed using the `grow` function with the number of eigencomponents to keep at each node as parameters. Once the tree has grown, the joining step is made using the `join` function. The prediction of the class of a new observation is possible through the `predict` function (or `predict_proba` for the probabilities to belong to each class).

7.2.1 Example on the Canadian Weather data

In this example, we perform a clustering of the univariate Canadian Temperature data extracted from the bivariate Canadian Weather data. We build the root node containing all the observations within the dataset. The `FCUBT` constructor is called.

```
1 root_node = Node(dailyTemp, is_root=True)
2 fcubt = FCUBT(root_node=root_node)
```

To grow the tree, we choose to consider a number of components that explain 95% of the variance of the remaining observations at each node of the tree. Moreover, the construction of the branch is stopped if there are less than 5 observations in a node. Figure 10 presents the results of clustering. The `plot` function from the `FCUBT` class allows us to show the maximum tree once the data has been fitted (currently, only for univariate data objects). This representation is particularly useful for the understanding of the clustering results. One might also cut the tree at a given height. For example, considering Figure 11,

```
1 fcubt.grow(n_components=0.95, min_size=5)
```

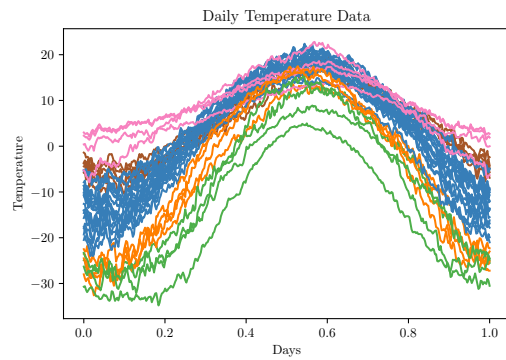


Figure 10: Plot of the Canadian Temperature dataset. Each color represents a different cluster.

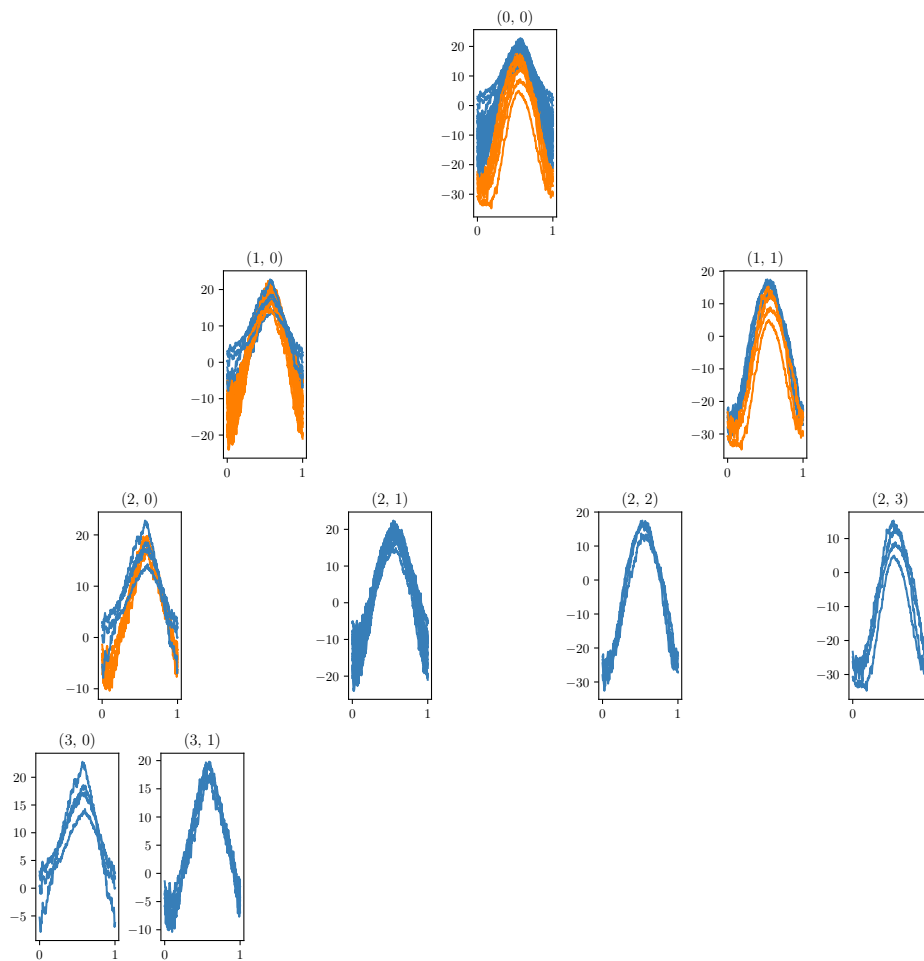


Figure 11: Grown tree \mathfrak{T} illustration for the Canadian Temperature dataset.

The joining step is performed using the `join` function. We choose to consider 95% of the explained variance of the observations to join two nodes.

```
1 fcubt.join(n_components=0.95)
```

8 Conclusion

The package is publicly available on Github⁴ and the Python Package Index⁵. A documentation, including examples, is available with the package. Some tests are also implemented using `unittest` which is the unit testing framework provided with **Python**.

Acknowledgment

The author wishes to thank Groupe Renault and the ANRT (French National Association for Research and Technology) for their financial support via the CIFRE convention no. 2017/1116.

References

- [1] C. Bouveyron. *funFEM: Clustering in the Discriminative Functional Subspace*, 2015. R package version 1.1.
- [2] C. Bouveyron, J. Jacques, and A. Schmutz. *funLBM: Model-Based Co-Clustering of Functional Data*, 2020. R package version 2.1.
- [3] S. Brockhaus, D. Rügamer, and S. Greven. Boosting functional regression models with FDboost. *Journal of Statistical Software*, 94(10):1–50, 2020.
- [4] C. R. Carreno, hzzhyj, Pablo, D. G. Fernandez, P. Marcos, pedrorponga, M. C. Berrocal, amandaher, D. Tucker, and S. Johnsen. Gaa-uam/scikit-fda: Version 0.5, Dec. 2020.
- [5] J. Fan and I. Gijbels. *Local polynomial modelling and its applications*. Number 66 in Monographs on statistics and applied probability , ISSN 0960-6696 ; ZDB-ID: 22968-4. Chapman & Hall, London, 1996.
- [6] J. Goldsmith, S. Greven, and C. Crainiceanu. Corrected Confidence Bands for Functional Data Using Principal Components. *Biometrics*, 69(1):41–51, 2013.

⁴<https://github.com/StevenGolovkine/FDApy>

⁵<https://pypi.org/project/FDApy/>

- [7] J. Goldsmith, F. Scheipl, L. Huang, J. Wrobel, C. Di, J. Gellar, J. Harezlak, M. W. McLean, B. Swihart, L. Xiao, C. Crainiceanu, and P. T. Reiss. *refund: Regression with Functional Data*, 2020. R package version 0.1-22.
- [8] S. Golovkine, N. Klutchnikoff, and V. Patilea. Clustering multivariate functional data using unsupervised binary trees. *arXiv:2012.05973 [cs, stat]*, Dec. 2020.
- [9] S. Golovkine, N. Klutchnikoff, and V. Patilea. Learning the smoothness of noisy curves with application to online curve estimation. *arXiv:2009.03652 [math, stat]*, Sept. 2020.
- [10] C. Happ and S. Greven. Multivariate Functional Principal Component Analysis for Data Observed on Different (Dimensional) Domains. *Journal of the American Statistical Association*, 113(522):649–659, Apr. 2018.
- [11] C. Happ-Kurz. Object-Oriented Software for Functional Data. *Journal of Statistical Software*, 93(1):1–38, Apr. 2020.
- [12] C. Happ-Kurz. *MFPCA: Multivariate Functional Principal Component Analysis for Data Observed on Different Dimensional Domains*, 2020. R package version 1.3-6.
- [13] M. Löning, A. Bagnall, S. Ganesh, V. Kazakov, J. Lines, and F. J. Király. sktime: A Unified Interface for Machine Learning with Time Series. *arXiv:1909.07872 [cs, stat]*, Sept. 2019.
- [14] A. Parodi, M. Patriarca, L. Sangalli, P. Secchi, S. Vantini, and V. Vitelli. *fdakma: Functional Data Analysis: K-Mean Alignment*, 2015. R package version 1.2.1.
- [15] J. Ramsay and B. W. Silverman. *Functional Data Analysis*. Springer Series in Statistics. Springer-Verlag, New York, 2 edition, 2005.
- [16] J. O. Ramsay, G. Hooker, and S. Graves. *Functional Data Analysis with R and MATLAB*. Use R! Springer-Verlag, New York, 2009.
- [17] J. O. Ramsay, S. Graves, and G. Hooker. *fda: Functional Data Analysis*, 2020. R package version 5.1.5.1.
- [18] A. Schmutz, J. Jacques, and C. Bouveyron. *funHDDC: Univariate and Multivariate Model-Based Clustering in Group-Specific Functional Subspaces*, 2019. R package version 2.3.0.
- [19] R. Tavenard, J. Faouzi, G. Vandewiele, F. Divo, G. Androz, C. Holtz, M. Payne, R. Yurchak, M. Rußwurm, K. Kolar, and E. Woods. Tslearn, A Machine Learning Toolkit for Time Series Data. *Journal of Machine Learning Research*, 21(118):1–6, 2020.
- [20] J. D. Tucker. *fdasrvf: Elastic Functional Data Analysis*, 2020. R package version 1.9.4.

- [21] F. Yao, H.-G. Müller, and J.-L. Wang. Functional Data Analysis for Sparse Longitudinal Data. *Journal of the American Statistical Association*, 100(470):577–590, June 2005.