Online Feature Screening for Data Streams with Concept Drift

Mingyuan Wang, Adrian Barbu Department of Statistics Florida State University

April 8, 2021

Abstract

Screening feature selection methods are often used as a preprocessing step for reducing the number of variables before training step. Traditional screening methods only focus on dealing with complete high dimensional datasets. Modern datasets not only have higher dimension and larger sample size, but also have properties such as streaming input, sparsity and concept drift. Therefore a considerable number of online feature selection methods were introduced to handle these kind of problems in recent years. Online screening methods are one of the categories of online feature selection methods. The methods that we proposed in this research are capable of handling all three situations mentioned above. Our research study focuses on classification datasets. Our experiments show proposed methods can generate the same feature importance as their offline version with faster speed and less storage consumption. Furthermore, the results show that online screening methods with integrated model adaptation have a higher true feature detection rate than without model adaptation on data streams with the concept drift property. Among the two large real datasets that potentially have the concept drift property, online screening methods with model adaptation show advantages in either saving computing time and space, reducing model complexity, or improving prediction accuracy.

1 Introduction

With the explosive growth in amount of data available in recent years, the efficiency of data processing stays a heated topic in both hardware and software fields. Various approaches were emerged to tackle this challenge, such as cloud computing, batch learning, online learning, more powerful hardware and so on. These approaches mainly focus on how to increasing the loading capacity of the systems. On the other hand, the screening (filter) feature selection methods, which shows impressive performance in reducing feature dimensions of large high dimensional data and improving overall model performance, especially with adhoc implementations, focus on how to scale down the data before considering the

loading capacity of the learning system. Screening feature selection methods are independent of the learning algorithms, which gives them a fast execution speed. They can be ideal add-ons when it comes to improving efficiency without losing performance. Built on the foundation of our previous survey on the performance of screening feature selection methods on real large datasets, we dedicate this article to introduce several novel online feature screening methods as extensions of existing offline screening methods to tackle datasets that come from a more modern environment.

In this article, five screening methods are selected from our previous survey [45] to be extended to their online versions, sparse versions, and addressing model adaptation issues. Among them, T-score[7] and Fisher Score [10] are mean-variance based methods, while Gini index [13], Chi-square score [30], and Mutual Information [28] are quantile-based methods. Comparative evaluations are then conducted on these methods between their online and offline versions using synthetic and real datasets. The model adaptation will also be tested against synthetic data with time-varying features. Finally we will evaluate the performance of these extended methods by showing experimental results on real datasets, we will show the performance of these methods by comparing the learners' predictive ability before and after applying screening methods. Our complete contribution....

Ours. Doesn't require previous knowledge of the max/min value of each feature. can stream continues data. Use class label, expendable to multiclass.

1.1 Related Work

The study of feature selection on streaming data has a long history. Even before the big data boom, there already existed applications that generate and require to process streaming data under computation and memory constraints. One such field is text mining and language processing in topic recognition and spam email identification. In cooperating with the well know SpamHunting system, J.R. Méndez et al. introduced a new term selection scheme in [35] based on Amount of Information (AI). AI is calculated from the appearance of certain terms in the text corpora. It can also be extended as a feature selection method for other types of binary categorical features. This is a method with online criteria calculation and concept adaptation capability. Concept adaptation is an essential issue online algorithms need to deal with when processing data streams over a large, possibly infinite, amount of time. The fundamental idea is that the relation between the prediction target and its features usually changes over time either gradually or drastically. The subset selected by the feature selection methods needs to be adjust to this change as well. Concept adaptation is also called concept drift, feature drift, model adaptation depending on the focus of the dynamic connection between target and features.

Feature selection methods can be divided into three categories based on their interaction with the learning algorithm: filters, wrappers and hybrids. Filters, also known as screening methods, compute a criterion for each feature and select features according to some selection scheme. They don't involve learner. The aforementioned AI method is a filter method. Wrappers wrap feature selection with any learner. They use a feature importance measure calculated by the learner to decide what features to keep. Hybrids, also known as embedded methods, rely on a sparsity inducing built-in regularizer of the learner to drop irrelevant features. One such example is the Lasso[43].

Screening methods have the advantage of fast processing and easy integration with other system. The framework introduced in this article also fall into this category. Considering the large number of streaming high dimensional applications, we feel its advantages make it an appropriate direction to pursue.

Outside the scope of screening methods, there are other online feature selection methods in the literature. In [3] an online learner Modified Balanced Winnow(MBW) was introduced. The authors use the absolute value between the positive weights and negative weights calculated by MBW to rank the features by their importance. This is a typical setting for the wrapper methods. Importing the idea of the trade-off between exploration and exploitation, [44] proposed a method that periodically updates feature weights, and selects feature using an arbitrary classifier.

Throughout the years, online screening methods have achieved steady development. Some of them are introduced to solely handle large data streaming without considering the drift problem. Katakis et al. [23] proposed a two stage mechanism for feature selection and data classification. They employed a incremental criterion calculation method. Features are selected according their rank based on the criterion such as chi-squared score and mutual information. Their incremental method is formulated for discrete features, therefore their method can not handle continuous feature. In response to the issue of concept drift for streaming data, different strategies were introduced.

One of the popular methods is sliding window. Its idea is to only consider the most recent data, making it a natural adaptation to the drift problem. In [34] a chunk structure similar to the sliding window was used by author. Deviation weight was introduced in this article as a feature importance measurement and indicator. The feature selection is them perform based on each feature's deviation weight. However the deviation weight is only applicable to categorical features. Similarly in [14], an contingency table is maintained for each feature from the sliding window. The tables are then used to calculate the criterion such as Mutual information and Chi-squared score and so on. The criterion mentioned in their study are only suitable for processing discrete features. They also introduced a dynamic threshold to avoid naive selection roles such as top-k features and fixed threshold.

Another popular strategy widely adapted to handle the drift problem is the fading factor. In [41], both sliding window and fading factor are used. In the fading factor variation, feature measures such as the Gini index and entropy are calculated incrementally over the entire data stream. However the criterion they use also works with discrete data only. An interesting attempt was presented in[19], which uses a month as the specific window size for the sliding window to calculate mutual information from categorical features. This is very practical

the the cases where the drift information is known.

In some studies, an estimator of criteria is used instead of exact computed criteria mentioned above. Keller et al. [25] used a k-nearest neighborhood mutual information estimator introduced by Kraskov el. [27] under the sliding window frame. The features are then selected based on their mutual information estimators. Instead of calculating some criterion for each feature all the way, in [18] a concept drift detector detects which features drift first using Feature Velocity and Inter Quartile Range. Once a drift is detected, all features that relate to the drift will have their mutual information updated using data in a recent window. Then a ranking and selection procedure is carried among all features based on their mutual information.

Despite various situations in which the aforementioned methods can be applied, to our best knowledge, none of the existing online screening methods applies to continues features. In order to calculate an appearance based criterion such as mutual information and chi-squared score from continuous features, one needs to be able to discretize the continuous features in an online fashion. Many efforts have been put into this area. It has been proven in [36] that O(N) space is required for an algorithm to compute the exact quantiles in a single pass of streaming data. In order to describe a one pass data stream in a reduced space, approximate quantile calculation methods are needed. Some earlier works are [21] and [2]. Their algorithms are used to calculate uniform quantiles in a single pass. In [12] a two-stage framework was proposed to obtain discrete binned data from continuous data. The suggested method first constructs many equal width intervals to capture and update the partition of incoming sample points. At query time, it aggregates the collected intervals to generate equal-width histograms or equal-frequency histograms. As intuitive as it is, this is a non-deterministic method, in the sense that there are no deterministic guarantees on the estimation error.

Manku et al. introduced a single pass algorithm in [32] to compute a deterministic ϵ -approximate uniform quantile summary. It requires prior knowledge of the sample size N and has a space complexity of $O(\frac{1}{\epsilon} \log^2 \epsilon N)$. Another algorithm that does not require prior knowledge of N was also proposed by Manku et al. in [33]. The space complexity for this algorithm is $O(\frac{1}{\epsilon} (\log^2 \frac{1}{\epsilon} + \log^2 \log \frac{1}{\delta}))$ with a failure probability of δ . A more recent approach (the GK algorithm) to compute a deterministic ϵ -approximate quantile summary on a single pass of streaming data without the prior knowledge of N was introduced by Greenwald et al. in [15]. This method imposed a tree structure. It is an improvement of Manku's algorithm with a space bound of $O(\frac{1}{\epsilon} \log \epsilon N)$. In [46], an improvement was made on the GK algorithm to significantly reduce the computational cost. The computational cost of this multi-level quantile summary algorithm is $O(N \log \frac{1}{\epsilon} \log \epsilon N)$. It is shown in their experiments that it can achieve about 200 - 300 × speedup over the GK algorithm. Its storage requirement of $O(\frac{1}{\epsilon} \log^2 \epsilon N)$ is higher than the GK algorithm.

Recent work in Xgboost[5] extended [15] and [46] with a focus on processing weighted data. This saves space and improves the summary accuracy when

dealing data streams containing duplicate values. The algorithm introduced in their article has the same guarantee as the GK algorithm. It can be plugged into all GK frameworks and its extensions.

There also exists works that focus on other aspects of calculating quantile summaries. In [29] was introduced an algorithms to compute uniform quantiles over sliding windows. Cormode et al. [6] proposed an algorithm to handle the biased quantile problem. It has a storage bound of $O(\frac{\log U}{\epsilon} \log \epsilon N)$ and time complexity of $O(\log \log U)$ where N is the sample stream size and U is the size of the domain from which the sample points are drawn. Efforts were also made to compute approximate quantiles for distributed streams and sensor networks. Greenwald et al. [16] proposed an algorithm for calculating ϵ -approximate quantiles for sensor network applications. In [40] an algorithm with space complexity of $O(\frac{1}{\epsilon} \log U)$ was proposed to compute medians and other quantiles in sensor networks.

In this study, we implemented mean-variance based feature screening methods using moving averages. We will also introduce quantile based methods based on the weighted quantile summary. We extended work in [5] to generate accurate live bin counts on demand. Our proposed algorithm also integrates ways to handle sparse streaming data as well as streaming data featuring concept drift, as an adaptation to the needs of modern applications.

2 Proposed Methods

Two categories of online feature screening methods are introduced in this section. For mean-variance based methods, we will show the concept behind it and illustrate the modifications that are integrated to tackling data stream with sparsity and concept drift. For bin count based methods, We will briefly go over the concept of quantile summary which is the foundation of our introduced methods. Our modification that helps provide exact observation count will also be introduced during the overview. Lastly, we will show the extension we did so that bin count based methods can also tackle data stream having sparsity and concept drift.

2.1 Mean-Variance Based Methods

2.1.1 Criteria of Interest

T-score For a feature x_j , its T-score is calculated as:

$$T_j = \frac{|\mu_1 - \mu_2|}{\sqrt{\frac{\sigma_1^2}{n_1} + \frac{\sigma_2^2}{n_2}}} \tag{1}$$

where μ_c , n_c , and σ_c denote the mean, sample count, and standard deviation of the values of observations belonging to class c. The higher the score, the more relevant the feature is to the target variable.

Fisher Score Similarly, the Fisher score of feature x_j is defined as:

$$Fisher_{j} = \frac{\sum_{c=1}^{C} n_{c}(\mu_{c} - \mu)^{2}}{\sum_{c=1}^{C} n_{c}\sigma_{c}^{2}}$$
(2)

where μ is the mean of the feature, and μ_c , n_c , and σ_c have been defined above.

It is clear that equation (1) and (2) are calculated from basic components such as means and variances. To generalize them to a streaming data setting is quite straightforward.

Without losing generality, we assume that a sample arrives at each time step t = 1, 2, 3, ..., n. At time n, the running average μ_{nj} and running mean of squared MS_{nj} of the j-th feature that form the sufficient statistics are:

$$\mu_{1j} = x_{1j}$$

$$\mu_{2j} = \frac{\mu_{1j}}{2} + \frac{x_{2j}}{2}$$

$$\vdots$$

$$\mu_{nj} = \frac{n-1}{n} \mu_{(n-1)j} + \frac{1}{n} x_{nj}$$

And:

$$MS_{1j} = x_{1j}^{2}$$

$$MS_{2j} = \frac{MS_{1j}}{2} + \frac{x_{1j}^{2}}{2}$$

$$\vdots$$

$$MS_{nj} = \frac{n-1}{n}MS_{(n-1)j} + \frac{1}{n}x_{nj}^{2}$$

Consequently the variance of j-th feature at time n can be written as:

$$\sigma_{nj}^2 = M S_{nj} - \mu_{nj}^2 \tag{3}$$

Therefore T-score and Fisher Score can incrementally maintain exact calculation as new samples arrive.

2.1.2 Sparse Input

In the scenario of sparse input, since the zero values are no-shown in data stream, one only need to accumulate the running average and running mean of squared with showed value and keep the record of sample count.

2.1.3 Model Adaptation

In order to adapt concept drift, a fading factor strategy is used as a penalty on the history incremented statistics:

$$\mu_{nj} = \alpha * \mu_{(n-1)j} + x_{nj}$$
$$MS_{nj} = \alpha * MS_{(n-1)j} + x_{nj}^2$$

Where α is a fading factor that takes a user set value in (0, 1).

Sparse Input When adaptation is required with sparse input, a time anchor is employed for each feature in every class to recording the last appearance of non-zero values n_{last} . It is equal to current sample count. Accumulated statistics then updated the next time a non-zero value appears:

$$\mu_{update,j} = \alpha^{(n-n_{last}-1)} * \mu_{last,j}$$
$$\mu_{nj} = \alpha * \mu_{update,j} + x_{nj}$$
$$MS_{update,j} = \alpha^{(n-n_{last}-1)} * MS_{last,j}$$
$$MS_{nj} = \alpha * MS_{update,j} + x_{nj}^2$$

Where $\mu_{last,j}$ and $MS_{last,j}$ is the penalized running average and running mean of squared at last appearance of a non-zero value.

2.2 Bin Count Based Methods

2.2.1 Criteria of Interest

Mutual Information For a feature x_j , its mutual information can be calculated as:

$$I(X_j, \mathbf{y}) = \sum_{b=1}^{B} \sum_{c=1}^{C} P(x_j \in bin_b, \mathbf{y} = c) \log \frac{P(x_j \in bin_b, \mathbf{y} = c)}{P(x_j \in bin_b)P(\mathbf{y} = c)}$$
(4)

Where $P(x_j \in bin_b, \mathbf{y} = c)$ is the joint probability of having feature values fall into bin_b and label value equal to c. $P(x_j \in bin_b)$ and $P(\mathbf{y} = c)$ are the marginal probabilities.

In the case of samples with discrete feature values, the probability can be expressed as:

$$P(x_j \in bin_b, \mathbf{y} = c) = \frac{n_{x_j \in bin_b, \mathbf{y} = c}}{n}$$
$$P(x_j \in bin_b) = \frac{n_{x_j \in bin_b}}{n}$$

$$P(\mathbf{y}=c) = \frac{n_{\mathbf{y}=c}}{n}$$

Where n, $n_{x_j \in bin_b, \mathbf{y}=c}$, $n_{x_j \in bin_b}$, $n_{\mathbf{y}=c}$ denote the sample count that fall into respective value groups.

Chi-squared Score With a similar definition of n's, the chi-squared score of a feature x_j can be defined as:

$$\chi_j^2 = \sum_{b=1}^B \sum_{c=1}^C \frac{(n_{x_j \in bin_b, \mathbf{y} = c} - \hat{n}_{x_j \in bin_b, \mathbf{y} = c})^2}{\hat{n}_{x_j \in bin_b, \mathbf{y} = c}}$$
(5)

Where:

$$\hat{n}_{x_j \in bin_b, \mathbf{y}=c} = \frac{n_{x_j \in bin_b} n_{\mathbf{y}=c}}{n}$$

Gini Index For a given feature x_j , let $A_h = \{i, x_{ij} \leq h\}$ denote the number of samples whose values of the *j*-th feature is smaller than or equal to *h* and $B_h = \{i, x_{ij} > h\}$. Its Gini Index can be expressed as:

$$Gini_j = P(A_h)(1 - \sum_{c=1}^{C} P(C_c | A_h)^2) + P(B_h)(1 - \sum_{c=1}^{C} P(C_c | B_h)^2)$$
(6)

Where $P(A_h)$ is the number of samples in subset A_h divided by the number of total samples. $P(C_c|A_h)$ is the conditional probability of samples having label c given that they are in subset A_h . Let $n_{x_j \in A_h, \mathbf{y}=c}$ denote the number of samples in A_h with label c. Let $n_{x_j \in A_h}$ denote the number of samples in A_h . Then $P(C_c|A_h)$ can be calculated as $n_{x_j \in A_h, \mathbf{y}=c}/n_{x_j \in A_h}$. The same goes for $P(B_h)$ and $P(C_c|B_h)$. h is chosen to give the minimum Gini Index for each feature.

In order to compute a forementioned criterion from data stream with continuous values. A proper online discretization method must be applied. Therefore based on the ϵ -approximate quantile summary structure in [15], [46] [5], we introduce an improved implementation algorithm to generate an on demand bin count from data stream with continuous values. Furthermore, we extend our algorithm to adapt to sparse input and concept drift scenario. In the following segment we will first present an overview of ϵ -approximate quantile summary structure and its operation. Then we will illustrate our extended methods in detail.

2.2.2 Quantile Summary

The basic idea is to use several container like sub-summaries s to store approximated ranking information of partial data stream. In turn, an aggregated

summary S of sub-summaries can describe the entire data stream. Various operation are conducted periodically to maintain the estimations in these containers such that at any time n, the summary S(n) can answer any r-quantile query with ϵn precision.

A sub-summary consists of several tuples $s = \{T_1, T_2, ..., T_b\}$. Each tuple in the form of $T=(v, \tilde{r}^-, \tilde{r}^+, \tilde{w})$ describes a number of similar data points from the data stream. v denotes the data value estimation this tuple represents. \tilde{r}^- and \tilde{r}^+ are the lowest and highest estimated ranks of this value in the current subsummary. \tilde{w} is the accumulated weight value which represents how many data points this tuple covers. The sub-summary s is sorted by the values v. Given a small input stream $Q = \{(x_1, w_1), (x_2, w_2), ..., (x_n, w_n)\}$, where (x_i, w_i) is a data point. x_i denotes its value and w_i is its weight. Usually data weights are set to 1. For each tuples, two rank functions and a weight function are defined.

$$r^{-}(v) = \sum_{(x,w) \in Q, x < v} w$$
(7)

$$r^+(v) = \sum_{(x,w)\in Q, x\leqslant v} w \tag{8}$$

$$w(v) = r^{+}(v) - r^{-}(v) = \sum_{(x,w) \in Q, x=v} w$$
(9)

The weight of the entire sub-summary is defined as:

$$w(s) = w(Q) = \sum_{(x,w) \in Q} w \tag{10}$$

Without loss of generality, in the rest of this article, weight will be used to refer to the calculated weight value of w(v). Rank will be used to refer to the calculated rank value of $r^+(v)$ or $r^-(v)$.

Summary S is consist of a multi-level sub-summary structure, shown in Figure 1, when it is not queried. It is used to maintain the desired precision as well as speed up the calculation. L is the total number of levels. s_l denotes the sub-summary at level l, l = 0, 1, ..., L. The whole data stream is divided into consecutive segments of size $b = \left\lceil \frac{L}{\epsilon} \right\rceil$, where L is the largest integer that makes $b2^{(L-1)} \leq N$.

At the lowest level, s_0 is defined to hold all recently arrived points until it researches size b. The tuples in s_0 are constructed with

$$v = x_i, \tilde{r}^-(x_i) = r^-(x_i), \tilde{r}^-(x_i) = r^-(x_i), \tilde{w}(x_i) = w(x_i)$$
(11)

Therefore s_0 is a 0-approximate summary. It can answer all query questions exactly. Algorithm 1 shows the basic procedures of summarizing when a new data point x_i in the data stream arrives. In the algorithm, s_{temp} denotes a temporary sub-summary. s_l denotes the *l*th level in the multi-level summary structure mentioned above.




Figure 1: Multi-level summary [46]: The length of s_l in the figure represents its coverage of data points. s_0 contains the summary for the most recent data input block. s_l consists the summary of the oldest 2^l data blocks. At each level, s_l is maintained as an ϵ_l -summary.

PRUNE $(s, \frac{k}{2})$ is an operation that converts a sub-summary s with size k and precision ϵ_0 into a sub-summary with size $\frac{k}{2} + 1$ and precision $\epsilon_0 + \frac{1}{k}$. It is shown in [46] that each level in the summary can maintain an error less than ϵ .

In the PRUNE operation, maximum g tuples are chosen from the input sub-summary according to position indicator $d = \frac{i-1}{g}w(s), i = 1, 2, ..., b + 1$. Algorithm 2 shows how to use the query operation Q(s, d) to choose tuples to form the new sub-summary. $\tilde{r}^{-}(x_i), \tilde{r}^{-}(x_i), \tilde{w}(x_i)$ of the selected tuples are copied from the original sub-summary.

Another operation is MERGE. MERGE (s_1,s_2) combines two sub-summaries into one sub-summary. Tuples from two sub-summaries s_1 and s_2 are sorted together by their value v. For each unique value v from s_1 and s_2 , $\tilde{r}^-(x_i)$, $\tilde{r}^-(x_i)$, $\tilde{w}(x_i)$ are updated as follows

$$\tilde{r}^{-}(v) = \tilde{r_{s_1}}(v) + \tilde{r_{s_2}}(v)$$
(12)

$$\tilde{r}^+(v) = \tilde{r_{s_1}}^+(v) + \tilde{r_{s_2}}^+(v) \tag{13}$$

$$\tilde{w}(v) = \tilde{w_{s_1}}(v) + \tilde{w_{s_2}}(v) \tag{14}$$

Let the precisions of two sub-summaries before merging to be ϵ_a and ϵ_b . The precision of merged sub-summary s_{temp} is $\max(\epsilon_a, \epsilon_b)$ [5]. MERGE operation can also be apply to more than two sub-summaries. It is shown, at the end of Algorithm 1, the aggregated summary S is the out come of MERGE operation over all sub-summaries. Therefore, S in its result form has the same structure as s.

It is shown in [46] that the outcome summary S is an ϵ -approximate summary of the entire stream.

According to Algorithm 1, whether to perform a PRUNE or MERGE operation is based on the segment size b which is determined by the stream size N. In order to obtain a summary from a data stream with stream size Nunknown, the input data stream is divided into pieces of disjoint sub-streams $B_i, i = 0, 1, ..., m$. B_i has size of $\frac{2^i}{\epsilon}$ and covers data arriving in the time interval $\left[\frac{2^{i-1}}{\epsilon}, \frac{2^{i+1}-1}{\epsilon}\right]$. With fixed sub-stream size aggregated summaries can be obtained. Due to the fact that the output of S and s have the same structure, Scan too perform PRUNE and MERGE operation with other S. Therefore after

Algorithm 1 General Procedure for Quantile Summary

Input: x_i , where i=1, ..., t

1: push x_i into s_0 2: if $size(s_0) < b$ then go back to line 1 3: 4: else $s_{temp} = \text{PRUNE}(s_0, \frac{size(s_0)}{2})$ 5: 6: clear s_0 for l = 1, ..., L do 7:if $size(s_l)$ is 0 then 8: $s_l = s_{temp}$ 9: clear s_{temp} ; break 10:11: else $\begin{array}{l} s_{temp} {=} \text{MERGE}(s_{temp}, s_l) \\ s_{temp} {=} \text{PRUNE}(s_{temp}, \frac{size(s_{temp})}{2}) \end{array}$ 12:13:if $size(s_{temp}) < b$ then 14: $s_l = s_{temp}$; clear s_{temp} ; break 15:else 16:clear s_l 17:18:end if 19: end if end for 20: 21: end if 22: **Output:** S=MERGE $(s_0, s_1, ..., s_L)$

obtaining S_i for each sub-stream B_i , a multi-level summary structure [S] now can be constructed from the summary of each sub-stream S_i . The procedure is illustrated below.

- 1. The summary S_c of current sub-stream B_c is updated and maintained until the last data point in B_c has arrived. $\epsilon' = \frac{\epsilon}{2}$ is used to set size limit.
- 2. A $\frac{\epsilon}{2}$ -approximate summary is obtained as an output of S_c . The output is then set to PRUNE with the desired size of $\frac{2}{\epsilon}$ and assigned to S_i .
- 3. A set of summaries of all sub-streams $\tilde{S} = \{S_0, S_1, ..., S_m\}$ is computed. [S] is obtained by MERGE summaries in \tilde{S} .

2.2.3 Exact Weight Update

When used as a query algorithm, only the rank r and value v of the tuple will be used to answer the question. According to the original PRUNE operation in section 2.2.2, the selected tuples along with their stored elements are directly moved to the resulting summary. Although this behavior causes the lost of half of the elements that store weight values. It still guarantees the ϵ maximum error

Algorithm 2 Query Function Q(s,d)

Input: d: $0 \leq d \leq w(s)$, s is a sub-summary with tuple value $v_i = x_i$, i = 1, 2, ..., k1: if $d < \frac{1}{2}[\tilde{r_s}^-(x_1) + \tilde{r_s}^+(x_1)]$ then 2: return x_1 3: end if 4: if $d \ge \frac{1}{2} [\tilde{r_s}^{-}(x_k) + \tilde{r_s}^{+}(x_k)]$ then return x_k 5:6: end if 7: Find i such that 8: $\frac{1}{2}[\tilde{r_s}^-(x_i) + \tilde{r_s}^+(x_i)] \leq d < \frac{1}{2}[\tilde{r_s}^-(x_{i+1}) + \tilde{r_s}^+(x_{i+1})]$ 9: if $2d < \tilde{r_s}^-(x_i) + \tilde{w_s}(x_i) + \tilde{r_s}^+(x_{i+1}) - \tilde{w_s}(x_{i+1})]$ then 10: return x_i 11: else 12:return x_{i+1} 13: end if

as shown in [5] [15] [46]. However, to the end of providing accurate bin count as inputs to these bin count based criteria, each tuple is treated as a mini-bin. The weight w of each tuple will be used to calculate the final bin count. Therefore, the preservation of the complete weight values is required.

In the PRUNE operation, after each selection, instead of carrying elements directly from original tuples to tuples in new summary, different procedures are taken. Let the value of each tuple associate with original summary be v_k , k = 1, 2, 3, ..., i, ..., j, ..., b. *i* is the index for last selected tuple. *j* is the index of currently selected tuple. Let the value of each tuple associate with output summary be u_h , h = 1, 2, 3, ..., q, ..., b/2. u_q is the corresponding tuple derived from v_j . Following adjustments are made:

$$u_q = v_j$$

$$\tilde{r}^-(u_q) = \tilde{r}^-(v_{i+1})$$

$$\tilde{r}^+(u_q) = \tilde{r}^+(v_j)$$

$$\tilde{w}(u_q) = \sum_{k=i+1}^j \tilde{w}(v_k)$$

The definition of ϵ -approximate quantile summary states that let Q be the set of all data points covered by the summary, if for any $x \in Q$

$$\tilde{r}^+(x) - \tilde{r}^-(x) - \tilde{w}^+(x) \leqslant \epsilon w(Q) \tag{15}$$

The above adjustment leads the left hand side of the inequality to zero which satisfied the requirement of a ϵ -approximate quantile summary.

2.2.4 Quantile Binning

With the weight of each data point set to 1, the weight element in a tuple can represent the number of data points this tuple covered. Using procedure in last two sections, a final summary [S] consists of m tuples is generated. [S] is then further aggregated into smaller number of denser bins. For the purpose of comparability with our offline method survey [45], procedures that mimic the discretization in [37] are introduced. Details are shown in Algorithm 3. d_{inter} denotes the interval length when data points are equally divided into Ksegments. Bin_k denotes the bin count in kth Bin. p_i is the position index of ith cutoff point. $T_j.w$ represents the weight of the jth tuple.

Algorithm 3 Bin Aggregation Procedure

Input: $[S] = T_1, T_2, ..., T_m, N$: number of total data so far, K: user defined number of final bins.

1: $d_{inter} = \lfloor \frac{N}{K} \rfloor$, h = 02: for i = 1, ..., K - 1 do $p_i = i * d_{inter}$ 3: 4: end for 5: for k = 1, ..., K do $Bin_k = 0$ 6: 7: end for for j = 1, ..., m do 8: $Bin_h = Bin_h + T_j.w$ 9: if $|Bin_h| \ge p_h$ then 10: $h_{temp} = h$ 11: h = h + 112:while $|Bin_{h_{temp}}| \ge p_h$ do 13:h = h + 114:end while 15:else16:continue 17:end if 18: end for 19:20: **Output:** $Bin_k, k = 1, 2, ..., K$

Criteria score in section 2.2.1 can then be calculated using Bin_k

2.2.5 Sparse Input

Different from using running sum for mean-variance based methods, the zero values are assigned weight one. Therefore in the scenario of sparse input, zero values need to be processed through the summary. Processing zero values every time one shows up will be computationally inefficient. We take the advantage of the fact that sparse data has enormous zero values and quantile summary directly stacks the weights of identical data values together. The total number

of zero values are recorded. When the algorithm is called to provide feature importance score, a single data point (x, w), with x equals to 0 and w equals to the recorded number, is pushed through the algorithm before aggregating the summary.

2.2.6 Model Adaptation

In the situation of concept drift, a fading factor strategy is still adopted. Let α denote the fading factor, w_i be the weight value of data point at *i* time and W_i be the weight values in the multi-level quantile summary at *i* time.

I

$$W_i = \alpha W_{i-1} + w_i \tag{16}$$

Notice in equation 16, the weight in W_{i-1} needs to be updated every time a new data point arrive. This includes all the tuples on all the levels in the summary. Such high frequency repeatedly calculation is very time consuming. Therefore we split update process into two parts. The first part, we conduct update only on most recently established tuples in s_0 (see Fig 1 to refresh memory of s_0). The second part, based on the number of data points covered in s_0 , we only penalize the weights in multi-level structure whenever a PRUNE and MERGE operation initialized by s_0 happens. Let the number of data points in s_0 be k and the weights in multi-level summary be W_i . The update for part two become:

$$W_i = \alpha^k W_{i-1} \tag{17}$$

Sparse Input When sparse inputs are received in a model adaptation setting, since the weight of each data point is penalized according to the order that it arrives, injecting the weights of all zero value data points at the end can not provide the correct penalized weight. In order to keep weight accumulation matching with data point order for the zero value data points, time anchors and universal weight maps are employed. The universal weight map is a vector that store the accumulated penalized weight at each timestamp for each class. These maps are used across all features. The time anchors are designed to record the timestamp of the last non-zero data point.

When incoming data stream has greater or equal to two class. Simply recording the class label and recover the penalized weight for zero values by repeatedly penalizing the weights in summary so far is extremely time consuming. On the contrary, universal weight map and time anchor can achieve the same purpose with very small extra storage space and faster computing speed without trigger inter-class penalization complex. Given universal weight map recorded up until now for each class. The weight for all zero values between last non-zero data point and current non-zero data point can be calculated. Let time indices for last non-zero data point be a and current non-zero data point be b.

$$\mathbf{w}_c = M_{b,c} - M_{a,c} * \alpha^{(b-a)} \tag{18}$$

 \mathbf{w}_c denotes the recovered weight for zero values. $M_{b,c}$ indicates the recorded weight value for c class at time index b. When a non-zero value arrives, \mathbf{w}_c is calculated and added to summary before any other procedures.

2.3 Minibatch

It is noticed during our experiments that for non-spare inputs, the summaries of all features are required to be visited. This behavior builds increased computing time. Therefore within a reasonable storage budget, batch data handling are integrated with the algorithm, as it gives a considerably acceleration to the algorithm by reducing the visit frequency. This batch procedure is denoted by minibatch in the rest of the text.

3 Evaluation of Proposed Methods

3.1 Online-Offline Methods Comparison

To perform the experiments, each dataset is processed in a one-pass fashion by both online and offline version of screening methods respectively. Each dataset is passed through each algorithm and parameter setting once and the weight scores for all features are calculated. For quantile summary based methods, we use K = 5 quantile bins throughout all our experiments. We test the computation time by fixing either the minibatch size or the precision parameter ϵ and varying the other parameter. When testing the approximation accuracy, we only fix the minibatch size. The fixed values are 250 for the minibatch and 0.001 for ϵ . The varying ranges are $\epsilon = \frac{1}{f}$, where $f \in \{5, 50, 100, 500, 1000, 1500, 2000\}$ and minibatch= 2^k , where $k \in \{0, 1, 2, ..., 11\}$. The feature rank is calculated by sorting the feature weights monotonically according to importance score obtained by the corresponding screening method. Features that have low rank value are more important (i.e. feature with rank value 1 is the most important). For Gini index, the feature that has smaller weight has lower (better) rank value. On the contrary, for the other methods, the feature that has larger weight has lower rank value. Feature weights and feature ranks were used to construct different kinds of tables to evaluate the performance of online methods compared to offline methods.

3.1.1 Construction of Comparison Tables

Five types of tables are constructed according to minibatch size, feature weights and feature rank.

1) The influence of minibatch size on computation time. This table shows the computation time (in milliseconds) of the online quantile compared to the offline quantile when varying the minibatch size. A minibatch size of one is equivalent to an online method without minibatch processing.

Dataset	Learning type Feature type		Number of features	Number of observations
Gisette [17]	Classification	Continuous	5000	7000
Dexter [17]	Classification	Continuous	20000	600
Madelon [17]	Classification	Continuous	500	2600
SMK_CAN_187 [42]	Classification	Continuous	19993	187
GLI_85 [11]	Classification	Continuous	22283	85
Dorothea [17]	Classification	Continuous	100,000	1,150
Url [31]	Classification	Continuous, Binary	74,110	16,000
Kdd12 [22]	Classification	Binary	48,957	16,000

Table 1: The datasets used for evaluating the online/offline screening methods.

2) The influence of the precision parameter ϵ on computation time. This table shows the computation time (in milliseconds) of the online quantile compared to the offline quantile when varying the value of ϵ .

3) The influence of ϵ on count differences per feature per bin. This table shows the average count differences between online quantile and offline quantile when varying the value of ϵ . Each cell gives the average count difference per feature per bin.

4) The influence of ϵ on score accuracy. This table shows the mean score difference ratio between online methods and offline methods when varying the value of ϵ . The mean score difference ratio is calculated by

$$DR = \frac{1}{p} \sum_{j=1}^{p} \frac{|w_{on}^{j} - w_{off}^{j}|}{\max(W_{off}) - \min(W_{off})},$$
(19)

where p is the total number of features. W_{on} and W_{off} are the score vectors of all features generated from online and offline methods. w_{off}^{j} and w_{off}^{j} are the scores of the *j*-th feature from online and offline methods.

5) The influence of ϵ on the rank accuracy among top 10% most important features. This table shows the average unmatched ranking ratio of online methods with respect to corresponding offline methods when varying the value of ϵ . Only the top 10% of features ranked by offline scores are involved. The average mis-rank ratio is calculated as $\frac{\sum_{j=1}^{p} r_{on}^{j} \neq r_{off}^{j}}{p}$, where r_{off}^{j} and r_{off}^{j} are the rank values of the *j*-th feature from online and offline methods.

3.1.2 Data Sets

Datasets used for online-offline methods comparison are shown in Table 1.

Gisette, Dexter, Madelon are part of the NIPS 2003 Feature selection challenge [17] and are also available on the UCI Machine Learning Repository. Dorothea is part of the NIPS 2003 Feature selection challenge and is also available on the UCI Machine Learning Repository. We combined the training set and validation set in order to get a larger sample body. The Url dataset contains a total of 121 data files, one for each monitored day. We only used data from Day0 in our experiments. The Kdd12 dataset originates from the second track of the KDD Cup 2012. The raw version can be found on kaggle.com, made available by the organizers and Tencent Inc. The data we use comes from LIB-SVM [4]: a library for support vector machines. Only the first 16000 samples were used in our experiments.

3.1.3 Results

The following results are based on the output generated using Matlab 2018b [1]. For the offline screening methods we used the same Matlab 2018b implementations as those in [45]. The online screening methods were implemented by ourselves.

Comparison of the Moving Average Based Methods It is shown in Section 2.1 that the moving average based online screening methods can achieve exactly the same result as their offline version. Therefore we don't provide any real data analysis here.

Comparison of the Online Quantile Based Methods First we conducted a study of the computation time of the online quantile based methods. Here we only evaluate the time from when the data was input data to when the sample points counts in each bin were returned. We first conducted an experiment to evaluate the relation between computation time and minibatch size to estimate the minibatch size that we were going to use to obtain an acceptable speed in our following experiments. In this experiment, the ϵ was fixed at 0.001. The minibatch size was varied as 2^k , where k = 0, 1, 2, ..., 11. The result is shown in Table 2, where the time is measured in milliseconds. Compared across all datasets, it can be seen that the computation times are gradually stable for minibatch sizes lager than 128, with an acceptable fluctuation. For most datsets, the computation speed of the online quantile outperforms that of the offline quantile long before the minibatch size reaches 128. $SMK_{-}CAN_{-}187$ has only 187 observations. There the minibatch doesn't improve computation time after minibatch size 128. As a result 250 was selected as minibatch size in all of the following studies.

The next experiment was conducted to verify that in a real data scenario, computation time increases as ϵ decreases. In Table 3 is shown that it is certainly the relation between computation speed and ϵ . Furthermore, in some case where the datasets have large sample size e.g. url and kdd12, a low ϵ value can cause the online methods to use more computation time than offline methods. To improve the computation speed, larger minibatch size ought to be used. Here in order to maintain the consistency, we still use 250 as minibatch size.

The following experiments are regarding accuracy. In Table 4 is shown the count differences between online and offline quantile methods when the ϵ value was varied. The results are reported as sample count differences per bin per

Table 2: Influence of minibatch size on computation time for online quantile compared to offline quantile.

minibatch	url	SMK_CAN_187	dexter	dorothea	gisette	kdd12	madelon
offline	135,878	538	872	12,927	4,260	93,163	181
1	303,490	1,198	969	27,917	3,448	191,194	109
2	220,596	811	756	20,562	2,509	124,219	86
4	150,464	749	542	$14,\!560$	2,269	$75,\!610$	83
8	97,157	671	358	11,829	1,968	52,788	84
16	$67,\!665$	583	248	$10,\!590$	1,472	40,366	68
32	$51,\!140$	628	217	$10,\!458$	1,367	32,890	71
64	43,186	605	194	9,569	1,520	27,870	68
128	$37,\!937$	572	182	9,875	1,329	$25,\!511$	66
256	35,712	589	174	11,146	1,296	24,427	65
512	36,117	578	157	10,628	1,421	22,987	64
1024	36,061	586	160	10,970	1,251	$22,\!694$	73
2048	$35,\!636$	566	197	11,060	1,245	22,093	76

Table 3: Influence of ϵ on computation time for online quantile compared to offline quantile.

epsilon	url	SMK_CAN_187	dexter	dorothea	gisette	kdd12	madelon
offline	130,177	517	735	11,961	4,018	87,891	185
0.2	$15,\!451$	489	144	1,797	935	8,443	92
0.02	$13,\!117$	374	151	1,847	889	8,433	72
0.01	$13,\!490$	319	127	1,925	860	8,581	66
0.002	$16,\!314$	481	177	$2,\!621$	913	10,557	59
0.001	19,094	758	280	4,285	$1,\!176$	12,371	65
0.00066667	$487,\!828$	1,303	337	$5,\!461$	1,024	$250,\!470$	64
0.0005	$934,\!553$	$1,\!458$	565	6,409	$1,\!439$	$235,\!280$	60

feature. Although different datasets have different schedule, all differences were annihilated after ϵ decreases below 0.001. The online quantile method can in practice achieve the same counts per bin as the offline quantile when ϵ is lower than a certain level. Cross checking with Table 3 and Table 2, we can see that online methods can still achieve speed advantage with little to no error in bin count estimation.

Table 5 shows the accuracy measure from Eq. (19) of the scores calculated by three online methods compared to their offline counterparts when the ϵ value was varied. The scores were computed using the Chi-square score, Gini index and Mutual information respectively. Among the three methods Gini index provides slightly better accuracy than the other two methods. All of them can achieve zero error when ϵ is smaller than 0.001. The results shown here align with the count accuracy shown in Table 4.

Finally, we check the ranking accuracy of each of the three online methods with respect to their offline version. In Table 6 is shown that the ranking error

epsilon	url	SMK_CAN_187	dexter	dorothea	gisette	kdd12	madelon
0.2	0.086	4.06	0.012	0	8.21	0	76.09
0.02	0.0079	0	0.0011	0	0.7	0	7.57
0.01	0.00045	0	0.00047	0	0.17	0	1.18
0.002	3.80E-05	0	0	0	0	0	0
0.001	1.60E-05	0	0	0	0	0	0
0.00066667	0	0	0	0	0	0	0
0.0005	0	0	0	0	0	0	0

Table 4: Influence of ϵ on count differences between online and offline quantiles (results are reported per feature per bin).

can be eliminated when using ϵ smaller than 0.01, even for the most difficult datasets. The features compared here are top 10% ranked features according to scores calculated by the offline methods. 10 percent of all features is usually the zone where most important features reside. Therefore, for the sole purpose of screening feature selection, using online methods with an relative large ϵ is enough to assure that we can get identical feature ranking results as the offline methods.

3.2 Online Screening Methods with Model Adaptation

In his section, online screening methods with model adaptation capability are evaluated for their performance in handling data with the concept drift property. Synthetic datasets are generated to provide a measurable reference.

3.2.1 Synthetic Data Generation

The ground truth is assume to have linear relationship with the features. For the *i*-th observation, let y_i denote target value and \mathbf{x}_i denote the feature vector associated with each target.

$$y_i = \boldsymbol{\beta}_i \cdot \mathbf{x}_i^T + c + e_i \tag{20}$$

Equation 20 illustrates the relation between the target and the features. Here β_i is a coefficient vector with each of its elements corresponding to the elements in \mathbf{x}_i , c is a constant, e_i is a random noise $e_i \sim N(0, 1)$. The feature vector \mathbf{x}_i is generated as follow:

$$\mathbf{x}_i = \nu z_i \mathbf{o} + \widetilde{\boldsymbol{\epsilon}}_i \tag{21}$$

Where $z_i \sim N(0, 1)$, **o** is a vector of the same length as \mathbf{x}_i and all its entries equal to 1, ν is a parameter to control the correlation between features, and $\tilde{\epsilon}_i$ is a noise vector with its *j*-th element $\tilde{\epsilon}_{ij} \sim N(0, 1)$. In this setup, the correlation between any two features is $\nu/(1 + \nu)$. In our experiment ν is set to 0.5.

Let j denote the element index in β_i and k denote the number of non-zero coefficients. The indices of non-zero coefficients are shifted every l observations. Let b denote the non-zero signal value. Then β_i is constructed as:

Table 5: Influence of ϵ on accuracy (19) of online chi-square/gini index/mutual
information scores compared to their offline versions

epsilon	url	SMK_CAN_187	dexter	dorothea	gisette	kdd12	madelon				
Chi-square											
0.2	6.60E-06	0.065	4.20E-05	0	0.001	0	0.18				
0.02	2.90E-07	0	6.60E-07	0	4.30E-05	0	0.0042				
0.01	4.90E-08	0	4.70E-07	0	1.00E-05	0	0.00089				
0.002	8.30E-09	0	0	0	0	0	0				
0.001	2.00E-09	0	0	0	0	0	0				
0.00066667	0	0	0	0	0	0	0				
0.0005	0	0	0	0	0	0	0				
Gini index											
0.2	5.40E-06	0.064	3.40E-05	0	0.00037	0	0.12				
0.02	1.20E-07	0	1.40E-06	0	2.40E-05	0	0.0029				
0.01	4.30E-08	0	2.20E-07	0	3.20E-06	0	0.00055				
0.002	9.00E-09	0	0	0	0	0	0				
0.001	0	0	0	0	0	0	0				
0.00066667	0	0	0	0	0	0	0				
0.0005	0	0	0	0	0	0	0				
Mutual info	ormation										
0.2	6.40E-06	0.061	4.50E-05	0	0.00099	0	0.17				
0.02	2.70E-07	0	7.70E-07	0	4.30E-05	0	0.0042				
0.01	4.50E-08	0	4.00E-07	0	1.10E-05	0	0.00088				
0.002	8.40 E-09	0	0	0	0	0	0				
0.001	2.00E-09	0	0	0	0	0	0				
0.00066667	0	0	0	0	0	0	0				
0.0005	0	0	0	0	0	0	0				

$$\beta_{ij} = \begin{cases} b & \text{if } j \in \left(\left\lfloor \frac{i}{l} \right\rfloor : \left\lfloor \frac{i}{l} \right\rfloor + k \right) \\ 0 & \text{otherwise} \end{cases}$$
(22)

In our experiments, we choose feature space to be 1000D, thus $\mathbf{x}_i \in \mathbb{R}^{1000}$. The number of true features k is set to 100. The coefficient signal value is set to b = 1. A total of 100,000 samples are generated. We change the value of l (number of samples until shift) to control the concept drift level.

3.2.2 Results

In this section, we use detection rate @k to measure how well the algorithm performed. Given a set of k selected feature indices FS and a set of true feature indices TU, the detection rate @k is defined as.

$$DetRate@k = \frac{|FS \cap TU|}{|TU|}$$
(23)

Table 6: Influence of ϵ on unmatched ranking among top 10% features for chi-square/gini index/mutual information score according to its offline feature ranking

epsilon	url	SMK_CAN_187	dexter	dorothea	gisette	kdd12	madelon			
Chi-square										
0.2	0.017	1	0.89	0	0.81	0	1			
0.02	0.0019	0	0	0	0.36	0	0.8			
0.01	0	0	0	0	0.12	0	0.42			
0.002	0	0	0	0	0	0	0			
0.001	0	0	0	0	0	0	0			
0.00066667	0	0	0	0	0	0	0			
0.0005	0	0	0	0	0	0	0			
Gini index										
0.2	0.044	1	0.88	0	0.66	0	0.92			
0.02	0.00054	0	0	0	0.28	0	0.68			
0.01	0.00027	0	0	0	0.028	0	0.28			
0.002	0	0	0	0	0	0	0			
0.001	0	0	0	0	0	0	0			
0.00066667	0	0	0	0	0	0	0			
0.0005	0	0	0	0	0	0	0			
Mutual info	ormation									
0.2	0.018	1	0.92	0	0.8	0	1			
0.02	0.0026	0	0	0	0.39	0	0.8			
0.01	0.0004	0	0	0	0.12	0	0.44			
0.002	0	0	0	0	0	0	0			
0.001	0	0	0	0	0	0	0			
0.00066667	0	0	0	0	0	0	0			
0.0005	0	0	0	0	0	0	0			

All k-s in this section are set to 500.

Performance Plots Fig 2 visualizes the performance of online screening methods handling data with concept drift property. Top-left graph shows the overall performance of different screening methods. The shifting rate l is fixed to 2000, and the fading factor α is fixed to $\alpha = 0.9$. The five screening methods show very similar performance. However compared to the others, the Gini Index requires more samples to establish a good performance at the beginning. The graph on the top-right shows how shifting rate affects the variable detection rate. The fading factor α is still fixed to $\alpha = 0.9$. It is obvious that a fast shifting rate has a negative impact on the performance of the algorithm. On the bottom-left graph, it can be observed that by adjusting the fading factor α , the detection rate can be improved even for data with a faster shifting rate. The heatmap on the bottom-right shows the impact of fading factor on detection

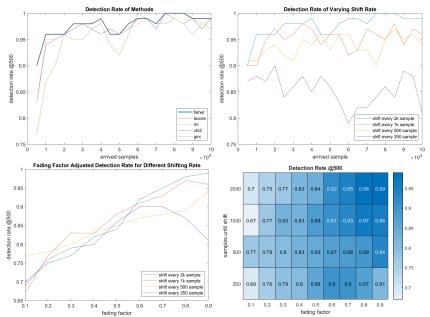


Figure 2: Top-left: detection rate by methods. Top-right: detection rate vs shifting rate. Bottom-left: detection rate by shifting rate adjusted by fading factor. Bottom-right: detection rate by shifting rate vs. fading factor.

rate in detail.

In Fig 3, it is shown in detail how the detection rate changes when different number of features are selected by online screening methods, as well as whether model adaptation helps improve the performance of the screening methods. Across all four shift rates that are tested, the screening methods with model adaptation outperform those without model adaptation. Generally, the slower the shift the fewer features need to be selected to provide a full detection. Even in the fastest shift rate that is tested (shift every 250 samples), the screening methods with model adaptation still manage to detect all true features with fewer selected features and consistently detect more true features than the methods without model adaptation.

3.3 Realistic Performance of Online Screening Methods

This section provides an insight of the performance of online screening methods on real world large datasets. Different learners and screening methods are combined to generate prediction. The misclassification error rate is used in this section to measure the performance of the algorithm. For learners, Sparse FSA and SGD (stochastic gradient decent with log loss) are chosen.

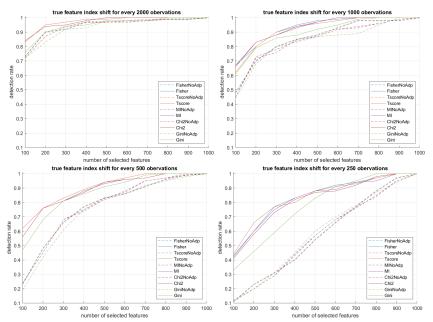


Figure 3: Influence of model adaptation on true variable detection rates for different rates of concept drift. Solid curves denote methods with model adaptation, dashed curves are methods without model adaptation

Dataset	Learning type	Feature type		Number of observations	
20NewsGroups [24]	Classification	Binary	723,066	11,862	
Url [31]	Classification	Continuous, Binary	3.2million	2million	

3.3.1 Data Sets

Among the datasets showed in Table 7, Url data already be introduced in Section 3.1. Here Url data from day 0 to 99 is used to train the model. The 20News-Groups is an email content data that is generated according to [24]. The data originates from the UCI repository [9]. We also extracted the timestamp for each email and sorted the data in time order.

3.3.2 Results

For all tables in this section, the cell value "random select" indicates that a specified number of features are randomly selected as input for the learner. The first two rows in each table show the computing time for online screening methods. The "Run Time" column contains the training time only.

In Table 8 is shown that for the 20NewsGroup data, some screening methods such as Mutual Information provide improvement to Sparse FSA. Moreover, in most cases, the screening methods with model adaptation give better performance than without model adaptation. For SGD, there is slight improvement given by bin-count based screening methods.

In Table 9, it is shown that there is no improvement by applying screening methods on Sparse FSA. The training time is reduced due to smaller feature space caused by screening methods. When combined with SGD, the mean-variance based screening methods with model adaptation provide significant improvement on performance.

		Selected		Learner	Run Time	
Adaptation	Screening Method	Features	Learner	Selected	Seconds	Error Rate
1	Quantile based				7.21	
1	Moving average				3.75	
0			sparseFSA	35k	37.86	0.064
0	random select	70k	sparseFSA	35k	13.42	0.144
1	T-score	70k	sparseFSA	35k	39.38	0.062
0	T-score	70k	sparseFSA	35k	40.3	0.062
1	Fisher	70k	sparseFSA	35k	48.31	0.063
0	Fisher	70k	sparseFSA	35k	47.87	0.062
1	MI	70k	sparseFSA	35k	39.42	0.061
0	MI	70k	sparseFSA	35k	39.51	0.062
1	Chi2	70k	sparseFSA	35k	40.27	0.063
0	Chi2	70k	sparseFSA	35k	41.05	0.062
1	Gini	70k	sparseFSA	35k	40.63	0.062
0	Gini	70k	sparseFSA	35k	40.87	0.062
0			SGD		0.299	0.063
0	random select	35k	SGD		0.324	0.172
1	T-score	35k	SGD		0.333	0.064
0	T-score	35k	SGD		0.349	0.064
1	Fisher	35k	SGD		0.174	0.066
0	Fisher	35k	SGD		0.146	0.065
1	MI	35k	SGD		0.306	0.062
0	MI	35k	SGD		0.344	0.064
1	Chi2	35k	SGD		0.33	0.062
0	Chi2	35k	SGD		0.385	0.062
1	Gini	35k	SGD		0.335	0.063
0	Gini	35k	SGD		0.351	0.062

Table 8: 20 News Groups

4 Conclusion

In our studies of online screening methods, the moving average based online screening methods can be proved to have the same performance as their offline version and have the advantage of a faster speed and lower storage requirement.

		Selected		Learner	Run Time	
Adaptation	Screening Method	Features	Learner	Selected	Seconds	Error Rate
1	Quantile based				205	
1	Moving average				142	
0			SparseFSA	50K	12484	0.0091
0	Random Index	1000K	SparseFSA	50K		0.0155
1	MI	1000K	SparseFSA	50K	7055	0.0097
0	MI	1000K	SparseFSA	50K	7173	0.0104
1	Chi2	1000K	SparseFSA	50K	7674	0.0106
0	Chi2	1000K	SparseFSA	50K	7813	0.0122
1	Gini	1000K	SparseFSA	50K	6612	0.0101
0	Gini	1000K	SparseFSA	50K	7250	0.0122
1	Fisher	1000K	SparseFSA	50K	7938	0.012
0	Fisher	1000K	SparseFSA	50K	7842	0.0122
1	T-score	1000K	SparseFSA	50K	7887	0.0102
0	T-score	1000K	SparseFSA	50K	7819	0.013
0			SGD		147	0.008
0	Random Index	2000K	SGD			0.0085
1	T-score	2000K	SGD		102	0.0073
0	T-score	2000K	SGD		112	0.0097
1	Fisher	2000K	SGD		102	0.0072
0	Fisher	2000K	SGD		118	0.0092
1	MI	2000K	SGD		63	0.0093
0	MI	2000K	SGD		64	0.0095
1	Chi2	2000K	SGD		63	0.0093
0	Chi2	2000K	SGD		65	0.0092
1	Gini	2000K	SGD		64	0.0093
0	Gini	2000K	SGD		64	0.0092

Table 9: URL data

The experiments in Section 3.1 show that the bin-count based online screening methods can also achieve the same results as their offline version given the right ϵ . Moreover, they can obtain faster or about the same computation speed compared to their offline versions with the right combination of ϵ and minibatch size.

The results in Section 3.2 give empirical evidences that adding model adaptation utility to screening methods can help improve their performance when data have concept drift property. It is shown that to some degree, adjusting fading factor can assist screening method to tackle datasets with high concept drift rate. The real data analysis in Section 3.3 further demonstrates the capability of online screening methods in dealing with real life large datasets with sparsity and possible concept drift.

Our results show that online screening methods with model adaptation is

computationally efficient. They are useful in improving the model performance of complex data learning, especially when sample size and feature space are extremely large.

5 Future Works

Some criteria used by screening methods such as mutual information and Gini index are also applied in learning algorithms such as decision tree as a component to judge impurity. It triggers our interests to study whether online quantile based methods can improve the speed or even performance of decision trees.

Throughout the years some works were done to describe the reconstruction and transformation from decision trees to neural network. Several mapping methods were mentioned in [39] [38] [26] and [20]. A new framework Neural Rule Ensembles (NRE) introduced in recent literature [8] also focused on such a mapping strategy. It shows that any decision tree can be mapped into a set of neural rules, and the ensemble of neural rules can subsequently be trained using back-propagation. Therefore the expected improvement of training speed on decision trees can hopefully also reflect on neural network training.

References

- [1] Matlab release 2018b, 2018. The MathWorks, Inc., Natick, MA, USA.
- [2] Rakesh Agrawal and Arun N. Swami. A one-pass space-efficient algorithm for finding quantiles. In COMAD, 1995.
- [3] Vitor R Carvalho and William W Cohen. Single-pass online learning: Performance, voting schemes and online feature selection. In Proceedings of the 12th ACM SIGKDD international conference on Knowledge discovery and data mining, pages 548–553, 2006.
- [4] Chih-Chung Chang and Chih-Jen Lin. LIBSVM: A library for support vector machines. ACM Transactions on Intelligent Systems and Technology, 2:27:1–27:27, 2011. Software available at http://www.csie.ntu.edu.tw/ cjlin/libsvm.
- [5] Tianqi Chen and Carlos Guestrin. Xgboost: A scalable tree boosting system. In Proceedings of the 22nd acm sigkdd international conference on knowledge discovery and data mining, pages 785–794. ACM, 2016.
- [6] Graham Cormode, Flip Korn, Shan Muthukrishnan, and Divesh Srivastava. Space-and time-efficient deterministic algorithms for biased quantiles over data streams. In Proceedings of the twenty-fifth ACM SIGMOD-SIGACT-SIGART symposium on Principles of database systems, pages 263–272. ACM, 2006.

- [7] John C Davis and Robert J Sampson. Statistics and data analysis in geology, volume 646. Wiley New York et al., 1986.
- [8] Gitesh Dawer, Yangzi Guo, Sida Liu, and Adrian Barbu. Neural rule ensembles: Encoding sparse feature interactions into neural networks. In 2020 International Joint Conference on Neural Networks (IJCNN), pages 1–8, 2020.
- [9] Dheeru Dua and Casey Graff. UCI machine learning repository, 2017.
- [10] Richard O Duda, Peter E Hart, and David G Stork. Pattern classification. John Wiley & Sons, 2012.
- [11] William A Freije, F Edmundo Castro-Vargas, Zixing Fang, Steve Horvath, Timothy Cloughesy, Linda M Liau, Paul S Mischel, and Stanley F Nelson. Gene expression profiling of gliomas strongly predicts survival. *Cancer research*, 64(18):6503–6510, 2004.
- [12] Joao Gama and Carlos Pinto. Discretization from data streams: applications to histograms and data mining. In *Proceedings of the 2006 ACM* symposium on Applied computing, pages 662–667, 2006.
- [13] CW Gini. Variability and mutability, contribution to the study of statistical distribution and relations. *Studi Economico-Giuricici della R*, 1912.
- [14] Joao Bartolo Gomes, Mohamed Medhat Gaber, Pedro AC Sousa, and Ernestina Menasalvas. Mining recurring concepts in a dynamic feature space. *IEEE Transactions on Neural Networks and Learning Systems*, 25(1):95–110, 2013.
- [15] Michael Greenwald, Sanjeev Khanna, et al. Space-efficient online computation of quantile summaries. ACM SIGMOD Record, 30(2):58–66, 2001.
- [16] Michael B Greenwald and Sanjeev Khanna. Power-conserving computation of order-statistics over sensor networks. In Proceedings of the twenty-third ACM SIGMOD-SIGACT-SIGART symposium on Principles of database systems, pages 275–285. ACM, 2004.
- [17] Isabelle Guyon, Steve Gunn, Asa Ben-Hur, and Gideon Dror. Result analysis of the nips 2003 feature selection challenge. In Advances in neural information processing systems, pages 545–552, 2005.
- [18] Mahmood Shakir Hammoodi, Frederic Stahl, and Atta Badii. Real-time feature selection technique with concept drift detection using adaptive micro-clusters for data stream mining. *Knowledge-Based Systems*, 161:205– 239, 2018.
- [19] Márcia Henke, Eduardo Souto, and Eulanda M dos Santos. Analysis of the evolution of features in classification problems with concept drift: Application to spam detection. In 2015 IFIP/IEEE International Symposium on Integrated Network Management (IM), pages 874–877. IEEE, 2015.

- [20] Yani Ioannou, Duncan Robertson, Darko Zikic, Peter Kontschieder, Jamie Shotton, Matthew Brown, and Antonio Criminisi. Decision forests, convolutional networks and the models in-between. arXiv preprint arXiv:1603.01250, 2016.
- [21] Raj Jain and Imrich Chlamtac. The p 2 algorithm for dynamic calculation of quantiles and histograms without storing observations. *Communications* of the ACM, 28(10):1076–1085, 1985.
- [22] Yuchin Juan, Yong Zhuang, Wei-Sheng Chin, and Chih-Jen Lin. Fieldaware factorization machines for ctr prediction. In *Proceedings of the 10th* ACM Conference on Recommender Systems, pages 43–50. ACM, 2016.
- [23] Ioannis Katakis, Grigorios Tsoumakas, and Ioannis P Vlahavas. On the utility of incremental feature selection for the classification of textual data streams. In *Panhellenic Conference on Informatics*, volume 5, pages 338– 348. Citeseer, 2005.
- [24] S Sathiya Keerthi, Dennis DeCoste, and Thorsten Joachims. A modified finite newton method for fast solution of large scale linear syms. *Journal* of Machine Learning Research, 6(3), 2005.
- [25] Fabian Keller, Emmanuel Müller, and Klemens Böhm. Estimating mutual information on data streams. In Proceedings of the 27th International Conference on Scientific and Statistical Database Management, pages 1–12, 2015.
- [26] Peter Kontschieder, Madalina Fiterau, Antonio Criminisi, and Samuel Rota Bulo. Deep neural decision forests. In *Proceedings of the IEEE international conference on computer vision*, pages 1467–1475, 2015.
- [27] Alexander Kraskov, Harald Stögbauer, and Peter Grassberger. Estimating mutual information. *Physical review E*, 69(6):066138, 2004.
- [28] David D Lewis. Feature selection and feature extraction for text categorization. In *Proceedings of the workshop on Speech and Natural Language*, pages 212–217. Association for Computational Linguistics, 1992.
- [29] Xuemin Lin, Hongjun Lu, Jian Xu, and Jeffrey Xu Yu. Continuously maintaining quantile summaries of the most recent n elements over a data stream. In *Proceedings. 20th International Conference on Data Engineering*, pages 362–373. IEEE, 2004.
- [30] Huan Liu and Rudy Setiono. Chi2: Feature selection and discretization of numeric attributes. In *Tools with artificial intelligence*, 1995. proceedings., seventh international conference on, pages 388–391. IEEE, 1995.
- [31] Justin Ma, Lawrence K Saul, Stefan Savage, and Geoffrey M Voelker. Identifying suspicious urls: an application of large-scale online learning. In Proceedings of the 26th annual international conference on machine learning, pages 681–688. ACM, 2009.

- [32] Gurmeet Singh Manku, Sridhar Rajagopalan, and Bruce G Lindsay. Approximate medians and other quantiles in one pass and with limited memory. ACM SIGMOD Record, 27(2):426–435, 1998.
- [33] Gurmeet Singh Manku, Sridhar Rajagopalan, and Bruce G Lindsay. Random sampling techniques for space efficient online computation of order statistics of large datasets. In ACM SIGMOD Record, volume 28, pages 251–262. ACM, 1999.
- [34] Mohammad M Masud, Qing Chen, Jing Gao, Latifur Khan, Jiawei Han, and Bhavani Thuraisingham. Classification and novel class detection of data streams in a dynamic feature space. In *Joint European conference* on machine learning and knowledge discovery in databases, pages 337–352. Springer, 2010.
- [35] José Ramon Méndez, Florentino Fdez-Riverola, Daniel Glez-Peña, Fernando Díaz, and Juan M Corchado. Relaxing feature selection in spam filtering by using case-based reasoning systems. In *Portuguese Conference* on Artificial Intelligence, pages 53–62. Springer, 2007.
- [36] J Ian Munro and Mike S Paterson. Selection and sorting with limited storage. *Theoretical computer science*, 12(3):315–323, 1980.
- [37] Xuan Vinh Nguyen(2014). Information theoretic feature selection, version 1.1, Updated 07 Jul 2014.
- [38] Ishwar K Sethi. Decision tree performance enhancement using an artificial neural network implementation. In *Machine Intelligence and Pattern Recognition*, volume 11, pages 71–88. Elsevier, 1991.
- [39] Ishwar Krishnan Sethi. Entropy nets: from decision trees to neural networks. Proceedings of the IEEE, 78(10):1605–1613, 1990.
- [40] Nisheeth Shrivastava, Chiranjeeb Buragohain, Divyakant Agrawal, and Subhash Suri. Medians and beyond: new aggregation techniques for sensor networks. In Proceedings of the 2nd international conference on Embedded networked sensor systems, pages 239–249. ACM, 2004.
- [41] Blaz Sovdat. Updating formulas and algorithms for computing entropy and gini index from time-changing data streams. arXiv preprint arXiv:1403.6348, 2014.
- [42] Avrum Spira, Jennifer E Beane, Vishal Shah, Katrina Steiling, Gang Liu, Frank Schembri, Sean Gilman, Yves-Martine Dumas, Paul Calner, Paola Sebastiani, et al. Airway epithelial gene expression in the diagnostic evaluation of smokers with suspect lung cancer. *Nature medicine*, 13(3):361, 2007.

- [43] Robert Tibshirani. Regression shrinkage and selection via the lasso. Journal of the Royal Statistical Society. Series B (Methodological), pages 267–288, 1996.
- [44] Jialei Wang, Peilin Zhao, Steven CH Hoi, and Rong Jin. Online feature selection and its applications. *IEEE Transactions on Knowledge and Data Engineering*, 26(3):698–710, 2013.
- [45] Mingyuan Wang and Adrian Barbu. Are screening methods useful in feature selection? an empirical study. *PloS one*, 14(9):e0220842, 2019.
- [46] Qi Zhang and Wei Wang. A fast algorithm for approximate quantiles in high speed data streams. In 19th International Conference on Scientific and Statistical Database Management (SSDBM 2007), pages 29–29. IEEE, 2007.