MIPROT: A Medical Image Processing Toolbox for MATLAB

Alberto Gomez

School of Biomedical Engineering and Imaging Sciences, King's College London

Abstract

This paper presents a Matlab toolbox to perform basic image processing and visualization tasks, particularly designed for medical image processing. The functionalities available are similar to basic functions found in other non-Matlab widely used libraries such as the Insight Toolkit (ITK). The toolbox is entirely written in native Matlab code, but is fast and flexible.

Main use cases for the toolbox are illustrated here, including image input/output, pre-processing, filtering, image registration and visualisation. Both the code and sample data are made publicly available and open source.

Keywords: Image processing, Medical imaging, Matlab

1. Introduction

MATLAB¹ (The Mathworks Inc.) is a widely used programming language and integrated development environment (IDE) with many engineering features, including image processing and computer vision. MATLAB is intuitive and easy to use, and allows for easy prototyping and rapid visualisation. As a result, many researchers use MATLAB for medical image processing. However, medical imaging presents a number of key differences with computer vision and natural image processing that require for specific processing tools.

Although there is a large number of medical imaging work carried out in MATLAB, most researchers develop their own functionality. There is also a large amount of software made available to the community to address some specific aspects of medical image processing, such as image input/output [1], image segmentation [2], feature extraction of medical images [3], and graphical user interfaces for research pipelines [4].

However, the vast majority of medical imaging algorithmic research and development is implemented in C++ and python using specific libraries such

¹https://mathworks.com/products/matlab.html

as the Insight Toolkit² (ITK), MIRTK³, and more recently libraries that integrate machine learning and deep learning features such as MONAI⁴. The lack of a unified framework to manage, analyse, process and visualise medical images in MATLAB, that facilitates implementation of common techniques such as segmentation, registration and classification motivated the work in this paper.

This paper describes the Medical Image Processing Toolbox for MAT-LAB (MIPROT), an open source, free software aiming at facilitating research and development with medical images. The software is available from the MATLAB Central File Exchange⁵, and the most up-to-date version can be downloaded from the public GitLab repository⁶.

This paper is organised as follows. First, the specific aspects of medical images that need to be covered are described in Section 2. Section 3 gives a description of the software, focusing on image I/O, basic functionalities, filtering and visualisation. overview of the software. Section 4 provides some example applications including image registration and image segmentation.

2. Specific Aspects of Medical Images

Medical imaging requires to consider particularities of medical images that are normally disregarded in natural images. Not only the physics of the acquisition systems (magnetic resonance -MR, ultrasound -US, computed tomography -CT, etc) are different to optical systems employed in natural images, but also medical images are embedded in a coordinate system where, beyond image intensity, pixel size and image axes bear important information about the anatomy. Moreover, the recorded intensity may have a physiological meaning. As a result, especial care must be taken when performing basic image processing operations such as re-sizing, re-sampling, or intensity re-scaling, so as to consider the impact of these operations on the medical information contained in the image.

For this reasons, dedicated medical image processing libraries have been developed for some programming languages, such as Python or C++, with the most popular example being the Insight Toolkit (ITK) [5]. However, although MATLAB is very widely used for both computer vision and medical imaging, and there is a large collection of built-in functions and classes for

²https://itk.org/

³https://mirtk.github.io/

⁴https://github.com/Project-MONAI/MONAI/

 $^{^5 \}rm mathworks.com/matlabcentral/file$ $exchange/41594-medical-image-processing-toolbox <math display="inline">^6 \rm https://gitlab.com/compounding/matlab$

computer vision within, there is a lack of a structured toolbox for medical image processing. To this end, this paper describes a MATLAB toolbox for medical image processing. The toolbox is focused around basic 2D, 3D and 4D medical image processing tasks, including image input/output (I/O), spatial transforms, cropping, resizing, slicing, and visualization. The toolbox also provides basic mesh I/O.

3. Organisation of the Software

This toolbox is built around the class ImageType, which represents *N*-dimensional medical images, and heavily inspired by the *itk::Image* class from ITK. Figure 1 shows the organisation in modules, and the functionality is described in turn over the following subsections. Section ?? describes an app that features a graphical interface to visualize images interactively.

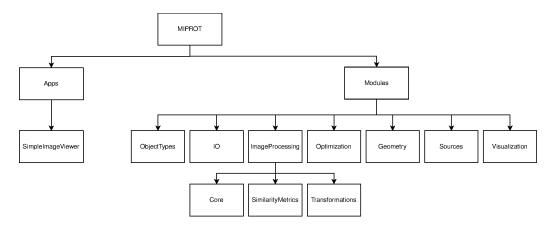


Figure 1: Overview of MIPROT organisation.

3.1. Module 'Object Types'

The main object types are illustrated in Fig. 2. ImageType represents an image, and its subclass PatchType can be used to represent a patch within an image. MeshType represents triangulated meshes (for example, for image segmentation), and each node of the mesh can contain one or more attributes of type AttributeType.

ImageType: The ImageType is a container that allows to store a N-dimensional image (currently 2D, 3D and 4D are supported). The class contains the image pixel values (stored in the .data member as a double matrix), and the geometry defined by the .origin member ($N \times 1$ matrix with the world coordinates of the pixel with index (1,...)), the .spacing member ($N \times 1$ matrix with the pixel size), and the .orientation member

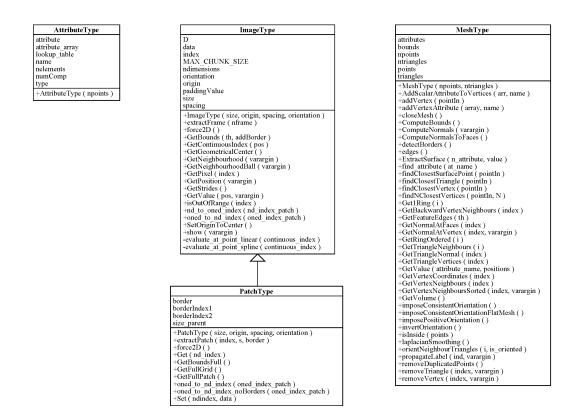


Figure 2: Main object types: ImageType, PatchType, MeshType and AttributeType.

(a $N \times N$ matrix defining the axis of the image, identity by default). The image class also features the following members:

- .index The index of the first pixel. By default this is $1 \in \mathbb{N}^N$. However, this could change and particularly for images of type PatchType as described later.
- .paddingValue is by default 0, and is a value that will be used for padding in operations that require values outside the image extent, for example after a transformation.
- .size contains the size of the data matrix.
- .MAX_CHUNK_SIZE is a number defining the maximum number of pixels to be processed at once by filters that operate pixel-wise. This allows to limit memory usage of the methods at the cost of longer processing time.

To construct a new image, the user can define an empty image from the geometry or use an existing image as template (all members are copied):

Listing 1: Creating an image

```
1 sz = [100 120 130]'; % size, in numer of voxels
2 sp = [1.1 1.0 0.9]'; % spacing, in mm
3 or = -(sz-1)/2.*sp; % origin, with point (0,0,0) at centre
4 im = ImageType(sz, or, sp); % image created
5
6 im2 = ImageType(im); % copy all members from template
```

In addition to these members, ImageType features the following member functions (arguments marked with '<>' are optional:

- .extractFrame(n) From a 4D image extracts the n-th 3D frame.
- .force2D() Remove all singleton dimensions to make the image 2D, if the input is 3D.
- .GetBounds(th) obtains the $2N \times 1$ vector with the min and max coordinate values beyond which the pixel values are below th.
- .GetContinuousIndex(*pos*) extract the index, as a double, corresponding to the position *pos*.
- .GetGeometricCentre() calculates the world coordinates of the center of the image.
- .GetNeighbourhood($\langle n \rangle$ Get the relative indices of the fully connected neighbourhood of width n. By default, n = 1. This is convenient for neighbourhood based operators. The shape of this neighbourhood is an N-dimensional cube.
- .GetNeighbourhoodBall($\langle n \rangle$ Get the relative indices of the fully connected neighbourhood ball of width n. By default, n = 1. This is convenient for neighbourhood based operators. The shape of this neighbourhood is an N-dimensional sphere.
- .GetPixel(*idx*) get the intensity value at pixel with index *idx*. Indices start at 1.
- .GetPosition($\langle cidx \rangle$) returns the position (or positions) in world coordinates of pixels with indices cidx, which can be a continuous index. cidx should be a Nxm matrix, where m is the number of indices. if no argument is passed, the function returns all positions of the image. If N = 1 and the image dimension is > 1, then the indices are interpreted as linear indices. This allows to do things like the following, to extract the positions of the pixels where values are above a threshold:

Listing 2: Creating an image

```
1 th = 0.5;
2 indices = find(im.data > th);
3 positions = im.GetPosition(indices);
```

- .GetStrides() Returns the strides to compute linear indices.
- .GetValue(pos, < mode > Interpolates the image intensity value at position(s) pos. The interpolation mode is optional (by default is 'NN') and can take the following values, as strings: 'NN' (nearest neighbour), 'linear' or 'spline'.
- .isOutOfRange(*idx*) returns true if the index is outside the image extent.
- .nd_to_oned_index(*ndidx*) and .oned_to_nd_index(*idx*) convert from Nd to linear indices and vice-versa.
- .SetOriginToCenter()) is a convenience function to center the image.
- .show(<options...>)) is a simple visualization function. 2D and 3D images are supported. For 2D images it shows the image in grayscale. For 3D images, a 3D representation of 3 orthogonal planes is shown. The following options (and option pairs) allow further customization:
 - 'opacity', opacity val : sets the opacity of the image to a value between 0 and 1.
 - 'colorrange', range : a tuple with the min and max value of colors to show. The image range is stretched to that range.
 - 'colormap', cm: sets the colormap from the default (gray) to any other.
 - 'mpr': shows 3D images as a 2D multi-planar-reformatting view.
 - 'mproffset': set the coordinates of the point where the mpr planes meet. By default, the centre of the image.

PatchType: The PatchType is a subclass of ImageType that is used internally by some algorithms and for most everyday processing can be safely ignored.

MeshType: The MeshType class contains triangular meshes. The main members are the .triangles, which contain a $3 \times n$ matrix with one column per triangle, and each row represents the index of the vertex; and

.points which contain the list of vertices coordinates. In addition, the mesh has the .attributes member which is an array of one or more attributes AttributeType. Each attribute can be associated to the vertices or to the triangles. Association is established depending on the number of elements.

3.2. Module 'IO'

This module provides functions to read and write images and meshes. The functions provided are:

- read_gipl(filename) Read a *.gipl image.
- write_gipl(filename, im) Writes the image im to the *.gipl file.
- read_mhd(filename) Read a *.mhd/*.raw image.
- write_mhd(filename, im <, options>) Writes the image im to *.mhd/*.raw files (only the *.mhd needs to be passed as argument). the options are:
 - 'elementtype', type: choose the pixel type, type={'uint8',
 ...}
- read_nifty(filename) Read a *.nii image. Writing is not yet supported.
- read_picture(filename) Read a *.png, jpeg, tiff, etc. images.
- read_MITKPoints(filename) Read an *.mps MITK file.
- read_MITKPointsFast(filename) Read an *.mps MITK file (faster implementation)
- write_MITKPoints(filename, pts) Write a point list to an *.mps MITK file.
- read_stlMesh(filename) Read *.stl meshes.
- write_stlMesh(filename, mesh)Write to *.stl file.
- read_vtkMesh(filename) Read text (legacy) *.vtk mesh files.
- write_vtkMesh(filename, mesh) Write to text (legacy) *.vtk mesh files.
- write_deformetricaVTKShape(filename, mesh) Write mesh to a deformetrica file.

• read_ITKMatrix(filename) Read a 4 × 4 matrix (which can be used as a 3D affine matrix) from a text file. The file format should be with a first line commented with '#' followed by 4 lines of space separated values, as follows:

itkMatrix 4 x 4
1.0 0.0 0.0 0.0 0.0
0.0 1.0 0.0 0.0
0.0 0.0 1.0 0.0
0.0 0.0 1.0 0.0

• write_ITKMatrix(filename, M) writes a matrix M to the file 'filename'. *.mat extension is preferred.

As an example, one can read an image and write it into a different format:

Listing 3: Image I/O. The image is read in gipl, and regardless of the pixel format, it is saved as unsigned char.

```
1 filename_in = 'myfolder/image.gipl';
2 im = read_gipl(filename_in);
3 % convert the range to [0,255] to save as uint8
4 im.data = im.data / max(im.data(:)) * 255;
5 filename_out = 'myfolder/image.mhd';
6 write_mhd(filename_out, im, 'ElementType','uint8');
```

3.3. Module 'ImageProcessing'

The image processing module has three submodules: Core, SimilarityMetrics and Transformations

3.3.1. Core

The Core module includes basic operations:

- cropImage(image, bounds) Crops the image to the bounds specified by the $2N \times 1$ vector, which should contain the min and max values along each dimension (in world coordinates).
- gradientImage(image <, options>) Computes the gradient of an image, and returns a N + 1 list with the gradient over each of the N dimensions. Features the following options:

```
- 'order', o: applies the derivative of order o. By default, o = 1.
```

- resampleImage(image, ref <, options>) Resamples the input image to the grid defined by the ref image. The function can also be used without a reference image, using the options as follows:
 - Resample to a specific spacing

```
1 % downsample the image to pixels twice as big:
2 im2 =resampleImage(im, [], 'spacing', im.spacing * 2);
```

 Resample the image to a certain spacing and size, by using padding/cropping under the hood if needed:

 Resample the image to a certain spacing, size and centre, by using padding/cropping under the hood if needed:

This function also allows to define the interpolation by adding the option 'interpolation', 'NN', or 'iterpolation', 'linear' to the arguments.

• resliceImage(image <, options>) This function allows to slice a 3D image to obtain an oblique slice. Returns a 3D image with the oriented slice, and a 2D image. The options to define the slice are indicated by the following examples:

```
1 % reslice defining the slicing plane with a 4x4 matrix
2 M = eye(4); % this will extract the central XY plane.
3 [slice, slice2D] = resliceIMage(im, 'mat', M);
```

```
3 point = [0 0 0]';
```

```
4 [slice, slice2D] = resliceIMage(im, 'plane', n, point);
```

```
1 % reslice and set the spacing of the slice (otherwise
average spacing is used)
2 M = eye(4); % this will extract the central XY plane.
3 [slice, slice2D] = resliceIMage(im, 'mat', M, 'spacing',
[0.5 0.5]');
```

```
1 % reslice and take 3 continguous slices (the resulting
    image will be 3D)
2 n = 3;
3 [sl, sl] = resliceIMage(im, 'mat', M, 'thicknes', n);
```

3.3.2. SimilarityMetrics

This module includes implementation of the normalised cross-correlation (NCC), normalised mutual information (NMI) and sum of squared differences (SSD) commonly used in image registration, as exemplified in Section 4.2.

3.3.3. Transformations

This module includes geometric transformation models that are typically used in image registration. The main functions are:

- transformRigid applies an affine transform to an image.
- transformFFDSplines applies a free-form deformation to an image, using a BSpline grid.

And helper functions to obtain parameters from affine/rigid matrices and vice-versa. These will be exemplified in Section 4.2.

3.4. Module 'Optimization'

This module includes commonly used optimization functions, including RANSAC [6], the Broyden-Fletcher-Goldfarb-Shannon method and variants (BFGS, implemented by D.Kroon from the University of Twente, 2010) and the conjugate gradient method (implemented by Ian T Nabney). Examples of how they can be used can be found in Sec 4.2.

3.5. Module 'Geometry'

The Geometry module includes auxiliary low-level functions that are used by other functions to do basic geometric calculations. These functions are not intended to be used by the toolbox user, and are aimed at developers.

3.6. Module 'Sources'

The **Sources** module includes mesh and image sources, in the style of Paraview sources. Examples of mesh sources are indicated below and the result is shown in Fig. 3.

Listing 4: Demonstration of the sources module.

```
% box
 1
 2
   center = [0 \ 0 \ 0]';
 3 dims = [10 20 5]';
 4 b = boxMesh(center, dims);
 5 | subplot(1, 5, 1) |
 6 viewMesh(b);
 7
   view(30, 30);
 8
   axis equal
 9
   title('boxMesh')
10
11
   % cylinder
12 | ax = [1 \ 0 \ 0]';
13 | radius = 5;
14 height = 20;
15 resolution = 12;
16 | b = cylinderMesh(ax,center,radius, height,resolution);
17 | subplot(1, 5, 2)
18 viewMesh(b);
19 |view(30, 30);
20 axis equal
21
   title('cylinderMesh')
22
23
   % ellipsoid
24 | radius = [10 20 5]';
25 b = ellipsoidMesh(center, radius, 'resolution', 20);
26 | subplot(1, 5, 3)
27
   viewMesh(b);
28
   view(30, 30);
29 axis equal
30
   title('ellipsoidMesh')
31
32
33 % plane
34 | point = [2 \ 0 \ 0]';
35 | normalVector = [0 0 1]';
```

```
36 | b = planeMesh(point, normalVector, 'scale', 2);
   subplot(1, 5, 4)
37
38 viewMesh(b);
   view(30, 30);
39
40 axis equal
41
   title('planeMesh')
42
43
   % sphere
44
   radius = 10;
45 | b = sphereMesh(center, radius, 'resolution', 20);
46 | subplot(1, 5, 5)
47
   viewMesh(b);
48
   view(30, 30);
49 axis equal
50
   title('sphereMesh')
```

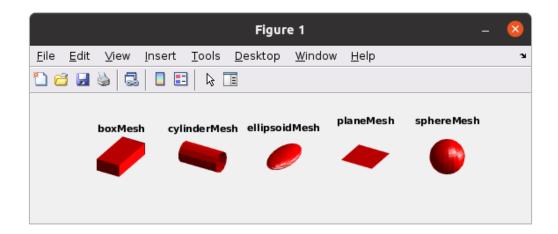


Figure 3: Mesh sources from the Sources module.

3.7. Module 'Visualization'

The Visualization module includes auxiliary visualization functions to display meshes, 2D and 3D points, bounding boxes and axes representations:

- plotAxis(direction <, options>): display 3 colored arrows with the x, y and z axes defined by the 4 × 4 matrix direction. The matrix defines also the origin where the axes meet on the fourth column.
- plotboundingbox(bounds <, options>) displays a wireframe box from the $2N \times 1$ bounds vector.

- plotpoints() and plotpoints2() are wrappers of the plot function to plot respectively 3D and 2D points from a 3 × n and a 2 × n array. After the matrix, they take the same optional arguments as the plot function.
- viewMesh(m <, options>) displays a MeshType object, as demonstrated in Fig. 3. It takes the following optional arguments:
 - 'showvectors', scale, attributen: displays (alongside the mesh) the vectors in the mesh attribute number attributen scaled by the factor scale.
 - 'labelColor', attributen: uses the scalar values in the attribute number attributen to color the mesh. Otherwise all mesh is displayed with the same color.
 - 'triangles', trianglelist. Only display the triangles in trianglelist.
 - 'axes', a. Visualize the mesh on the figure axes a.
 - 'wireframe': Display the mesh as a wireframe.
 - 'featureedgescolor', color: display the feature edges (edges which are a sharp ridge in the surface) with the color color, which should be an [r g b] array.
 - 'wireframeSurface': display both the surface and the edges as wireframe.
 - 'color', c: use the color ${\tt c}$ for the surface.
 - 'Tag', t: Assign the tag tag.
 - 'opacity', o: apply the opacity $o \in [0,1]$ to the surface.

4. Example Applications

In this section we present a number of examples of everyday medical image processing tasks to illustrate how the toolbox may be used.

4.1. Image Preprocessing

The toolbox includes a collection of functions for convenient pre-processing of images that can be used prior to other tasks. Here we illustrate this capabilities with some examples.

• Image resampling to change image resolution, as shown in the examples in Sec. 3.3.1.

• Image cropping to focus on a region of interest.

```
im = read_picture([folder '/mri1.jpg']);
 1
2
   bounds = [350 650 400 550]';
   roi = cropImage(im, bounds);
3
4
5
   subplot(1,2,1)
6 hold on;
7
   im.show()
   plotboundingbox(bounds, 'LineWidth',3);
8
   hold off;
9
   axis equal;
10
11 axis off;
12
   title('Input image')
13
14 | subplot(1,2,2)
15 | roi.show();
16 axis equal;
17
   axis off;
18
   title('RoI')
```

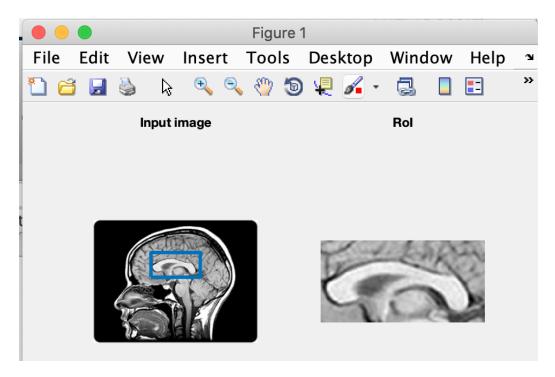


Figure 4: Cropping an image with a bounding box.

• Blurring and computing image gradients. In this example we first downsample the input image, and then we blur it by resample it to its own grid and adding a Gaussian blurring. Then we compute the derivatives along x and y, using the derivative of a Gaussian.

```
im = read_mhd( 'data/CT1.mhd');
 1
 2
   im = resampleImage(im, [], 'spacing', [2 2]');
 3
   neigh = [5 5]'; sigma = [3 3]';
 4
   im_blurred = resampleImage(im, im, 'blur', neigh, sigma);
 5
 6
   gradients1 = gradientImage(im);
 7
   gx = ImageType(im);
 8
   gx.data = gradients1(:,:,1);
 9
   gy = ImageType(im);
10
   gy.data = gradients1(:,:,2);
11
12
   subplot(1,4,1)
13
   im.show(); axis equal; axis off;
14
   title('Input')
15
   %
16
   subplot(2,4,2)
17
   im_blurred.show(); axis equal; axis off;
18
   title('Blurred')
19
   %
20 | subplot(2,4,3)
21
   gx.show(); axis equal; axis off;
22
   title('Gx')
23
24
   subplot(2,4,4)
25
   gy.show(); axis equal; axis off;
26
   title('Gy')
```




Figure 5: Blurring and computing derivatives.

4.2. Rigid Image Registration

In this example we demonstrate 2D image registration between 2 MRI images. The data was borrowed from the Elastix [7] public repository. The results of the registration are illustrated in Fig. 7. This example uses normalised cross-correlation (similarityMetric_NCC) as similarity measure and the fminlbfgs optimizer.

Listing 5: Example of rigid registration.

```
1
   fixed = read_mhd(['data/fixed.mhd']);
 2
   moving= read_mhd(['data/moving.mhd']);
 3
   %% Add some random displacement to the moving image
 4
   moving=transform_rigid(moving, [0 0 15*pi/180], 'ref', moving);
 5
 6
 7
   %% Display images initially
 8 difference = ImageType(fixed);
   difference.data = fixed.data - moving.data;
 9
10 |figure;
11 | subplot(2,3,1);
12
   fixed.show(); axis equal; axis off; title('Fixed')
13 | subplot(2,3,2);
14 moving.show(); axis equal; axis off; title('Moving')
15 | subplot(2,3,3);
16 difference.show(); axis equal; axis off; title('Difference
       before reg.')
17
   %% Set up the registration process.
18
19 | \mathbf{x0} = [0 \ 0 \ 0];
20
21
   options = optimset('GradObj','off', 'Display', 'iter');
22
   transform_object.transform_function = @(moving, params)
       transform_rigid(moving, params, 'ref', fixed);
23
24
   f=@(x) similarityMetric_NCC( moving,fixed,transform_object,x);
25
   %% Run registration
26
27
28 | X = fminlbfgs(f, x0, options);
29
30 moving_tx = transform_rigid(moving, X, 'ref', fixed);
31 difference.data = fixed.data - moving_tx.data;
```

```
32 subplot(2,3,5); moving_tx.show(); axis equal; axis off; title('
    Moving after reg')
33 subplot(2,3,6); difference.show(); axis equal; axis off; title(
    'Difference after reg.')
```

The example script displays the images before and after registration. The moving image is initially rotated 15 degrees, and the optimization recovers -14.95 degrees, which is an accuracy of 99.67%.

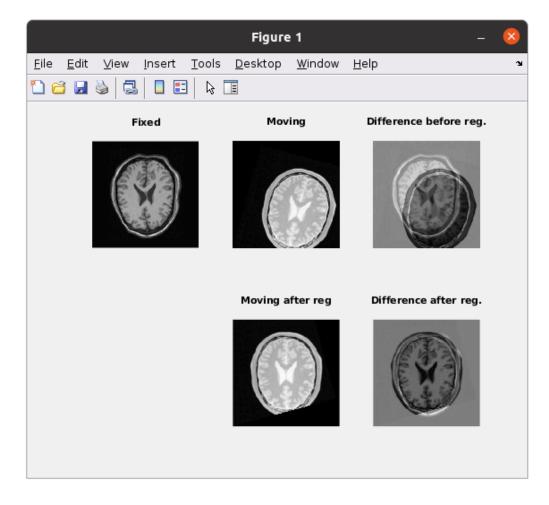


Figure 6: Result of rigid registration between two 2D images.

4.3. Deformable Image Registration

In this example we demonstrate image registration using B-spline based free form deformations. This is a simple example with a single level B-spline grid, using B-splines of order 1 (linear). More information about B-spline based registration can be found in [8].

Listing 6: Example of deformable B-spline registration.

```
fixed = read_picture([getenv('HOME') 'data/c1.png']);
 1
2 moving= read_picture([getenv('HOME') 'data/c3.png']);
3
4
   % Downsample data
5 fixed = resampleImage(fixed, [], 'spacing',fixed.spacing.*[3
      41');
   moving= resampleImage(moving, [], 'spacing',moving.spacing.*[3
 6
      4]');
 7
8 %% Display images initially
9 difference = ImageType(fixed);
10 difference.data = fixed.data - moving.data;
11 | figure;
12
   subplot(2,3,1); fixed.show(); axis equal; axis off; title('
       Fixed')
13 subplot(2,3,2); moving.show(); axis equal; axis off; title('
      Moving')
14 subplot(2,3,3); difference.show(); axis equal; axis off; title(
       'Difference before req.')
15
16 % Set up the registration process.
17 |transform_params.nlevels=1;
18 |transform_params.bsd=1;
   transform_params.bounds=-1; % if -1 then take from image
19
20
   transform_params.grid_spacing = [10 10]';
21
22
   transform_initialization = transform_FFDBsplines_initialize(
      moving, transform_params);
23
24 x0 = randn(size(transform_initialization.params0{1}))*10;
25
26 options = optimset('GradObj','off', 'Display', 'iter', 'MaxIter
       ', 100);
27 |transform_object.transform_function = @(moving, params)
      transform_FFDBsplines(moving, params, 'init',
      transform_initialization);
28
29 | f = @(x) similarityMetric_NCC( moving, fixed, transform_object,
       x);
```

30	
31	%% Run registration
32	X = fminlbfgs(f, x0, options);
33	
34	<pre>moving_tx = transform_FFDBsplines(moving, X, 'init',</pre>
	<pre>transform_initialization);</pre>
35	<pre>difference.data = fixed.data - moving_tx.data;</pre>
36	<pre>subplot(2,3,5); moving_tx.show(); axis equal; axis off; title('</pre>
	Moving after reg')
37	<pre>subplot(2,3,6); difference.show(); axis equal; axis off; title(</pre>
	'Difference after reg.')

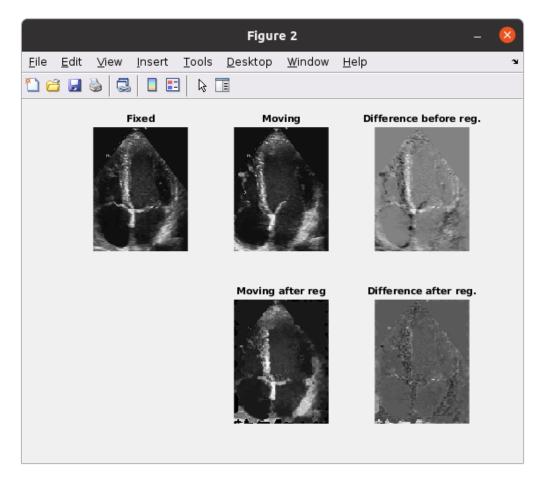


Figure 7: Result of non-rigid registration between two 2D ultrasound images of the heart, acquired at different phases of the cardiac cycle.

4.4. Other applications

Since the software was initially released in 2012, the toolbox has been intensively used by different researchers. Some examples of papers where this toolbox has been used for image preprocessing or visualization include: extending the viewer for the Matlab version of the flow profile extraction software presented in [9]; Radiotheraphy image analysis [10]; classification of cardiac disease [11]; manual registration of ultrasound images [12]; and many others.

5. Simple Image Viewer

The toolbox also includes an image viewer graphical user interface, named SimpleViewer_GUI. The main interface is illustrated in Fig. 8.

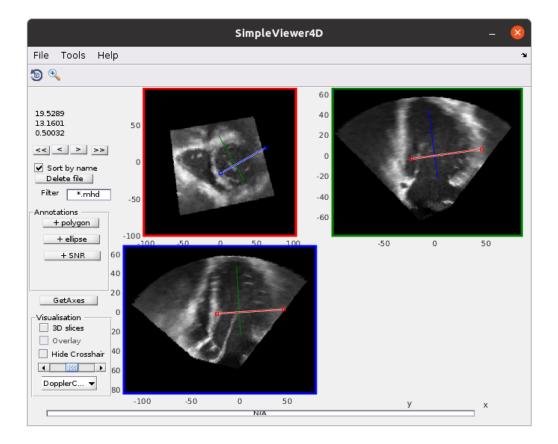


Figure 8: Main interface of the simple viewer showing a 3D ultrasound image of the heart.

The viewer allows to load 2D, 3D and 3D+t images, and select oblique slices by tilting the cross-hairs on each panel, as shown in the figure. Other functionalities include:

- Obtain the current slicing axes as a 4×4 matrix.
- Overlay two images with two different colormaps.
- Switch colormaps.
- Manual 2D segmentations (using polygon and ellipse tool).
- Manual rigid registration.

6. Conclusion

We have presented the Medical Imaging Processing Toolbox for Matlab. This toolbox provides flexibility and easy of use for everyday medical image analysis tasks and can be easily extended and integrated into other pipelines.

Acknowledgements

This work was partly supported by the Wellcome Trust UK (110179/Z/15/Z, 203905/Z/16/Z). A. Gomez also acknowledge financial support from the Department of Health via the National Institute for Health Research (NIHR) comprehensive Biomedical Research Centre award to Guy's and St Thomas' NHS Foundation Trust in partnership with King's College London and King's College Hospital NHS Foundation Trust.

References

References

- D. J. Kroon, Read Medical Data 3D, MATLAB Central File Exchange (2011).
- [2] K. Otsuka, Medical Image Segmentation using SegNet, MATLAB Central File Exchange (2020).
- [3] A. Liebgott, T. Küstner, H. Strohmeier, T. Hepp, P. Mangold, P. Martirosian, F. Bamberg, K. Nikolaou, B. Yang, S. Gatidis, Imfeatbox: a toolbox for extraction and analysis of medical image features, International journal of computer assisted radiology and surgery 13 (12) (2018) 1881–1893.
- [4] C. Brossard, O. Montigon, F. Boux, A. Delphin, T. Christen, E. L. Barbier, B. Lemasson, Mp3: Medical software for processing multiparametric images pipelines, Frontiers in Neuroinformatics 14 (2020) 53.

- [5] T. S. Yoo, M. J. Ackerman, W. E. Lorensen, W. Schroeder, V. Chalana, S. Aylward, D. Metaxas, R. Whitaker, Engineering and algorithm design for an image processing api: a technical report on itk-the insight toolkit, Studies in health technology and informatics (2002) 586–592.
- [6] M. A. Fischler, R. C. Bolles, Random sample consensus: a paradigm for model fitting with applications to image analysis and automated cartography, Communications of the ACM 24 (6) (1981) 381–395.
- [7] S. Klein, M. Staring, K. Murphy, M. A. Viergever, J. P. Pluim, Elastix: a toolbox for intensity-based medical image registration, IEEE transactions on medical imaging 29 (1) (2009) 196–205.
- [8] D. Rueckert, L. I. Sonoda, C. Hayes, D. L. Hill, M. O. Leach, D. J. Hawkes, Nonrigid registration using free-form deformations: application to breast mr images, IEEE transactions on medical imaging 18 (8) (1999) 712–721.
- [9] A. Gomez, M. Marčan, C. J. Arthurs, R. Wright, P. Youssefi, M. Jahangiri, C. A. Figueroa, Optimal b-spline mapping of flow imaging data for imposing patient-specific velocity profiles in computational hemodynamics, IEEE Transactions on Biomedical Engineering 66 (7) (2018) 1872–1883.
- [10] H. Niko, X. Dafina, K. Theodhor, T. Ervis, Calculation methods in radiotherapy using matlab, Journal International Environmental Application Science, ISSN (2014) 1307–0428.
- [11] M. P. Marciniak, Automatic classification of cardiac disease state from medical image data, Master's thesis (2017).
- [12] A. Gomez, K. Bhatia, S. Tharin, J. Housden, N. Toussaint, J. A. Schnabel, Fast registration of 3d fetal ultrasound images using learned corresponding salient points, in: Fetal, Infant and Ophthalmic Medical Image Analysis, Springer, 2017, pp. 33–41.