
DIPS-Plus: The Enhanced Database of Interacting Protein Structures for Interface Prediction

Alex Morehead*
University of Missouri
acmwhb@missouri.edu

Chen Chen
University of Missouri
chen.chen@missouri.edu

Ada Sedova
Oak Ridge National Laboratory
sedovaaa@ornl.gov

Jianlin Cheng
University of Missouri
chengji@missouri.edu

Abstract

How and where proteins interface with one another can ultimately impact the proteins' functions along with a range of other biological processes. As such, precise computational methods for protein interface prediction (PIP) come highly sought after as they could yield significant advances in drug discovery and design as well as protein function analysis. However, the traditional benchmark dataset for this task, Docking Benchmark 5 (DB5) [1], contains only a paltry 230 complexes for training, validating, and testing different machine learning algorithms. In this work, we expand on a dataset recently introduced for this task, the Database of Interacting Protein Structures (DIPS) [2, 3], to present DIPS-Plus, an enhanced, feature-rich dataset of 42,112 complexes for geometric deep learning of protein interfaces. The previous version of DIPS contains only the Cartesian coordinates and types of the atoms comprising a given protein complex, whereas DIPS-Plus now includes a plethora of new residue-level features including protrusion indices, half-sphere amino acid compositions, and new profile hidden Markov model (HMM)-based sequence features for each amino acid, giving researchers a large, well-curated feature bank for training protein interface prediction methods.

1 Introduction

Proteins are one of the fundamental drivers of work in living organisms. Their structures often reflect and directly influence their functions in molecular processes, so understanding the relationship between protein structure and protein function is of utmost importance to biologists and other life scientists. Here, we study the interaction between binary protein complexes, pairs of protein structures that bind together, to better understand how these coupled proteins will function *in vivo*. Predicting where two proteins will interface *in silico* has become an appealing method for measuring the interactions between proteins as a computational approach saves time, energy, and resources compared to traditional methods for experimentally measuring such interfaces [4].

A key motivation for determining protein-protein interface regions is to decrease the time required to discover new drugs and to advance the study of newly designed and engineered proteins [5]. Towards this end, we set out to curate a dataset large enough and with enough features to develop a computational model that can reliably predict the residues that will form the interface between two given proteins. In response to the exponential rate of progress being made in applying representation learning to biomedical data, we designed a dataset to accommodate the need for more detailed training data to solve this fundamental problem in structural biology.

*<https://amorehead.github.io/>

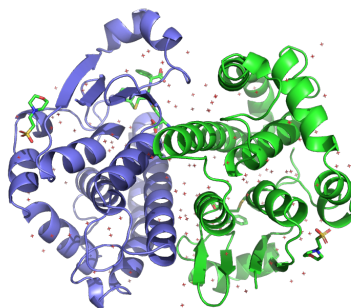


Figure 1: A PyMOL [6] visualization for a complex of interacting proteins (PDB ID: 10GS).

2 Related Work

Machine learning has been used heavily to study biomolecules such as DNA, RNA, proteins and drug-like bio-targets. From a classical perspective, a wide array of machine learning algorithms have been employed in this domain. [7, 8] used Bayesian networks to model gene expression data. [9] give an overview of HMMs being used for biological sequence analysis, such as in [10]. [11] have used decision trees to classify membrane proteins. In a similar vein, Liu *et al.* [12] used support vector machines (SVMs) to automate the recognition of protein folds.

In particular, machine learning methods have also been used extensively to help facilitate a biological understanding of protein-protein interfaces. [13] created a random forests model for interface region prediction using structure-based features. Chen *et al.* [14] trained SVMs solely on sequence-based information to predict interfacing residues. Using both sequence and structure-based information, [15] created an SVM for partner-specific interface prediction. Shortly after, [16] achieved even better results by adopting an XGBoost algorithm and classifying residue pairs structured as pairs of feature vectors.

Over the past several years, deep learning has established itself as an effective means of automatically learning useful feature representations from data. These learned feature representations can be used for a range of tasks including classification, regression, generative modeling, and even advanced tasks such as playing Go [17] or folding proteins *in silico* [18]. Out of all the promising domains of deep learning, one area of deep learning in particular, geometric deep learning, has arisen as a natural avenue for modeling scientific as well as other types of relational data [19], such as the protein complex shown in Figure 1.

Previously, geometric learning algorithms like convolutional neural networks (CNNs) and graph neural networks (GNNs) have been used to predict protein interfaces. Fout *et al.* [20] designed a siamese GNN architecture to learn weight-tied feature representations of residue pairs. This approach, in essence, processes subgraphs for each residue in each complex and aggregates node-level features locally using a nearest-neighbors approach. Since this partner-specific method derives its training dataset from DB5, it is ultimately data-limited. [2] represent interacting protein complexes by voxelizing each residue into a 3D grid and encoding in each grid entry the presence and type of the residue’s underlying atoms. This partner-specific encoding scheme captures structural features of interacting complexes, but it is not able to scale well due to its requiring a computationally-expensive spatial resolution of the residue voxels to achieve good results.

Continuing the trend of applying geometric learning to protein structures, [21] perform partner-independent interface region prediction with an attention-based GNN. This method learns to perform binary classification of the residues in both complex structures to identify regions where residues from both complexes are likely to interact with one another. However, because this approach predicts partner-independent interface regions, it is less likely to be useful in helping solve related tasks such as drug-protein interaction prediction and protein-protein docking [22]. To date, the best results obtained by any model for protein interface prediction come from [23] where high-order (i.e. sequential and coevolution-based) interactions between residues are learned and preserved throughout the network

Table 1: Residue features added in DIPS-Plus

New Features (1)	New Features (2)
Secondary Structure	Half-Sphere Amino Acid Composition
Relative Solvent Accessibility	Coordinate Number
Residue Depth	Profile HMM Features
Protrusion Index	Amide Normal Vector

in addition to structural features embedded in protein complexes. However, this approach is also data-limited as it uses the DB5 dataset and its predecessors to derive its training data. As such, it remains to be shown how much precision could be obtained with these and similar methods by training them on much more exhaustive datasets.

3 Dataset

3.1 Overview

As we have seen, two main encoding schemes have been proposed for protein interface prediction: modeling protein structures at the atomic level and modeling structures at the level of the residue. Both schemes, when adopted by a machine learning algorithm such as a neural network, require copious amounts of training examples to generalize past the training dataset. However, only one exceedingly-large dataset for protein interface prediction currently exists, DIPS, and it is designed solely for modeling structures at the atomic level. If one would like to model complexes at the residue level to gain additional features for training, DB5 is currently the only available dataset for training that meets this criterion. As such, one of the primary motivations for curating DIPS-Plus was to answer the following two questions: Why must one choose between having a large dataset and having enough features for their interface prediction models to generalize well? And is it possible for a single dataset to facilitate both encoding schemes while maintaining its size and feature-richness?

3.2 Construction

As a follow-up to the above two questions, we constructed DIPS-Plus, a feature-expanded version of DIPS accompanied, with permission from the original authors of DIPS, by a CC-BY 4.0 license for reproducibility and extensibility. DIPS-Plus, compared to DIPS, not only contains the original PDB features in DIPS such as amino acids’ Cartesian coordinates and their corresponding atoms’ element types but now also new residue-level features shown in Table 1 following a feature set similar to [15, 20, 23]. DIPS-Plus also replaces the residue sequence-conservation feature conventionally used for interface prediction with a novel set of emission and transition probabilities derived from HMM sequence profiles. Each HMM profile used to ascertain these residue-specific transition and emission probabilities are constructed by HHmake [24] using MSAs that were generated after two iterations by HHblits [24] and the Big Fantastic Database (BFD) (version: March 2019) of protein sequences [25]. Inspired by the work of Guo *et al.* [26], we chose to use HMM profiles to create sequence-based features in DIPS-Plus as they have been shown to contain more detailed information concerning the relative frequency of each amino acid in alignment with other protein sequences compared to what has traditionally been done to generate sequence-based features for interface prediction, directly sampling (i.e. windowing) MSAs to assess how conserved (i.e. buried) each residue is [24]. As is standard for interface prediction [15, 20, 23], we define the labels in DIPS-Plus to be the IDs of inter-protein residue pairs that, in the complex’s bound state, can be found within 6 Å of one another.

The original DIPS, being a carefully curated Protein Data Bank (PDB) subset, contains almost 200x more protein complexes than *frightfully-small* 230 complexes in DB5, what is still considered to be the gold-standard of protein-protein interaction datasets. DIPS-Plus consists of 42,112 complexes compared to the 42,826 complexes in DIPS after pruning out 714 large and evolutionarily-distinct complexes that are no longer available in the RCSB PDB (as of April 2021) or for which MSA generation was prohibitively time-consuming and computationally expensive. Since we perform minimal pruning to the complexes in DIPS to create DIPS-Plus, the number of complexes remaining in DIPS-Plus should still be sufficient to train a deep network for many iterations. Similar to [2], in the version of DB5 we update with new features from DIPS-Plus (i.e. DB5-Plus), we record the

file names of the complexes added between versions 4 and 5 of Docking Benchmark as the final test dataset for users' convenience. This results in users having 55 well-sampled, difficulty-diversified complexes on which to test their methods after training and with which to compare their results with those of other methods.

3.3 New Features

The features we chose to add to DIPS to create DIPS-Plus were selected carefully and intentionally based on our analysis of previously-successful interface prediction models. In this section, we describe of these new features in detail, including why we chose to include them, how we collected or generated them, and the strategy we took for normalizing the features and imputing missing feature values when they arose. It should be noted beforehand that these features were derived only for standard residues (e.g. amino acids) by filtering out hetero residues and waters from each PDB complex before calculating, for example, half-sphere amino acid compositions for each residue. This is, in part, to reduce the computational overhead of generating each residue's features. More importantly, however, we chose to ignore hetero residue features in DIPS-Plus to keep it consistent with DB5 as hetero residues and waters are not present in DB5.

3.3.1 Secondary Structure

Secondary structure (SS) is included in DIPS-Plus as a categorical variable that describes the type of local, three-dimensional structural segment in which a residue can be found. This feature has been shown to correlate with the presence or absence of protein-protein interfaces [27]. As such, we hypothesize adding it to protein interface prediction models could prove beneficial to model performance. We generate each residue's SS value using version 3.0.0 of the Database of Secondary Structure Assignments for Proteins (DSSP) [28], a well-known and frequently-used software package in the bioinformatics community. In particular, we use version 1.78 of BioPython [29] to call DSSP and have it retrieve for us DSSP's results for each residue. Each residue is assigned one of eight possible SS values, 'H', 'B', 'E', 'G', 'I', 'T', 'S', or '-'. The symbol '-' signifies the default value for unknown or missing SS values. Since this categorical feature is naturally one-hot encoded, it does not need to be normalized numerically.

3.3.2 Relative Solvent Accessibility

Each residue can behave differently when interacting with water. Solvent accessibility is a scalar feature that quantifies a residue's accessible surface area, the area of a residue's atoms that can be touched by water. Polar residues typically have larger accessible surface areas, while hydrophobic residues tend to have a smaller accessible surface area. It has been observed that hydrophobic residues tend to appear in protein interfaces more often than polar residues [30]. Including solvent accessibility as a residue-level feature, then, may provide models with additional information regarding how likely a residue is to interact with another inter-protein residue.

Relative solvent accessibility (RSA) is simple modification of solvent accessibility that normalizes each residue's solvent accessibility by an experimentally-determined normalization constant specific to each residue. These normalization constants are designed to help more closely correlate generated RSA values with their residues' true solvent accessibility [31]. Here, we again use BioPython and DSSP together, this time to generate each residue's RSA value. The RSA values returned from BioPython are pre-normalized according to the constants described in [31] and capped to an upper limit of 1.0. Missing RSA values are denoted by the NaN constant from NumPy [32], a popular scientific computing library for Python. Since we use NumPy's representation of NaN for missing values, users have available to them many convenient methods for imputing missing feature values for each feature type, and we provide the scripts to perform such feature imputation with our source code for DIPS-Plus.

3.3.3 Residue Depth

Residue depth (RD) is a scalar measure of the average distance of the atoms of a residue from its solvent accessible surface. Afsar *et al.* [15] have found that for interface prediction this feature is complementary to each residues' RSA value. Hence, this feature holds predictive value for determining interacting protein residues as it can be viewed as a description of how "buried" each

residue is. We use BioPython and version 2.6.1 of MSMS [33] to generate each residue’s depth, where the default quantity for a missing RD value is NaN. To make all RD values fall within the range [0, 1], we then perform structure-specific min-max normalization of each structure’s non-NaN RD values using scikit-learn [34]. That is, for each structure, we find its minimum and maximum RD values and normalize the structure’s RD values X using the expression

$$X = \frac{X - X.min(axis = 0)}{X.max(axis = 0) - X.min(axis = 0)} \times (max - min) + min$$

where $min = 0$ and $max = 1$.

3.3.4 Protrusion Index

A residue’s protrusion index (PI) is defined using its non-hydrogen atoms. It is a measure of the proportion of a 10 Å sphere centered around the residue’s non-hydrogen atoms that is not occupied by any atoms. By computing residues’ protrusion this way, we end up with a 1 x 6 feature vector that describes the following six properties of a residue’s protrusion: average and standard deviation of protrusion, minimum and maximum protrusion, and average and standard deviation of the protrusion of the residue’s non-hydrogen atoms facing its side chain. We used version 1.0 of PSAIA [35] to calculate the PIs for each structure’s residues collectively. That is, each structure has its residues’ PSAIA values packaged in a single .tbl file. Missing PIs default to a 1 x 6 vector consisting entirely of NaNs. We min-max normalize each PI entry columnwise to get six updated PI values, similar to how we normalize RD values in a structure-specific manner.

3.3.5 Half-Sphere Amino Acid Composition

Half-sphere amino acid compositions (HSAACs) are comprised of two 1 x 21 unit-normalized vectors concatenated together to get a single 1 x 42 feature vector for each residue. The first vector, termed the upward composition (UC), reflects the number of times a particular amino acid appears along the residue’s side chain, while the second, the downward composition (DC), describes the same measurement in the opposite direction. The 21st vector entry for each residue corresponds to the unknown or unmappable residue, '-'. Knowing the composition of amino acids along and away from a residue’s side chain, for all residues in a structure, is another feature that has been shown to offer crucial predictive value to machine learning models for interface prediction as these UC and DC vectors can vary widely for residues, suggesting another way of assessing residue accessibility [15, 23]. Missing HSAACs default to a 1 x 42 vector consisting entirely of NaNs. Furthermore, since both the UC and DC vectors for each residue are unit normalized before concatenating them together, after concatenation all columnwise HSAAC values for a structure still inclusively fall between 0 and 1.

3.3.6 Coordinate Number

A residue’s coordinate number (CN) is conveniently determined alongside the calculation of its HSAAC. It denotes how many other residues to which the given residue was found to be significant. Significance, in this context, is defined in the same way as [15]. That is, the significance score for two residues is defined as

$$s = e^{\frac{-d^2}{2 \times st^2}},$$

where d is the minimum distance between any of their atoms and st is a given significance threshold which, in our case, defaults to the constant $1e^{-3}$. Then, if two residues’ significance score falls above st , they are considered significant. As per our convention in DIPS-Plus, the default value for missing CNs is NaN, and we min-max normalize the CN for each structure’s residues.

3.3.7 Profile HMM Features

Sequence profile features can carry rich evolutionary information regarding how each residue in a structure is related all other residues. As such, to gather sequence profile features for DIPS-Plus, we derive profile HMMs for each structures’ residues using HH-suite3 by first generating MSAs using HHblits followed by taking the output of HHblits to create profile HMMs using HHmake. From these

Table 2: A comparison of datasets for PIP

Dataset	# Complexes	# Residues	# Residue Interactions	# Residue Features
DB5	230	121,943	21,091	0
DB5-Plus	230	121,943	21,091	8
DIPS	42,826	22,547,678	5,767,039	0
DIPS-Plus	42,112	22,127,737	5,677,450	8

profile HMMs, we can then calculate each structure’s residue-wise emission and transition profiles. A residue’s emission profile, represented as a 1×20 feature vector of probability values, illustrates how likely the residue is across its evolutionary history to emit one of the 20 possible amino acid symbols. Similarly, each residue’s transition profile, a 1×7 probability feature vector, depicts how likely the residue is to transition into one of the seven possible HMM states.

To derive each structure’s emission and transition probabilities, for a residue i and a standard amino acid k we extract the profile HMM entry (i, k) (i.e. the corresponding frequency) and convert the frequency into a probability value with the equation

$$p_{ik} = 2^{-\frac{Freq_{ik}}{1000}}.$$

After doing so, we get a 1×27 vector of probability values for each residue. Similar to other features in DIPS-Plus, missing emission and transition probabilities for a single residue default to a 1×27 vector comprised solely of NaNs. Moreover, since each residue is assigned a probability vector as its sequence features, we do not need to normalize these sequence feature vectors columnwise. It should be noted that we chose to leave out three profile HMM values for each residue. These last three omitted values represent the diversity of the alignment with respect to HHmake’s generation of profile HMMs from HHblits’ generated MSAs for a given structure. Since we do not see any predictive value in including these as additional residue features, we decided to leave them out of both DIPS-Plus and DB5-Plus.

3.3.8 Amide Normal Vector

Each residue’s amide plane has a normal vector (NV) that we can derive by taking the cross product of the difference between the residue’s alpha-carbon (CA) atom and beta-carbon (CB) atoms’ Cartesian coordinates and the difference between the coordinates of the residue’s CB atom and its nitrogen (N) atom. If users choose to encode the complexes in DIPS-Plus as pairs of graphs, these NVs can then be used to define rich edge features such as the angle between the amide plane NVs for two residues [20]. Similar to how we impute other missing feature vectors, the default value for an underivable NV (e.g. for Glycine residues which do not have a beta-carbon atom) is a 1×3 vector consisting of NaNs. Further, since these vectors represent residues’ amide plane NVs, we leave them unnormalized for, at users’ discretion, additional postprocessing (e.g. custom normalization) of these NVs.

3.4 Analysis

Table 2 gives a brief summary of the datasets available for protein interface prediction to date and the number of residue features available in them. In it, we can see that our version of DIPS, labeled DIPS-Plus, contains many more residue features than its original version at the expense of minimal pruning to the number of complexes available for training. As such, DIPS-Plus should enable machine learning algorithms to learn a detailed representation of protein structures, one more closely aligned with an atom-level view of each structure, using a plethora of features describing structural and sequence-based features of each residue. Further, by using *two orders of magnitude* more training data than would be possible with DB5, networks trained on DIPS-Plus have the opportunity to unearth intricate representations of protein complexes that may enrich our understanding of protein-protein interactions.

Complementary to Table 2, Table 3 shows how many features we were able to include for each residue in DB5-Plus and DIPS-Plus, respectively. Regarding DB5-Plus, we see that for relative solvent accessibility, residue depth, protrusion index, half-sphere amino acid composition, coordinate number, and profile HMM features, the majority of residues have valid (i.e. non-NaN) entries. That

Table 3: How many residue features were successfully generated for each PIP dataset

DB5-Plus	DIPS-Plus	DB5-Plus	DIPS-Plus
SS: 95,614	SS: 17,835,959	HSAAC: 121,943	HSAAC: 21,791,175
RSA: 121,591	RSA: 22,104,449	CN: 121,943	CN: 22,127,737
RD: 121,601	RD: 22,069,320	HMM: 121,943	HMM: 22,127,050
PI: 121,943	PI: 19,246,789	NV: 113,376	NV: 20,411,267

is, more than 99.7% of all residues in DB5-Plus have valid values for these features. In addition, secondary structures and amide plane normal vectors exist, respectively, for 78.4% and 93% of all residues. Concerning DIPS-Plus, relative solvent accessibilities, residue depths, half-sphere amino acid compositions, coordinate numbers, and profile HMM features exist for more than 98.5% of all residues. Also, we notably observe that valid secondary structures, protrusion indices, and normal vectors exist, respectively, for 80.6%, 87%, and 92.2% of all residues.

From the above analysis, we made a stand-alone observation. For both DB5-Plus and DIPS-Plus, residues’ secondary structure labels are available from DSSP for, on average, 80.6% of all residues in DIPS-Plus and DB5-Plus, collectively. This implies that there may be benefits to gain from varying how we collect secondary structures for each residue, possibly by using deep learning-driven alternatives to DSSP that predict the secondary structure to which a residue belongs, as in [26]. Complementing DSSP in this manner may yield even better secondary structure values for DIPS-Plus and DB5-Plus. We defer the exploration of this idea to future work.

4 Impact and Challenges

4.1 Graph Learning

Over the last several years, machine learning of graphs has surfaced as a powerful means of uncovering structural and relational features in graph-structured data [19]. To facilitate convenient processing of each DIPS-Plus and DB5-Plus protein complex to fit this paradigm, we include with DIPS-Plus’ source code the scripts necessary to convert each complex’s Pandas DataFrame into two stand-alone graph objects compatible with the Deep Graph Library (DGL) along with their corresponding residue-residue interaction matrix [36]. These graph objects can then be used for a variety of graph learning tasks such as node classification (e.g. for interface region prediction) or link prediction (e.g. for inter-protein residue-residue interaction prediction). Our graph conversion scripts can also be extended or adapted to facilitate alternative graph representation schemes for the complexes in DIPS-Plus and DB5-Plus. By default, each DGL graph contains for each node 86 features either one-hot encoded or extracted directly from the new feature set described above. Further, each graph edge contains two distinct features after being min-max normalized, the angle between the amide plane NV for a given source and destination node as well as the squared relative distance between the source and destination nodes.

4.2 Biases

DIPS-Plus contains only bound protein complexes. On the other hand, our new PIP dataset for testing machine learning models, DB5-Plus, consists of unbound complexes. As such, the conformational state of DIPS-Plus’ complexes can bias learning algorithms to learning protein structures in their final, post-deformation state since the structures in a complex often undergo deviations from their natural shape after being bound to their partner protein. However, Townshend *et al.* [2] show that networks well suited to the task of learning protein interfaces (i.e. those with suitable inductive biases for the problem domain) can generalize beyond the training dataset (i.e. DIPS) and perform well on unbound protein complexes (i.e. those in DB5). Hence, we leave it up to the designers of future PIP algorithms how best to make use of DIPS-Plus’ structural bias for complexes.

4.3 Associated Risks

DIPS-Plus is designed to be used for machine learning of biomolecular data. It contains only publicly-available information concerning biomolecular structures and their interactions. Consequently, all

data used to create DIPS-Plus does not contain any personally identifiable information or offensive content. As such, we do not foresee any negative societal impacts as a consequence of DIPS-Plus being made publicly available. Furthermore, future adaptations or enhancements of DIPS-Plus may benefit the machine learning community and, more broadly, the scientific community by providing meaningful refinements to an already-anonymized, transparent, and extensible dataset for geometric deep learning tasks in the life sciences.

5 Conclusion

We present DIPS-Plus, a comprehensive dataset for training and validating protein interface prediction models. Protein interface prediction is a novel, high-impact challenge in structural biology that can be vastly advanced with innovative algorithms and rich data sources. Several algorithms and even a large atomic dataset for protein interface prediction have previously been proposed, however, until DIPS-Plus no large-scale data source with rich residue features has been available. We expect the impact of DIPS-Plus to be significantly enhanced quality of models and community discussion in how best to design algorithmic solutions to this novel open challenge. Further, we anticipate that DIPS-Plus could be used as a template for creating new large-scale machine learning datasets tailored to the life sciences.

Acknowledgments and Disclosure of Funding

The project is partially supported by two NSF grants (DBI 1759934 and IIS 1763246), one NIH grant (GM093123), three DOE grants (DE-SC0020400, DE-AR0001213, and DE-SC0021303), and the computing allocation on the Andes compute cluster provided by Oak Ridge Leadership Computing Facility (Project ID: BIF132). In particular, this research used resources of the Oak Ridge Leadership Computing Facility at the Oak Ridge National Laboratory, which is supported by the Office of Science of the U.S. Department of Energy under Contract No. DE-AC05-00OR22725.

References

- [1] Thom Vreven et al. “Updates to the integrated protein–protein interaction benchmarks: docking benchmark version 5 and affinity benchmark version 2”. In: *Journal of molecular biology* 427.19 (2015), pp. 3031–3041.
- [2] Raphael Townshend et al. “End-to-End Learning on 3D Protein Structure for Interface Prediction”. In: *Advances in Neural Information Processing Systems*. Ed. by H. Wallach et al. Vol. 32. Curran Associates, Inc., 2019, pp. 15642–15651. URL: <https://proceedings.neurips.cc/paper/2019/file/6c7de1f27f7de61a6daddfffbbe05c058-Paper.pdf>.
- [3] Raphael J. L. Townshend et al. *ATOM3D: Tasks On Molecules in Three Dimensions*. 2020. arXiv: 2012.04035 [cs.LG].
- [4] James A Wells and Christopher L McClendon. “Reaching for high-hanging fruit in drug discovery at protein–protein interfaces”. In: *Nature* 450.7172 (2007), pp. 1001–1009.
- [5] Yoichi Murakami et al. “Network analysis and in silico prediction of protein–protein interactions with applications in drug discovery”. In: *Current opinion in structural biology* 44 (2017), pp. 134–142.
- [6] Schrödinger, LLC. “The PyMOL Molecular Graphics System, Version 1.8”. Nov. 2015.
- [7] Nir Friedman et al. “Using Bayesian networks to analyze expression data”. In: *Journal of computational biology* 7.3-4 (2000), pp. 601–620.
- [8] Benedict Anchang et al. “Modeling the temporal interplay of molecular signaling and gene expression by using dynamic nested effects models”. In: *Proceedings of the National Academy of Sciences* 106.16 (2009), pp. 6447–6452.
- [9] Anders Krogh et al. “Hidden Markov models in computational biology: Applications to protein modeling”. In: *Journal of molecular biology* 235.5 (1994), pp. 1501–1531.
- [10] Richard Durbin et al. *Biological sequence analysis: probabilistic models of proteins and nucleic acids*. Cambridge university press, 1998.
- [11] E Siva Sankari and D Manimegalai. “Predicting membrane protein types using various decision tree classifiers based on various modes of general PseAAC for imbalanced datasets”. In: *Journal of theoretical biology* 435 (2017), pp. 208–217.

- [12] Bin Liu, Chen-Chen Li, and Ke Yan. “DeepSVM-fold: protein fold recognition by combining support vector machines and pairwise sequence similarity scores generated by deep learning networks”. In: *Briefings in bioinformatics* 21.5 (2020), pp. 1733–1741.
- [13] Mile Šikić, Sanja Tomić, and Kristian Vlahoviček. “Prediction of protein–protein interaction sites in sequences and 3D structures by random forests”. In: *PLoS Comput Biol* 5.1 (2009), e1000278.
- [14] Peng Chen and Jinyan Li. “Sequence-based identification of interface residues by an integrative profile combining hydrophobic and evolutionary information”. In: *BMC bioinformatics* 11.1 (2010), pp. 1–15.
- [15] Fayyaz ul Amir Afsar Minhas, Brian J Geiss, and Asa Ben-Hur. “PAIRpred: Partner-specific prediction of interacting residues from sequence and structure”. In: *Proteins: Structure, Function, and Bioinformatics* 82.7 (2014), pp. 1142–1155.
- [16] Ruben Sanchez-Garcia et al. “BIPSPI: a method for the prediction of partner-specific protein–protein interfaces”. In: *Bioinformatics* 35.3 (July 2018), pp. 470–477. ISSN: 1367-4803. DOI: 10.1093/bioinformatics/bty647. eprint: <https://academic.oup.com/bioinformatics/article-pdf/35/3/470/27700304/bty647.pdf>. URL: <https://doi.org/10.1093/bioinformatics/bty647>.
- [17] David Silver et al. “Mastering the game of Go with deep neural networks and tree search”. In: *nature* 529.7587 (2016), pp. 484–489.
- [18] John Jumper. *High Accuracy Protein Structure Prediction Using Deep Learning*. Nov. 2020. URL: <https://deepmind.com/blog/article/alphafold-a-solution-to-a-50-year-old-grand-challenge-in-biology>.
- [19] Michael M. Bronstein et al. *Geometric Deep Learning: Grids, Groups, Graphs, Geodesics, and Gauges*. 2021. arXiv: 2104.13478 [cs.LG].
- [20] Alex Fout et al. “Protein Interface Prediction using Graph Convolutional Networks”. In: *Advances in Neural Information Processing Systems*. Ed. by I. Guyon et al. Vol. 30. Curran Associates, Inc., 2017, pp. 6530–6539. URL: <https://proceedings.neurips.cc/paper/2017/file/f507783927f2ec2737ba40afbd17efb5-Paper.pdf>.
- [21] Bowen Dai and Chris Bailey-Kellogg. “Protein Interaction Interface Region Prediction by Geometric Deep Learning”. In: *Bioinformatics* (Mar. 2021). btab154. ISSN: 1367-4803. DOI: 10.1093/bioinformatics/btab154. eprint: <https://academic.oup.com/bioinformatics/advance-article-pdf/doi/10.1093/bioinformatics/btab154/36516110/btab154.pdf>. URL: <https://doi.org/10.1093/bioinformatics/btab154>.
- [22] Shandar Ahmad and Kenji Mizuguchi. “Partner-aware prediction of interacting residues in protein-protein complexes from sequence data”. In: *PLoS one* 6.12 (2011), e29104.
- [23] Yi Liu et al. “Deep learning of high-order interactions for protein interface prediction”. In: *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*. 2020, pp. 679–687.
- [24] Martin Steinegger et al. “HH-suite3 for fast remote homology detection and deep protein annotation”. In: *BMC bioinformatics* 20.1 (2019), pp. 1–15.
- [25] Martin Steinegger, Milot Mirdita, and Johannes Söding. “Protein-level assembly increases protein sequence recovery from metagenomic samples manyfold”. In: *Nature methods* 16.7 (2019), pp. 603–606.
- [26] Zhiye Guo, Jie Hou, and Jianlin Cheng. “DNSS2: improved ab initio protein secondary structure prediction using advanced deep learning architectures”. In: *Proteins: Structure, Function, and Bioinformatics* 89.2 (2021), pp. 207–217.
- [27] Jaru Taechalertpaisarn et al. “Correlations between secondary structure-and protein–protein interface-mimicry: the interface mimicry hypothesis”. In: *Organic & biomolecular chemistry* 17.12 (2019), pp. 3267–3274.
- [28] Wouter G Touw et al. “A series of PDB-related databanks for everyday needs”. In: *Nucleic acids research* 43.D1 (2015), pp. D364–D368.
- [29] Peter JA Cock et al. “Biopython: freely available Python tools for computational molecular biology and bioinformatics”. In: *Bioinformatics* 25.11 (2009), pp. 1422–1423.
- [30] Changhui Yan et al. “Characterization of protein–protein interfaces”. In: *The protein journal* 27.1 (2008), pp. 59–70.

- [31] Burkhard Rost and Chris Sander. “Conservation and prediction of solvent accessibility in protein families”. In: *Proteins: Structure, Function, and Bioinformatics* 20.3 (1994), pp. 216–226.
- [32] Charles R. Harris et al. “Array programming with NumPy”. In: *Nature* 585.7825 (Sept. 2020), pp. 357–362. DOI: 10.1038/s41586-020-2649-2. URL: <https://doi.org/10.1038/s41586-020-2649-2>.
- [33] Michel F Sanner, Arthur J Olson, and Jean-Claude Spehner. “Reduced surface: an efficient way to compute molecular surfaces”. In: *Biopolymers* 38.3 (1996), pp. 305–320.
- [34] F. Pedregosa et al. “Scikit-learn: Machine Learning in Python”. In: *Journal of Machine Learning Research* 12 (2011), pp. 2825–2830.
- [35] Josip Mihel et al. “PSAIA—protein structure and interaction analyzer”. In: *BMC structural biology* 8.1 (2008), pp. 1–11.
- [36] Minjie Wang et al. “Deep Graph Library: Towards Efficient and Scalable Deep Learning on Graphs.” In: (2019).
- [37] Peter W Rose et al. “The RCSB Protein Data Bank: redesigned web site and web services”. In: *Nucleic acids research* 39.suppl_1 (2010), pp. D392–D401.
- [38] The pandas development team. *pandas-dev/pandas: Pandas*. Version latest. Feb. 2020. DOI: 10.5281/zenodo.3509134. URL: <https://doi.org/10.5281/zenodo.3509134>.
- [39] Michael M McKerns et al. “Building a framework for predictive science”. In: *arXiv preprint arXiv:1202.1056* (2012).

A Appendix

A.1 Datasheet

A.1.1 Motivation

For what purpose was the dataset created? Was there a specific task in mind? Was there a specific gap that needed to be filled? Please provide a description.

DIPS-Plus was created for training and validating deep learning models aimed at predicting protein interfaces and inter-protein interactions. Without DIPS-Plus, deep learning algorithms that encode protein structures at the level of a residue would be limited either to the scarce protein complexes available in the Docking Benchmark 5 (DB5) dataset [1] or to the original, feature-limited Database of Interacting Protein Structures (DIPS) dataset [2, 3] for training.

Who created this dataset (e.g., which team, research group) and on behalf of which entity (e.g., company, institution, organization)?

DIPS-Plus was created by Professor Jianlin Cheng’s Bioinformatics & Machine Learning (BML) lab at the University of Missouri. The original DIPS was created by Professor Ron Dror’s Computational Biology lab at Stanford University and was enhanced to create DIPS-Plus with the original authors’ permission.

Who funded the creation of the dataset? If there is an associated grant, please provide the name of the grantor and the grant name and number.

The project is partially supported by two NSF grants (DBI 1759934 and IIS 1763246), one NIH grant (GM093123), three DOE grants (DE-SC0020400, DE-AR0001213, and DE-SC0021303), and the computing allocation on the Andes compute cluster provided by Oak Ridge Leadership Computing Facility (Project ID: BIF132). In particular, this research used resources of the Oak Ridge Leadership Computing Facility at the Oak Ridge National Laboratory, which is supported by the Office of Science of the U.S. Department of Energy under Contract No. DE-AC05-00OR22725.

A.1.2 Composition

What do the instances that comprise the dataset represent (e.g., documents, photos, people, countries)?

Are there multiple types of instances (e.g., movies, users, and ratings; people and interactions between them; nodes and edges)? Please provide a description.

DIPS-Plus is comprised of binary protein complexes (i.e. bound ligand and receptor protein structures) extracted from the Protein Data Bank (PDB) of the Research Collaboratory for Structural Bioinformatics (RCSB) [37]. Both protein structures in the complex are differentiable in that they are stored in their own Pandas DataFrame objects [38]. Each structure’s DataFrame contains information concerning the atoms of each residue in the structure such as their Cartesian coordinates and element type. For the alpha-carbon atoms of each residue (typically the most representative atom of a residue), each structure’s DataFrame also contains residue-level features like a measure of amino acid protrusion and solvent accessibility.

How many instances are there in total (of each type, if appropriate)?

There are 42,826 binary protein complexes in the original DIPS and 42,112 binary protein complexes in DIPS-Plus after additional pruning.

Does the dataset contain all possible instances or is it a sample (not necessarily random) of instances from a larger set? If the dataset is a sample, then what is the larger set? Is the sample representative of the larger set (e.g., geographic coverage)? If so, please describe how this representativeness was validated/verified. If it is not representative of the larger set, please describe why not (e.g., to cover a more diverse range of instances, because instances were withheld or unavailable).

The dataset contains all possible instances of bound protein complexes obtainable from the RCSB PDB for which it is computationally reasonable to generate residue-level features. That is, if it takes more than 48 hours to generate an RCSB complex’s residue features, it is excluded from DIPS-Plus. This results in us excluding approximately 100 complexes after our pruning of RCSB complexes.

What data does each instance consist of? “Raw” data (e.g., unprocessed text or images) or features? In either case, please provide a description.

Each instance, consisting of a pair of Pandas DataFrames containing a series of alpha-carbon (CA) atoms and non-CA atoms with residue and atom-level features, respectively, is stored in a Python dill file for data compression and convenient file loading [39]. Each Pandas DataFrame contains a combination of numeric, categorical, and vector-like features describing each atom.

Is there a label or target associated with each instance? If so, please provide a description.

The dataset contains the labels of which pairs of CA atoms from opposite structures are within 6 Å of one another (i.e. positives), implying an interaction between the two residues, along with an equally-sized list of randomly-sampled non-interacting residue pairs (i.e. negatives). For example, if a complex in DIPS-Plus contains 100 interacting residue pairs (i.e. positive instances), there will also be 100 randomly-sampled non-interacting residue pairs included in the complex’s dill file for optional downsampling of the negative class during training.

Is any information missing from individual instances? If so, please provide a description, explaining why this information is missing (e.g., because it was unavailable). This does not include intentionally removed information, but might include, e.g., redacted text.

All eight of the residue-level features added in DIPS-Plus are missing values for at least one residue. This is because not all residues have, for example, DSSP-derivable secondary structure (SS) values [28] or profile hidden Markov models (HMMs) that are derivable by HH-suite3 [24], the software package we use to generate multiple sequence alignments (MSAs) and subsequent MSA-based features. A similar situation occurs for the six other residue features. That is, not all residues have derivable features for a specific feature column, governed either by our own feature parsers or by the external feature parsers we use in making DIPS-Plus. We denote missing feature values for all features as NumPy’s NaN constant with the exception of residues’ SS value in which case we use ‘-’ as the default missing feature value [32].

Are relationships between individual instances made explicit (e.g., users’ movie ratings, social network links)? If so, please describe how these relationships are made explicit. If so, please provide a description, explaining why this information is missing (e.g., because it was unavailable). This does not include intentionally removed information, but might include, e.g., redacted text.

The relationships between individual instances (i.e. protein complexes) are made explicit by the directory and file-naming convention we adopt for DIPS-Plus. Complexes’ DataFrame files are grouped into folders by shared second and third characters of their PDB identifier codes (e.g. 1x9e.pdb1_0.dill and 4x9e.pdb1_5.dill reside in the same directory x9/).

Are there recommended data splits (e.g., training, development/validation, testing)? If so, please provide a description of these splits, explaining the rationale behind them.

Since DIPS-Plus is relatively large (i.e. has more than 10,000 complexes), we provide a randomly-sampled 80%-20% dataset split for training and validation data, respectively, in the form of two text files: pairs-postprocessed-train.txt and pairs-postprocessed-val.txt. The file pairs-postprocessed.txt is a master list of all complex file names from which we derive pairs-postprocessed-train.txt and pairs-postprocessed-val.txt for cross-validation. It contains the file names of 42,112 complex DataFrames, filtered down from the original 42,112 complexes in DIPS-Plus to complexes having no more than 17,500 CA and non-CA atoms, to match the maximum possible number of atoms in DB5-Plus structures and to create an upper-bound on the computational complexity of learning algorithms trained on DIPS-Plus. However, we also include the scripts necessary to conveniently regenerate pairs-postprocessed.txt with a modified or removed atom-count filtering criterion and with different cross-validation ratios.

Are there any errors, sources of noise, or redundancies in the dataset? If so, please provide a description.

As mentioned in missing information point above, not all residues have software-derivable features for the feature set we have chosen for DIPS-Plus. In the case of missing features, we substitute NumPy’s NaN constant for the missing feature value with the exception of SS values which are replaced with the symbol ‘-’. We also provide with DIPS-Plus postprocessing scripts for users to perform imputation of missing feature values (e.g. replacing a column’s missing values with the

column's mean, median, minimum, or maximum value or with a constant such as zero) depending on the type of the missing feature (i.e. categorical or numeric).

Is the dataset self-contained, or does it link to or otherwise rely on external resources (e.g., websites, tweets, other datasets)? If it links to or relies on external resources, a) are there guarantees that they will exist, and remain constant, over time; b) are there official archival versions of the complete dataset (i.e., including the external resources as they existed at the time the dataset was created); c) are there any restrictions (e.g., licenses, fees) associated with any of the external resources that might apply to a future user? Please provide descriptions of all external resources and any restrictions associated with them, as well as links or other access points, as appropriate.

The dataset relies on feature generation using external tools such as DSSP and PSAIA. However, in our Zenodo data repository for DIPS-Plus, we provide either a copy of the external features generated using these tools or the exact version of the tool with which we generated features (e.g. version 3.0.0 of DSSP for generating SS values using version 1.78 of BioPython). The most time-consuming and computationally-expensive features to generate, profile HMMs and protrusion indices, are included in our Zenodo repository for users' convenience. We also provide the final, postprocessed version of each DIPS-Plus complex in our Zenodo data bank.

Does the dataset contain data that might be considered confidential (e.g., data that is protected by legal privilege or by doctor-patient confidentiality, data that includes the content of individuals non-public communications)? If so, please provide a description.

No, DIPS-Plus does not contain any confidential data. All data with which DIPS-Plus was created is publicly available.

Does the dataset contain data that, if viewed directly, might be offensive, insulting, threatening, or might otherwise cause anxiety? If so, please describe why.

No, DIPS-Plus does not contain data that, if viewed directly, might be offensive, insulting, threatening, or might otherwise cause anxiety.

Does the dataset relate to people? If not, you may skip the remaining questions in this section.

No, DIPS-Plus does not contain data that relates directly to individuals.

A.1.3 Collection Process

How was the data associated with each instance acquired? Was the data directly observable (e.g., raw text, movie ratings), reported by subjects (e.g., survey responses), or indirectly inferred/derived from other data (e.g., part-of-speech tags, model-based guesses for age or language)? If data was reported by subjects or indirectly inferred/derived from other data, was the data validated/verified? If so, please describe how.

The data associated with each instance was acquired from the RCSB's PDB repository for protein complexes (<https://ftp.wwpdb.org/pub/pdb/data/biounit/coordinates/divided/>), where each complex was screened, inspected, and analyzed by biomedical professionals and researchers before being deposited into the RCSB PDB.

What mechanisms or procedures were used to collect the data (e.g., hardware apparatus or sensor, manual human curation, software program, software API)? How were these mechanisms or procedures validated?

X-ray diffraction, nuclear magnetic resonance (NMR), and electron microscopy (EM) are the most common methods for collecting new protein complexes. These techniques are industry standard in biomolecular research.

Who was involved in the data collection process (e.g., students, crowdworkers, contractors) and how were they compensated (e.g., how much were crowdworkers paid)?

Unknown.

Over what timeframe was the data collected? Does this timeframe match the creation timeframe of the data associated with the instances (e.g., recent crawl of old news articles)? If not, please describe the timeframe in which the data associated with the instances was created.

The protein structures in the RCSB PDB have been collected iteratively over the last 50 years.

Were any ethical review processes conducted (e.g., by an institutional review board)? If so, please provide a description of these review processes, including the outcomes, as well as a link or other access point to any supporting documentation.

Unknown.

Does the dataset relate to people? If not, you may skip the remaining questions in this section.

No, DIPS-Plus does not contain data that relates directly to individuals.

A.1.4 Preprocessing, Cleaning, and Labeling

Was any preprocessing/cleaning/labeling of the data done (e.g., discretization or bucketing, tokenization, part-of-speech tagging, SIFT feature extraction, removal of instances, processing of missing values)? If so, please provide a description. If not, you may skip the remainder of the questions in this section.

All eight of the residue-level features added in DIPS-Plus are missing values for at least one residue. This is because not all residues have, for example, DSSP-derivable secondary structure (SS) values [28] or profile hidden Markov models (HMMs) that are derivable by HH-suite3 [24], the software package we use to generate multiple sequence alignments (MSAs) and subsequent MSA-based features. A similar situation occurs for the six other residue features. That is, not all residues have derivable features for a specific feature column, governed either by our own feature parsers or by the external feature parsers we use in making DIPS-Plus. We denote missing feature values for all features as NumPy's NaN constant with the exception of residues' SS value in which case we use '-' as the default missing feature value [32]. In the case of missing features, we substitute NumPy's NaN constant for the missing feature value. We also provide with DIPS-Plus postprocessing scripts for users to perform imputation of missing feature values (e.g. replacing a column's missing values with the column's mean, median, minimum, or maximum value or with a constant such as zero) depending on the type of the missing feature (i.e. categorical or numeric).

Was the "raw" data saved in addition to the preprocessed/cleaned/labeled data (e.g., to support unanticipated future uses)?

The version of each complex prior to any postprocessing we perform for DIPS-Plus complexes is saved separately in our Zenodo data repository. That is, each pruned pair from DIPS is stored in our data repository prior to the addition of DIPS-Plus features. The raw complexes from which DIPS complexes are derived can be retrieved from the RCSB PDB individually or in batch using FTP or similar file-transfer protocols (from <https://ftp.wwpdb.org/pub/pdb/data/biounit/coordinates/divided/>).

Is the software used to preprocess/clean/label the instances available? If so, please provide a link or other access point.

Our GitHub repository with source code and instructions for generating DIPS-Plus from scratch can be found at <https://github.com/amorehead/DIPS-Plus>.

A.1.5 Uses

Has the dataset been used for any tasks already? If so, please provide a description.

At the time of publication, DIPS-Plus has not yet been used for any tasks since it is a newly-released expansion of DIPS. However, we have internally been using DIPS-Plus for ongoing projects that will be published in the near future.

Is there a repository that links to any or all papers or systems that use the dataset? If so, please provide a link or other access point.

We will be linking to all papers or systems that use DIPS-Plus (as we find out about them) in our GitHub repository for DIPS-Plus (<https://github.com/amorehead/DIPS-Plus>).

What (other) tasks could the dataset be used for?

This dataset can be used with most deep learning algorithms, especially geometric learning algorithms, for studying protein structures, complexes, and their inter/intra-protein interactions at scale. This dataset can also be used to test the performance of new or existing geometric learning algorithms for node classification, link prediction, object recognition, or similar benchmarking tasks.

Is there anything about the composition of the dataset or the way it was collected and pre-processed/cleaned/labeled that might impact future uses? For example, is there anything that a future user might need to know to avoid uses that could result in unfair treatment of individuals or groups (e.g., stereotyping, quality of service issues) or other undesirable harms (e.g., financial harms, legal risks) If so, please provide a description. Is there anything a future user could do to mitigate these undesirable harms?

There is minimal risk for harm: the data DIPS-Plus was created from was already public.

Are there tasks for which the dataset should not be used? If so, please provide a description.

This data is collected solely in the proteomics domain, so systems trained on it may or may not generalize to other tasks in the life sciences.

A.1.6 Distribution

Will the dataset be distributed to third parties outside of the entity (e.g., company, institution, organization) on behalf of which the dataset was created? If so, please provide a description.

Yes, the dataset's source code is publicly available on the internet (<https://github.com/amorehead/DIPS-Plus>).

How will the dataset will be distributed (e.g., tarball on website, API, GitHub)? Does the dataset have a digital object identifier (DOI)?

The dataset is distributed on Zenodo (<https://zenodo.org/record/4815267>) with 10.5281/zenodo.4815267 as its DOI.

When will the dataset be distributed?

The dataset has been distributed on Zenodo as of June 7th, 2021.

Will the dataset be distributed under a copyright or other intellectual property (IP) license, and/or under applicable terms of use (ToU)? If so, please describe this license and/or ToU, and provide a link or other access point to, or otherwise reproduce, any relevant licensing terms or ToU, as well as any fees associated with these restrictions.

The dataset will be distributed under a CC-BY 4.0 license, and the code used to generate it will be distributed on GitHub under a GPL-3.0 license. We also request that if others use the dataset they cite the corresponding paper:

DIPS-Plus: The Enhanced Database of Interacting Protein Structures for Interface Prediction. Alex Morehead, Chen Chen, Ada Sedova, and Jianlin Cheng. arXiv, 2021.

Have any third parties imposed IP-based or other restrictions on the data associated with the instances? If so, please describe these restrictions, and provide a link or other access point to, or otherwise reproduce, any relevant licensing terms, as well as any fees associated with these restrictions.

No.

Do any export controls or other regulatory restrictions apply to the dataset or to individual instances? If so, please describe these restrictions, and provide a link or other access point to, or otherwise reproduce, any supporting documentation.

Unknown.

A.1.7 Maintenance

Who is supporting/hosting/maintaining the dataset?

Alex Morehead (<https://amorehead.github.io/>) is supporting the dataset.

How can the owner/curator/manager of the dataset be contacted (e.g., email address)?

Alex Morehead's email address is acmwhb@missouri.edu.

Is there an erratum? If so, please provide a link or other access point.

No. Since DIPS-Plus was released on June 7th, 2021, there have not been any errata discovered.

Will the dataset be updated (e.g., to correct labeling errors, add new instances, delete instances)? If so, please describe how often, by whom, and how updates will be communicated to users (e.g., mailing list, GitHub)?

This will be posted on the dataset's GitHub repository page.

If the dataset relates to people, are there applicable limits on the retention of the data associated with the instances (e.g., were individuals in question told that their data would be retained for a fixed period of time and then deleted)? If so, please describe these limits and explain how they will be enforced.

N/A.

If the dataset relates to people, are there applicable limits on the retention of the data associated with the instances (e.g., were individuals in question told that their data would be retained for a fixed period of time and then deleted)? If so, please describe these limits and explain how they will be enforced.

If and when the dataset is updated after its initial release, we will keep older versions of it around for consistency.

If others want to extend/augment/build on/contribute to the dataset, is there a mechanism for them to do so? If so, please provide a description. Will these contributions be validated/verified? If so, please describe how. If not, why not? Is there a process for communicating/distributing these contributions to other users? If so, please provide a description.

Others may do so and should contact the original authors about incorporating fixes/extensions.

A.2 Hardware and Software Used

The Oak Ridge Leadership Facility (OLCF) at the Oak Ridge National Laboratory (ORNL) is an open science computing facility that supports HPC research. The OLCF houses the Andes compute cluster. Andes is a (704)-node commodity-type Linux® cluster. Andes provides a conduit for large-scale scientific discovery via pre- and post-processing of simulation data. Each of Andes's 704 nodes contain two 16-core 3.0 GHz AMD EPYC processors and 256GB of main memory. Andes also has nine large memory GPU nodes. These nodes each have 1TB of main memory and two NVIDIA K80 GPUs with two 14-core 2.30 GHz Intel Xeon processors with HT Technology. Andes is connected to the OLCF's high performance GPFS® filesystem, Alpine. We compiled both DIPS-Plus and DB5-Plus with ORNL's Andes compute cluster, using a single compute node for inherently-sequential operations in our data postprocessing pipeline and 16 compute nodes for concurrent operations. In addition, we used version 3.8.5 of Python as well as Anaconda to manage our Python dependencies. A more in-depth description of the software environment we use for constructing DIPS-Plus can be found in our GitHub repository linked above.