

DebiasedDTA: Model Debiasing to Boost Drug - Target Affinity Prediction

Rıza Özçelik¹, Alperen Bağ^{1,+}, Berk Atıl^{1,+}, Arzucan Özgür^{1,*}, Elif Ozkirimli^{2,*}

¹Department of Computer Engineering, Boğaziçi University, İstanbul, Turkey and

²Data and Analytics Chapter, Pharma International Informatics, F. Hoffmann-La Roche AG, Switzerland

⁺These authors contributed equally to the work.

^{*}To whom correspondence should be addressed.

Abstract

Motivation: Computational models that accurately identify high-affinity protein - compound pairs can accelerate drug discovery pipelines. These models aim to learn binding mechanics through drug - target interaction datasets and use the learned knowledge while predicting the affinity of any protein-compound pair. However, the datasets they rely on bear misleading patterns that bias models towards memorizing dataset-specific biomolecule properties, instead of learning binding mechanics. Insufficiently focused on the binding mechanics, the resulting models struggle while predicting the drug - target affinities (DTA), especially between de novo biomolecules. Here we present DebiasedDTA, the first model debiasing approach that avoids dataset biases in order to boost the affinity prediction on novel biomolecules. DebiasedDTA uses ensemble learning and weight sample adaptation for bias identification and avoidance and is applicable to almost all existing DTA prediction models.

Results: The results show that DebiasedDTA can boost models while predicting the interactions between novel biomolecules. Known biomolecules also benefit from the performance boost, though the boost is amplified as the test biomolecules become more dissimilar to the training set. The experiments also show that DebiasedDTA can augment the DTA prediction models of different input and model structures and can avoid biases of different sources.

Availability: The source code, the models, and the data sets are available at <https://github.com/bountabi/debiaseddta-reproduce>

Contact: arzucan.ozgur@boun.edu.tr, elif.ozkirimli@roche.com

1 Introduction

Identifying high affinity protein - compound pairs is the first step towards drug discovery. However, the number of possible protein-compound combinations (~ 560 K proteins in UniProt [Apweiler et al.,

2004] and ~ 2.1 M compounds in ChEMBL [Davies et al., 2015]) makes this task a “needle in the haystack” problem and calls for accelerated and accurate approaches.

Computational drug - target affinity (DTA) prediction models aim to rapidly identify high-affinity protein - compound pairs in the combination space via learning binding mechanics through large interaction datasets. On the other hand, even the widely used datasets such as DUD-E [Mysinger et al., 2012] and PDBBind [Wang et al., 2004], suffer from misleading patterns, or dataset biases, like clear differences in the hydrogen bond donor count and polar surface area of actives and decoys [Chaput et al., 2016, Wallach and Heifets, 2018, Sieg et al., 2019, Yang et al., 2020, Scantlebury et al., 2020]. These differences are so discriminatory within the datasets that the DTA models can learn to use only these patterns in order to optimize their objective function over the training set, instead of learning protein-compound binding mechanics. Because of the failure in binding mechanics learning, the resulting models can achieve high performance only on the biomolecules with the same and/or similar biochemical properties, and fail while predicting the affinities between dissimilar biomolecules [Chen et al., 2019, Tran-Nguyen et al., 2020, Yang et al., 2020, Özçelik et al., 2021]. The performance drop on dissimilar biomolecules poses a major problem in drug discovery pipelines, as it challenges predicting the binding affinity between a novel drug candidate and protein targets, and vice versa.

Recent studies to boost DTA model performance on novel biomolecules have proposed to design train/validation/test splits with dissimilar proteins and compounds, so that memorizing the training set patterns is less rewarding on validation set and the the test split can better demonstrate the generalizability of the models [Wallach and Heifets, 2018, Tran-Nguyen et al., 2020]. Clustering-based approaches and genetic algorithms were proposed to maximize the split dissimilarity in drug - target interaction prediction task, where the goal is to label chemicals as active or inactive, [Rohrer and Baumann, 2009, Wallach and Heifets, 2018], but counter the aim, they introduced a risk of degrading model generalizability and could not estimate distant test set performance accurately [Sundar and Colwell, 2019]. Overall, these “dataset-oriented” approaches that arrange dataset splits in order to obtain more generalizable prediction models could not present the models of the desired generalizability. Furthermore, their use in the affinity prediction task is additionally challenging, as they are designed for drug-target interaction datasets with binary labels.

An alternative is to use “model-oriented” approaches, approaches which modify model training instead of dataset splits, that are applicable to affinity prediction task as well. A model-oriented approach is ligand pose augmentation, which was used in structure-based virtual screening [Scantlebury et al., 2020]. Unlike dataset-oriented methods, ligand pose augmentation can easily be adapted to boost the generalizability of affinity prediction models. However, the approach uses the 3D poses of the protein-ligand complexes, limiting its applicability only to a small subset of protein-ligand pairs, the pairs with known 3D structure.

Here, we propose DebiasedDTA, a model-oriented approach to boost the generalizability of drug-target affinity prediction models. DebiasedDTA uses SMILES strings of chemicals and amino-acid sequences of proteins, which are available for all biomolecules, and can be used for all protein-compound pairs. DebiasedDTA is inspired by the debiasing studies in natural language inference (NLI), where the task is to classify sentence pairs as neutral, contradicting, or entailing. The NLI models also struggle to generalize to distant test sets due to misleading dataset biases [Gururangan et al., 2018, Poliak et al., 2018, Tsuchiya, 2018, McCoy et al., 2019] and several model-oriented approaches are proposed to face the challenge [He et al., 2019, Clark et al., 2019, Sakaguchi et al., 2020, Clark et al., 2020, Sanh et al., 2020, Utama et al., 2020a,b]. Common to these models is the use of weak and strong learners in an ensemble in order to identify and avoid dataset biases.

DebiasedDTA also ensembles a weak and a strong learner to improve model generalizability, where the weak learner quantifies training set biases for the strong learner. The strong learner uses the output of the weak learner in order to adapt the training sample weights during training and boosts generalizability to novel biomolecules. We propose two weight adaptation strategies that are suitable for debiasing any optimization-based DTA model on any dataset.

We evaluate DebiasedDTA with two different weak learners to assess its performance for different bias sources and with three sequence-based strong learners to observe its generalizability to different DTA prediction models. We run experiments on two datasets, each of which contains four test sets. The proposed approach is robust to different bias sources and can boost prediction performance of the DTA models using different drug - target representations. Noteworthy, the boost is not observed only for the novel biomolecules but also for the known ones.

To the best of our knowledge, DebiasedDTA is the first model debiasing approach that boosts the generalizability of drug-target affinity prediction models. Using the always available sequence-based representations of biomolecules and a widely-applicable training strategy, DebiasedDTA can be adopted to boost the prediction performance of almost any DTA model.

2 Materials and Methods

2.1 Background

2.1.1 Byte Pair Encoding (BPE)

Here we experiment with some models that views ligands and proteins as documents coming from chemical and protein languages, respectively, and processes the biomolecules as word sequences. In these languages, though, the words are hidden and need to be identified. We use Byte Pair Encoding (BPE) for hidden word identification, which is an algorithm that is first proposed for compression [Gage, 1994]. BPE is widely-adopted by natural language processing (NLP) studies to identify the vocabularies of different languages with no prior information [Sennrich et al., 2015, Nguyen and Chiang, 2017, Heinzerling and Strube, 2018, Devlin et al., 2019, Liu et al., 2021], and more recently, it is shown to be effective to process biomolecule sequences, too [Li and Fourches, 2021, Asgari et al., 2019, Kawano et al., 2019].

BPE approach postulates that frequent subsequences in a large corpus are meaningful language units. As such, given a corpus, BPE first extracts the uni-character vocabulary of the corpus and then computes the frequencies of all two-character subsequences. The algorithm expands its vocabulary with the most frequent subsequence and restarts counting by considering all elements in the vocabulary as a single character. The counting and vocabulary expansion continue until the target vocabulary size (V) is reached. When the algorithm terminates, the vocabulary contains the most frequent V subsequences, which are the words of the language.

We use BPE to identify biomolecule words to use in some weak and strong learners. We run the algorithm on ~ 1.9 M canonical SMILES strings downloaded from ChEMBL database (vChEMBL27) [Gaulton et al., 2016] to find the chemical words and on ~ 560 K amino-acid sequences of SwissProt [Poux et al., 2017] to find the protein words. We construct 8K, 16K, and 32K vocabularies for both languages and share these vocabularies publicly for future studies.

2.1.2 Biomolecule Representation

One Hot Encoding One hot encoding uses vectors of dimension $L + 1$, and $P + 1$ to represent ligands and proteins, respectively, where L is the number of unique ligands and P is the number of unique proteins in the training set. In this strategy, each ligand and protein has a unique vector whose all elements are zero but one, which is 1. Finally, novel ligands are represented with a vector whose $L + 1^{st}$ dimension is set to 1 only, resulting in the same vector representation for all novel ligands. Similar follows for the novel protein representation.

Bag-of-Words (BoW) Bag-of-Words (BoW) representation is a frequently used strategy in NLP to vectorize a document solely based on its words. BoW strategy interprets the documents as an unordered collection of words and counts the occurrence of each word in the document for vectorization. A vector with the dimension of vocabulary size (V) is produced for each document, such that each dimension is associated with a word and its value is set based on the word’s count in the document.

Here, we use BoW to vectorize ligands and proteins based on their SMILES strings and amino-acid sequences, respectively. We treat compounds and proteins as documents and identify their words with BPE. We then represent a biomolecule with a vector \vec{v} such that $\vec{v}_i = f(w_i), \forall i \in \{1, 2, \dots, V\}$, where \vec{v}_i is the i^{th} element of the vector, $f(w_i)$ is the normalized frequency of i^{th} word of the vocabulary in the document, and V is the vocabulary size. Normalized frequency of a word is computed by dividing its count in the document by the number of words the document contained.

Pretrained Language Model Embeddings Language models (LMs) in natural language are trained to predict the next word of a sequence, given the previous words. The LMs randomly initialize vectors for each word and update them during training to maximize accuracy in the next word prediction task. Thus, the final word vectors, called pre-trained word embeddings, encompass semantic information and can be valuable in other tasks, too. In fact, models that utilize the pre-trained word embeddings often dominate the leaderboards in NLP [Sun et al., 2019, Yamada et al., 2020, Jiang et al., 2020].

The high performance of LMs also triggered studies on biomolecule language models [Wang et al., 2019, Fabian et al., 2020, Elnaggar et al., 2020, Vig et al., 2020]. The protein LMs were able to learn biologically relevant information such as amino-acid locations in 3D [Vig et al., 2020] and SMILES language models boosted cheminformatics models in various tasks [Wang et al., 2019].

Here, we use ChemBERTa [Chithrananda et al., 2020], an LM trained on SMILES strings, and ProtBERT [Elnaggar et al., 2020], an LM for protein sequences, to vectorize compounds and proteins. We input SMILES strings to ChemBERTa and protein sequences to ProtBERT and the models output vectors for the biomolecules based on the sequences. We use the LM output to represent each biomolecule.

2.2 DebiasedDTA

Here we describe DebiasedDTA, our model debiasing approach to boost drug-target affinity prediction on novel biomolecules. DebiasedDTA is motivated by the studies that show how dataset biases can hinder model generalizability and aims to avoid these biases to boost prediction performance. DebiasedDTA leverages a “weak learner”, that is an affinity prediction model designed only to quantify dataset biases. The weak learners output a number that is called “inverse bias coefficient”

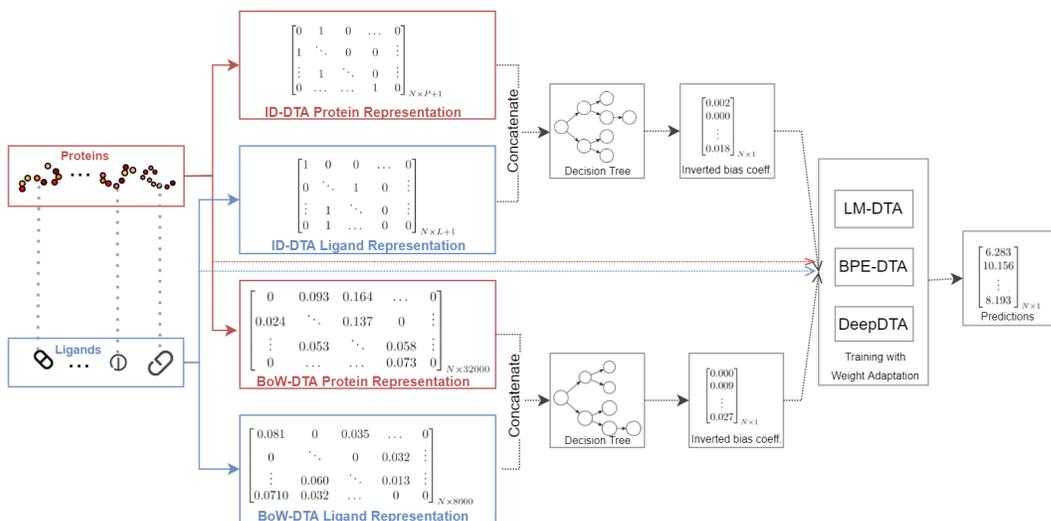


Figure 1: DebiasedDTA. Given a training set of protein - ligand pairs, DebiasedDTA first quantifies the dataset biases with weak learners. Here we experiment with two weak learners, BoW-DTA and ID-DTA, to observe the effect of different bias sources in the datasets. The quantified datasets biases are called as inverse bias coefficients and fed to strong learners. The strong learners leverage the coefficient to avoid the dataset biases by sample weight adaptation and boost their predictions, especially on novel biomolecules. We use three strong learners, DeepDTA, BPE-DTA, and LM-DTA, in order to observe how debiasing works for models of different structure.

for each training set interaction. These coefficients are used to adapt the training sample weights during the training of the “strong learner”, that is the drug-target affinity prediction model being debiased. The debiased strong learner is then used standalone to predict the affinity between any protein - compound pair. Figure 1 illustrates the weak and strong learners in DebiasedDTA.

2.2.1 The Weak Learner

We design two weak learners to identify different bias sources: an identifier-based model (ID-DTA) and a biomolecule word-based model (BoW-DTA). ID-DTA is motivated by the fact that mere use of biomolecule identifiers can produce high-achieving models for similar test sets [Özçelik et al., 2021], and thus, can be a strong bias source. ID-DTA featurizes the interactions by one-hot encoding the protein and ligand identifiers, and then concatenates their vectors to represent an interaction. BoW-DTA, on the other hand, bases on NLI studies in which the use of certain words in a sentence produced a strong bias with its semantic label. [Gururangan et al., 2018, Poliak et al., 2018]. Here, we propose the existence of a similar bias and create BoW-DTA. The proteins and ligands are represented with bag-of-words in BoW-DTA (words are obtained through BPE), and the interactions are represented with their concatenation. Both ID-DTA and BoW-DTA use decision tree regression for prediction as it is a simple yet effective model to learn apparent patterns.

We use 5-fold cross-validation to quantify dataset biases with the weak learner. First, we randomly divide the training set into five folds and construct five different mini-training and mini-

validation sets. We train the weak learner on each mini-training set and compute the squared errors of its predictions on the corresponding mini-validation set. One run of cross-validation yields one squared-error measurement per protein - compound pair as each pair is placed in the mini-validation set exactly once. In order to better estimate the performance on each sample, we run the 5-fold cross-validation 10 times and obtain 10 error measurements per sample. We compute the median of the 10 squared errors and name it as the "inverse bias coefficient" of a compound - target pair. If the inverse bias coefficient of a pair is low, then the pair is easily predictable by merely exploiting the dataset biases. So, it is a biasing sample for the affinity prediction models. Otherwise, the pair has a high inverse bias coefficient, and thus, it is a challenging pair to predict based on dataset biases, or a less model-biasing sample. The strong learner leverages the quantified biases during its training to boost its prediction performance.

2.2.2 The Strong Learner

In DebiasedDTA, the strong learner uses the inverse bias coefficients calculated by the weak learner to boost its predictions and can be any optimization-based DTA model we would like to debias. The inverse bias coefficients are normalized to sum to 1 over the training samples and then used to determine the sample weights at each epoch. We experiment with two weight adaptation strategies to determine the training sample weights: bias decay (BD) and bias growth (BG).

BD initializes the training sample weights to 1 and updates them at each epoch such that the weight of each training sample converges to its inverse bias coefficient at the last epoch. When trained with BD strategy, the strong learner attributes more importance to less-biased samples as the learning continues, that is the bias in the model decays over time. BD strategy is formulated as follows:

$$\vec{w}_e = (1 - \frac{e}{E}) + \vec{b} \times \frac{e}{E} \quad (1)$$

where w_e is the vector of training sample weights at epoch e , E is the number of training epochs, and b is the inverse bias coefficients vector. Here, e/E increases as the training continues, and thus the impact of \vec{b} on the sample weights. This ensures that the importance of less-biased samples (or samples with high inverse bias coefficients) is increased towards the end of training.

BG adopts the inverse strategy of BD and pushes the strong learner to pay more attention to less-biasing samples during the initial epochs. In BG, the sample weights are initialized to inverse bias coefficients and updated to reach to 1 at the last epoch. The training sample weights are computed with the following equation at each epoch:

$$\vec{w}_e = \frac{e}{E} + (\vec{b} - \frac{e}{E} \times \vec{b}) \quad (2)$$

In this equation, $\vec{w}_e = \vec{b}$ initially but the contribution of \vec{b} to the weights decreases over epochs, suggesting that the model attributes more attention to less-biasing samples in the early epochs.

We implement three drug - target affinity prediction models to observe the performance of DebiasedDTA with different strong learners. The first one is DeepDTA [Öztürk et al., 2018], an influential affinity prediction model that uses SMILES strings of compounds and amino-acid sequences of proteins to represent biomolecules. DeepDTA applies three layers of character-level convolutions over input sequences and uses a three-layered fully-connected neural network for prediction. Here, we slightly modify DeepDTA and treat chemical groups in the SMILES strings

([OH], [COH], [COOH] etc.) as a single token, while original DeepDTA processes these groups as character-by-character, too.

In the second model, we alter DeepDTA to use biomolecule word-level convolutions where the words are identified via BPE algorithm and name the resulting model as BPE-DTA. We experiment with BPE vocabulary sizes of 8K, 16K, and 32K for SMILES and protein sequences and pick the combination of 8K-32K as it yields high scores across datasets we used in our previous studies [Özçelik et al., 2021]. We report the results for all vocabulary combinations in our GitHub repository for completeness.

Third, we utilize ChemBERTa [Chithrananda et al., 2020] and ProtBERT [Elnaggar et al., 2020] to create another drug-target affinity prediction model, LM-DTA. LM-DTA vectorizes SMILES and amino-acid sequences via the language models and concatenates their vectors to represent the interaction. Finally, LM-DTA uses a two-layered fully connected neural network for prediction.

2.3 Experimental Setup

2.3.1 Datasets

We test DebiasedDTA on BDB [Özçelik et al., 2021] and KIBA [Tang et al., 2014] datasets. KIBA contains 118K affinity measurements of 229 kinase family proteins and 2111 ligands, such that the affinities are reported in terms of KIBA score. KIBA score combines different measurement sources such as K_d , IC_{50} , and K_i , and ranges from 1.3 to 17.2 in the dataset, the latter denoting a higher binding affinity.

BDB is a dataset filtered from BindingDB database [Liu et al., 2007] and comprises 31K binding affinity measurements of 490 proteins and 924 ligands. The binding affinities are recorded in terms of pK_d (Equation 3), which correlates positively with the binding strength and changes between 1.6 and 13.3 in the dataset. Protein diversity is higher in BDB than KIBA as it contains fewer interactions but more proteins from different families. More information about the datasets is available in the GitHub repository.

$$pK_d = -\log_{10}\left(\frac{K_d}{1e9}\right) \quad (3)$$

2.3.2 Experimental Settings

We create five distinct train - test setups per dataset to evaluate the models. To create different setups, we clustered the proteins and ligands in the datasets and randomly divided the clusters into two as “warm” and “cold” clusters. We interpret the warm clusters as the already known biomolecules and the cold clusters as novel biomolecules. The dissimilarity of known and novel biomolecules is enforced by the clustering-based split.

In order to produce training and test interactions from warm and cold biomolecule clusters, we first filter interactions between proteins and ligands in the warm clusters. We use these interactions mainly as the training sets, but also separate small subsets as “validation” and “warm test” sets. The validation fold is used to tune model hyper-parameters, whereas the warm test set is to evaluate models on the interactions between known biomolecules.

We create two more test sets called “cold ligand” and “cold protein”, where the cold ligand test set consists of the interactions between ligands in the cold cluster and proteins in the warm cluster. This test set is used to measure model performance in the scenarios in which new drugs are searched to target existing proteins. The cold protein test set is created similarly and used

to evaluate models in the scenarios where existing drugs are searched to target a novel protein. Finally, we create a “cold both” test set that is the set of interactions between the proteins and ligands in the cold clusters. This is the most challenging test set of every setup, as both the protein and the ligand do not reside in the training set.

In order to tune the hyper-parameters, we train models on the training set of each setup and measure the performance on the corresponding validation set. We pick the hyper-parameter combination that scores the lowest average mean squared error on validation set to predict the test set interactions.

2.3.3 Evaluation Metrics

We evaluate DebiasedDTA models with two regression metrics, namely concordance index (CI) and R^2 . We use CI in order to evaluate the consistency of predicted binding affinity ranking with the expected one. Evaluating a ranking, CI is independent of the output range and allows comparisons across datasets. CI is expected to be around 0.5 for random predictions and reaches 1 when two rankings match exactly. We compute CI via Equation 4 [Gönen and Heller, 2005] where b_x is the prediction for the larger affinity pair δ_x , b_y is the prediction for the smaller affinity pair δ_y , Z is a normalization constant, $h(m)$ is a step function that is 0 when $m < 0$, 0.5 when $m = 0$, and 1, otherwise.

$$CI = \frac{1}{Z} \sum_{\delta_x > \delta_y} h(b_x - b_y) \quad (4)$$

We also calculate R^2 , a scale-invariant regression metric that measures how much of the actual variance in the gold labels is explained by the predictions. We use the `scikit-learn` [Pedregosa et al., 2011] implementation to compute R^2 .

3 Results

3.1 DebiasedDTA Boosts Drug-Target Affinity Prediction

We debias DeepDTA, BPE-DTA, and LM-DTA models with BoW-DTA and ID-DTA on BDB and KIBA datasets. We experiment with BD and BG for all strong - weak learner combinations and report CI and R^2 scores on each test set in Table 1.

The effect of weak learners As the first component of debiasing, we investigate the effect of the weak learner selection on the affinity prediction performance by comparing BoW-DTA (BG) models with ID-DTA (BG), and BoW-DTA (BD) with ID-DTA (BD). For comparison, we count the times a weak learner outperformed the other in terms of both metrics on a test set, totalling up to 24 comparisons per dataset. For BDB, models debiased with BoW-DTA yield higher scores in 9 configurations and ID-DTA based models outperform BoW-DTA 5 times. 10 out of 24 times, BoW-DTA achieved higher CI, but lower R^2 than ID-DTA, or vice versa. We call these 10 cases as “ties” since no model could outperform the other in terms of both metrics.

On KIBA, ID-DTA achieved higher scores than BoW-DTA in 13 cases whereas BoW-DTA outperformed ID-DTA 7 times and two models are tied 4 out of 24 times. The higher performance of ID-DTA on KIBA compared to BDB (13 wins vs. 5 wins) suggests that biomolecule identities

Table 1: The effect of different debiasing strategies on the model performance per interaction type. We train each model 5 times using different folds of the training set and compute mean test set scores of the models. We report mean and standard deviation (in parantheses) of CI and R² metrics in the table. Mean squared errors and root mean squared errors, which are in parallel with R², are also available in the project repository.

		Warm		Cold Ligand		Cold Protein		Cold Both		
Model		CI	R ²	CI	R ²	CI	R ²	CI	R ²	
BDB	DeepDTA	No Debiasing	0.888 (0.009)	0.781 (0.028)	0.687 (0.096)	0.039 (0.243)	0.759 (0.006)	0.315 (0.049)	0.554 (0.047)	-0.154 (0.164)
		BoW-DTA (BD)	0.899 (0.004)	0.799 (0.013)	0.698 (0.037)	0.043 (0.108)	0.777 (0.014)	0.351 (0.090)	0.568 (0.044)	-0.092 (0.132)
		BoW-DTA (BG)	0.890 (0.011)	0.785 (0.011)	0.715 (0.036)	-0.003 (0.116)	0.781 (0.011)	0.357 (0.051)	0.611 (0.025)	-0.157 (0.167)
		ID-DTA (BD)	0.898 (0.005)	0.804 (0.011)	0.693 (0.058)	0.026 (0.109)	0.771 (0.007)	0.339 (0.067)	0.585 (0.040)	-0.128 (0.056)
	ID-DTA (BG)	0.886 (0.010)	0.785 (0.008)	0.685 (0.079)	-0.176 (0.214)	0.774 (0.025)	0.350 (0.079)	0.579 (0.050)	-0.345 (0.244)	
	BPE-DTA	No Debiasing	0.883 (0.006)	0.774 (0.013)	0.657 (0.083)	-0.143 (0.202)	0.653 (0.060)	-0.256 (0.411)	0.522 (0.054)	-0.442 (0.349)
		BoW-DTA (BD)	0.888 (0.008)	0.781 (0.016)	0.687 (0.082)	-0.091 (0.302)	0.664 (0.067)	-0.386 (0.593)	0.568 (0.084)	-0.334 (0.347)
		BoW-DTA (BG)	0.873 (0.013)	0.760 (0.027)	0.683 (0.058)	-0.164 (0.162)	0.674 (0.029)	-0.010 (0.167)	0.537 (0.044)	-0.513 (0.270)
		ID-DTA (BD)	0.891 (0.005)	0.777 (0.019)	0.692 (0.065)	-0.045 (0.252)	0.650 (0.039)	-0.689 (0.476)	0.565 (0.090)	-0.426 (0.231)
	ID-DTA (BG)	0.880 (0.008)	0.759 (0.018)	0.637 (0.079)	-0.224 (0.162)	0.698 (0.031)	0.069 (0.109)	0.526 (0.042)	-0.432 (0.322)	
	LM-DTA	No Debiasing	0.876 (0.005)	0.745 (0.011)	0.688 (0.046)	-0.027 (0.175)	0.780 (0.016)	0.384 (0.083)	0.572 (0.028)	-0.226 (0.205)
		BoW-DTA (BD)	0.882 (0.006)	0.762 (0.003)	0.688 (0.069)	-0.005 (0.169)	0.781 (0.017)	0.386 (0.081)	0.563 (0.032)	-0.182 (0.136)
BoW-DTA (BG)		0.879 (0.007)	0.755 (0.004)	0.671 (0.049)	-0.045 (0.145)	0.776 (0.019)	0.381 (0.087)	0.557 (0.048)	-0.245 (0.164)	
ID-DTA (BD)		0.883 (0.006)	0.758 (0.003)	0.683 (0.067)	-0.016 (0.270)	0.782 (0.017)	0.387 (0.080)	0.581 (0.017)	-0.198 (0.174)	
ID-DTA (BG)		0.882 (0.010)	0.748 (0.006)	0.686 (0.053)	0.016 (0.139)	0.777 (0.017)	0.372 (0.072)	0.568 (0.034)	-0.199 (0.160)	
BoW-LM-DTA (BD)		0.884 (0.009)	0.761 (0.008)	0.662 (0.074)	-0.096 (0.227)	0.784 (0.016)	0.395 (0.078)	0.548 (0.033)	-0.244 (0.137)	
BoW-LM-DTA (BG)	0.879 (0.007)	0.756 (0.011)	0.701 (0.057)	0.010 (0.212)	0.778 (0.025)	0.369 (0.081)	0.586 (0.043)	-0.198 (0.155)		
KIBA	DeepDTA	No Debiasing	0.873 (0.005)	0.756 (0.021)	0.753 (0.018)	0.337 (0.081)	0.719 (0.029)	0.330 (0.109)	0.654 (0.019)	0.087 (0.099)
		BoW-DTA (BD)	0.888 (0.005)	0.775 (0.019)	0.761 (0.004)	0.349 (0.046)	0.713 (0.036)	0.308 (0.115)	0.639 (0.028)	0.045 (0.147)
		BoW-DTA (BG)	0.875 (0.007)	0.745 (0.021)	0.749 (0.014)	0.328 (0.060)	0.707 (0.039)	0.271 (0.099)	0.633 (0.025)	0.073 (0.142)
		ID-DTA (BD)	0.887 (0.006)	0.775 (0.018)	0.761 (0.020)	0.350 (0.101)	0.725 (0.038)	0.333 (0.124)	0.660 (0.034)	0.084 (0.195)
	ID-DTA (BG)	0.877 (0.003)	0.755 (0.022)	0.750 (0.018)	0.335 (0.075)	0.709 (0.032)	0.305 (0.076)	0.639 (0.019)	0.060 (0.130)	
	BPE-DTA	No Debiasing	0.881 (0.005)	0.760 (0.016)	0.735 (0.025)	0.274 (0.105)	0.680 (0.020)	0.185 (0.077)	0.605 (0.033)	-0.006 (0.117)
		BoW-DTA (BD)	0.891 (0.003)	0.774 (0.016)	0.736 (0.018)	0.231 (0.093)	0.679 (0.030)	0.174 (0.103)	0.604 (0.017)	-0.046 (0.082)
		BoW-DTA (BG)	0.882 (0.003)	0.759 (0.016)	0.743 (0.031)	0.278 (0.115)	0.677 (0.033)	0.118 (0.095)	0.605 (0.026)	-0.071 (0.114)
		ID-DTA (BD)	0.893 (0.003)	0.776 (0.012)	0.736 (0.021)	0.229 (0.099)	0.684 (0.023)	0.179 (0.060)	0.590 (0.014)	-0.037 (0.079)
	ID-DTA (BG)	0.884 (0.004)	0.759 (0.016)	0.727 (0.024)	0.208 (0.116)	0.654 (0.034)	-0.439 (1.077)	0.589 (0.025)	-0.635 (0.980)	
	LM-DTA	No Debiasing	0.858 (0.005)	0.756 (0.012)	0.749 (0.012)	0.409 (0.067)	0.713 (0.049)	0.366 (0.137)	0.650 (0.041)	0.107 (0.122)
		BoW-DTA (BD)	0.865 (0.005)	0.769 (0.013)	0.756 (0.013)	0.435 (0.064)	0.717 (0.051)	0.382 (0.139)	0.653 (0.028)	0.159 (0.121)
BoW-DTA (BG)		0.859 (0.004)	0.755 (0.016)	0.756 (0.015)	0.425 (0.069)	0.713 (0.057)	0.373 (0.152)	0.652 (0.042)	0.147 (0.133)	
ID-DTA (BD)		0.864 (0.006)	0.767 (0.014)	0.759 (0.011)	0.436 (0.056)	0.718 (0.053)	0.385 (0.143)	0.652 (0.036)	0.151 (0.126)	
ID-DTA (BG)		0.860 (0.005)	0.757 (0.017)	0.755 (0.012)	0.424 (0.065)	0.717 (0.049)	0.384 (0.139)	0.664 (0.031)	0.133 (0.132)	
BoW-LM-DTA (BD)		0.864 (0.005)	0.768 (0.012)	0.758 (0.010)	0.441 (0.055)	0.719 (0.054)	0.382 (0.145)	0.646 (0.032)	0.139 (0.115)	
BoW-LM-DTA (BG)	0.862 (0.005)	0.760 (0.015)	0.761 (0.014)	0.426 (0.073)	0.714 (0.053)	0.382 (0.138)	0.653 (0.026)	0.119 (0.145)		

cause more bias in this dataset. We relate this with the fact that KIBA contains more interactions per biomolecule and thus the models are capable of inferring more biomolecule identity information from the interactions. In total, BoW-DTA wins the 15 comparisons and ID-DTA wins 18, indicating that the performance of ID-DTA and BoW-DTA is similar to each other and both chemical word based and identity based biases are prevalent in the datasets.

We also observed in Table 1 that, LM-DTA is the only model with which ID-DTA outperformed BoW-DTA both on BDB and KIBA datasets. We relate this with the fact that LM-DTA and BoW-DTA use different biochemical word vocabularies and tokenizers, and thus BoW-DTA might fail to capture chemical-word biases that adversely affect LM-DTA. This motivated us to design a new weak learner, BoW-LM-DTA, that uses the same vocabularies and tokenizers as the LM-DTA model and bag-of-words representation. We compare BoW-DTA and BoW-LM-DTA approaches as previously and find that 8 out of 16 times BoW-LM-DTA achieves higher performance than BoW-DTA and two models tie three times, meaning that one cannot outperform another in both metrics. The higher performance of BoW-LM-DTA highlights that the commonality of vocabularies and tokenizers between weak and strong learners facilitates eliminating the word-based biases.

Table 2: The gain of debiasing. The percentile improvement in CI and increase in R^2 are displayed for each model on every test set. The statistics are computed by comparing the best Debaised-DTA score with the non-debiased one. Negative statistics are reported if the non-debiased model outperforms every debiasing configuration.

		Warm		Cold Ligand		Cold Protein		Cold Both	
Model		CI	R^2	CI	R^2	CI	R^2	CI	R^2
BDB	DeepDTA	1.239%	0.023	4.076%	0.004	2.899%	0.042	10.289%	0.062
	BPE-DTA	0.906%	0.007	5.327%	0.098	6.891%	0.325	8.812%	0.108
	LM-DTA	0.913%	0.017	1.890%	0.043	0.513%	0.011	2.448%	0.044
KIBA	DeepDTA	1.718%	0.019	1.062%	0.013	0.834%	0.003	0.917%	-0.003
	BPE-DTA	1.362%	0.017	1.088%	0.004	0.588%	-0.006	0.000%	-0.031
	LM-DTA	0.816%	0.013	1.602%	0.032	0.842%	0.019	2.154%	0.052

The effect of weight adaptation strategy The other component of the proposed debiasing approach is the selection of bias decay (BD) and bias growth (BG) weight adaptation strategies. In order to evaluate the effect of the weight adaptation strategy, we compared each BG model with its BD counterpart and count the wins in the comparisons as in the previous part. Table 1 shows that every BD model outperforms its BG counterpart on warm test sets, indicating the power of BD on predicting the interactions of known biomolecules.

For the other test sets, BD is again the superior approach for 27 out of 42 comparisons, whereas BG outperforms BD only 6 times, suggesting the overall superiority of BD to BG for debiasing. Interestingly, BG wins all comparisons on the cold protein test set of BDB with DeepDTA and BPE-DTA models, indicating that BG approach has merits too, even if the scope is limited.

The Overall Gain of Debiasing In order to summarize the gains of debiasing, we compare the best DebaisedDTA model in each setup with its non-debiased counterpart by reporting the percent increase in CI and absolute increase in R^2 in Table 2.

Table 2 demonstrates that in 44 of 48 cases, at least one DebaisedDTA model outperformed the non-debiased counterpart, highlighting the strength of the proposed approach to boost DTA prediction performance. In order to show that the performance increase due to DebaisedDTA is statistically significant, we used one-sided one-sample t-tests with the null hypotheses that mean CI and R^2 gains are 0. The statistical tests resulted in the rejection of the null hypotheses with p-values < 0.01 , suggesting that DebaisedDTA boosts prediction performance in general, with 99% significance.

The improvements due to debiasing are more evident in the cold test sets of BDB, due to BDB being a more diverse dataset than KIBA. Since the BDB biomolecules are more diverse, the training biases are less generalizable to the unknown test molecules and their elimination boosts the DTA prediction performance more than KIBA.

We also observe in Table 2 that, DebaisedDTA improves the performance on every warm test set, even though it is mainly designed to improve DTA prediction performance on novel biomolecules. This shows that eliminating the training set biases helps models to better represent the known biomolecules, too.

Finally, Table 2 shows that debiasing improved the performance of all affinity prediction models in the study. This highlights that DTA prediction models are susceptible to dataset biases irrespective of their input representation and the proposed methodology is powerful enough to eliminate

Table 3: Binary evaluation of the models on cross-dataset. We use the previously learned weights for each model and predict affinity of the cold-both and cross-dataset interactions. We convert the predicted and reported affinity scores to binary labels and measure F1-scores. We report the mean and standard deviation (in parantheses) of 5 different weights for each model.

Training Dataset	Model	Cold Both	Cross Dataset
BDB	DeepDTA	0.122 (0.029)	0.146 (0.025)
	DebiasedDTA	0.298 (0.101)	0.172 (0.020)
	BPE-DTA	0.072 (0.059)	0.168 (0.040)
	DebiasedDTA	0.134 (0.059)	0.253 (0.019)
	LM-DTA	0.217 (0.107)	0.520 (0.031)
KIBA	DebiasedDTA	0.246 (0.103)	0.522 (0.021)
	DeepDTA	0.361 (0.141)	0.246 (0.021)
	DebiasedDTA	0.337 (0.137)	0.243 (0.037)
	BPE-DTA	0.291 (0.123)	0.190 (0.040)
	DebiasedDTA	0.225 (0.083)	0.217 (0.018)
	LM-DTA	0.384 (0.101)	0.286 (0.019)
	DebiasedDTA	0.391 (0.106)	0.289 (0.016)

these biases in different biomolecule representation settings.

3.2 DebiasedDTA Facilitates Out-of-Dataset Generalization

Having observed the strong prediction performance of DebiasedDTA on many settings, we decided to further challenge the proposed methodology by out-of-dataset interactions. For out-of-dataset evaluation, we use the models trained on BDB to predict the affinity of all protein - compound pairs in KIBA, and vice versa. Prior to prediction, we remove the SMILES - amino-acid sequence pairs shared between the datasets to eliminate risk of information leak from test set to training set.

A challenge to overcome during the cross-evaluation is that BDB and KIBA report the affinity scores in terms of invertible metrics and thus, regression performance of the models on the cross-dataset cannot be evaluated. We take an alternative approach and convert both the model predictions and the affinity scores reported in the datasets to binary classes of strong- and weak-binding. $pK_d > 7$ in BDB and KIBA Score > 12.1 in KIBA are used as the high-affinity threshold as in the previous work [Özçelik et al., 2021].

We utilize the previously learned weights to evaluate performance on cross-dataset. Five different weights are already available for each DebiasedDTA model and these weights are used for prediction. F1-score is used as the evaluation metric and mean and standard deviation are calculated. Table 3 reports the statistics for the non-debiased and debiased models on cross-dataset and in-dataset cold-both test set as a benchmark. The best performing DebiasedDTA models are shown in Table 3 for brevity. The statistics for all DebiasedDTA models are presented in GitHub repository.

Table 3 demonstrates that DebiasedDTA achieves a higher mean cross-dataset F1-score than the non-debiased models, except for the DeepDTA model trained on KIBA. The difference is the most significant for BPE-DTA trained on BDB, where a student’s t-test also supports the superiority of DebiasedDTA with 0.99 significance. These results suggest that DebiasedDTA can boost out-of-dataset generalization of the DTA prediction models.

Table 3 also displays the higher performance of the LM-DTA model to predict the affinities of

cross-dataset interactions. LM-DTA achieves the highest performance on both datasets, suggesting its higher generalization potential. This may be due to LM-DTA leveraging pre-trained ligand and protein language model vectors, which carry information about millions of biomolecules already.

Another result in Table 3 is that, models trained on BDB perform better on KIBA, compared to their in-dataset cold-both test set. This is a consequence of BDB and KIBA sharing 201 proteins and BDB having a challenging cold-both test set due to its higher biomolecule diversity. This also aligns with our finding in the previous sections, where we conclude that DebiasedDTA boosted BDB cold-both performance more than KIBA, as due to its high diversity.

Overall, we observe that DebiasedDTA can boost performance not only on in-dataset test sets but also on other datasets. We also show that pre-trained language models can help predict the affinities of novel biomolecules and the affinity prediction models are challenged further when predicting the interactions of distant biomolecules.

4 Conclusion

Protein - compound interaction space is not sampled evenly, either because some protein targets are privileged due to their association with certain disease states or because some compounds are privileged due to their relatively easier synthesis. As a result, machine learning methodologies that are based on existing protein - compound interaction pair information struggle to learn generalizable patterns from the training data that has high training set bias. In this work, we propose DebiasedDTA, a novel training approach that boosts the performance of DTA prediction methods both on known and unknown biomolecules. The performance boost is observed for similar and distant test sets and underlines the value of DebiasedDTA.

DebiasedDTA owes the performance boost to its weak learners that are designed to identify specific type of bias sources. Here, we experiment with biochemical word and biochemical identity driven biases and find that elimination of any of the two can improve the prediction models. We also find that biochemical word based bias is more prevalent in general and in these cases the prediction model and the weak learner should utilize the same biomolecule word vocabulary.

The strong learners use the weak learners’ output to guide their training by sample weight adaptation strategies. We experiment with bias decay and bias growth that eliminates dataset biases in different stages of the training. The results suggest that the late elimination of the biases produces higher scores in general, and especially for known biomolecules.

Dataset biases are among the major hurdles on the path to develop robust and generalizable DTA models. One approach will be to sample all regions of interaction space. However, such complete sampling of the landscape is either impossible due to limitations in synthesis or highly unlikely due to diversity in interest. Therefore, while we wait for it, we believe that widely-applicable model training strategies can help to overcome this hurdle and we present DebiasedDTA as a pioneering work along this line. We foresee that DebiasedDTA will trigger more studies and help to create more reliable DTA models in the future. We view DebiasedDTA as a technique to prioritize informative training samples and believe that it will have implications on debiasing natural language processing models and on computer vision, where out-of-distribution generalization is an essential problem.

Funding

This work was supported by The Scientific and Technological Research Council of Turkey [2211-A to R.O., 2247-C to B.A.]; and Turkish Science Academy [TUBA-GEBIP award to A.O.].

References

- R. Apweiler, A. Bairoch, C. H. Wu, W. C. Barker, B. Boeckmann, S. Ferro, E. Gasteiger, H. Huang, R. Lopez, M. Magrane, et al. Uniprot: the universal protein knowledgebase. *Nucleic acids research*, 32(suppl.1):D115–D119, 2004.
- E. Asgari, A. C. McHardy, and M. R. Mofrad. Probabilistic variable-length segmentation of protein sequences for discriminative motif discovery (dimotif) and sequence embedding (protvecx). *Scientific reports*, 9(1):1–16, 2019.
- L. Chaput, J. Martinez-Sanz, N. Saettel, and L. Mouawad. Benchmark of four popular virtual screening programs: construction of the active/decoy dataset remains a major determinant of measured performance. *Journal of cheminformatics*, 8(1):1–17, 2016.
- L. Chen, A. Cruz, S. Ramsey, C. J. Dickson, J. S. Duca, V. Hornak, D. R. Koes, and T. Kurtzman. Hidden bias in the dud-e dataset leads to misleading performance of deep learning in structure-based virtual screening. *PloS one*, 14(8):e0220113, 2019.
- S. Chithrananda, G. Grand, and B. Ramsundar. Chemberta: Large-scale self-supervised pretraining for molecular property prediction. *arXiv preprint arXiv:2010.09885*, 2020.
- C. Clark, M. Yatskar, and L. Zettlemoyer. Don’t take the easy way out: Ensemble based methods for avoiding known dataset biases. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 4060–4073, 2019.
- C. Clark, M. Yatskar, and L. Zettlemoyer. Learning to model and ignore dataset bias with mixed capacity ensembles. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: Findings*, pages 3031–3045, 2020.
- M. Davies, M. Nowotka, G. Papadatos, N. Dedman, A. Gaulton, F. Atkinson, L. Bellis, and J. P. Overington. ChEMBL web services: streamlining access to drug discovery data and utilities. *Nucleic acids research*, 43(W1):W612–W620, 2015.
- J. Devlin, M.-W. Chang, K. Lee, and K. Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, 2019.
- A. Elnaggar, M. Heinzinger, C. Dallago, G. Rehawi, Y. Wang, L. Jones, T. Gibbs, T. Feher, C. Angerer, M. Steinegger, et al. ProtTrans: Towards cracking the language of life’s code through self-supervised deep learning and high performance computing. *bioRxiv*, 2020.

- B. Fabian, T. Edlich, H. Gaspar, M. Segler, J. Meyers, M. Fiscato, and M. Ahmed. Molecular representation learning with language models and domain-relevant auxiliary tasks. *arXiv preprint arXiv:2011.13230*, 2020.
- P. Gage. A new algorithm for data compression. *The C Users Journal*, 12(2):23–38, 1994.
- A. Gaulton, A. Hersey, M. Nowotka, A. P. Bento, J. Chambers, D. Mendez, P. Mutowo, F. Atkinson, L. J. Bellis, E. Cibrián-Uhalte, M. Davies, N. Dedman, A. Karlsson, M. P. Magariños, J. P. Overington, G. Papadatos, I. Smit, and A. R. Leach. The ChEMBL database in 2017. *Nucleic Acids Research*, 45(D1):D945–D954, 11 2016. ISSN 0305-1048. doi: 10.1093/nar/gkw1074. URL <https://doi.org/10.1093/nar/gkw1074>.
- M. Gönen and G. Heller. Concordance probability and discriminatory power in proportional hazards regression. *Biometrika*, 92(4):965–970, 2005.
- S. Gururangan, S. Swayamdipta, O. Levy, R. Schwartz, S. Bowman, and N. A. Smith. Annotation artifacts in natural language inference data. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 2 (Short Papers)*, pages 107–112, 2018.
- H. He, S. Zha, and H. Wang. Unlearn dataset bias in natural language inference by fitting the residual. *EMNLP-IJCNLP 2019*, page 132, 2019.
- B. Heinzerling and M. Strube. Bpemb: Tokenization-free pre-trained subword embeddings in 275 languages. In *Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC 2018)*, 2018.
- H. Jiang, P. He, W. Chen, X. Liu, J. Gao, and T. Zhao. Smart: Robust and efficient fine-tuning for pre-trained natural language models through principled regularized optimization. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 2177–2190, 2020.
- K. Kawano, S. Koide, and C. Imamura. Seq2seq fingerprint with byte-pair encoding for predicting changes in protein stability upon single point mutation. *IEEE/ACM transactions on computational biology and bioinformatics*, 17(5):1762–1772, 2019.
- X. Li and D. Fourches. Smiles pair encoding: A data-driven substructure tokenization algorithm for deep learning. *Journal of Chemical Information and Modeling*, 61(4):1560–1569, 2021.
- H. Liu, Z. Dai, D. R. So, and Q. V. Le. Pay attention to mlps. *arXiv preprint arXiv:2105.08050*, 2021.
- T. Liu, Y. Lin, X. Wen, R. N. Jorissen, and M. K. Gilson. Bindingdb: a web-accessible database of experimentally determined protein–ligand binding affinities. *Nucleic acids research*, 35(suppl 1):D198–D201, 2007.
- T. McCoy, E. Pavlick, and T. Linzen. Right for the wrong reasons: Diagnosing syntactic heuristics in natural language inference. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 3428–3448, Florence, Italy, July 2019. Association for Computational Linguistics. doi: 10.18653/v1/P19-1334. URL <https://www.aclweb.org/anthology/P19-1334>.

- M. M. Mysinger, M. Carchia, J. J. Irwin, and B. K. Shoichet. Directory of useful decoys, enhanced (dud-e): better ligands and decoys for better benchmarking. *Journal of medicinal chemistry*, 55(14):6582–6594, 2012.
- T. Q. Nguyen and D. Chiang. Transfer learning across low-resource, related languages for neural machine translation. In *Proceedings of the Eighth International Joint Conference on Natural Language Processing (Volume 2: Short Papers)*, pages 296–301, 2017.
- R. Özçelik, H. Öztürk, A. Özgür, and E. Ozkirimli. Chemboost: A chemical language based approach for protein – ligand binding affinity prediction. *Molecular Informatics*, 40(5):2000212, 2021. doi: <https://doi.org/10.1002/minf.202000212>. URL <https://onlinelibrary.wiley.com/doi/abs/10.1002/minf.202000212>.
- H. Öztürk, A. Özgür, and E. Ozkirimli. Deepdta: deep drug–target binding affinity prediction. *Bioinformatics*, 34(17):i821–i829, 2018.
- F. Pedregosa, G. Varoquaux, A. Gramfort, V. Michel, B. Thirion, O. Grisel, M. Blondel, P. Prettenhofer, R. Weiss, V. Dubourg, J. Vanderplas, A. Passos, D. Cournapeau, M. Brucher, M. Perrot, and E. Duchesnay. Scikit-learn: Machine learning in Python. *Journal of Machine Learning Research*, 12:2825–2830, 2011.
- A. Poliak, J. Naradowsky, A. Haldar, R. Rudinger, and B. Van Durme. Hypothesis only baselines in natural language inference. In *Proceedings of the Seventh Joint Conference on Lexical and Computational Semantics*, pages 180–191, New Orleans, Louisiana, June 2018. Association for Computational Linguistics. doi: 10.18653/v1/S18-2023. URL <https://www.aclweb.org/anthology/S18-2023>.
- S. Poux, C. N. Arighi, M. Magrane, A. Bateman, C.-H. Wei, Z. Lu, E. Boutet, H. Bye-A-Jee, M. L. Famiglietti, B. Roechert, and T. UniProt Consortium. On expert curation and scalability: UniProtKB/Swiss-Prot as a case study. *Bioinformatics*, 33(21):3454–3460, 07 2017. ISSN 1367-4803. doi: 10.1093/bioinformatics/btx439. URL <https://doi.org/10.1093/bioinformatics/btx439>.
- S. G. Rohrer and K. Baumann. Maximum unbiased validation (muv) data sets for virtual screening based on pubchem bioactivity data. *Journal of chemical information and modeling*, 49(2):169–184, 2009.
- K. Sakaguchi, R. Le Bras, C. Bhagavatula, and Y. Choi. Winogrande: An adversarial winograd schema challenge at scale. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 8732–8740, 2020.
- V. Sanh, T. Wolf, Y. Belinkov, and A. M. Rush. Learning from others’ mistakes: Avoiding dataset biases without modeling them. *arXiv preprint arXiv:2012.01300*, 2020.
- J. Scantlebury, N. Brown, F. Von Delft, and C. M. Deane. Data set augmentation allows deep learning-based virtual screening to better generalize to unseen target classes and highlight important binding interactions. *Journal of Chemical Information and Modeling*, 60(8):3722–3730, 2020.
- R. Sennrich, B. Haddow, and A. Birch. Neural machine translation of rare words with subword units. *arXiv preprint arXiv:1508.07909*, 2015.

- J. Sieg, F. Flachsenberg, and M. Rarey. In need of bias control: evaluating chemical data for machine learning in structure-based virtual screening. *Journal of chemical information and modeling*, 59(3):947–961, 2019.
- C. Sun, X. Qiu, Y. Xu, and X. Huang. How to fine-tune BERT for text classification? In *China National Conference on Chinese Computational Linguistics*, pages 194–206. Springer, 2019.
- V. Sundar and L. Colwell. The effect of debiasing protein–ligand binding data on generalization. *Journal of Chemical Information and Modeling*, 60(1):56–62, 2019.
- J. Tang, A. Szwajda, S. Shakyawar, T. Xu, P. Hintsanen, K. Wennerberg, and T. Aittokallio. Making sense of large-scale kinase inhibitor bioactivity data sets: a comparative and integrative analysis. *Journal of Chemical Information and Modeling*, 54(3):735–743, 2014.
- V.-K. Tran-Nguyen, C. Jacquemard, and D. Rognan. Lit-pcba: An unbiased data set for machine learning and virtual screening. *Journal of Chemical Information and Modeling*, 2020.
- M. Tsuchiya. Performance impact caused by hidden bias of training data for recognizing textual entailment. In *Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC 2018)*, Miyazaki, Japan, May 2018. European Language Resources Association (ELRA). URL <https://www.aclweb.org/anthology/L18-1239>.
- P. A. Utama, N. S. Moosavi, and I. Gurevych. Mind the trade-off: Debiasing nlu models without degrading the in-distribution performance. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8717–8729, 2020a.
- P. A. Utama, N. S. Moosavi, and I. Gurevych. Towards debiasing nlu models from unknown biases. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 7597–7610, 2020b.
- J. Vig, A. Madani, L. R. Varshney, C. Xiong, R. Socher, and N. F. Rajani. Bertology meets biology: Interpreting attention in protein language models. *arXiv preprint arXiv:2006.15222*, 2020.
- I. Wallach and A. Heifets. Most ligand-based classification benchmarks reward memorization rather than generalization. *Journal of chemical information and modeling*, 58(5):916–932, 2018.
- R. Wang, X. Fang, Y. Lu, and S. Wang. The pdbbind database: Collection of binding affinities for protein- ligand complexes with known three-dimensional structures. *Journal of medicinal chemistry*, 47(12):2977–2980, 2004.
- S. Wang, Y. Guo, Y. Wang, H. Sun, and J. Huang. Smiles-bert: large scale unsupervised pre-training for molecular property prediction. In *Proceedings of the 10th ACM international conference on bioinformatics, computational biology and health informatics*, pages 429–436, 2019.
- I. Yamada, A. Asai, H. Shindo, H. Takeda, and Y. Matsumoto. Luke: Deep contextualized entity representations with entity-aware self-attention. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 6442–6454, 2020.
- J. Yang, C. Shen, and N. Huang. Predicting or pretending: artificial intelligence for protein-ligand interactions lack of sufficiently large and unbiased datasets. *Frontiers in Pharmacology*, 11:69, 2020.