

“NORMAL” PHYLOGENETIC NETWORKS EMERGE AS THE LEADING CLASS

ANDREW FRANCIS

ABSTRACT. The rich and varied ways that genetic material can be passed between species has motivated extensive research into the theory of phylogenetic networks. Features that align with biological processes, or with mathematical tractability, have been used to define classes and prove results, with the ultimate goal of developing the theoretical foundations for network reconstruction methods. We have now reached the point that a collection of recent results can be drawn together to make one class of network, the so-called *normal* networks, a clear leader. We may be at the cusp of practical inference with phylogenetic networks.

Keywords: Phylogenetic Network; Identifiability; Tree-child Network; Normal Phylogenetic Network

The challenge of representing evolutionary relationships in phylogenetic networks has been described as one of the key problems in the use of mathematics in biology [5]. The last decade has seen significant investment in exploring the modelling, inference, and mathematics of such phylogenetic networks. The motivation is clear: well-studied evolutionary processes, such as horizontal gene transfer, endosymbiosis, and hybridization, are not able to be represented by phylogenetic trees [8, 9, 7].

The difficulty is that, in contrast to phylogenetic trees, there are infinitely many phylogenetic networks that relate a given set of taxa appearing at the leaves of the network. This makes inference decidedly harder: it is not even *theoretically* possible to search the whole space for optimal solutions.

In order to infer phylogenetic networks, researchers have focused on classes of network that have important provable properties. To this end, a menagerie of classes has been proposed, each capturing features whose goal is either to represent a specific biological process, or to provide properties that are amenable to mathematical persuasion [4, 13, 10, 18, 3].

In this article, we make the case that one of these classes — the *normal* networks — has emerged as the strong contender for inference, because of its proven mathematical properties and prospects for practical use, that we describe below. It is now reasonable to hope that further research on these might bring feasible inference of phylogenetic networks within reach.

A *phylogenetic network* is a directed acyclic graph with vertices of the following types: *the root* (in-degree 0 and out-degree ≥ 1); *tree vertices* (in-degree 1 and out-degree ≥ 2); *reticulation vertices* (in-degree ≥ 2 and out-degree 1); and *leaves* (in-degree 1 and out-degree 0). See Figure 1 for an example.

Many families of phylogenetic network have been defined, each seeking to capture either biological intuition or desirable mathematical features. *Normal* networks are one such class. They are a subclass of the *tree-child* networks, which are defined by the property that every internal vertex has a child that is a tree vertex [4]. Each

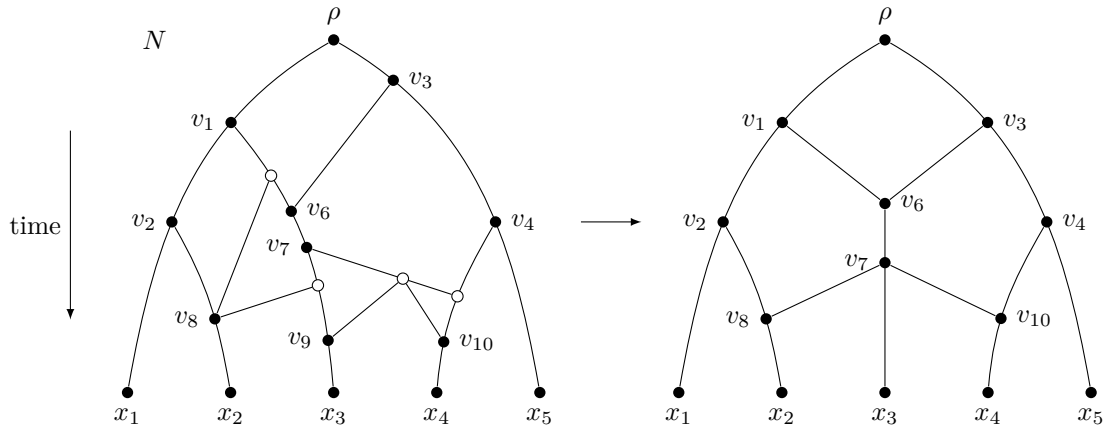


FIGURE 1. A phylogenetic network N and its normalisation. Edges are directed forward in time (down the page, arrows on edges omitted). Vertices are shown solid if they are visible. The non-visible vertices in N are those vertices v with the property that for any leaf x_i there is a path from the root of N to x_i that does not pass through v . Thus, tracing back from any extant leaf to the root, it is possible to never “see” a non-visible vertex as there is always a path that avoids it. The normalisation of N on the right shows all visible vertices in N except v_9 , which is suppressed since it would be degree 2 in the cover digraph of the visible vertices of N .

vertex v in a tree-child network has the property that there is a leaf x for which every path from the root to x passes through v . This property is called “visibility” because it implies that the evolutionary signal from v is visible in a leaf, x . Normal networks are defined to be tree-child networks without short-cuts (edges (u, v) for which there is another path $u \rightarrow v$ in the network).

The first part of the case for normal networks is that they form the largest class known that is provably *identifiable*. A class of networks is identifiable under a particular evolutionary model if, given sufficient data generated by the model on a network from the class — for instance a long enough sequence alignment — it is theoretically possible to uniquely identify the particular network on which the data arose (see e.g. [2] for a good introduction to this problem, for trees). Such results are limited for phylogenetic networks, but recently identifiability has been shown for normal networks under a realistic evolutionary model [12].

The second part of the case for normal networks is a practical question: what structural information is needed to *reconstruct* a network? For instance, it is possible to reconstruct a phylogenetic tree from the set of “rooted triples” on the leaves (the rooted triples in a tree are the restrictions of the tree to sets of three leaves) [1]. For networks, the problem is more difficult. Indeed, an arbitrary network cannot be reconstructed from its displayed trees, even if one has the full set of trees displayed by the network [15]. Again, normal networks have moved well ahead of other classes. Firstly, in the case in which each internal vertex has degree 3 (the binary case), they are among those that *can* be reconstructed from their display trees [18]. But more recently, significant new progress has shown that they can be reconstructed just from the sets of triplets, and four-leaf “caterpillars” [14]. Caterpillars are a simple

tree-structure that have just a single pair of leaves that have the same parent vertex (such pairs of leaves are known as cherries). This result then says that normal networks can be reconstructed from some very simple substructures: relationships among subsets of three taxa, and just some subsets of four taxa.

The third part of the case is that normal networks have a set of mathematical properties that are unique, and biologically informative. For instance, every internal tree vertex in a normal network is the least common ancestor (in the graph theoretic sense) of two leaves [16]. This means that every internal tree vertex carries a specific biological piece of information. Another example is that normal networks display any given tree at most once [17, 6]. Neither of these results extend to the larger class of tree-child networks, and both point to a significant efficiency in the class of normal networks: they represent information that we have, but with minimal redundancy.

Finally, the icing on the cake. Focussing on normal networks is not in fact neglecting other classes of network, because it has recently been shown that every phylogenetic network has a uniquely defined “normalization”. More precisely, there is a well-defined and fast process (polynomial time), that discards redundant vertices and edges in a network to yield a canonical normal network [11]. An example of a normalization is shown in the Figure. This captures the key information in *any* given network: the information that is in fact reconstructable, that is, the vertices and edges whose evolutionary signal may be visible in the leaves. If one has data that evolved from a process on a network, reconstructing the normalization of the network is the sweet spot: both the most information reasonable to hope for, and the most that can practically be obtained.

Phylogenetics is the science of inferring ancestral relationships among a set of present-day species. With such a project, and in the presence of reticulate events such as hybridization and horizontal gene transfer, there can inevitably be information whose signal is irretrievably lost. The mathematics of phylogenetic networks is now indicating that the class of *normal* networks provides a framework for inference that respects this information constraint. The further development of methods for the reconstruction of normal networks, and results that develop their mathematical properties, seems a most promising direction for future research.

REFERENCES

- [1] Alfred V. Aho, Yehoshua Sagiv, Thomas G. Szymanski, and Jeffrey D. Ullman. Inferring a tree from lowest common ancestors with an application to the optimization of relational expressions. *SIAM Journal on Computing*, 10(3):405–421, 1981.
- [2] Elizabeth S Allman and John A Rhodes. The identifiability of tree topology for phylogenetic models, including covarion and mixture models. *Journal of Computational Biology*, 13(5):1101–1113, June 2006.
- [3] Magnus Bordewich and Charles Semple. Reticulation-visible networks. *Advances in Applied Mathematics*, 78:114–141, July 2016.
- [4] G. Cardona, F. Rosselló, and G. Valiente. Comparison of tree-child phylogenetic networks. *IEEE/ACM Trans. Comput. Biol. Bioinf.*, 6:552–569, 2009.
- [5] Joel E Cohen. Mathematics is biology’s next microscope, only better; biology is mathematics’ next physics, only better. *PLoS Biology*, 2(12):e439, 2004.
- [6] Paul Cordue, Simone Linz, and Charles Semple. Phylogenetic networks that display a tree twice. *Bulletin of Mathematical Biology*, 76:2664–2679, 2014.
- [7] Tal Dagan and William F. Martin. The tree of one percent. *Genome Biology*, 7:118, 2006.

- [8] Rob DeSalle and Margaret Riley. Should Networks Supplant Tree Building? *Microorganisms*, 8(8):1179–14, August 2020.
- [9] W. F. Doolittle and E. Bapteste. Pattern pluralism and the tree of life hypothesis. *Proceedings of the National Academy of Sciences (USA)*, 104:2043–2049, 2007.
- [10] Péter L Erdős, Charles Semple, and Mike Steel. A class of phylogenetic networks reconstructable from ancestral profiles. *Mathematical Biosciences*, 313:33–40, 2019.
- [11] Andrew Francis, Daniel H Huson, and Mike Steel. Normalising phylogenetic networks. *Molecular Phylogenetics and Evolution (in press)*, 2021.
- [12] Andrew Francis and Vincent Moulton. Identifiability of tree-child phylogenetic networks under a probabilistic recombination-mutation model of evolution. *Journal of Theoretical Biology*, 446:160–167, 2018.
- [13] Andrew Francis and Mike Steel. Which phylogenetic networks are merely trees with additional arcs? *Systematic Biology*, 64(5):768–777, 2015.
- [14] Simone Linz and Charles Semple. Caterpillars on three and four leaves are sufficient to reconstruct binary normal networks. *Journal of Mathematical Biology*, 81:961–980, 2020.
- [15] F. Pardi and C. Scornavacca. Reconstructible phylogenetic networks: do not distinguish the indistinguishable. *PLoS Computational Biology*, 11(e1004135):768–777, 2015.
- [16] S. J. Willson. Properties of normal phylogenetic networks. *Bulletin of Mathematical Biology*, 72(2):340–358, 2010.
- [17] S. J. Willson. Tree-average distances on certain phylogenetic networks have their weights uniquely determined. *Algorithms for Molecular Biology*, 7(13), 2012.
- [18] Stephen Willson. Regular networks can be uniquely constructed from their trees. *IEEE/ACM Transactions on Computational Biology and Bioinformatics*, 8(3):785–796, 2011.

CENTRE FOR RESEARCH IN MATHEMATICS AND DATA SCIENCE, WESTERN SYDNEY UNIVERSITY, AUSTRALIA, E-MAIL: A.FRANCIS@WESTERNSYDNEY.EDU.AU.