(will be inserted by the editor)

A Real Use Case of Semi-Supervised Learning for Mammogram Classification in a Local Clinic of Costa Rica

Saúl Calderón-Ramírez · Diego Murillo-Hernández · Kevin Rojas-Salazar · David Elizondo · Shengxiang Yang · Armaghan Moemeni · Miguel Molina-Cabello

Received: date / Accepted: date

Total Tables: 6
Total Figures: 11

Abstract The implementation of deep learning based computer aided diagnosis systems for the classification of mammogram images can help in improving the accuracy, reliability, and cost of diagnosing patients. However, training a deep learning model requires a considerable amount of labeled images, which can be expensive to obtain as time and effort from clinical practitioners is required. A number of publicly available datasets have been built with data from different hospitals and clinics. However, using models trained on these datasets for later work on images sampled from a different hospital or clinic might result in lower performance. This is due to the distribution mismatch of

Saúl Calderón-Ramírez \cdot David Elizondo \cdot Shengxiang Yang Centre for Computational Intelligence (CCI), De Montfort University, United Kingdom

Saúl Calderón-Ramírez \cdot Diego Murillo-Hernández \cdot Kevin Rojas-Salazar

PARMA Research Group, Instituto Tecnológico de Costa Rica, Costa Rica

Diego Murillo-Hernández · Kevin Rojas-Salazar School of Computing Engineering, Instituto Tecnológico de Costa Rica, Costa Rica

Armaghan Moemeni

School of Computer Science, University of Nottingham, United Kingdom

Miguel Molina-Cabello

Department of Computer Languages and Computer Science. University of Málaga, Spain

 $\label{eq:condition} E-mail: sacalderon@itcr.ac.cr, diemurillo@ic-itcr.ac.cr, kevin.rojas7@estudiantec.cr, elizondo@dmu.ac.uk, syang@dmu.ac.uk, armaghan.moemeni@nottingham.ac.uk, miguelangel@lcc.uma.es$

the datasets, which include different patient populations and image acquisition protocols. The scarcity of labeled data can also bring a challenge towards the application of transfer learning with models trained using these source datasets. In this work, a real world scenario is evaluated where a novel target dataset sampled from a private Costa Rican clinic is used, with few labels and heavily imbalanced data. The use of two popular and publicly available datasets (INbreast and CBIS-DDSM) as source data, to train and test the models on the novel target dataset, is evaluated. The use of the semi-supervised deep learning approach known as MixMatch, to leverage the usage of unlabeled data from the target dataset, is proposed and evaluated. In the tests, the performance of models is extensively measured, using different metrics to assess the performance of a classifier under heavy data imbalance conditions. It is shown that the use of semi-supervised deep learning combined with fine-tuning can provide a meaningful advantage when using scarce labeled observations. We make available the novel dataset for the benefit of the community.

Keywords Transfer Learning \cdot Breast Cancer \cdot Mammogram \cdot Semi-Supervised Deep Learning \cdot Data Imbalance

1 Introduction

Breast cancer is one of the leading causes of death in women around the world [53]. Nonetheless, it is widely known that diagnosing a malign breast tumor in its early stages can increase treatment effectiveness [5]. In many situations, an early diagnostic can increase survival probability significantly.

Deep learning has extensively been explored and implemented as an approach to develop Computer Aided Diagnosis (CAD) systems using medical imaging [3,9,12,17,18]. Such systems have the potential of highly improving the diagnosis and further treatment of patients. For mammogram analysis, different deep learning architectures have been proposed, for either binary classification, BI-RADS based multi-class classification, or segmentation of regions of interest [1,27]. However, the usage of deep learning in the medical domain faces the challenge of scarce labeled data.

In this work, we explore the following setting: take a specific clinic or hospital to deploy a deep learning model (target hospital/clinic). Therefore, data sampled from such hospital must be used for evaluation purposes. Additionally, a small number of labeled observations sampled from such target hospital/clinic might be available. Furthermore, different datasets sampled from other hospitals or clinics might also be available. The notation of such experimental settings can be formalised as follows:

- Target labeled dataset D_t^l : A small number of labeled observations n_t^l might be available which can be used for training/fine-tuning the model.
- Source labeled dataset D_s^l : Different data sources of data sampled in different hospitals/clinics might be used. Usually these datasets have a large number of labeled observations, thus $n_t^l < n_s^l$.
- Target unlabeled dataset D_t^u : A larger number of unlabeled observations n_t^u might be available and can also be used for training/fine-tuning the model. As unlabeled data is cheaper to obtain, it can often be found that $n_t^l < n_t^u$.
- Source unlabeled dataset D_s^u : Similarly to the aforementioned case, more source unlabeled observations might be available when compared to the number of source labeled observations, thus $n_s^l < n_s^l$.

In this work, the usage of both transfer and semi-supervised learning using two different source datasets is explored: INbreast $(D_{s,\text{IN}}^l)$ [39] and CBIS-DDSM $(D_{s,\text{DDSM}}^l)$ [35]. The target dataset was obtained from the Costa Rican medical private clinic Imágenes Médicas Dr. Chavarría Estrada (hereafter referred as $D_{t,\text{CR}}^l$). The aim of this research is to experiment the effectiveness of fine-tuning deep learning models in a semi-supervised fashion (using both D_t^u and D_t^l), performing transfer learning from models trained with the source datasets $D_{s,\text{DDSM}}^l$ and $D_{s,\text{IN}}^l$. For this study, the usage of unlabeled data from other source datasets was avoided, as it has been reported that it might decrease the performance of a Semi-supervised Deep Learning (SSDL) model [15, 16]. In this work, we use MixMatch

as a semi-supervised learning approach [11], given previously positive results reported for this approach in medical imaging [13,14].

2 State of the Art

2.1 Transfer learning and data augmentation for mammogram classification

CAD of breast cancer via mammogram image classification has been widely studied in the literature. Authors in [1] present a survey of the state of the art in the application of deep learning in the analysis of mammography images for the early detection of breast cancer. The authors summarize open challenges and best practices to follow when dealing with mammogram analysis using deep learning. One of the most frequent shortcomings of implementing deep learning for mammogram analysis in a target clinic/hospital is the lack of labeled training data [1]. Labeling medical images can be particularly expensive, as trained professionals are needed to carry out such specialized tasks [49]. To overcome this challenge, a number mammogram datasets are publicly available. However, different patient populations and image acquisition protocols can limit and hinder the performance of the final model using the target data [34].

Two of the most common approaches to tackle the problem of labeled data scarcity are transfer learning and data augmentation [1, 27]. Using pre-trained model parameters from more general tasks often improve the model's performance. Authors in [25] experimented with the multi-class classification of mammograms using transfer learning from ImageNet. Similarly, authors in [42] observed encouraging results in the classification of mammograms when using transfer learning from a chest X-ray dataset of patients with pneumonia.

Applying transfer learning with models trained with observations from the same domain is intuitively an interesting approach. Authors in [4] carried out an exhaustive research for improving the performance of deep learning models in the binary classification of mammogram anomalies by using features previously learned from different mammogram datasets. Authors in [44] also experimented with transfer learning from mammogram datasets for the detection and classification of anomalies in mammogram images. For these cases the more specific term "domain adaptation" can be used, as although images from different datasets can be visually and semantically similar, their distributions might be significantly different, as explained in [20, 50].

As previously mentioned, data augmentation is also an effective approach to tackle data scarcity [1]. Simple augmentations by applying common image transformations like image rotations and flips can improve results [36]. In previous works, more sophisticated and domain-specific data augmentation techniques have been developed [24]. Authors in [19] obtained positive results by implementing elastic deformations for mammogram images, simulating possible different views of the same breast. The augmentation of training data has also been recently achieved by creating artificial observations with generative deep learning models [32, 54].

2.2 Semi-supervised learning for medical imaging and mammogram analysis

Another approach to deal with small labeled datasets is the usage of SSDL, which leverages unlabeled data to improve the model's performance [20]. In recent years, the usage of the cheaper and larger unlabeled datasets for training deep learning models has proven to be a viable option for handling the lack of labeled data, as well as improving the performance of models [13, 17]. Authors in [20] present a survey of recent literature of semi-supervised learning approaches for medical imaging. The survey shows how unlabeled datasets have been used for improving model training in brain tumor segmentation, detection of vascular lesions, and prostate cancer detection. More recently, the usage of unlabeled data with semi-supervised deep learning has proven to give positive results in the detection of COVID-19 in chest x-ray images [13, 17].

However, research on SSDL approaches for mammogram analysis is still limited. In [48] the authors propose a new semi-supervised architecture for convolutional neural networks, designed to extract information from multiple views of masses from mammogram images for their binary classification. In [6] a semi-supervised setup is proposed for the joint use of weakly labeled data with fully labeled data of mammogram regions in the detection and classification of anomalies. Authors in [49] also proposed a semi-supervised approach based on graphs and convolutional neural networks for the classification of anomalies in mammograms. However, from our knowledge few authors in the literature deal with the classification of mammograms using less expensive whole-image labels only. In [14] the MixMatch approach was tested to improve the accuracy and predictive uncertainty of models applied to the binary classification of whole mammogram images. A target hospital or clinic might not have lower level labels available, to fine-tune and test a deep learning model.

As previously mentioned, analysis of mammograms includes lower level tasks such as: segmentation and detection of anomalies, the higher abstraction of level tasks, the binary classification of images (malign findings with no/benign findings) [1, 27]. It may also include multi-class classification, for instance using the BI-RADS standard [24]. As such, different levels of annotations in the data might be needed for lower level tasks, like pixel-level annotations of the Region of Interest (ROI). When using transfer learning to leverage information from thoroughly annotated source datasets for lower level tasks, fine-tuning on the target data might still be needed [20]. This, similar degrees of annotations would be preferable in the target dataset as well. Therefore, the need to use target data to train or fine-tune a model makes the use of unlabeled data an interesting alternative. Different image acquisition protocols and patient distribution sampled in a dataset source is a frequent real-life scenario that increases the need of model fine-tuning.

2.3 SSDL with MixMatch

In this work, the MixMatch method is used as the semisupervised learning approach for training models with unlabeled data. This is novel SSDL method, presented by the authors in [11] has shown important accuracy gains against previous SSDL frameworks. It is mainly based on the use of pseudo-labels, unsupervised regularization and data augmentation. The following corresponds to a brief description of the method.

SSDL makes use of labeled and unlabeled observations X_l , X_u respectively. MixMatch implements data augmentation with affine transformations on both datasets. Pseudo-labels are then generated for each unlabeled observation, sharpening the average of the predictions of a model on each of its augmented "versions". This results in the set \tilde{Y} of pseudo-labels for observations of X_u . Similarly, the set Y_l can be used to represent the labels of observations in X_l .

Further data augmentation is applied to the datasets S_l and \tilde{S}_u , with $S_l = (X_l, Y_l)$ and $\tilde{S}_u = (X_u, \tilde{Y})$, by using linear interpolation of the data with the MixUp algorithm, as mentioned in [11]. This way, the sets of augmented data \tilde{S}'_u and S'_l are obtained and finally used to train a model by minimizing the compound loss function shown in equation 1.

$$\mathcal{L}(S,\theta) = \sum_{(x_i, y_i) \in S'_l} \mathcal{L}_l(\theta, x_i, y_i) +$$

$$\gamma r(\tau) \sum_{(x_j, \tilde{y}_j) \in \tilde{S}'_u} \mathcal{L}_u(\theta, x_j, \tilde{y}_j)$$
(1)

This loss function is formed by the respective supervised and unsupervised loss terms \mathcal{L}_l and \mathcal{L}_u . In this

work, the former is implemented as a cross-entropy loss, while the latter is implemented as an Euclidean distance, with the regularization coefficient γ and the rampup function $r(\tau) = \tau/3000$, as recommended in [13].

2.4 Class imbalance correction

A major factor that must be taken into account in the process of implementing a model for classification tasks, specially in the medical domain, is the distribution of classes in a dataset [1]. For medical conditions, it is common for observations depicting a disease or a "positive" case, to be fairly less frequent in comparison to normal or healthy observations [17]. Training a model with imbalanced data can lead to the final model being biased towards the majority classes, while ignoring the minorities.

Multiple approaches to tackle the problem of imbalanced class distributions in datasets can be found in the literature [17]. Two of the most straightforward techniques used include under-sampling and oversampling [52]. These techniques, although fairly simple and intuitive, might not prove to be the best choice, as they can lead respectively to information loss and over fitting [52]. Other common approaches used towards imbalanced class distributions in datasets involve the so called "cost sensitive learning" [52]. One implementation of this approach is to give weights to each class inside the cross-entropy loss function to correct for class imbalance. In the case of semi-supervised learning, authors in [17] proposed a similar technique called Pseudo-label based Balance Correction (PBC). This technique applies class-balance correction both to the labeled and unlabeled data in the MixMatch SSDL approach. Given its reported positive results, we implement the class imabalance correction approach tested in [17] in our work.

2.5 Classification Metrics for Imbalanced Data

Class-imbalanced datasets and its impact on the implementation of classification models has long been a subject of study in the literature [33]. Using metrics that account for class imbalance is an important aspect, specially for CAD systems used under real-life conditions. The most frequent and almost customary method for evaluating the classification performance of models consists in the traditional classification accuracy [47]. It is

measured as follows for the case of binary classification, which is the focus of this work:

$$Accuracy = \frac{TP + TN}{TP + TN + FP + FN}$$
 (2)

With true positives (TP), true negatives (TN), false positives (FP) and false negatives (FN) representing all elements in the traditional confusion matrix scheme for binary classification. Despite its wide usage, traditional accuracy is not an adequate metric for imbalanced test data settings [2]. As seen in Equation 2, this metric does not take into account the possible differences between the distribution of both classes, and thus can mislead to optimistic results, as illustrated by authors in [21]. A simple example of this situation consists of a scenario where 90% of observations from a dataset belong to the negative class and the remaining 10% belong to the positive class. If a model predicts all observations as negative, it would have an overly optimistic accuracy of 90%. The author in [2] explains that in such cases, traditional accuracy might reveal more information about label distribution than the model's performance.

Basic and widely known classification metrics that also derive from the confusion matrix scheme are the recall, specificity, and precision [2]. These metrics offer more information about the model's classification performance and have been used in the literature to provide more complete analysis in cases with imbalanced data settings [2, 31]. These are defined as:

$$Recall = \frac{TP}{TP + FN}$$
 (3)

Specificity =
$$\frac{TN}{TN + FP}$$
 (4)

$$Precision = \frac{TP}{TP + FP}$$
 (5)

Recall can be interpreted as the true positive rate, or accuracy for the positive class. It is the complement of the false negative rate. In a similar fashion, specificity can be interpreted as the true negative rate or accuracy for the negative class. It is the complement of the false positive rate. As for the precision, it indicates the probability of a model's positive predictions being correct. Precision, sensitivity and specificity measures provide values in the interval [0, 1], where higher is better. While these metrics can be studied individually to analyse different dimensions of the performance of a model, other metrics can be used to summarize them into a single score or value. As discussed by the authors

in [21], currently there is no consensus in the machine learning community on the ideal classification metric to use, specially in cases with imbalanced data.

Two of the most widely used classification metrics, besides traditional accuracy, are the F-1 Score and Area Under the Receiver Operating Characteristic Curve (AUROC). These metrics are commonly used in contexts prone to data imbalance, such as information retrieval [43] and the medical domain [47], although they are not always adequate for such cases [37]. The F-1 score corresponds to the harmonic mean between recall and precision. As such, it focuses on the positive class and does not take into account the TN predictions of a model, as seen on Equation 6. This metric is most useful in contexts where the main focus of a problem is the positive class, and the detection of the negative class is less relevant [47]. It offers a balanced score of the rate of true positives (recall) and the rate of correctly predicted positives (precision).

Nevertheless, multiple works and studies point out the deficiencies of this metric and discourage its use as a standalone measure for the classification performance of a model [21, 26, 37, 43], specially in cases of high class imbalance. Namely, one of the problems commonly pointed out is the fact that the F-1 Score weights the FP the same as the FN, as it can be seen in Equation 6. To address this short-coming in imbalanced data scenarios is the F-2 score [23], measured as follows:

$$F\beta \text{ Score} = (1 + \beta^2) \cdot \frac{\text{Precision} \cdot \text{Recall}}{(\beta^2 \cdot \text{Precision}) + \text{Recall}}$$
$$= \frac{(1 + \beta^2) \cdot \text{TN}}{(1 + \beta^2) \cdot \text{TP} + \beta^2 \cdot \text{FN} + \text{FP}}$$
(6)

The F-1 Score and the F-2 Score can be generalised as the F β Score, with $\beta=1$ and $\beta=2$ respectively.

The AUROC is another single score metric that summarises the trade-off between the rate of true positives and the rate of false positives given multiple decision thresholds for the classification performance of a model. It provides a deeper insight of the model's behavior, when compared to the accuracy. However, it still faces many problems that are pointed out by a number of authors in the literature [10, 21, 28], some related to the impact of highly imbalanced data.

Other classification metrics that have been proposed and explored in the literature for data imbalance scenarios are the balanced accuracy and the G-Mean [2, 31, 33, 46]. Both of these metrics summarize the recall and specificity, offering a single score that balances the model's capacity to correctly classify observations belonging to both the majority (negative)

and the minority (positive) classes. The balanced accuracy and G-mean are measured as follows:

Balanced Accuracy =
$$\frac{\text{Recall} + \text{Specificity}}{2}$$
 (7)

$$G-Mean = \sqrt{Recall \cdot Specificity}$$
 (8)

As can be noted from Equations 7 and 8, both metrics rely solely on the recall and the specificity of a model. The balanced accuracy consists of the arithmetic mean of both metrics, while the G-Mean is their geometric mean. Both metrics can be useful in cases of imbalanced data, as values closer to 1 imply that a model has a high predictive power for both classes.

It can be noted that, while both metrics are similar, due to its mathematical properties, the G-Mean is less sensitive to outliers [2]. An example can be a model that achieves a perfect specificity of 1 by correctly classifying all negative samples, but with a low recall of 0.1. Here, the balanced accuracy would be 0.55, while the G-Mean would be 0.31. This shows how the balanced accuracy can be over-optimistic. In this work, the usage of the G-mean as a metric is implemented as it takes into account the rate of true positives and true negatives for malign cases, as its the most under-represented class.

A wide variety of other classification metrics can be used for cases of imbalanced data, like the Matthews correlation coefficient [21]. This metric corresponds to a correlation coefficient between the observed and predicted classifications. Other metrics include the Youden's index and the Discriminant Power [47]. These metrics, although useful, are not as popular or widely used as the other mentioned classification metrics and might not be as intuitive to understand.

3 Methods

3.1 Experimental Setup

This work proposes the usage of unlabeled data in fine-tuning with the MixMatch SSDL approach [11] . This is done as a mean of improving the performance of deep learning models on the task of binary classification of whole mammogram images under a real-life scenario using a novel target dataset. Evaluations and comparisons are drawn over the performance of deep learning models on the classification of mammogram images obtained in the context of the day-to-day basis of a local medical private clinic of Costa Rica.

For this purpose several experimental configurations were analysed and carried out, as illustrated in Figure

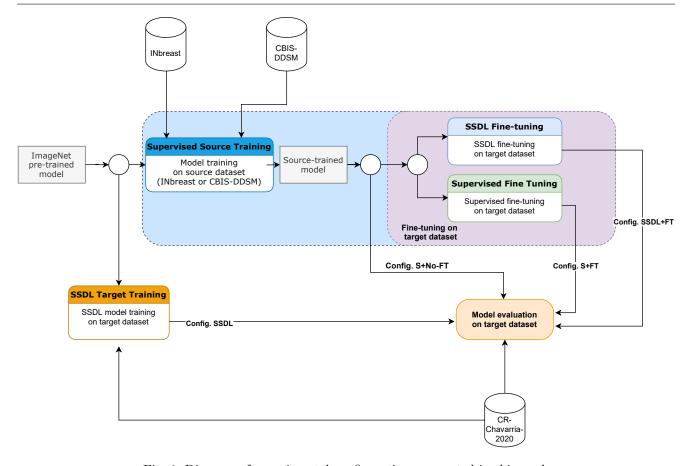


Fig. 1: Diagram of experimental configurations presented in this work

1. Multiple models were trained under different training configurations to evaluate the impact of SSDL on their classification performance on a target dataset. Transfer learning (a simple "Domain adaptation" method) and loss function based class-imbalance correction were also tested. This was done as means for dealing with common difficulties of the implementation of classification models for real-life use cases, such as limited amounts of data and extreme class imbalance (further detailed in section 3.2.2).

Deep learning models were first trained in a supervised manner with complete mammography datasets $D_{s,\text{IN}}^l$ and $D_{s,\text{DDSM}}^l$ in order to obtain source-trained models, which were further fine-tuned on our target Costarrican dataset in a Supervised (Config. $\mathbf{S+FT}$) or Semi-Supervised (Config. $\mathbf{SSDL+FT}$) manner, with limited amounts of labeled observations n_t^l .

The performance of source-trained models, without fine-tuning on the target dataset, was also evaluated (Config. S+No-FT). The performance of models directly trained on the target dataset using SSDL, without domain adaptation from a source mammography dataset (Config. SSDL) was also tested. Class imbalance correction of the loss function with the PBC method developed in [17] was also used as part of the experiments of Configurations SSDL+FT, S+FT and SSDL. The empirical results obtained in this study showed a considerable impact of its usage for correcting data imbalance. Therefore, we included it to train all of the tested SSDL models. Finally, all models were evaluated on test images from our novel target Costarrican dataset.

Due to the extreme data imbalance present in the target dataset (95% of observations belong to the negative class and 5% to the positive class), specific classification metrics, aside from traditional accuracy, were evaluated as performance indicators. Following the research presented in Section 2.5, the G-Mean was chosen as main classification metric. This metric was used to provide insight related to the accuracy of the models on the positive class, without ignoring their predictive power at classifying the negative class. Other metrics including F-2 Score, accuracy, recall, specificity, and precision are also reported.

Deep data set Dissimilarity Measures (DeDiMs) following the novel approach presented by authors in [15] were also evaluated, to provide a more thorough analysis of the impact of the choice of source datasets. This

Table 1: Summary of datasets used in this work

	INbreast [39]	CBIS-DDSM [35]	Target CR Dataset
Origin	Portugal	USA	Costa Rica
Year	2011	1997-2016	2020
Number of cases	115	1566	87
Number of images	410	3103	341
Views	$_{ m MLO}^{ m CC}$	$_{ m MLO}^{ m CC}$	$_{ m MLO}^{ m CC}$
Image mode	Full-field digital	Digitised screen-film	Full-field digital
Categories	BI-RADS ACR Density	BI-RADS ACR Density Verified Pathology	BI-RADS
ROI annotations	Yes	Yes	No

method consists in a simple and practical approach to compare different datasets by measuring their dissimilarity in the feature space of a generic deep learning classification model. We aim to quantitatively assess the similarity between the tested datasets and correlate it with the yielded results.

3.2 Mammography Datasets

Three different mammography datasets were used to carry out the experiments depicted in this work, summarized in Table 1. Sample images are shown in Figure 9. The selected datasets correspond to two popular and publicly available "source" datasets, used solely for model training: the INbreast $(D_{s,\mathrm{IN}}^l)$ and CBIS-DDSM $(D_{s,\mathrm{DDSM}}^l)$. A third novel "target" dataset $D_{t,\mathrm{CR}}^l$ comprised of mammogram images gathered from a private medical clinic of Costa Rica was also used.

3.2.1 Third-party Source Datasets

Introduced in [39], the INbreast dataset is a mammographic database comprised of multiple full-field digital mammograms of patients with a wide variety of anomalies like masses and calcifications. Each image is labeled according to the BI-RADS scale from categories 1 to 6 and their density measure with the American College of Radiology (ACR) standard. The dataset is composed of 410 images in total, collected from 115 different cases.

Since this work is focused on the binary classification of mammograms (i.e. according to the presence of breast anomalies), images from the INbreast dataset were divided into 2 groups. Similar to [44], mammograms labeled with BI-RADS categories 1 and 2 are defined as negative (benign) observations, and the ones labeled with categories 4, 5 and 6 are defined as positive

(malign) observations. Mammograms labeled with categories 0 (non-conclusive) and 3 (probably benign) are ignored. For the INbreast dataset, this process results in 287 negative and 100 positive observations.

The Curated Breast Imaging Subset of Digital Database for Screening Mammography (CBIS-DDSM) dataset, presented in [34] was made publicly available by the The Cancer Imaging Archive (TCIA) [22]. It corresponds to a curated and standardized version of the DDSM dataset [29]. The dataset comprises a total of 3103 digitised screen-film mammography images gathered from 1566 cases, labeled according to the type of anomalies present (masses or calcifications), their BI-RADS category, their ACR density measure and their verified pathology as benign (1728 images) or malign (1375 images). The dataset presents an overlap between cases that are classified as containing masses or calcifications, as some patients presented both. The total number of images detailed here represents the overall total of both mass and calcification cases, as obtained from [35] and subsequently used for model training.

3.2.2 Clínica Chavarría's 2020 Mammogram Target Dataset

The CR-Chavarria-2020 dataset consists of a novel collection of full-field digital mammograms obtained from the Costa Rican medical private clinic Imágenes Médicas Dr. Chavarría Estrada, over a period of one year (referred as CR-Chavarria-2020 in Figure 1). The images are completely anonymized. Specifically, these images correspond to mammograms taken as a result of routinely medical appointments for patients of the clinic across the year 2020. The entire dataset is available for researchers, along with documentation of its distribution, annotations, and extra images that were discarded in the process of constructing the dataset. If the reader is interested in using our collected dataset, please make contact via email with the first author, as we plan to make the dataset publicly available in the future ¹.

We highlight the value of this dataset as target data for the evaluation of deep learning models in the medical domain, as it is highly representative of the operation conditions that production-implemented models would have to deal with, in a medium sized clinic. The complete dataset, referred as $D_{t,\mathrm{CR}}^l$, consists of a set of BI-RADS-labeled images. These are also annotated in

¹The authors using our novel dataset are required to cite this paper, for instance as: Calderon-Ramirez, S., Murillo-Hernandez, D., Rojas-Salazar, K., Elizondo, D. A., Yang, S., Moemeni, A., Molina-Cabello, M. (2021). A Real Use Case of Semi-Supervised Learning for Mammogram Classification in a Local Clinic of Costa Rica.

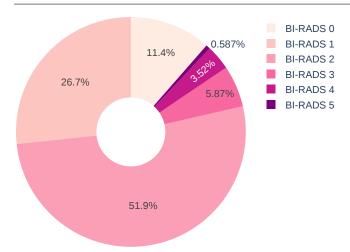


Fig. 2: BI-RADS categories distribution for $D_{t,CR}^l$

a similarly manner as the source datasets, with their respective anonymous patient id, gender, age, type of view, and depicted breast.

The complete $D_{t,\mathrm{CR}}^l$ dataset contains a total of 341 labeled images from 87 patients. Similarly to the INbreast dataset, images from $D_{t,\mathrm{CR}}^l$ were also subject to the same "binarization" process described above. This resulted in the binary-labeled target dataset $D_{t,\mathrm{CR}}^b \subset D_{t,\mathrm{CR}}^l$, with a total of 282 images; 268 negative and 14 positive observations from 68 and 4 patients, respectively.

Figures 2 and 3 illustrate the distribution of both BI-RADS and binary labels for $D_{t,\text{CR}}^l$ and $D_{t,\text{CR}}^b$ respectively. Here, the extreme class imbalance of observations can be better appreciated, being one of the most frequent and troublesome situations that arise in the implementation of machine learning models in the medical domain. In addition, figures 4, 5, 6, 7 and 8 show the distribution of other dimensions of both $D_{t,\text{CR}}^l$ and $D_{t,\text{CR}}^b$, like the depicted view and breast in each mammogram, along with the age of patients. These aspects show more balanced distributions, as is the case with most mammogram datasets, and that the regular age span for patients varies from 40 to almost 90 years old.

Along with the complete $D_{t,\text{CR}}^l$ dataset, a set of discarded images has also been made available. These images were retrieved from the clinic, but were discarded due to low image quality or artifacts (i.e. patients with breast implants). Nevertheless, these could prove to be useful on further investigations, surrounding the robustness of models to domain-specific noise or corruptions in images [30].




Fig. 3: Binary categories distribution for $D_{t,CR}^b$




Fig. 4: Craniocaudal (CC) and Mediolateral Oblique (MLO) views distribution for complete and binary-labeled target datasets



Fig. 5: Depicted breast distribution for complete and binary-labeled target datasets

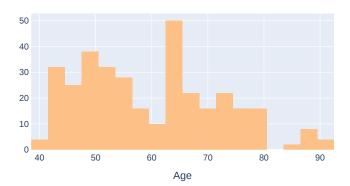


Fig. 6: Age distribution for patients in $D_{t,CR}^l$

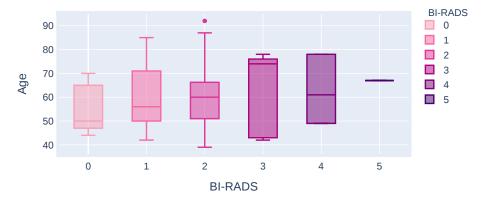


Fig. 7: Age distribution according to BI-RADS categories for patients in $D_{t,CR}^l$

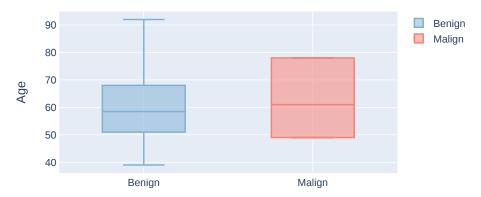


Fig. 8: Age distribution according to binary categories for patients in $D_{t,CR}^b$

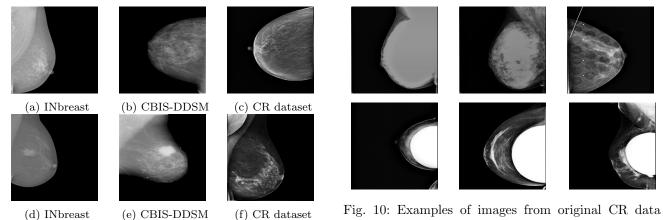


Fig. 9: Examples of benign (top) and malign (bottom) mammogram images from each dataset

3.2.3 Data Preprocessing

(d) INbreast

Mammograms from all three described datasets originally possessed considerably high image resolutions. In order to avoid memory constraints, all image files were resized to 224×224 pixels, after being converted from the DICOM format to the BMP one. Standardization

Fig. 10: Examples of images from original CR data discarded due to image quality (top) or patients with breast implants (bottom)

was applied to all images. The mean and standard deviation, according to the respective dataset employed for training, were calculated (complete INbreast, complete CBIS-DDSM or the corresponding training partition of each of the data subsets of the target dataset). Then, for each image, the channel-wise pixel values were subtracted by the mean and divided by the standard deviation. Standardization is done for each training batch.




Fig. 11: Examples of images with background noise from CBIS-DDSM dataset, before and after being preprocessed

Additionally, through visual inspection of the images in CBIS-DDSM dataset, it can be noted that several mammograms contain multiple forms of noise, mainly due to the digitization process of the screenfilm. Physical labels, orientation tags and scanning artifacts are some of the types of noise inducing elements that can be found in mammogram images, as illustrated in [40]. To minimize the effects of these types of noise, a similar approach to the one described in [8] was implemented and applied to images from the CBIS-DDSM dataset. This is shown in figure 11. Authors in [8] describe the implemented preprocessing pipeline in this work, designed for background removal in mammograms. The process consists mainly on the application of a rolling ball algorithm with radius = 5. This is followed by the application of Huang's fuzzy thresholding and morphological transformations of erosion and dilation. This process results in a binary map that can be used to remove background noise from an image. Such image preprocessing pipeline is implemented in this work, which makes use of the base code made available by the authors of [8] and algorithm implementations from the OpenCV library.

3.2.4 Experiments

All experiments described in this work were implemented in Python using the FastAI and PyTorch libraries, based on the MixMatch implementation described in [13]. The PyTorch implementation of the VGG 19-layer with batch normalization was chosen as the main architecture for the models of all experiments. Additionally, experiments of Configurations SSDL+FT and S+FT were also carried out using PyTorch implementations of ResNet-152 and EfficientNet-

b0. Transfer learning with pre-trained weights from ImageNet was used for the initial models of all experimental configurations. All depicted experiments were executed employing a total of 10 different randomly generated subsets $D^b_{i,t,\mathrm{CR}}|i=1,...,10$ of the binary-labeled target Costarrican dataset $D^b_{t,\mathrm{CR}}$. Each with an average distribution of 70% of images for training and 30% for testing, with observations from different patients for training and for testing. Therefore, around 198 training images (including both labeled and unlabeled), and 82 test images were used.

The models for the configurations $\mathbf{SSDL+FT}$, $\mathbf{S+FT}$ and \mathbf{SSDL} were trained on each data subset $D^b_{i,t,\mathrm{CR}}$, with $n^l_t=20,40$ and 60 amounts of labeled observations, with 95% of observations corresponding to the negative class (benign) and 5% to the positive class (malign). Class-imbalance correction of the loss function was implemented, respectively, as a weighted cross-entropy loss for the supervised models and as the PBC technique [17] for the SSDL models. Supervised models were trained only with the specified n^l_t images from the corresponding training partition of the $D^b_{i,t,\mathrm{CR}}$ target data subset as D^l_t . The SSDL models also used the remaining training images in $D^b_{i,t,\mathrm{CR}}$ as unlabeled data D^t_t .

Data augmentation was implemented for the training dataset as random flips and rotations through the FastAI library, for both supervised and SSDL models. All models were trained for 50 epochs each, with early stopping to avoid overfitting. We used the G-Mean as a criterion for keeping the model from the epoch with the best score after training. A learning rate of 0.00002, a weight decay of 0.001 and a batch size of 10 images were used. The hyper-parameters for MixMatch were set as: K = 2 transformations, a sharpening temperature of T=0.25, an alpha mix value of $\alpha=0.75$ and unsupervised coefficient $\gamma = 200$, following the authors' recommendations in [11]. The G-Mean, F2-Score, traditional accuracy, recall, specificity, and precision were evaluated for each model, using the test data from their respective $D_{i,t,CR}^b$. Results from these metrics were then reported as averages across the 10 target data subsets.

The dissimilarities between the complete source datasets $D_{s,\mathrm{DDSM}}^l$ and $D_{s,\mathrm{IN}}^l$, and the binary-labeled target dataset $D_{t,\mathrm{CR}}^b$ were evaluated following the approach presented in [15]. The cosine distance d_C was chosen as the dissimilarity measure, given its reported behavior in [15]. This was evaluated in the feature space of a generic Wide-ResNet model pre-trained on ImageNet, with the cosine distance calculated between the distributions of two datasets on each feature of the feature space and then summed [15]. We used 10 randomly

Table 2: Classification performance for models of Configuration S+No-FT

Metric	INbreast models		CBIS-DDSM models		
	$ar{x}$	s	$ar{x}$	s	
G-Mean	0.3773	0.1043	0.3476	0.2534	
F2-Score	0.1882	0.0625	0.1347	0.1148	
Accuracy	0.2183	0.0602	0.7379	0.0678	
Recall	0.7667	0.2509	0.2333	0.1876	
Specificity	0.1901	0.0558	0.7639	0.0707	
Precision	0.0470	0.0160	0.0517	0.0467	

Table 3: Classification performance for models of Configuration **SSDL**

Metric	$n_t^l = 20$		n_t^l =	$n_t^l = 40$		$n_t^l = 60$	
Metric	\bar{x}	s	\bar{x}	s	\bar{x}	s	
G-Mean	0.4798	0.1936	0.5720	0.1257	0.6413	0.0929	
F2-Score	0.2169	0.1194	0.2683	0.1168	0.3038	0.0889	
Accuracy	0.5786	0.2212	0.6482	0.2172	0.6869	0.1412	
Recall	0.5167	0.2687	0.5750	0.2648	0.6333	0.2297	
Specificity	0.5815	0.2404	0.6518	0.2354	0.6904	0.1544	
Precision	0.1189	0.1551	0.1079	0.0754	0.1096	0.0491	

selected batches of 40 observations to calculate the feature distribution distances, as suggested in [15].

4 Results and Discussion

The results of each of the described experimental configurations are presented in Tables 6, 2, 3, 4, and 5, as the mean and standard deviation of the corresponding classification metrics, evaluated across each of the 10 random data subsets of the target dataset. Results are also presented accordingly to the number of n_t^l that were used for training (Configs. **SSDL+FT**, **S+FT** and **SSDL**).

The classification performance on the target dataset of source-trained-only models appears to be rather poor, with no clear advantages between the source datasets, as seen in Table 2. The low average G-Mean values yielded by models trained on each of the source datasets show a deficient ability to correctly discriminate between both classes. This situation is confirmed by the yielded average recall and specificity values, which show a clear imbalance of the discrimination accuracy for each class. Low average F2-Score values also reinforce this conclusion, showing a relatively high number of FP in proportion to TP predictions. The "accuracy paradox" can also be seen in the yielded average accuracy scores of Table 2. Models trained on $D_{s,\text{IN}}^l$ scored notably lower accuracy values in comparison to models trained on $D_{s,\text{DDSM}}^l$. However, further analysis suggests that the higher accuracy scores of the latter models were due to their relatively high specificity

scores. This shows a clear bias on the accuracy scores for the majority class (negative cases).

Table 3 shows the classification performance results of models trained with SSDL on the target dataset, without domain adaptation from a source mammography dataset. Considerably high standard deviations are observed for the majority of the results. Despite this, the average values of both G-Mean and F2-Score show steady improvements as the number of n_t^l increases. It is only logical that these models are able to make a better use of an increased number of labeled observations for training. This is mainly due to the fact that they do not possess previous domain-knowledge from a source dataset.

Significant improvements can be perceived in the classification performance of the source-trained models after fine-tuning on the target dataset, as depicted by Tables 4 and 5. Wilcoxon signed-rank tests were applied to these results in order to identify statistically significant (p-values < 0.1) differences between the performance of the models fine-tuned either in a supervised manner or with the SSDL method. Table 4 shows the results of the models first trained on $D_{s,\text{IN}}^l$ and then fine-tuned on the target dataset. It includes all the tested model architectures. Models fine-tuned with SSDL generally yielded moderately better average G-Mean and F2-Score results in comparison to models fine-tuned using a supervised manner. This happens specially when using a reduced number of labeled observations for training $(n_t^l = 20, 40)$, as the perceived gains decrease with a higher value of n_t^l . With more labels, the results tend to reveal less statistical significance with p-values > 0.1.

The results shown in Table 5 correspond to the models that were first trained on $D_{s,\text{DDSM}}^l$ and then fine-tuned on the target dataset. Considerably higher average G-Mean and F2-Score values were yielded by models fine-tuned with SSDL. They show statistical significance when employing lower amounts of labeled observations $(n_t^l = 20, 40)$, specially for the models that used the VGG19 architecture. For these models, the ones that were fine-tuned in a supervised fashion scored higher average specificity values. However, by observing their respective average recall values it is clear that their rate of correct predictions is unbalanced for both classes. These models appear to be biased to the majority class. However, the models with SSDL can be considered to be less biased, according to the yielded results. Their average recall and specificity show a more stable behavior. A similar, yet not so strong trend can be noticed in models of the other tested architectures. Models with supervised fine-tuning also achieved generally higher average accuracy values, when compared to the no fine-tuned models.

In summary, models that were subject to domain adaptation from a source mammography dataset showed improved classification performance results in comparison to the other experimental configurations tested in this work. However, the choice of source dataset and deep learning model architecture are shown to be important factors in the yielded results. Models that used the CBIS-DDSM as source dataset showed better overall results, with more evident trends and noticeable improvements by the use of SSDL. Models that used the INbreast as source dataset scored relatively worse results, with no significant differences between the performance of supervised and SSDL models. Additionally, the performance of supervised models does not change significantly across the different number of labeled observations tested. These models achieved seemingly converging G-Mean values with fairly balanced recall and specificity values from a lower number of n_t^l . This was observed on all tested model architectures.

Regarding the poor performance of configuration S+No-FT, we found that the measurement of the DeDiMs can be an useful warning of choosing one unlabeled data source over another. The dissimilarity between $D_{s,\text{IN}}^l$ and $D_{t,\text{CR}}^b$ was measured as **31.10** ± 1.56, while for the dissimilarity between $D_{s,\text{DDSM}}^l$ and $D_{t,\text{CR}}^b$ was **26.21** \pm 2.31, both results with *p*-values < 0.05. These results indicate that the feature distributions (using a generic ImageNet pre-trained model) between both source datasets and the target dataset are significantly different. This can explain the poor results of Configuration S+No-FT as a high dissimilarity is accurately suggesting that some sort of domain adaption is needed. At the same time, a lower dissimilarity between $D_{s,{
m DDSM}}^l$ and $D_{t,{
m CR}}^b$ might indicate that the former could be better suited to be used as a source dataset, as seen in the yielded performance behavior for both datasets in Tables 4 and 5. The reasons behind a higher dissimilarity between two datasets need to be explored further.

Table 6 summarizes the performance of the models with the lowest number of labels. The average G-Mean scores are shown for models fine-tuned with the lowest number of labeled observations. The results in Table 6 show how the model architecture constitutes an important factor in the yielded performance of the models. As seen previously, SSDL models show better performance in comparison to supervised ones. However, the improved gains are stronger for the more complex models (i.e. architectures with more trainable parameters).

Overall, SSDL models without domain adaptation show significantly lower performance than models with domain adaptation either supervised or with SSDL (Configs. S+FT and SSDL+FT). Low average precision and F2-Score values are observed for models of all experimental configurations. As it was mentioned, for a binary classification task, this implies a considerably high number of false positives in relation to the number of true positives. Nonetheless, it must be taken into account that the target dataset suffers from extreme class imbalance. This causes the calculation of the precision to be highly sensitive to the number of false positives.

Table 4: Results of Configurations SSDL+FT and $\mathbf{S} + \mathbf{F} \mathbf{T}$, using $\mathbf{INbreast}$ as source dataset

(a) VGG19 with batch normalization

1	Market	SSI	OL	Supervised				
n_t^l	Metric	\bar{x}	s	\bar{x}	s			
	G-Mean	0.6764	0.1084	0.6682	0.0770			
	F2-Score	0.3506	0.0973	0.3133	0.0673			
20	Accuracy*	0.7812	0.0727	0.7014	0.0793			
20	Recall	0.5917	0.1687	0.6500	0.1748			
	Specificity*	0.7907	0.0755	0.7048	0.0876			
	Precision*	0.1436	0.0636	0.1074	0.0335			
	G-Mean	0.7017	0.0932	0.6656	0.0877			
	F2-Score	0.3650	0.0899	0.3484	0.1112			
40	Accuracy	0.7742	0.0659	0.7224	0.1590			
40	Recall	0.6417	0.1715	0.6417	0.2081			
	Specificity	0.7810	0.0693	0.7262	0.1721			
	Precision	0.1380	0.0373	0.1837	0.1708			
	G-Mean	0.6689	0.0957	0.6604	0.0876			
	F2-Score	0.3278	0.0958	0.3415	0.1116			
60	Accuracy	0.7211	0.1169	0.7432	0.1374			
60	Recall	0.6250	0.1318	0.6000	0.1748			
	Specificity	0.7267	0.1230	0.7510	0.1466			
	Precision	0.1226	0.0565	0.1822	0.1704			
(b) ResNet-152								

(b) ResNet-152

n_t^l	Metric	SSI	DL	Supervised		
n_t	Metric	\bar{x}	s	\bar{x}	s	
	G-Mean	0.6774	0.1167	0.6767	0.1021	
	F2-Score	0.3577	0.1349	0.3155	0.0828	
20	Accuracy	0.6851	0.1903	0.5978	0.1021	
20	Recall	0.7250	0.2189	0.7917	0.1632	
	Specificity	0.6838	0.2064	0.5883	0.1062	
	Precision*	0.1407	0.0869	0.0946	0.0300	
	G-Mean	0.6762	0.1170	0.6705	0.1037	
	F2-Score	0.3422	0.1285	0.3099	0.0814	
40	Accuracy	0.7075	0.1237	0.6443	0.0940	
40	Recall	0.6750	0.2058	0.7250	0.2189	
	Specificity	0.7080	0.1341	0.6409	0.1017	
	Precision	0.1230	0.0640	0.0975	0.0283	
	G-Mean	0.6539	0.1384	0.6774	0.0787	
	F2-Score	0.3226	0.1386	0.3388	0.0973	
60	Accuracy	0.6590	0.1547	0.7034	0.1353	
00	Recall	0.6667	0.2041	0.6667	0.1179	
	Specificity	0.6584	0.1599	0.7051	0.1442	
	Precision	0.1201	0.0803	0.1231	0.0567	

(c) EfficientNet-b0

		` /				
n_t^l	Metric	SSI	OL	Supervised		
n_t	Wetric	$ar{x}$	s	$ar{x}$	s	
	G-Mean	0.6512	0.1081	0.6393	0.0603	
	F2-Score	0.3282	0.1142	0.2954	0.0538	
20	Accuracy	0.7440	0.1433	0.7011	0.1072	
20	Recall	0.6000	0.2108	0.5917	0.1208	
	Specificity	0.7519	0.1565	0.7062	0.1157	
	Precision	0.1309	0.0624	0.1041	0.0338	
	G-Mean*	0.6752	0.0977	0.6401	0.0754	
	F2-Score	0.3331	0.0999	0.2920	0.0598	
40	Accuracy	0.7090	0.1174	0.7139	0.0768	
40	Recall	0.6667	0.2041	0.5750	0.1208	
	Specificity	0.7107	0.1273	0.7209	0.0797	
	Precision	0.1161	0.0470	0.0999	0.0232	
	G-Mean*	0.6620	0.0919	0.6422	0.0869	
	F2-Score	0.3274	0.1031	0.2975	0.0808	
60	Accuracy	0.7229	0.1279	0.7161	0.0836	
	Recall	0.6250	0.1768	0.5750	0.1208	
	Specificity	0.7282	0.1376	0.7234	0.0851	
	Precision	0.1196	0.0540	0.1036	0.0352	

Table 5: Results of Configurations SSDL+FT and S+FT, using CBIS-DDSM as source dataset

(a) VGG19 with batch normalization

n_t^l	Metric	SSI	OL	Supervised		
n_t	Metric	\bar{x}	s	\bar{x}	s	
	G-Mean*	0.7313	0.0742	0.5163	0.2826	
	F2-Score*	0.3910	0.0909	0.2892	0.1797	
20	Accuracy*	0.7455	0.1115	0.8333	0.0710	
20	Recall*	0.7333	0.1459	0.3917	0.2292	
	Specificity*	0.7460	0.1201	0.8554	0.0709	
	Precision	0.1480	0.0551	0.1602	0.1289	
	G-Mean*	0.7264	0.0909	0.5743	0.2308	
	F2-Score*	0.3917	0.1124	0.3070	0.1597	
40	Accuracy*	0.7588	0.1041	0.8286	0.0476	
40	Recall*	0.7083	0.1632	0.4417	0.2189	
	Specificity*	0.7612	0.1110	0.8482	0.0453	
	Precision	0.1520	0.0630	0.1458	0.0899	
	G-Mean	0.7142	0.0717	0.6466	0.1462	
	F2-Score	0.3779	0.1001	0.3436	0.1506	
60	Accuracy*	0.7197	0.1445	0.8132	0.0723	
60	Recall*	0.7333	0.1459	0.5333	0.2297	
	Specificity*	0.7190	0.1559	0.8271	0.0779	
	Precision	0.1435	0.0623	0.1539	0.0834	

Motric	SSI	OL	Supervised		
Metric	$ar{x}$	s	$ar{x}$	s	
G-Mean*	0.6575	0.1075	0.5857	0.0598	
F2-Score	0.3068	0.1151	0.2527	0.0672	
Accuracy*	0.5910	0.1184	0.6828	0.1286	
Recall*	0.7583	0.1687	0.5000	0.0000	
Specificity*	0.5825	0.1234	0.6925	0.1354	
Precision	0.0959	0.0538	0.0917	0.0432	
G-Mean	0.5947	0.1502	0.5759	0.0626	
F2-Score	0.2610	0.1228	0.2426	0.0643	
Accuracy	0.6541	0.0909	0.6616	0.1327	
Recall	0.5833	0.2966	0.5000	0.0000	
Specificity	0.6569	0.1002	0.6703	0.1397	
Precision	0.0839	0.0416	0.0848	0.0368	
G-Mean	0.6153	0.1250	0.5561	0.0769	
F2-Score	0.2706	0.1003	0.2207	0.0642	
Accuracy	0.6869	0.0613	0.6463	0.0909	
Recall	0.5750	0.2372	0.4750	0.0791	
Specificity	0.6931	0.0696	0.6554	0.0940	
Precision	0.0907	0.0399	0.0731	0.0306	
	F2-Score Accuracy* Recall* Specificity* Precision G-Mean F2-Score Accuracy Recall Specificity Precision G-Mean F2-Score Accuracy Recall Specificity Recall Specificity	Metric x G-Mean* 0.6575 F2-Score 0.3068 Accuracy* 0.5910 Recall* 0.7583 Specificity* 0.5825 Precision 0.0959 G-Mean 0.5947 F2-Score 0.2610 Accuracy 0.6541 Recall 0.5833 Specificity 0.6569 Precision 0.0839 G-Mean 0.6153 F2-Score 0.2706 Accuracy 0.6869 Recall 0.5750 Specificity 0.6931	G-Mean* 0.6575 0.1075 F2-Score 0.3068 0.1151 Accuracy* 0.5910 0.1184 Recall* 0.7583 0.1687 Specificity* 0.5825 0.1234 Precision 0.0959 0.0538 G-Mean 0.5947 0.1502 F2-Score 0.2610 0.1228 Accuracy 0.6541 0.0909 Recall 0.5833 0.2966 Specificity 0.6569 0.1002 Precision 0.0839 0.0416 G-Mean 0.6153 0.1250 F2-Score 0.2706 0.1003 Accuracy 0.6869 0.0613 Recall 0.5750 0.2372 Specificity 0.6931 0.0696	Metric \$x\$ \$x\$ G-Mean* 0.6575 0.1075 0.5857 F2-Score 0.3068 0.1151 0.2527 Accuracy* 0.5910 0.1184 0.6828 Recall* 0.7583 0.1687 0.5000 Specificity* 0.5825 0.1234 0.6925 Precision 0.0959 0.0538 0.0917 G-Mean 0.5947 0.1502 0.5759 F2-Score 0.2610 0.1228 0.2426 Accuracy 0.6541 0.0909 0.6616 Recall 0.5833 0.2966 0.5000 Specificity 0.6569 0.1002 0.6703 Precision 0.0839 0.0416 0.0848 G-Mean 0.6153 0.1250 0.5561 F2-Score 0.2706 0.1003 0.2207 Accuracy 0.6869 0.0613 0.6463 Recall 0.5750 0.2372 0.4750 Specificity 0.6931 0.0696	

(c) EfficientNet-b0

n_t^l	Metric	SSI	OL	Supervised		
n_t	Metric	\bar{x}	s	\bar{x}	s	
	G-Mean	0.5982	0.0753	0.5824	0.0489	
	F2-Score	0.2521	0.0550	0.2467	0.0475	
20	Accuracy	0.6537	0.0938	0.5886	0.1426	
20	Recall	0.5750	0.2058	0.6083	0.1419	
	Specificity	0.6579	0.1060	0.5866	0.1558	
	Precision	0.0805	0.0181	0.0757	0.0192	
	G-Mean	0.6055	0.1048	0.6130	0.0519	
	F2-Score	0.2607	0.0853	0.2884	0.0668	
40	Accuracy	0.6693	0.0894	0.7182	0.1443	
40	Recall	0.5750	0.2372	0.5333	0.1054	
	Specificity	0.6742	0.0993	0.7264	0.1562	
	Precision	0.0839	0.0262	0.1102	0.0436	
	G-Mean	0.6014	0.0971	0.6013	0.0618	
	F2-Score	0.2612	0.0835	0.2792	0.0882	
60	Accuracy	0.6810	0.1020	0.7187	0.1391	
	Recall	0.5500	0.1972	0.5000	0.0000	
	Specificity	0.6878	0.1106	0.7300	0.1459	
	Precision	0.0890	0.0362	0.1200	0.0869	

^{*}Statistic significance (p-values < 0.1) for average differences between results of SSDL and supervised models

5 Conclusions

In this work we discussed the impact of using target datasets with scarce labeled data for the implementation of deep learning models for detection of malign cases using mammogram images. As presented in [7], the determination and study of an appropriate dataset size is an open challenge. It is clear that under real-life conditions medical imaging implementation of deep learning systems is still challenging, namely due to problems with labeled data scarcity and classimbalance.

To tackle these challenges on the binary classification of mammograms, a combination of transfer learning from source datasets and semi-supervised learning to leverage unlabeled target data has been proposed and tested. In the experiments carried out in this work, it was found that this combination can achieve significant improvements on the classification performance of deep learning models. This surpasses the performance of models without transfer learning or without the use of unlabeled target data. The experiments depicted in this work also reveal the importance of using transfer learning from source datasets. Still, the highest yielded performance of the SSDL model with fine-tuning have a large room for improvement. Enforcing further supervision with small labeled datasets (pixel-wise labelling of the regions of interest), with other forms of weak or selfsupervision [51] and/or domain adaptation [45], along with more complex data augmentation approaches as in [24], might improve the overall model performance. This must be done without raising too much the need of expensive labelling.

The target dataset used in this work for the evaluation of the models in the classification of mammograms is made available for other interested researchers. The dataset built for this work shows real-life conditions for the deployment of a deep learning based CAD system. Highly imbalanced data, along with the significant distribution mismatch with the source datasets are important and frequent aspects of real-world test data for medical imaging based CAD.

The dissimilarity between source and target datasets was found to be significant with the use of the DeDiMs measures. This was shown to be the case even though images from datasets can be considered as semantically and visually similar. Related to this, the choice of the source dataset was found to be an important factor in the yielded improvements in the performance of models, as well as model complexity. The measured DeDiMs can be considered a generic and simple data quality metric, similar to the data heterogeneity metric proposed in [38]. Specific data quality metrics

for deep learning models to solve medical imaging challenges is still a very under-developed topic in the literature. We plan to contribute in such data-oriented metric development in the medical imaging analysis field in the future. Additionally further evaluation of modeloriented properties of deep learning models such as robustness and predictive uncertainty, as recommended in [41], is also a future work-line to develop.

Acknowledgements This research was partially supported by a machine allocation on Kabré supercomputer at the Costa Rica National High Technology Center. This work is partially supported by by the Ministry of Science, Innovation and Universities of Spain under grant number RTI2018-094645-B-I00, project name Automated detection with low cost hardware of unusual activities in video sequences. It is also partially supported by the Autonomous Government of Andalusia (Spain) under project UMA18-FEDERJA-084, project name Anomalous behaviour agent detection by deep learning in low cost video surveillance intelligent systems. All of them include funds from the European Regional Development Fund (ERDF). The authors thankfully acknowledge the computer resources, technical expertise and assistance provided by the SCBI (Supercomputing and Bioinformatics) center of the University of Malaga. The authors also acknowledge the funding from the Instituto de Investigación Biomédica de Málaga – IBIMA and the Universidad de Málaga. Lastly, the authors acknowledge the contribution and support from Luis Chavarría as a member of the executive board of the private clinic Imágenes Médicas Dr. Chavarría Estrada, for granting permission to the access and usage of mammogram images from the clinic.

Compliance with ethical standards

Conflicts of interest The authors have no conflicts of interest to declare that are relevant to the content of this article.

Research involving human participants The authors declare that both this study and the data gathering process of these images comply with the Declaration of Helsinki for medical research, as this study was entirely observational, did not directly involve any human subjects. Furthermore, no identifiable human material nor data were used. The data was already acquired during regular clinical practice. Additionally, data from the INbreast and CBIS-DDSM datasets was gathered from previous third-party studies and made available for academic research.

The authors count with explicit permission from the Chavarría Clinic executive board for the usage of their images for academic purposes. Additionally, since the data was collected from patients of the clinic in 2020, it was already gathered by the beginning of this study and was ultimately provided to the research team.

Table 6: Summary of G-Mean scores for models of Configs. **SSDL+FT** and **S+FT**, using $n_t^l = 20$ labeled observations. The corresponding number of trainable parameters for the PyTorch-implementation of each architecture is also shown

Model		INbr	east			CBIS-I	DDSM		Trainable
Architecture	SSI	OL	Supe	rvised	SSI	DL	Super	rvised	Parameters
Architecture	$ar{x}$	s	$ar{x}$	s	$ar{x}$	s	$ar{x}$	s	1 arameters
VGG19_bn	0.6764	0.1084	0.6682	0.0770	0.7313	0.0742	0.5163	0.2826	139.5 Million
ResNet-152	0.6774	0.1167	0.6767	0.1021	0.6575	0.1075	0.5857	0.0598	58.1 Million
EfficientNet-b0	$\boldsymbol{0.6512}$	0.1081	0.6393	0.0603	0.5982	0.0753	0.5824	0.0489	4 Million

Author Biographies

Saúl Calderón-Ramírez received his B.Sc. in computer science and his M.Sc. in electrical engineering from the University of Costa Rica, Costa Rica. He is currently a Ph.D student at De Montfort University, U.K.

Diego Murillo-Hernández received the B.Sc. degree in computer engineering from the Costa Rica Institute of Technology, Costa Rica, in 2021. He is currently working in the private industry as a data scientist.

Kevin Rojas-Salazar currently an undergraduate student of Computer Engineering at the Costa Rica Institute of Technology, Costa Rica. He works as a research assistant of deep learning applications.

David Elizondo (Senior Member, IEEE) received his P h.D. in computer science, U.of Strasbourg, France. He is currently a professor at De Montfort University, U.K.

Shengxiang Yang (Senior Member, IEEE) received the Ph.D. degree from Northeastern University, China. He is currently Director of the Centre for Computational Intelligence, De Montfort University, U.K.

Armaghan Moemeni received the Ph.D. degree in computer science from De Montfort University. She is currently an Assistant Professor in computer science with the University of Nottingham.

Miguel Molina-Cabello received the Ph.D. degree in computer engineering from the University of Málaga. He works at the University of Málaga, where he holds a teaching and researching position.

References

 Abdelhafiz, D., Yang, C., Ammar, R., Nabavi, S.: Deep convolutional neural networks for mammography: advances, challenges and applications. BMC bioinformatics 20(11), 1–20 (2019)

- Akosa, J.: Predictive accuracy: A misleading performance measure for highly imbalanced data. In: Proceedings of the SAS Global Forum, vol. 12 (2017)
- 3. Alfaro, E., Fonseca, X.B., Albornoz, E.M., Martínez, C.E., Ramrez, S.C.: A brief analysis of u-net and mask r-cnn for skin lesion segmentation. In: 2019 IEEE International Work Conference on Bioinspired Intelligence (IWOBI), pp. 000123-000126. IEEE (2019)
- Alkhaleefah, M., Ma, S.C., Chang, Y.L., Huang, B., Chittem, P.K., Achhannagari, V.P.: Double-shot transfer learning for breast cancer classification from x-ray images. Applied Sciences 10(11), 3999 (2020)
- American Cancer Society: Breast cancer facts & figures 2019-2020. American Cancer Society, Inc. pp. 1–44 (2019)
- Bakalo, R., Goldberger, J., Ben-Ari, R.: Weakly and semi supervised detection in medical imaging via deep dual branch net. Neurocomputing 421, 15–25 (2021). DOI https://doi.org/10.1016/j.neucom.2020.09.037
- Balki, I., Amirabadi, A., Levman, J., Martel, A.L., Emersic, Z., Meden, B., Garcia-Pedrero, A., Ramirez, S.C., Kong, D., Moody, A.R., et al.: Sample-size determination methodologies for machine learning in medical imaging research: a systematic review. Canadian Association of Radiologists Journal 70(4), 344–353 (2019)
- 8. Beeravolu, A.R., Azam, S., Jonkman, M., Shanmugam, B., Kannoorpatti, K., Anwar, A.: Preprocessing of breast cancer images to create datasets for deep-cnn. IEEE Access (2021)
- Bermudez, A., Calderon-Ramirez, S., Thang, T., Tyrrell, P., Moemeni, A., Yang, S., Torrents-Barrena, J.: A first glance to the quality assessment of dental photostimulable phosphor plates with deep learning. In: 2020 International Joint Conference on Neural Networks (IJCNN), pp. 1–6. IEEE (2020)
- Berrar, D., Flach, P.: Caveats and pitfalls of roc analysis in clinical microarray research (and how to avoid them). Briefings in bioinformatics 13(1), 83–97 (2012)
- Berthelot, D., Carlini, N., Goodfellow, I., Papernot, N., Oliver, A., Raffel, C.A.: Mixmatch: A holistic approach to semi-supervised learning. In: Advances in Neural Information Processing Systems, pp. 5049–5059 (2019)
- 12. Calderon-Ramirez, S., Fallas, F., Zumbado, M., Tyrrell, P.N., Stark, H., Emersic, Z., Meden, B., Solis, M.: Assessing the impact of the deceived non local means filter as a preprocessing stage in a convolutional neural network based approach for age estimation using digital hand x-ray images. In: 2018 25th IEEE International Conference on Image Processing (ICIP), pp. 1752–1756. IEEE (2018)
- 13. Calderon-Ramirez, S., Giri, R., Yang, S., Moemeni, A., Umana, M., Elizondo, D., Torrents-Barrena, J., Molina-Cabello, M.A.: Dealing with scarce labelled data: Semisupervised deep learning with mix match for covid-19 detection using chest x-ray images. In: 2020 25th Inter-

- national Conference on Pattern Recognition (ICPR), pp. 5294-5301. IEEE (2021)
- Calderon-Ramirez, S., Murillo-Hernandez, D., Rojas-Salazar, K., Calvo-Valverde, L.A., Yang, S., Moemeni, A., Elizondo, D., Lopez-Rubio, E., Molina-Cabello, M.: Improving uncertainty estimations for mammogram classification using semi-supervised learning. In: Institute of Electrical and Electronics Engineers (2021)
- Calderon-Ramirez, S., Oala, L.: More than meets the eye: Semi-supervised learning under non-iid data. arXiv preprint arXiv:2104.10223 (2021)
- Calderon-Ramirez, S., Oala, L., Torrents-Barrena, J., Yang, S., Moemeni, A., Samek, W., Molina-Cabello, M.A.: Mixmood: A systematic approach to class distribution mismatch in semi-supervised learning using deep dataset dissimilarity measures. arXiv preprint arXiv:2006.07767 (2020)
- 17. Calderon-Ramirez, S., Shengxiang-Yang, Moemeni, A., Elizondo, D., Colreavy-Donnelly, S., Chavarria-Estrada, L.F., Molina-Cabello, M.A.: Correcting data imbalance for semi-supervised covid-19 detection using x-ray chest images (2020)
- Calvo, I., Calderon-Ramirez, S., Torrents-Barrena, J., Muñoz, E., Puig, D.: Assessing the impact of a preprocessing stage on deep learning architectures for breast tumor multi-class classification with histopathological images. In: Latin American High Performance Computing Conference, pp. 262–275. Springer (2019)
- Castro, E., Cardoso, J.S., Pereira, J.C.: Elastic deformations for data augmentation in breast cancer mass detection. In: 2018 IEEE EMBS International Conference on Biomedical & Health Informatics (BHI), pp. 230–234. IEEE (2018)
- Cheplygina, V., de Bruijne, M., Pluim, J.P.: Not-so-supervised: A survey of semi-supervised, multi-instance, and transfer learning in medical image analysis. Medical Image Analysis 54, 280–296 (2019). DOI https://doi.org/10.1016/j.media.2019.03.009
- Chicco, D., Jurman, G.: The advantages of the matthews correlation coefficient (mcc) over f1 score and accuracy in binary classification evaluation. BMC genomics 21(1), 1– 13 (2020)
- Clark, K., Vendt, B., Smith, K., Freymann, J., Kirby, J., Koppel, P., Moore, S., Phillips, S., Maffitt, D., Pringle, M., et al.: The cancer imaging archive (tcia): Maintaining and operating a public information repository. Journal of Digital Imaging 26(6), 1045–1057 (2013). DOI https: //doi.org/10.1007/s10278-013-9622-7
- Devarriya, D., Gulati, C., Mansharamani, V., Sakalle, A., Bhardwaj, A.: Unbalanced breast cancer data classification using novel fitness functions in genetic programming. Expert Systems with Applications 140, 112866 (2020)
- Domingues, I., Abreu, P.H., Santos, J.: Bi-rads classification of breast cancer: a new pre-processing pipeline for deep models training. In: 2018 25th IEEE International Conference on Image Processing (ICIP), pp. 1378–1382. IEEE (2018)
- Falconí, L., Pérez, M., Aguilar, W., Conci, A.: Transfer learning and fine tuning in mammogram bi-rads classification. In: 2020 IEEE 33rd International Symposium on Computer-Based Medical Systems (CBMS), pp. 475–480. IEEE (2020)
- Forman, G., Scholz, M.: Apples-to-apples in cross-validation studies: pitfalls in classifier performance measurement. Acm Sigkdd Explorations Newsletter 12(1), 49–57 (2010)

- Hamidinekoo, A., Denton, E., Rampun, A., Honnor, K., Zwiggelaar, R.: Deep learning in mammography and breast histology, an overview and future trends. Medical image analysis 47, 45–67 (2018)
- 28. Hand, D.J.: Measuring classifier performance: a coherent alternative to the area under the roc curve. Machine learning **77**(1), 103–123 (2009)
- Heath, M., Bowyer, K., Kopans, D., Kegelmeyer, P., Moore, R., Chang, K., Munishkumaran, S.: Current status of the digital database for screening mammography. In: Digital mammography, pp. 457–460. Springer (1998). DOI https://doi.org/10.1007/978-94-011-5318-8_75
- Hendrycks, D., Dietterich, T.: Benchmarking neural network robustness to common corruptions and perturbations (2019)
- 31. Johnson, J.M., Khoshgoftaar, T.M.: Deep learning and thresholding with class-imbalanced big data. In: 2019 18th IEEE International Conference On Machine Learning And Applications (ICMLA), pp. 755–762. IEEE (2019)
- Korkinof, D., Rijken, T., O'Neill, M., Yearsley, J., Harvey,
 H., Glocker, B.: High-resolution mammogram synthesis
 using progressive generative adversarial networks (2019)
- Kubat, M., Matwin, S., et al.: Addressing the curse of imbalanced training sets: one-sided selection. In: Icml, vol. 97, pp. 179–186. Citeseer (1997)
- 34. Lee, R.S., Gimenez, F., Hoogi, A., Miyake, K.K., Gorovoy, M., Rubin, D.L.: A curated mammography data set for use in computer-aided detection and diagnosis research. Scientific Data 4(1) (2017). DOI https://doi.org/10.1038/sdata.2017.177
- 35. Lee, R.S., Gimenez, F., Hoogi, A., Rubin, D.: Curated breast imaging subset of ddsm. The cancer imaging archive (2016). DOI https://doi.org/10.7937/K9/TCIA. 2016.7O02S9CY
- 36. Lévy, D., Jain, A.: Breast mass classification from mammograms using deep convolutional neural networks. arXiv preprint arXiv:1612.00542 (2016)
- Maratea, A., Petrosino, A., Manzo, M.: Adjusted f-measure and kernel scaling for imbalanced data learning. Information Sciences 257, 331–341 (2014)
- 38. Mendez, M., Calderon, S., Tyrrell, P.N.: Using cluster analysis to assess the impact of dataset heterogeneity on deep convolutional network accuracy: A first glance. In: Latin American High Performance Computing Conference, pp. 307–319. Springer (2019)
- Moreira, I., Amaral, I., Domingues, I., Cardoso, A., Cardoso, M., Cardoso, J.: Inbreast: Toward a full-field digital mammographic database. Academic radiology 19, 236–48 (2011). DOI 10.1016/j.acra.2011.09.014
- Mustra, M., Grgic, M., Rangayyan, R.M.: Review of recent advances in segmentation of the breast boundary and the pectoral muscle in mammograms. Medical & biological engineering & computing 54(7), 1003–1024 (2016)
- Oala, L., Fehr, J., Gilli, L., Balachandran, P., Leite, A.W., Calderon-Ramirez, S., Li, D.X., Nobis, G., Alvarado, E.A.M., Jaramillo-Gutierrez, G., et al.: Ml4h auditing: From paper to practice. In: Machine Learning for Health, pp. 280–317. PMLR (2020)
- Pardamean, B., Cenggoro, T.W., Rahutomo, R., Budiarto, A., Karuppiah, E.K.: Transfer learning from chest x-ray pre-trained convolutional neural network for learning mammogram data. Procedia Computer Science 135, 400–407 (2018). DOI https://doi.org/10.1016/j.procs. 2018.08.190. The 3rd International Conference on Computer Science and Computational Intelligence (ICCSCI

- 2018): Empowering Smart Technology in Digital Era for a Better Life
- 43. Powers, D.M.: What the f-measure doesn't measure: Features, flaws, fallacies and fixes. arXiv preprint arXiv:1503.06410 (2015)
- Shen, L., Margolies, L.R., Rothstein, J.H., Fluder, E., McBride, R., Sieh, W.: Deep learning to improve breast cancer detection on screening mammography. Scientific reports 9(1), 1–12 (2019)
- 45. Shen, R., Yao, J., Yan, K., Tian, K., Jiang, C., Zhou, K.: Unsupervised domain adaptation with adversarial learning for mass detection in mammogram. Neurocomputing **393**, 27–37 (2020)
- Shi, Q., Zhang, H.: Fault diagnosis of an autonomous vehicle with an improved sym algorithm subject to unbalanced datasets. IEEE Transactions on Industrial Electronics (2020)
- Sokolova, M., Japkowicz, N., Szpakowicz, S.: Beyond accuracy, f-score and roc: a family of discriminant measures for performance evaluation. In: Australasian joint conference on artificial intelligence, pp. 1015–1021. Springer (2006)
- Sun, L., Wen, J., Wang, J., Zhao, Y., Xu, Y.: Classification of mammography based on semi-supervised learning.
 In: 2020 IEEE International Conference on Progress in Informatics and Computing (PIC), pp. 104–111 (2020).
 DOI 10.1109/PIC50277.2020.9350835
- 49. Sun, W., Tseng, T.L.B., Zhang, J., Qian, W.: Enhancing deep convolutional neural network scheme for breast cancer diagnosis with unlabeled data. Computerized Medical Imaging and Graphics 57, 4–9 (2017). DOI https: //doi.org/10.1016/j.compmedimag.2016.07.004. Recent Developments in Machine Learning for Medical Imaging Applications
- 50. Tajbakhsh, N., Shin, J.Y., Gurudu, S.R., Hurst, R.T., Kendall, C.B., Gotway, M.B., Liang, J.: On the necessity of fine-tuned convolutional neural networks for medical imaging. In: Deep Learning and Convolutional Neural Networks for Medical Image Computing, pp. 181–193. Springer (2017). DOI https://doi.org/10.1007/978-3-319-42999-1_11
- 51. Tardy, M., Mateus, D.: Looking for abnormalities in mammograms with self-and weakly supervised reconstruction. IEEE Transactions on Medical Imaging (2021)
- Wang, S., Liu, W., Wu, J., Cao, L., Meng, Q., Kennedy, P.J.: Training deep neural networks on imbalanced data sets. In: 2016 International Joint Conference on Neural Networks (IJCNN), pp. 4368–4374 (2016). DOI 10.1109/ IJCNN.2016.7727770
- Wild, C., Weiderpass, E., Stewart, B.: World cancer report: cancer research for cancer prevention. Lyon: International Agency for Research on Cancer (2020)
- Wu, E., Wu, K., Lotter, W.: Synthesizing lesions using contextual gans improves breast cancer classification on mammograms (2020)