

Efficient algorithms for collecting the statistics of large-scale IP address data

Jie Chen^{a,*}

^aCollege of Computer Science, Sichuan University, Chengdu 610065, P.R. China

Abstract

Compiling the statistics of large-scale IP address data is an essential task in network traffic measurement. The statistical results are used to evaluate the potential impact of user behaviors on network traffic. This requires algorithms that are capable of storing and retrieving a high volume of IP addresses within time and memory constraints. In this paper, we present two efficient algorithms for collecting the statistics of large-scale IP addresses that balance time efficiency and memory consumption. The proposed solutions take into account the sparse nature of the statistics of IP addresses while building the hash function and maintain a dynamic balance among layered memory blocks. There are two layers in the first proposed method, each of which contains a limited number of memory blocks. Each memory block contains 256 elements of size 256×8 bytes for a 64-bit system. In contrast to built-in hash mapping functions, the proposed solution completely avoids expensive hash collisions while retaining the linear time complexity of hash-based solutions. Moreover, the mechanism dynamically determines the hash index length according to the range of IP addresses, and can balance the time and memory constraints. In addition, we propose an efficient parallel scheme to speed up the collection of statistics. The experimental results on several synthetic datasets show that the proposed method substantially outperforms the baselines with respect to time and memory space efficiency.

Keywords: large-scale IP addresses, memory blocks, hash table, sorting, network traffic

1. Introduction

In recent years, the amount of network traffic has increased significantly because of the rapid development of emerging network services, such as video streaming, instant messaging, and online payment services. It is crucial to evaluate the potential impact of the features of user behavior on network traffic management. User behavior features are usually extracted from IP packets, which contain IP addresses. There is a close correspondence between informative user behavior features and the IP addresses that frequently appear in the packets. Hence, how to effectively obtain the statistics of large-scale IP address data in a timely manner, such as every few minutes, is a challenging problem in network traffic measurement. Obtaining the statistics of large-scale IP address data typically consists of two tasks: counting the number of occurrences of each IP address and sorting the results in a specific order.

A number of statistical algorithms for solving this problem have been studied in the last few decades [1, 2, 3, 4, 5]. A classic divide-and-conquer strategy has been proposed in which IP addresses are first divided into multiple subsets. Then, each subset is individually computed using a statistics collection method, such as a top k trie algorithm [6].

Finally, to merge and sort the results of the multiple subsets, sorting algorithms (e.g., bubble sort, insertion sort, merge sort, selection sort, or quick sort) are used [7, 8]. However, the reduction of computational cost is an intractable problem in the sorting procedure [9, 10, 11]. For example, the average complexity and worst-case complexity of the bubble, insertion, and selection sort algorithms are $O(n^2)$ [8, 12], where n represents the number of unsorted records. This indicates that the merging and sorting step of the multiple subsets occupies a large amount of memory and is extremely computationally costly to perform when collecting the statistics of millions or tens of millions of IP addresses. Therefore, statistics collection algorithms using the divide-and-conquer strategy still face several challenges caused by the rapid increase of the large-scale records, such as bounded memory and computational cost restrictions.

A hash table is an effective method for collecting the statistics of IP addresses [13]. It uses a hash function to compute a hash codes for an array of buckets with the statistical results. The hash function assigns each key to a unique bucket for each IP address. Unfortunately, the hash function can generate the same hash code for more than one IP address. With the increase in the generation of big data, millions or tens of millions of records have become ubiquitous in network traffic. Therefore, this approach could cause several hash collisions, especially for a large number of IP addresses. Although many strategies can be employed to avoid collisions, such as linear probing,

*This work was partially supported by National Natural Science Foundation of China (NSFC) under Grants 61303015 and Sichuan Science and Technology Program under Grant 2021YJ0078

*Corresponding author.

Email address: chenjie2010@scu.edu.cn (Jie Chen)

quadratic probing, and double hashing, they require extra storage space and computation.

The statistics collection algorithm should be stable, effective, and efficient for large-scale records. To overcome the disadvantages of general statistics collection methods, a number of parallel techniques have been developed for large-scale records by optimizing the efficiency and complexity. For example, these algorithms have been extended to the corresponding parallel structures for parallel hardware architectures, such as many-core and multi-core platforms [14, 15]. However, these parallel statistics collection algorithms are still the parallel computing variants of the original algorithms, and they continue to ignore the importance of the original characteristics of the unsorted records.

In this paper, we present two efficient algorithms for collecting the statistics of large-scale IP address data. We can obtain the frequently occurring IP addresses from the statistics, which can be regarded as a pre-processing step of user behavior analysis in network traffic management. Because of the increasing volume and speed of network traffic, it has become expensive and impractical to handle all IP addresses contained the IP packets. By taking full advantage of the successive characteristics of memory addresses and the fixed range of each individual part of an IP address, we design two relationship mapping mechanisms between memory blocks and IP addresses for a four-dimensional sparse matrix. The sparse matrix stores the number of occurrences of the individual IP addresses, in which the positions of the rows and columns are employed to represent the mapping relationship between the memory blocks and IP addresses. Specifically, we construct a two-layer memory block (TLMB) to implement the first mapping mechanism for the IP addresses. In addition, we employ a single shared memory block (SSMB) for all IP addresses to implement the other mapping mechanism of the IP addresses. The mechanisms of the mapping relationship effectively remove the information about trivial user behaviors that are irrelevant for statistical analysis. The proposed methods can be extended to the corresponding parallel versions for specific hardware architectures. Extensive experiments on several synthetic datasets show the effectiveness of the proposed method.

Our contributions are summarized as follows.

1. We present two efficient methods for collecting the statistics of large-scale IP address data that use two different relationship mapping mechanisms, TLMB and SSMB, between memory blocks and IP addresses for a four-dimensional sparse matrix.
2. The computational cost of TLMB is linearly proportional to the number of IP addresses with a limited memory resource, and the memory use of SSMB remains almost unchanged with a reasonable computational cost, regardless of the number of IP addresses.
3. A parallel computation optimization scheme for multiple computers is proposed to effectively improve

Table 1: Time complexity of various sorting algorithms.

Algorithm	<i>Best</i> (n)	<i>Average</i> (n)	<i>Worst</i> (n)
Bubble sort	$O(n)$	$O(n^2)$	$O(n^2)$
Insertion sort	$O(n)$	$O(n^2)$	$O(n^2)$
Selection sort	$O(n^2)$	$O(n^2)$	$O(n^2)$
Merge Sort	$O(n \log n)$	$O(n \log n)$	$O(n \log n)$
Quick Sort	$O(n \log n)$	$O(n \log n)$	$O(n^2)$
Heap Sort	$O(n \log n)$	$O(n \log n)$	$O(n \log n)$

the computational efficiency and dramatically reduce memory use.

4. Our extensive experimental results using synthetic datasets demonstrate that our proposed method shows clear superior performance in comparison with the baselines, striking a balance between computational cost and memory use.

The remainder of this paper is organized as follows. We briefly describe some of the original sorting techniques as well as various parallel sorting algorithms in Section 2. In Section 3, we introduce the proposed method. The experimental results are presented in Section 4. Finally, we draw the conclusions of the study in Section 5.

2. Background

2.1. Classical sort techniques

Bubble sort is a classical sorting algorithm in which each element in a list is compared with its neighboring elements and swapped until they are in the desired order [16]. Bubble sort leads to $(n - 1)$ number of passes and $\frac{n(n-1)}{2}$ number of iterations if n elements are given. Insertion sort is a simple and efficient sorting algorithm that iteratively takes one element and finds its appropriate position in the sorted list by comparing it with neighboring elements. It becomes less efficient as the number of records increases. Selection sort determined the smallest number in an unsorted list and swaps it with the first number in the sorted list. Then, it finds the next smallest element from the remaining list and swaps with the second element in the sorted list. Consequently, the number of sorted elements at the top of the list increases while the rest remain unsorted. Merge sort, which is based on the divide-and-conquer principle, repeatedly divides the array into two halves and then combines them in a sorted manner. For more details of classical sort algorithms, such as quick sort and heap sort, we refer the reader to the comments in [17, 7]. It is well known that computational cost and required memory are the primary concerns in sorting algorithms [18, 19]. Table 1 shows the time complexity of the best case, average case, and worst case of several classical sorting algorithms [7, 20, 21].

2.2. Parallel hardware architectures

The hardware architecture of modern processors usually consists of more than two independent central processing

units (CPUs) or graphics processing units (GPUs). Parallel software platforms can be implemented using high-level programming frameworks for specific hardware architectures [22]. The Compute Unified Device Architecture (CUDA) is a parallel computing platform for general computing on GPUs. Most parallel sorting algorithms are variants of standard, well-known sorting algorithms adapted to GPU hardware architecture. For example, Cederman designed a quick sort for the GPU platform [23], and Peters proposed an adaptive bitonic sorting algorithm with a bitonic tree for GPUs [24]. The parallel computation of sorting algorithms is considered to be the most efficient way of sorting elements on parallel hardware architectures [15].



Figure 1: Example of a memory block of size 256×8 bytes containing 256 elements.

3. Proposed method

3.1. Problem Formulation

Assume that IP flow data FD is a sequence of IP records, that is, $FD = \{(p_1, x_1), (p_2, x_2), \dots, (p_n, x_n)\} \in \mathbb{R}^{m \times n}$ and $n \geq 1e^6$, where each pair of elements (p_i, x_i) ($i \in [1, n]$) consists of an IP address p_i and a set of corresponding user behavior attributes x_i . Given a finite set of IP addresses $P = \{p_1, p_2, \dots, p_n\} \in \mathbb{R}^n$, the purpose of the IP address statistics task is to efficiently determine the first k IP addresses of the most frequent occurrences in P , where $k \ll n$.

3.2. IP Address Statistics Task

A standard IP address is composed of four decimal numbers ranging from 0 to 255 which are separated by dot symbols. An individual IP address is logically divided into four parts by splitting it with respect to each dot symbol, and each part of an IP address has an integer value. We create a four-dimensional array for the statistics of IP addresses, where the length of each dimension in the array is 256. Each element of the array can be employed to store the number of occurrences of the IP address according to the relationship mapping between the index of each dimension of the array and the integer value of the corresponding part of the IP address. For example, consider the individual IP address 1.2.3.4 and the four-dimensional array fd_array . The number of occurrences of this IP address is stored in $fd_array[1][2][3][4]$. However, individual IP addresses in the host logs often make up a small proportion of all IP addresses. The array can be considered to be sparse because most of its elements are zeros. Consequently, we can

carefully design a four-dimensional sparse matrix to store the number of an individual IP address by taking full advantage of the successive characteristics of array addresses and the fixed range of an individual part of an IP address.

Algorithm 1 TLMB

Input:

A finite set of IP addresses $X = [x_1, x_2, \dots, x_n] \in \mathbb{R}^{m \times n}$, number $k > 1$.

- 1: Construct 256×256 memory blocks of size 128 MB for the first layer;
- 2: **for** $i = 1 : n$ **do**
- 3: Assume that a, b, c and d each represent one of the integer values of the four parts of IP address x_i .
- 4: Calculate the index of the memory block in the first layer: $p = a \times 255 \times 255 + b \times 255$.
- 5: **if** the value of the j -th element is null in the p -th memory block **then**
- 6: Create a memory block in the second layer, set all elements of the memory block to zero, and store the starting address of the memory block in the j -th element.
- 7: **else**
- 8: Obtain the starting address of the memory block m in the second layer by finding the j -th element of the p -th memory block.
- 9: **end if**
- 10: Add 1 to the d -th element of memory block m in the second layer.
- 11: **end for**
- 12: Construct a minimum heap of size k using each non-zero element of the memory blocks in the second layer.

Output:

- 13: Traverse the nodes of the heap to obtain the k IP addresses and their number of occurrences.
-

3.3. IP Usage Storage and Retrieval Strategies for the Four-dimensional Sparse Matrix

Assume that each memory address of a 64-bit system can be stored in an element 8 bytes in size, and the number of occurrences of an individual IP address is no more than 2^{64} . There is an array of size 256 elements that consists of 256×8 bytes of memory. The array is regarded as a memory block that contains a contiguous address space, as shown in Fig. 1. In other words, the addresses of all bytes of the array are sequential in the memory block. Therefore, the position of the array can be indexed by the integer value of a particular part of the IP address. We present two efficient methods to collect the statistics of large-scale IP address data, each of which contains a relationship mapping mechanism between memory blocks and IP addresses for the four-dimensional sparse matrix.

3.3.1. First method: TLMB

The first proposed mapping mechanism of IP addresses is TLMB. The four parts of the IP address are represented

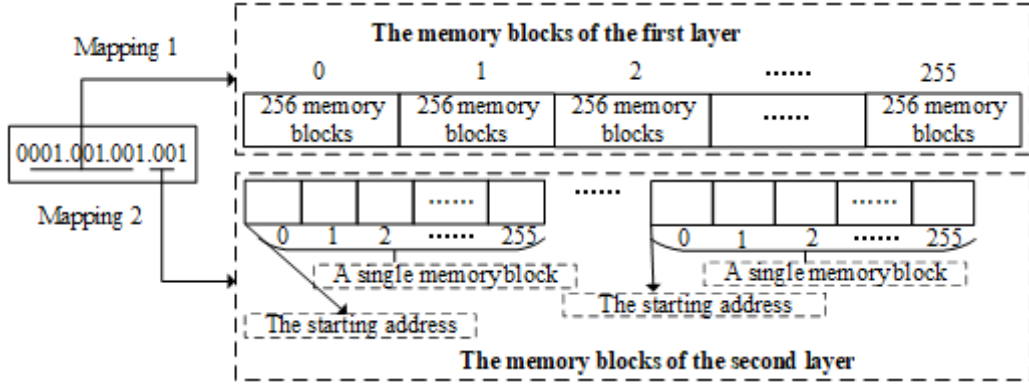


Figure 2: An example of the mapping relationships between memory blocks and an IP address.

in four layers, where each layer is made up of one or more memory blocks. The first layer only contains one memory block, whereas the second layer contains 256 memory blocks. Each memory block contains 256 elements. Each element of the memory block in the first layer is employed to store the starting addresses of the corresponding 256 memory blocks in the second layer. Similarly, the third layer contains 256×256 memory blocks, the size of which is 128 MB in memory. Then, the element of each memory block in the third layer stores the starting address of the corresponding memory block in the fourth layer. This would be 32 GB in size if we adopted a pre-allocation strategy for all memory blocks in the four layers. Hence, we present an alternative pre-allocation strategy for the memory blocks. A memory block will be allocated only when the first three parts of an initial IP address have been given. In particular, pre-allocating a big memory block of size 128 MB containing 256×256 contiguous memory blocks is feasible in a modern computer. Consequently, the first two layers can be removed from this architecture if the third layer has contiguous memory blocks of 128 MB.

We formally present a storage strategy for IP addresses that consists of two layers that consist of a limited number of memory blocks. The first layer contains 256×256 memory blocks. The first three parts of the IP address can be mapped into the corresponding position of the element in a particular memory block of the first layer according to the individual values of the three parts. We allocate a memory block in the other layer for the IP address when its first three parts are initially given. Each element of a memory block in this layer stores the number of occurrences of the corresponding IP address. Figure 2 shows an example of the relationship mapping between the memory blocks of two layers and an IP address. The positions of the first three dimensionalities of the sparse matrix can be mapped to the elements of the memory blocks in the first layer. The positions of the final dimensionality of the sparse matrix can be indexed by combining the starting address of the memory block in the second layer with the integer value of the four parts of the IP address.

We traverse all elements of the memory blocks of the sec-

ond layer to obtain the maximum number of occurrences of elements if $k = 1$. Otherwise, we construct a minimum heap of size k . The statistical results of the first k IP addresses are saved in the heap, which is a special binary tree and implemented by an array of size k . The construction of the heap is completed by traversing all elements of the memory blocks of the second layer. The tree node in the heap contains two important attributes: an IP address and its number of occurrences. The final IP addresses and numbers of occurrences can be obtained by a traversal of the nodes of the heap. The complete procedure for determining the first k of the most frequent IP addresses from host logs is outlined in Algorithm 1.

3.3.2. Second method: SSMB

We also designed an SSMB that stores all IP addresses and their statistics. IP addresses are logically divided into at most 256 subsets according to the value of the first part of each individual IP address. We construct a single memory block of $256 \times 256 \times 256$ elements that is $256 \times 256 \times 256 \times 8$ bytes in size, that is, 128 MB. The memory block is shared by all subsets. For each subset, the last three parts of the IP address can be mapped into the corresponding position of the element in the shared single memory block, which is always initialized at the beginning of the relationship mapping. Then, the element of this memory block stores the statistics of the IP addresses in this subset.

We further perform a round traversal of the memory block to initialize a minimum heap of size k after the relationship mapping has been completed in the first subset. Then, we continue to perform a round traversal of the memory block to adjust the heap after the relationship mapping has been completed for the subsequent subsets. Finally, we obtain the first k most frequently occurring IP addresses in the heap. The complete procedure for finding the first k of the most frequency IP addresses from host logs is outlined in Algorithm 2.

Algorithm 2 SSMB

Input:

A finite set of IP addresses $X = [x_1, x_2, \dots, x_n] \in \mathbb{R}^{m \times n}$, number $k > 1$.

- 1: Construct a memory block of size 128 MB saved by all IP addresses;
- 2: All IP addresses are logically partitioned into q subsets according to the first part of each IP address.
- 3: **for** $i = 1 : n$ **do**
- 4: Assume that a, b, c and d each represent one of the integer values of the four parts of IP address x_i .
- 5: **for** $j = 1 : q$ **do**
- 6: **if** $j == q$ **then**
- 7: Calculate the position of the memory block in the first layer: $p = b \times 255 \times 255 + c \times 255 + d$.
- 8: Add 1 to the p -th element of the memory block.
- 9: **end if**
- 10: **end for**
- 11: Construct a minimum heap of size k using the each non-zero elements of the memory block.
- 12: **end for**

Output:

- 13: Traverse of the nodes of the heap to obtain the k IP addresses and their number of occurrences.
-

3.4. Memory Use and Complexity Analysis

We first evaluate the memory use and computational complexity of the first proposed method, TLMB. The size of each memory block is 256×8 bytes, and there are 256×256 memory blocks in the first layer. Hence, the size of the memory blocks in the first layer is 128 MB. Assume that the number of the distinct first three parts of the IP addresses is s . The number of memory blocks in the second layer is linearly proportional to s . Moreover, the memory size of the minimum heap is $(k + 8)$ bytes, where each tree node contains two attributes, that is, an IP address and the number of occurrences. The total size of the memory of the proposed method is approximately the sum of the three parts, that is, 128 MB, s KB, and $(k + 8)$ bytes. The computational complexity of the two layers for calculating the IP address statistics is $O(n)$ in Algorithm 1, where n is the number of IP addresses. In addition, the computational complexity of constructing a minimum heap of size k is $O(k \log k)$, where k is the number of tree nodes in the heap. Consequently, the overall computational complexity of the proposed algorithm is $O(k \log k + n)$.

We next evaluate the memory use and computational complexity of the second proposed method, SSMB. The memory size of SSMB is 128 MB. Assume that the number of the distinct first parts of the IP addresses is q . The computational complexity of the mapping mechanism of the IP addresses in Algorithm 1 is $O(qn)$, where n is the number of IP addresses. Similarly, the computational complexity of constructing a minimum heap of size k is $O(k \log k)$ for each subset. Consequently, the overall computational

Table 2: Statistics of the three synthetic datasets.

Data sets	IP Records	Individual IP Addresses	Size
1	5, 000, 000	50, 000	77.5 MB
2	10, 000, 000	100, 000	155 MB
3	50, 000, 000	500, 000	775 MB

complexity of the proposed algorithm is $O(q(k \log k + n))$.

3.5. Parallel computation optimization techniques

3.5.1. Parallel computation mechanism of TLMB

In the worst case, the distinct first three parts of the IP addresses cover all the binary combinations. Hence, the size of the memory blocks in the second layer is 32 GB. We present a parallel computation scheme on multiple computers for improving the computational efficiency and reducing memory use. Assume that there are 2^r computers available for parallel computation, where r represents a positive integer. The task of collecting IP address statistics is then divided into multiple subtasks, which are performed by 2^r computers, respectively, according to the first r bits of the first part of the IP addresses. The number of memory blocks reduces to $(256 \times 256) / 2^r$ for 2^r computers. Simultaneously, the number of memory blocks will decrease to $32 / 2^r$ GB in the second layer. For example, the number of memory blocks in the first layer is 256×64 for each computer when $r = 2$, and the size of memory blocks in the second layer is 8 GB in the worst case. In addition, if four computers perform the task of computing IP address statistics by partitioning the first two bits of the first part of the IP addresses, then the second layers of multiple computers are merged into a complete second layer, where is employed to construct a minimum heap of size k . Finally, the parallel computation results can be obtained in a manner similar to the last step of Algorithm 1.

3.5.2. Parallel computation mechanism of SSMB

Assume that all IP addresses are logically divided into q subsets according to the value of the first part of an individual IP address. Further assume are q computers for parallel computation, where the statistics collection task of each subset can be performed by an individual computer. A minimum heap of size k is shared among these computers. Hence, this greatly increases the computational efficiency of the task by q times.

4. Experiments

4.1. Experimental Settings

In this section, we evaluate the performance of the proposed methods¹ on three synthetic datasets that contain 5 million, 10 million, and 50 million randomly generated

¹<https://github.com/chenjie20/IPStatistics>

Table 3: Computational cost (s) of different methods on the three synthetic datasets.

Data	k	Hash Mapping	IP Mapping	Ours (TLMB)	Ours (SSMB)
1	10	1458.14 (2.32)	<u>15.18</u> (0.07)	2.51 (0.01)	18.43 (0.05)
	100	1458.56 (2.76)	<u>15.21</u> (0.04)	2.52 (0.01)	18.43 (0.06)
2	10	2927.23 (11.64)	<u>17.41</u> (0.11)	4.92 (0.01)	27.59 (0.05)
	100	2934.65 (28.93)	<u>17.45</u> (0.05)	4.95 (0.01)	27.65 (0.06)
3	10	14547.09 (13.95)	<u>35.33</u> (0.09)	24.22 (0.07)	101.01 (0.17)
	100	14566.36 (26.78)	<u>35.39</u> (0.05)	24.24 (0.04)	101.20 (0.2)

Table 4: Memory use (MB) of different methods on the three synthetic datasets.

Data	k	Hash Mapping	IP Mapping	Ours (TLMB)	Ours (SSMB)
1	10	43.63 (0.12)	16332.81 (0.07)	189.61 (0.16)	<u>139.77</u> (0.13)
	100	43.73 (0.06)	16332.77 (0.05)	189.64 (0.07)	<u>139.79</u> (0.07)
2	10	74.8 (0.12)	16332.75 (0.12)	239.11 (0.1)	<u>139.74</u> (0.13)
	100	74.83 (0.05)	16332.77 (0.07)	239.06 (0.15)	<u>139.7</u> (0.12)
3	10	324.45 (0.99)	16332.59 (0.06)	628.33 (0.07)	<u>139.6</u> (0.15)
	100	324.4 (1.02)	16332.6 (0.16)	628.27 (0.01)	<u>139.71</u> (0.16)

IP records. Each individual IP address contains one or more of IP records. The average number of IP records is 100 for each individual IP address. Parameter k represents the number of frequently occurring IP addresses. The statistics of these datasets are summarized in Table 2.

We compared the proposed method with the following baselines:

- **Hash Mapping.** Each IP record is mapped into an entry with a statistical result using a hash table². Next, the statistical results are used to construct a minimum heap of size k .
- **IP Mapping.** All IP records are partitioned into q subsets according to the first part of each IP address. The statistics of the IP records in each subset are mapped into an array, whose memory is pre-allocated on a computer according to the last three parts of each IP address. The first k most frequent IP addresses are chosen from each subset. Next, a minimum heap of size k is constructed using the $q \times k$ IP addresses.

Two metrics were employed to evaluate the sorting performance, that is, computational cost and memory use. All experiments were implemented using the C language on a Windows platform with an Intel i7-9700k CPU and 32 GB RAM.

4.2. Experiment Results

Parameter k was set to 10 or 100, and we repeated each experiment 10 times. The average computational costs and standard deviations are reported in Table 4, and the mean memory use and standard deviations are given in Table 4. The results show that TLMB consistently outperformed all the other methods in terms of computational

cost. For example, TLMB achieves computational costs of 2.51 s and 2.52 s when $k = 10$ and $k = 100$, respectively. When the number of IP addresses increases from 5 million to 50 million with $k = 10$, the gap in computational costs of TLMB and IP Mapping are 12.6 s and 11.11 s, respectively. We also observed the same advantages when $k = 100$. In addition, SSMB shows competitive results when compared with the comparison methods in terms of memory use. The memory use of SSMB is always approximately 139 MB, even when the number of IP addresses changes. In contrast, the computational cost of SSMB substantially outperforms that of Hash Mapping under different numbers of IP addresses. IP Mapping obtained the lowest computation cost for all numbers of IP addresses. However, the highest memory use results of IP Mapping are consistent with expectations.

5. Conclusion

The collection of the statistics of large-scale IP address data is one of the most fundamental problems in network traffic measurement. In this paper, we addressed this problem. Specifically, the two proposed methods present two different relationship mapping mechanisms between memory blocks and IP addresses to strike a balance between computational cost and memory use. They can be employed to search for frequently occurring IP addresses in practical applications. The extensive experimental results demonstrate the effectiveness of the proposed methods.

References

- [1] Y. N. Jing, P. Tu, X. P. Wang, G. D. Zhang, Distributed-log-based scheme for ip traceback, in: The Fifth International Conference on Computer and Information Technology, Shanghai, China, 2005, pp. 711–715.
- [2] E. Kapur, P. Kumar, S. Gupta, Proposal of a two way sorting algorithm and performance comparison with existing algorithms, International Journal of Computer Science, Engineering and Applications 2 (3) (2012) 61–78.

²<https://github.com/activesys/libcstl>

- [3] S. T. Klein, On the connection between hamming codes, heap-sort and other methods, *Information Processing Letters* 113 (17) (2017) 617–620.
- [4] M. L. Fredman, An intuitive and simple bounding argument for quicksort, *Information Processing Letters* 3 (114) (2014) 137–139.
- [5] A. Agapitos, S. M. Lucas., Evolving efficient recursive sorting algorithms, in: 2006 IEEE International Conference on Evolutionary Computation, Vancouver, BC, Canada, 2016, pp. 2677–2684.
- [6] Y. N. Jing, P. Tu, X. P. Wang, G. D. Zhang, Space-efficient data structures for top-k completion, in: Proceedings of the 22nd international conference on World Wide Web, Rio de Janeiro, Brazil, 2013, pp. 583–594.
- [7] T. Cormen, C. Leiserson, R. Rivest, C. Stein, *Introduction to Algorithms*, MIT press, 2009.
- [8] J. Hammad, A comparative study between various sorting algorithms, *International Journal of Computer Science and Network Security* 15 (3) (2015) 358–367.
- [9] S. J. Puglisi, W. F. Smyth, A. Turpin, The performance of linear time suffix sorting algorithms, in: *Data Compression Conference*, Snowbird, UT, USA, USA, 2005, pp. 358–367.
- [10] F. A. Louza, S. Gog, G. P. Telles., Optimal suffix sorting and lcp array construction for constant alphabets, *Information Processing Letters* 118 (2017) 30–34.
- [11] S. Abdel-Hafeez, A. Gordon-Ross, An efficient $o(n)$ comparison-free sorting algorithm, *IEEE Transactions on Very Large Scale Integration (VLSI) Systems* 25 (6) (2017) 1930–1942.
- [12] M. Shabaz, A. Kumar, Sa sorting: a novel sorting technique for large-scale data, *Journal of Computer Networks and Communications* (2019) 1–7.
- [13] I. Müller, P. Sanders, A. Lacurie, W. Lehner, F. Färber, Cache-efficient aggregation: Hashing is sorting, in: *Proceedings of the 2015 ACM SIGMOD International Conference on Management of Data*, Melbourne, Victoria, Australia, 2015, p. 1123–1136.
- [14] N. Satish, M. Harris, M. Garland, Designing efficient sorting algorithms for manycore gpus, in: 2009 IEEE International Symposium on Parallel & Distributed Processing, Rome, Italy, 2009, pp. 1–10.
- [15] D. P. Singh, I. Joshi, J. Choudhary, Survey of gpu based sorting algorithms, *International Journal of Parallel Programming* 46 (6) (2018) 1017–1034.
- [16] P. M. E. Shutler, S. W. Sim, W. Y. S. Lim, Analysis of linear time sorting algorithms, *The Computer Journal* 51 (4) (2008) 451–469.
- [17] F. Idrizi, A. Rustemi, F. Dalipi, A new modified sorting algorithm: A comparison with state of the art, in: 2017 6th Mediterranean Conference on Embedded Computing, Bar, Montenegro, 2017, pp. 1–6.
- [18] I. Rusu, Sorting signed permutations by reversals using link-cut trees, *Information Processing Letters* 132 (2018) 44–48.
- [19] S. Jukna, H. Seiwert, Sorting can exponentially speed up pure dynamic programming, *Information Processing Letters* 159 (2020) 451–469.
- [20] G. Kocher, N. Agrawal, Analysis and review of sorting algorithms, *International Journal of Scientific Engineering and Research* 2 (3) (2014) 81–84.
- [21] N. Faujdar, S. P. Ghreera, Analysis and testing of sorting algorithms on a standard dataset, in: 2015 Fifth International Conference on Communication Systems and Network Technologies, Gwalior, India, 2015, pp. 1–10.
- [22] S. Chen, J. Qin, Y. Xie, J. Zhao, P. A. Heng, A fast and flexible sorting algorithm with cuda, in: *International Conference on Algorithms and Architectures for Parallel Processing*, Taipei, Taiwan, China, 2009, pp. 281–290.
- [23] D. Cederman, P. Tsigas, A practical quicksort algorithm for graphics processors, in: *European Symposium on Algorithms*, 2008, pp. 246–258.
- [24] H. Peters, O. Schulz-Hildebrandt, N. Luttenberger, Fast in-place, comparison-based sorting with cuda: a study with bitonic sort, *Concurrency and Computation: Practice and Experience*