

Data Type Inference for Logic Programming

João Barbosa, Mário Florido, and Vítor Santos Costa

Faculdade de Ciências, Universidade do Porto, Portugal
{joao.barbosa,amflorid,vscosta}@fc.up.pt

Abstract In this paper we present a new static data type inference algorithm for logic programming. Without the need of declaring types for predicates, our algorithm is able to automatically assign types to predicates which, in most cases, correspond to the data types processed by their intended meaning. The algorithm is also able to infer types given data type definitions similar to data definitions in Haskell and, in this case, the inferred types are more informative in general. We present the type inference algorithm, prove some properties and finally, we evaluate our approach on example programs that deal with different data structures.

Keywords: Logic Programming, Types, Type Inference

1 Introduction

Types are program annotations that provide information about data usage and program execution. Ensuring that all types are correct and consistent may be a daunting task for humans. However, this task can be automatized with the use of a type inference algorithm which assigns types to programs.

Logic programming implementers have been interested in types from early on [Zob87, DZ92, Lu01, FSVY91, YFS92, MO84, LR91, SBG08, HJ92, SCWD08]. Most research approached typing an over-approximation (a superset) of the program semantics [Zob87, DZ92, YFS92, BJ88, FSVY91]: any programs that succeeds will necessarily be well-typed. Other researchers followed the experience of functional languages and took a more aggressive approach to typing, where only well-typed programs are acceptable. Over the course of the last years it has become clear that there is a need for a type inference system that can support Prolog well. Next, we report on recent progress on our design, the YAP^T type system¹. We will introduce the key ideas and then focus on the practical aspects.

Our approach is motivated by the belief that programs (Prolog or otherwise) are about manipulating data structures. In Prolog, data structures are denoted by terms with a common structure, and, being untyped one cannot naturally distinguish between failure and results of type erroneous calls. We believe that to fully use data structures we must be able to discriminate between failure, error, and success [BFC19].

¹ This work is partially funded by the portuguese Fundação para a Ciência e a Tecnologia and by LIACC (FCT/UID/CEC/0027/2020).

36 Our starting point was a three-valued semantics that clearly distinguishes
 37 error and falsehood. In [BFC19] we use it to define a type system for logic pro-
 38 gramming that is semantically sound. In [BFC19] we presented a type system
 39 which formally defines the meaning of a *well-typed* program and showed that
 40 this notion of *well-typing* is sound with respect to a three-valued program se-
 41 mantics. From now on when we say *well-typed* we mean the notion presented in
 42 [BFC19]. Here we present the YAP^T type inference algorithm which is able to
 43 automatically infer data type definitions.

44 To use our semantics, we shall assume that typed Prolog programs operate
 45 in a context, e.g., suppose a programming context where the well-known `append`
 46 predicate is expected to operate on lists:

```
47 append([], X, X).
48 append([X|R], Y, [X|R1]) :- append(R, Y, R1).
```

49 This information is not achievable when using type inference as a conservative
 50 approximation of the success set of the predicate. The following example shows
 51 the output of type inference in this case, where t_i is the type of the i -th argument
 of `append`, “+” means type disjunction and “A” and “B” are type variables:

$t_1 = [] + [A \mid t_1]$ $t_2 = B$ $t_3 = B + [A \mid t_3]$	$t_1 = [] + [A \mid t_1]$ $t_2 = [] + [A \mid t_2]$ $t_3 = [] + [A \mid t_3]$
--	---

Figure 1. (1) Program approximation ; (2) Well-typing

52
 53 Types t_2 and t_3 , for the second and third argument of the left-hand side
 54 (1), do not filter any possible term, since they have a type variable as a member
 55 of the type definition, which can be instantiated with any type. And, in fact,
 56 assuming the specific context of using `append` as list concatenation, some calls
 57 to `append` succeed even if *unintended*², such as `append([], 1, 1)`. The solution
 58 we found for these arguably over-general types is the definition of closed types,
 59 that we first presented in [BFSC17], which are types where every occurrence of
 60 a type variable is constrained. We also defined a closure operation, from open
 61 types into closed types, using only information provided by the set of types
 62 themselves. Applying our type inference algorithm with closure to the `append`
 63 predicate yields the types on the right-hand side (2), which are the *intended*
 64 *types* [Nai92] for the `append` predicate.

65 Our type inference algorithm³ works for pure Prolog with system predicates
 66 for arithmetic. We assume as base types *int*, *float*, *string*, and *atom*. There is an
 67 optional definition of type declarations (like data declarations in Haskell), which,
 68 if declared by the programmer, are used by the type inference algorithm to refine

² accordingly to a notion of *intended meaning* first presented in [Nai92]

³ Implementation at <https://github.com/JoaoLBarbosa/TypeInferenceAlgorithm>

69 types. We follow a syntax inspired in [SCWD08] to specify type information. One
 70 example of such a declaration is the list datatype

```
71         :- type list(A) = [] + [A | list(A)].
```

72 In order to simplify further processing our type inference algorithm first
 73 compiles every predicate to a simplified form called *kernel Prolog* [VR90]. In this
 74 representation, each predicate is defined by a single clause ($H : -B$), where the
 75 head H contains distinct variables as arguments and the body B is a disjunction
 76 (represented by the symbol $;$) of queries. We assume that there are no common
 77 variables between queries, except for the variables that occur in the head of
 78 the clause, without loss of generality. In this form the scope of variables is not
 79 limited to a single clause, but is extended over the whole predicate and thus
 80 type inference is easier to perform. In the rest of the paper we will assume that
 81 predicate definitions are always in kernel Prolog.

82 As simple illustrating examples, using a pre-defined type declaration for lists,
 83 and reading “ $::$ ” as “has type”, our type inference algorithm gives the following
 84 results:

85 PREDICATE:	85 TYPE:
86	
87 $l(X) :- (X = [] ; X = [Y Ys], l(Ys)).$	$l :: t1$
88	$t1 = list(C)$
89	$list(B) = [] + [B list(B)]$
90	
91 $p(X) :- X = a ; X = 3.$	$p :: t2$
92	$t2 = atom + int$
93	
94 $q(Y) :- Y = 1.23; Y = 5.$	$q :: t3$
95	$t3 = float + int$
96	
97 $h(Z) :- Z = W, Z = Q, p(W), q(Q).$	$h :: t4$
98	$t4 = int$

99 2 Types

100 Here we define a new class of expressions, which we shall call *types*. We first
 101 define the notion of *type term* built from an infinite and enumerable set of type
 102 variables $TVar$, a finite set of base types $TBase$, an infinite and enumerable set
 103 of constants $TCons$, an infinite and enumerable set of function symbols $TFunc$,
 104 and an infinite and enumerable set of type symbols, $TSymb$. *Type terms* can be:

- 105 – a type variable ($\alpha, \beta, \gamma, \dots \in TVar$)
- 106 – a type constant ($1, [], 'c', \dots \in TCons$)
- 107 – a base type ($int, float, \dots \in TBase$)
- 108 – a function symbol $f \in TFunc$ associated with an arity n applied to an
 109 n-tuple of type terms ($f(int, [], g(X))$).

110 – a type symbol $\sigma \in TSymb$ associated with an arity n ($n \geq 0$) applied to an
 111 n-tuple of type variables ($\sigma(X, Y)$).

112 Type variables, constants and base types are called *basic types*. A *ground*
 113 *type term* is a variable-free type term. A *type definition*, which introduces a new
 114 type called an *algebraic data type*, is of the form:

$$\sigma(X_1, \dots, X_k) = \tau_1 + \dots + \tau_n,$$

115 where each τ_i is a type term and σ is the type symbol being defined. Variables
 116 X_1, \dots, X_n , for $n \geq 0$, include the type variables occurring in $\tau_1 + \dots + \tau_n$, and
 117 are called *type parameters*. The sum $\tau_1 + \dots + \tau_n$ is a *union type*, describing
 118 values that may have one of the types τ_1, \dots, τ_n . Note that type definitions may
 119 be recursive. *Deterministic type definitions* are type definitions where, on the
 120 right-hand side, none of τ_i is a type symbol and if τ_i is a type term starting with
 121 a type function symbol f , then no other τ_j starts with f .

122 *Example 1.* Assuming a base type *int* for the set of all integers, the type list of
 123 integers is defined by the type definition $list = [] + [int \mid list]^4$.

124 A *predicate type* is a functional type from a tuple of the type terms defining
 125 the types of its arguments to *bool*: $\tau_1 \times \dots \times \tau_n \rightarrow bool$. A *type* can be a *type*
 126 *term*, an *algebraic data type* or a *predicate type*. In [BFC19] we defined a formal
 127 Hindley-Milner semantics for types.

128 Our type language enables parametric polymorphism through the use of type
 129 schemes. A *type scheme* is defined as $\forall_{X_1} \dots \forall_{X_n} T$, where T is a predicate type
 130 and X_1, \dots, X_n are distinct type variables. In logic programming, there have
 131 been several authors that have dealt with polymorphism with type schemes
 132 or in a similar way [PR89, BG92, Hen93, Zob87, FSVY91, GdW94, YFS92,
 133 FD92]. Type schemes have type variables as generic place-holders for ground
 134 type terms. Parametric polymorphism comes from the fact these type variables
 135 can be instantiated with any type.

136 *Example 2.* A polymorphic list is defined by the following type definition:

$$list(X) = [] + [X \mid list(X)]$$

137 **Notation** Throughout the rest of the paper, for the sake of readability, we
 138 will omit the universal quantifiers on type schemes and the type parameters as
 139 explicit arguments of type symbols in inferred types. Thus we will assume that
 140 all free type variables on type definitions of inferred types are type parameters
 141 which are universally quantified.

142 Most type languages in logic programming use tuple distributive closures of
 143 types. The notion of tuple distributivity was given by Mishra [Mis84]. Through-
 144 out this paper, we restrict our type language to tuple distributive types, where
 145 type definitions are deterministic.

⁴ Type definitions will use the user friendly Prolog notation for lists instead of the list constructor

146 Sometimes, the programmer wants to introduce a new type in a program, so
147 that it is recognized when performing type inference. It is also a way of having
148 a more structured and clear program. These declarations act similarly to data
149 declarations in Haskell.

150 In our algorithm, types can be declared by the programmer in the following
151 way : $-type\ type_symbol(type_vars) = type_term_1 + \dots + type_term_n$. One
152 example would be:

```
153 :- type tree(X) = empty + node(X, tree(X), tree(X)).
```

154 In the rest of the paper we will assume that all constants and function symbols
155 that start a summand in a declared type cannot start a summand in a different
156 one, thus there are no overloaded constants nor function symbols. Note that
157 there is a similar restriction on data declarations in functional programming
158 languages.

159 2.1 Closed Types

160 *Closed types* were first defined in [BFSC17]. Informally, they are types where
161 every occurrence of a type variable is constrained. If a type is not closed, we say
162 that it is an *open type*. The restrictions under the definition of closed type can
163 be compressed in the following three principles:

- 164 – Types should denote a set of terms which is strictly smaller than the set of
165 all terms
- 166 – Every use of a variable in a program should be type constrained
- 167 – Types are based on self-contained definitions

168 The last one is important to create a way to go from open types to closed types.
169 We defined what is an unconstrained type variable as follows:

170 **Definition 1 (Unconstrained Type Variable).** *A type variable α is uncon-*
171 *strained with respect to a set of type definitions T , notation $unconstrained(\alpha, T)$,*
172 *if and only if it occurs exactly once in the set of all the right-hand sides of type*
173 *definitions in T .*

174 Unconstrained type variables type terms with any type, thus they do not really
175 provide type information. We now define *closed algebraic data types*, which are
176 types without variables as summands in their definition.

177 **Definition 2 (Closed Algebraic Data Type).** *An algebraic data type τ is*
178 *closed, notation $closedDataType(\tau)$, if and only if it has no type variables as*
179 *summands in its type definition.*

180 The definition for closed types uses these two previous auxiliary definitions.
181 Closed types correspond to close records or data definitions in functional pro-
182 gramming languages. The definition follows:

Definition 3 (Closed Types). A type term τ is closed with respect to a set of type definitions T , notation $\text{closed}(\tau, T)$, if and only if the predicate defined as follows holds:

$$\text{closed}(\tau, T) = \begin{cases} \text{closedDataType}(\tau) & \text{if } \tau \text{ is an algebraic data type} \\ \neg \text{unconstrained}(\tau, T) & \text{if } \tau \text{ is a type variable} \\ \text{True} & \text{if } \tau \text{ is basic but not a type variable} \end{cases}$$

183 *Example 3.* We recall the example in the Introduction, of the following types for
184 the `append` predicate, where t_n is the type of n th predicate argument:

185 `t1 = [] + [A | t1]`
186 `t2 = B`
187 `t3 = B + [A | t3]`

188 Type `t3`, for the third argument of `append`, is open, because `t3` has a type
189 variable as a summand, thus it does not filter any possible term, since the type
190 variable can be instantiated with any type. An example of a valid closed type
191 for `append` is:

192 `t1 = [] + [A | t1]`
193 `t2 = [] + [A | t2]`
194 `t3 = [] + [A | t3]`

195 The next step is to transform open types into closed types. Note that some
196 inferred types may be already closed. For the ones that are not, we defined
197 a *closure* operation, described in detail in [BFSC17]. This closure operation is
198 present in our type inference algorithm as an optional step to perform on the
199 resulting types after solving the type constraints generated by the algorithm.

200 3 Examples

201 There are some flags in the type inference algorithm that can be turned on or
202 off:

- 203 – *basetype* (default: *on*) - this flag types constants with their base types when
- 204 turned on and with a constant symbol equal to the constant itself otherwise;
- 205 – *list* (default: *off*) - this flag adds the data type declaration for polymorphic
- 206 lists to the program when turned on;
- 207 – *closure* (default: *off*) - this flag applies closure to the resulting type definitions
- 208 after solving the constraints when turned on.

209 In the following examples `pi` is the type symbol for the type of the i th argument
210 of predicate `p` and we assume that all free type variables on type definitions
211 are universally quantified and that the type of arguments of built-in arithmetic
212 predicates is predefined as *int + float*.

213 *Example 4.* Let us consider the predicate `concat`, which flattens a list of lists,
214 where `app` is the `append` predicate:

```

215 concat(X1,X2) :- X1=[], X2=[];
216             X1=[X|Xs], X2=List, concat(Xs,NXs), app(X,NXs,List).
217
218 app(A,B,C) :- A=[], B=D, C=D;
219             app(E,F,G), E=H, F=I, G=J, A=[K|H], B=I, C=[K|J].

```

220 The types inferred with all the flags *off* correspond to types inferred in previous
221 type inference algorithms which view types as an approximation of the success
222 set of the program:

```

223 concat :: concat1 x concat2
224 concat1 = [] + [ t | concat1 ]
225 concat2 = C + [] + [ B | concat2 ]
226 t = [] + [ B | t ]
227
228 app :: app1 x app2 x app3
229 app1 = [] + [ A | app1 ]
230 app2 = B
231 app3 = B + [ A | app3 ]

```

232 Now the types inferred when turning on the closure flag, *closure_flag*, are:

```

233 concat :: concat1 x concat2
234 concat1 = [] + [ concat2 | concat1 ]
235 concat2 = [] + [ B | concat2 ]
236
237 app :: app1 x app2 x app3
238 app1 = [] + [ A | app1 ]
239 app2 = [] + [ A | app2 ]
240 app3 = [] + [ A | app3 ]

```

241 Note that these types are not inferred by any previous type inference algorithm
242 for logic programming so far, and they are a step forward to the automatic
243 inference of program use in a specific context, more precisely, a context which
244 corresponds to how it would be used in a programming language with data type
245 declarations, such as Curry [Han13] or Haskell.

246 *Example 5.* Let *rev* be the reverse list predicate, defined using the *append* defin-
247 ition used in the previous example:

```

248 rev(A, B) :- A=[], B=[] ;
249             rev(C, D), app(D, E, F), E=[G], A=[G|C], B=F.

```

250 The inferred types with all flags *off* is (the types inferred for *append* are the
251 same as the one in the previous example):

```

252 rev :: rev1 x rev2
253 rev1 = [] + [ A | rev1 ]
254 rev2 = [] + [ t | rev2 ]
255 t = B + A

```

256 If we turn on the *list_flag*, which declares the data type for Prolog lists, the type
 257 inference algorithm outputs the same types that would be inferred in Curry or
 258 Haskell with pre-defined built-in lists:

```
259 rev :: rev1 x rev2
260 rev1 = list(A)
261 rev2 = list(A)
262
263 list(X) = [] + [ X | list(X) ]
```

264 We now show an example of the minimum of a tree.

265 *Example 6.* Let *tree_minimum* be the predicate defined as follows:

```
266 tree_min(A,B) :- A=empty, B=0 ;
267                 A=node(C,D,E), tree_min(D,F), tree_min(E,G),
268                 Y=[C,F,G], minimum(Y,X), X=B.
269
270 minimum(A,B) :- A=[I], B=I;
271                 A=[X|Xs], minimum(Xs,C), X=<C, B=C ;
272                 A=[Y|Ys], minimum(Ys,D), D=<Y, B=D.
```

273 The inferred types with all flags off, except for the *basetype_flag*, are:

```
274 tree_min :: tree_min1 x tree_min2
275 tree_min1 = atom + node(tree_min2, tree_min1, tree_min1)
276 tree_min2 = A + int + float
277
278 minimum :: minimum1 x minimum2
279 minimum1 = [ minimum2 | t ]
280 minimum2 = A + int + float
281 t2 = [] + [ minimum2 | t2 ]
```

282 If we now add a predefined declaration of a tree data type and turn on the
 283 *list_flag*, the algorithm outputs:

```
284 tree_minimum :: tree_minimum1 x tree_minimum2
285 tree_minimum1 = tree(tree_minimum2)
286 tree_minimum2 = int + float
287
288 minimum :: minimum1 x minimum2
289 minimum1 = list(minimum2)
290 minimum2 = int + float
291
292 tree(X) = empty + node(X, tree(X), tree(X))
293 list(Y) = [] + [ Y | list(Y) ]
```

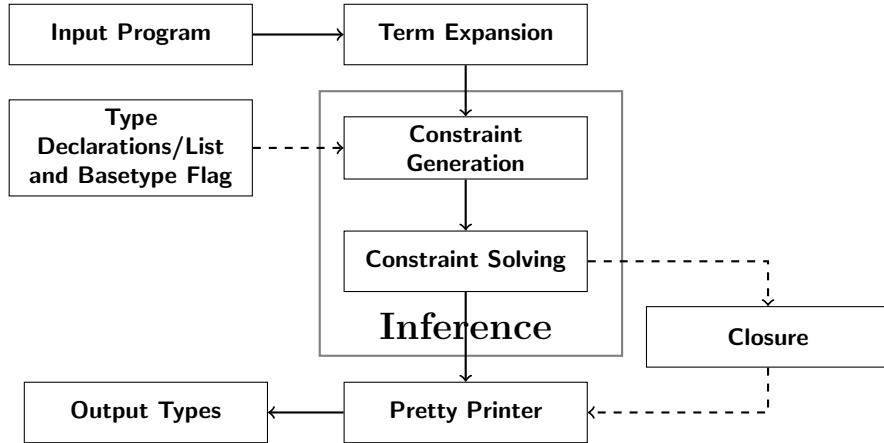



Figure 2. Type Inference Algorithm Flowchart

294 4 Type Inference

295 The type inference algorithm is composed of several modules, as described in
 296 Figure 2. On a first step, when consulting programs, we apply term expansion
 297 to transform programs into the internal format that the rest of the algorithm ex-
 298 pects. Secondly, we have the type inference phase itself, where a type constraint
 299 solver outputs the inferred types for a given program. There is also a simplifica-
 300 tion phase performed during inference. After this, we run directly a type pretty
 301 printer, or go through closure before printing the types.

302 Thus the type inference algorithm is composed of four main parts with some
 303 auxiliary steps:

- 304 – Term expansion
- 305 – Constraint generation
- 306 – Constraint solving
- 307 – Closure (optional)

308 There is also a simplification step, that is applied at every step. Without
 309 closure or type declarations our algorithm follows a standard approach of types
 310 as approximations of the program semantics. Using our algorithm to infer well-
 311 typings (which filter program behaviour instead of approximating it) is possible
 312 either by using explicit type declarations or by using the closure step.

313 4.1 Stratification

314 We assume that the input program of our algorithm is *stratified*. To understand
 315 the meaning of stratified programs, let us define the *dependency directed graph*
 316 of a program as the graph that has one node representing each predicate in the
 317 program and an edge from q to p for each call from a predicate p to a predicate
 318 q .

319 **Definition 4 (Stratified Program).** A stratified program P is such that the
 320 dependency directed graph of P has no cycles of size more than one.

321 This means that our type inference algorithm deals with predicates defined
 322 by direct recursion but not with mutual recursion. Note that stratified programs
 323 are widely used and characterize a large class of programs which is used in
 324 several database and knowledge base systems [Ull88]. Despite this, expanding
 325 our algorithm to mutually recursive predicates is a step we are working towards.

326 4.2 Constraints and Constraint Generation

327 The type inference algorithm begins by generating type constraints from a logic
 328 program, that will be solved by a constraint solver in a second stage of the
 329 algorithm. There are two different kinds of type constraints: equality constraints
 330 and subtyping constraints. The constraint generation step of the algorithm will
 331 output two sets of constraints, Eq (a set of equality constraints) and $Ineq$ (a
 332 set of subtyping constraints), that need to be solved during type inference. An
 333 equality constraint is of the form $\tau_1 = \tau_2$ and a subtyping constraint is of the
 334 form $\tau_1 \leq \tau_2$. In the subtyping constraint case, τ_i can be a type term or a sum
 335 of several type terms.

336 An *assumption* is a type declaration for a variable, written $X : \tau$, where X
 337 is a variable and τ a type. We define a *context* Γ as a set of assumptions with
 338 distinct variables as subjects (alternatively *contexts* can be defined as functions
 339 from variables to types and where $domain(\Gamma)$ stands for its domain). Contexts
 340 are synthesized by the type inference algorithm in two different ways: we can
 341 build a new context by linking assumptions in different contexts with disjunction
 342 (corresponding to different clauses of the same predicate) or with conjunction
 343 (corresponding to different queries). For this we define two auxiliary functions,
 344 \otimes (for conjunction) and \oplus (for disjunction), which are used by the constraint
 345 generation algorithm. They are defined as follows:

346 **Definition 5.** Let Γ_1 and Γ_2 be two contexts and Def be a set of type definitions
 347 defining the type symbols in $\Gamma_1 \cup \Gamma_2$. Let $V = domain(\Gamma_1) \cap domain(\Gamma_2)$.
 348 $\oplus((\Gamma_1 \cup \Gamma_2), Def) = (\Gamma, Def')$, such that $Def \subseteq Def'$,
 349 where $\forall X \in V. \Gamma(X) = \sigma$ and $(\sigma = \Gamma_1(X) + \Gamma_2(X)) \in Def'$, all σ s fresh, and
 350 $\forall X. X \in domain(\Gamma_i), X \notin V. \Gamma(X) = \Gamma_i(X)$, for $i, j = 1, 2$.

351 **Definition 6.** Let Γ_1 and Γ_2 be two contexts and Def be a set of type defini-
 352 tions defining the type symbols in $\Gamma_1 \cup \Gamma_2$. Let $V = domain(\Gamma_1) \cap domain(\Gamma_2)$.
 353 $\otimes((\Gamma_1 \cup \Gamma_2), Def) = (\Gamma, Def', Eq)$
 354 where $\forall X \in V. \Gamma(X) = \sigma$, $(\sigma = \alpha) \in Def'$, and $\{\alpha = def(\Gamma_1(X)), \alpha =$
 355 $def(\Gamma_2(X))\} \in Eq$, all α s and σ s fresh, and
 356 $\forall X. X \in domain(\Gamma_i), X \notin V. \Gamma(X) = \Gamma_i(X)$, for $i, j = 1, 2$.

357 Let P be a term, an atom, a query, a sequence of queries or a clause.
 358 $generate(P)$ is a function that outputs a tuple of the form $(\tau, \Gamma, Eq, Ineq, Def)$,

359 where τ is a type, Γ is an context for logic variables, Eq is a set of equality con-
 360 straints, $Ineq$ is a set of subset constraints, and Def is a set of type defintions.
 361 The function *generate*, which generates the initial type constraints, is defined
 362 by cases from the program syntax. Its definition follows:

363
 364 $generate(P) =$

- 365 – $generate(X) = (\alpha, \{X : \sigma\}, \emptyset, \emptyset, \{\sigma = \alpha\})$, X is a variable,
 366 where α is a fresh type variable and σ is a fresh type symbol.
- 367
 368 – $generate(c) = (basetype(c), \emptyset, \emptyset, \emptyset, \emptyset)$, c is a constant.
- 369
 370 – $generate(f(t_1, \dots, t_n)) = (basetype(f)(\tau_1, \dots, \tau_n), \Gamma, Eq, \emptyset, Def)$,
 371 where $generate(t_i) = (\tau_i, \Gamma_i, Eq_i, \emptyset, Def_i)$,
 372 $(\Gamma, Eq, Def) = \otimes((\Gamma_1 \cup \dots \cup \Gamma_n), (Def_1 \cup \dots \cup Def_n))$, and
 373 $Eq = Eq_1 \cup \dots \cup Eq_n \cup Eq'$.
- 374
 375 – $generate(t_1 = t_2) = (bool, \Gamma, Eq, \emptyset, Def)$
 376 where $generate(t_i) = (\tau_i, \Gamma_i, Eq_i, \emptyset, Def_i)$
 377 $(\Gamma, Def, Eq) = \otimes((\Gamma_1 \cup \Gamma_2), (Def_1 \cup Def_2))$, and
 378 $Eq = Eq_1 \cup Eq_2 \cup \{\tau_1 = \tau_2\} \cup Eq'$.
- 379
 380 – $generate(p(t_1, \dots, t_n)) = (bool, (\{X_1 : \sigma_1, \dots, X_n : \sigma_n\}, Eq, \{\alpha_1 \leq \tau_1, \dots, \alpha_n \leq$
 381 $\tau_n\}, Def)$, a non-recursive call,
 382 where $generate(p(Y_1, \dots, Y_n) : -body) = (bool, \Gamma, Eq, Ineq, Def)$,
 383 $\{Y_1 : \tau_1, \dots, Y_n : \tau_n\} \in \Gamma$
 384 $Def' = Def \cup \{\sigma_i = \alpha_i\}$, and σ_i and α_i are all fresh.
- 385
 386 – $generate(p(t_1, \dots, t_n)) = (bool, \{X_1 : \alpha_1, \dots, X_n : \alpha_n\}, \emptyset, \{\alpha_1 \leq \tau_1, \dots, \alpha_n \leq$
 387 $\tau_n\}, \emptyset)$, a recursive call,
 388 where τ_1, \dots, τ_n are the types for the variables in the head of the clause this
 389 call occurs in, and α_i are all fresh type variables.
- 390
 391 – $generate(c_1, \dots, c_n) = (bool, \Gamma, Eq, Ineq_1 \cup \dots \cup Ineq_n, Def)$,
 392 where $generate(c_i) = (bool, \Gamma_i, Eq_i, Ineq_i, Def_i)$,
 393 $(\Gamma, Def, Eq) = \otimes((\Gamma_1 \cup \dots \cup \Gamma_n), (Def_1 \cup \dots \cup Def_n))$, and
 394 $Eq = Eq_1 \cup \dots \cup Eq_n \cup Eq'$.
- 395
 396 – $generate(b_1; \dots; b_n) = (bool, \Gamma, Eq_1 \cup \dots \cup Eq_n, Ineq_1 \cup \dots \cup Ineq_n, Def)$,
 397 where $generate(c_i) = (bool, \Gamma_i, Eq_i, Ineq_i, Def_i)$, and
 398 $(\Gamma, Def) = \oplus((\Gamma_1 \cup \dots \cup \Gamma_n), (Def_1 \cup \dots \cup Def_n))$.
- 399
 400 – $generate(p(X_1, \dots, x_n) : -body.) = (bool, \Gamma, Eq, Ineq, Def)$,
 401 where $generate(body) = (bool, \Gamma, Eq, Ineq, Def)$.

402 *Example 7.* Consider the following predicate:

403 $\text{list}(X) :- X = []; X = [Y|YS], \text{list}(Ys).$

404 the output of applying the generate function to the predicate is:

405 $\text{generate}(\text{list}(X) :- X = []; X = [Y|YS], \text{list}(Ys)) =$
 406 $\{\text{bool}, \{X : \sigma_1, Y : \sigma_2, Ys : \sigma_3\}, \{\alpha = [], \beta = [\delta | \epsilon], \epsilon = v\}, \{v \leq \sigma_1\}, \{\sigma_1 =$
 407 $\alpha + \beta, \sigma_2 = \delta, \sigma_3 = \epsilon, \sigma_4 = v\}\}$

408 The set $\{v \leq \sigma_1\}$ comes from the recursive call to the predicate, while $\alpha = []$
 409 comes from $X = []$, and $\beta = [\delta | \epsilon]$ comes from $X = [Y|YS]$. The other
 410 constraints come from the application of the \otimes operation.

411 4.3 Constraint Solving

412 Let Eq be a set of equality constraints, $Ineq$ be a set of subtyping constraints,
 413 and Def a set of type definitions. Function $\text{solve}(Eq, Ineq, Def)$ solves the con-
 414 straints, outputting a new set of type definitions. Note that the rewriting rules
 415 in the following definitions of the solver algorithm are assumed to be ordered.

416
 417 $\text{solve}(Eq, Ineq, Def) = \text{FinalDef}$, where

418 $-\text{ solve_eq}(Eq) = S$
 419 $-\text{ solve_ineq}(S(Ineq), S(Def)) = \text{FinalDef}$

420 **Definition 7.** *A set of equality constraints is in solved form if all constraints*
 421 *are of the form $\alpha = \tau$, where α is a type variable and τ is a type term.*

422 **Solving Equality Constraints** Let Eq be a set of equality constraints. Then
 423 solve_eq is a rewriting algorithm that outputs a set of equality constraints in
 424 solved form, which can be interpreted as a substitution, that will later be applied
 425 to $Ineq$ and Def .

426 We now present the rewrite rules for solving the type equality constraints.
 427 A *configuration* is either the term *fail* (representing failure) or a set of equality
 428 constraints Eq . The rewriting algorithm consists of the transformation rules on
 429 configurations listed below.

430
 431 $\text{solve_eq}(Eq) =$

- 432 1. $\{t = t\} \cup Rest \rightarrow Rest$
- 433 2. $\{\alpha = t\} \cup Rest \rightarrow \{\alpha = t\} \cup Rest[\alpha \mapsto t]$, if α , which is a type variable,
 434 occurs somewhere in $Rest$
- 435 3. $\{t = \alpha\} \cup Rest \rightarrow \{\alpha = t\} \cup Rest$, where α is a type var and t is not a type
 436 variable nor a type symbol
- 437 4. $\{f(t_1, \dots, t_n) = f(s_1, \dots, s_n)\} \cup Rest \rightarrow \{t_1 = s_1, \dots, t_n = s_n\} \cup Rest$
- 438 5. otherwise $\rightarrow \text{fail}$

439 Note that an occur check would be required in step 2, but from the definition
 440 of our constraint generation algorithm, it never happens that α occurs in t .

Example 8. Following example 7, applying *solve_eq* to the set of equality constraints is as follows step-by-step:

$$\{\alpha = [], \beta = [\delta \mid \epsilon], \epsilon = v\} \rightarrow_2 \{\alpha = [], \beta = [\delta \mid v]\}$$

441 And the final set only contains constraints in solved form, that can be seen as a
442 substitution to be applied to *Ineq* and *Def*.

443 **Solving Subtyping Constraints** Let *Ineq* be a set of inequality constraints
444 and *Def* be a set of type definitions. *solve_ineq* is a rewriting algorithm that
445 outputs a new set of type definitions.

446 A *configuration* now is either the term *fail* (representing failure) or a pair
447 of the form $(Ineq, Def)$, where *Ineq* and *Def* are as described above. The re-
448 writing algorithm consists on the transformation rules on configurations listed
449 below. In this algorithm we assume a store of pairs of types that already have
450 been compared by the algorithm.

451
452 $solve_ineq(Ineq, Def) =$

- 453 1. $(\{t \leq t\} \cup Rest, Def) \rightarrow (Rest, Def)$
- 454 2. $(\{f(t_1, \dots, t_n) \leq f(s_1, \dots, s_n)\} \cup Rest, Def) \rightarrow (\{t_1 \leq s_1, \dots, t_n \leq s_n\} \cup$
455 $Rest, Def)$
- 456 3. $(\{\alpha \leq t_1, \dots, \alpha \leq t_n\} \cup Rest, Def) \rightarrow (\{\alpha \leq t\} \cup Rest, S(Def)),$
457 where α is a type variable, $n \geq 2$, and $intersect(t_1, \dots, t_n) = (t, S)$
- 458 4. $(\{\alpha \leq t\} \cup Rest, Def) \rightarrow (Rest, Def[\alpha = t]),$
459 where α is a type variable
- 460 5. $(\{t_1 + \dots + t_n \leq t\} \cup Rest, Def) \rightarrow (\{t_1 \leq t, \dots, t_n \leq t\} \cup Rest, Def)$
- 461 6. $(\{\sigma \leq t\} \cup Rest, Def) \rightarrow (Rest, Def),$
462 if σ and t have already been compared
- 463 7. $(\{\sigma \leq t\} \cup Rest, Def) \rightarrow (\{Rhs_\sigma \leq t\} \cup Rest, Def),$
464 where σ is a type symbol, and $\sigma = Rhs_\sigma \in Def$. Also add (σ, t) to the store
465 of pairs of types that have been compared.
- 466 8. $(\{t_1 \leq \alpha, \dots, t_n \leq \alpha\} \cup Rest, Def) \rightarrow (Rest, Def[\alpha = t_1 + \dots + t_n])$
- 467 9. $(\{t \leq t_1 + \dots + t_n\} \cup Rest, Def) \rightarrow (\{t \leq t_i\} \cup Rest, Def),$
468 where t_i is one of the summands
- 469 10. $(\{t \leq \sigma\} \cup Rest, Def) \rightarrow (Rest, Def),$
470 if σ and t have already been compared.
- 471 11. $(\{t \leq \sigma\} \cup Rest, Def) \rightarrow (\{t \leq Rhs_\sigma\} \cup Rest, Def),$
472 where σ is a type symbol, and $\sigma = Rhs_\sigma \in Def$. Also add (σ, t) to the store
473 of pairs of types that have been compared.
- 474 12. $(\emptyset, Def) \rightarrow Def$
- 475 13. otherwise $\rightarrow fail$

476 Type intersection, $intersect(t_1, \dots, t_n)$, is calculated using a version of Zo-
477 bel's intersection algorithm previously presented in [Zob87].

Example 9. Following example 7, applying *solve_ineq* to the set of subtyping constraints is as follows step-by-step:

$$(\{v \leq \sigma_1\}, \{\sigma_1 = [] + [\delta \mid v]\}) \rightarrow_4 (\emptyset, \{\sigma_1 = [] + [\delta \mid \sigma_1]\})$$

478 **Arithmetic** To extend the type inference algorithm to include built-in arithmetic
 479 predicates ($\leq /2$, $< /2$, $\geq /2$, $> /2$, and *is/2*) we add the following rule
 480 to the constraint generation algorithm:

481 – *generate*($p(t_1, t_2)$) = (*bool*, $\{X_1 : \sigma_1, \dots, X_n : \sigma_n\}, \emptyset, \{\alpha_1 \leq num, \dots, \alpha_n \leq$
 482 $num\}, \{\sigma_1 = \alpha_1, \dots, \sigma_n = \alpha_n\}$),
 483 where X_1, \dots, X_n are the variables occurring in t_1 and t_2 ; σ_i and α_i are
 484 fresh; and $num = int + float$.

485 4.4 Decidability and Soundness

486 The next theorem shows that both the equality constraint and subtyping con-
 487 straint solvers terminate at every input set of constraints.

488 **Theorem 1 (Termination).** *solve_eq and solve_ineq always terminate. When*
 489 *solve_eq terminates, it either fails or the output is in solved form. When solve_ineq*
 490 *terminates, it either fails or the output is a pair with zero subtyping constraints.*

491 Proofs of this theorem follows a usual termination proof approach, where we
 492 show that a carefully chosen metric decreases at every step.

493 We do not have a formal proof of soundness yet, but we believe that proofs
 494 of soundness of type inference algorithms for functional programming can be
 495 adapted to the logic programming case; in particular, we need the following
 496 extra definitions and lemmas:

- 497 – a type system which defines the notion of *well-typed* program: for this we use
- 498 the type system defined in [BFC19];
- 499 – a notion of constraint satisfaction;
- 500 – a lemma for the soundness of constraint solving which states that the solver
- 501 terminates in a set of constraints in solved form which satisfies the initial set
- 502 of constraints.

503 Informally, the soundness theorem should state that if one applies the substi-
 504 tution corresponding to the solved form of the generated constraints to the type
 505 obtained by the constraint generation function, we get a well-typed program.

506 5 Related Work

507 Types have been used before in Prolog systems: relevant works on type sys-
 508 tems and type inference in logic programming include types used in the logic
 509 programming systems CIAO Prolog [SG95, VB02], SWI and Yap [SCWD08].
 510 CIAO uses types as approximations of the success set, while we use types as

511 filters to the program semantics. There is an option where the programmer gives
512 the types for the programs in the form of assertions, which is recommended in
513 [PCPH08]. The well-typings given in [SBG08], also have the property that they
514 never fail, in the sense that every program has a typing, which is not the case in
515 our algorithm, which will fail for some predicates. The previous system of Yap
516 only type checked predicate clauses with respect to programmer-supplied type
517 signatures. Here we define a new type inference algorithm for pure Prolog, which
518 is able to infer data types.

519 In several other previous works types approximated the success set of a pre-
520 dicate [Zob87, DZ92, YFS92, BJ88]. This sometimes led to overly broad types,
521 because the way logic programs are written can be very general and accept more
522 than what was initially intended. These approaches were different from ours in
523 the sense that in our work types can filter the success set of a predicate, whenever
524 the programmer chooses to do so, using the closure operation.

525 A different approach relied on ideas coming from functional programming
526 languages [MO84, LR91, HL94, SCWD08]. Other examples of the influence of
527 functional languages on types for logic programming are the type systems used
528 in several functional logic programming languages [Han13, SHC96]. Along this
529 line of research, a rather influential type system for logic programs was Mycroft
530 and O’Keefe type system [MO84], which was later reconstructed by Lakshman
531 and Reddy [LR91]. This system had types declared for the constants, function
532 symbols and predicate symbols used in a program. Key differences from our work
533 are: 1) in the Mycroft-O’Keefe type system, each clause of a predicate must have
534 the same type. We lift this limitation extending the type language with sums
535 of types, where the type of a predicate is the sum of the types of its clauses;
536 2) although we may use type declarations, they are optional and we can use a
537 closure operation to infer datatype declarations from untyped programs.

538 Set constraints have also been used by many authors to infer types for logic
539 programming languages [HJ92, GdW94, TTD97, CP98, DMP00, DMP02]. Al-
540 though these approaches differ from ours since they follow the line of conservative
541 approximations to the success set, we were inspired from several techniques from
542 this area to define our type constraint solvers.

543 6 Conclusions and Future Work

544 In this paper, we present a flexible type inference algorithm for Prolog. Inferred
545 types are standard semantic approximations by default, but the user may tune
546 the algorithm, quite easily, to automatically infer types which correspond to the
547 usual algebraic data types used in the program. Moreover, the algorithm may
548 also be tuned to use predefined (optional) data type declarations to improve the
549 output types. Although our algorithm was tested and it was able to locate type
550 errors in several existing Prolog programs, the next obvious step of this work is
551 to prove its soundness with respect to a type system which defines the notion of
552 *well-typed* program.

553 References

- 554 BFC19. João Barbosa, Mário Florido, and Vítor Santos Costa. A three-valued se-
555 mantics for typed logic programming. In *Proceedings 35th International*
556 *Conference on Logic Programming (Technical Communications), ICLP*
557 *2019 Technical Communications, Las Cruces, NM, USA, September 20-25,*
558 *2019*, volume 306 of *EPTCS*, pages 36–51, 2019.
- 559 BFSC17. João Barbosa, Mário Florido, and Vítor Santos Costa. Closed types for logic
560 programming. In *25th Int. Workshop on Functional and Logic Programming*
561 *(WFLP 2017)*, 2017.
- 562 BG92. Roberto Barbuti and Roberto Giacobazzi. A bottom-up polymorphic type
563 inference in logic programming. *Sci. Comput. Program.*, 19(3):281–313,
564 1992.
- 565 BJ88. Maurice Bruynooghe and Gerda Janssens. An instance of abstract inter-
566 pretation integrating type and mode inferencing. In *Fifth International*
567 *Conference and Symposium, Washington, 1988*, pages 669–683, 1988.
- 568 CP98. Witold Charatonik and Andreas Podelski. Directional type inference for
569 logic programs. In Giorgio Levi, editor, *Static Analysis*, pages 278–294.
570 Springer Berlin Heidelberg, 1998.
- 571 DMP00. Włodzimierz Drabent, Jan Małuszyński, and Paweł Pietrzak. *Locating Type*
572 *Errors in Untyped CLP Programs*, pages 121–150. Springer Berlin Heidel-
573 berg, 2000.
- 574 DMP02. Włodzimierz Drabent, Jan Małuszyński, and Paweł Pietrzak. Using para-
575 metric set constraints for locating errors in CLP programs. *Theory and*
576 *Practice of Logic Programming*, 2(4-5):549–610, 2002.
- 577 DZ92. Philip W. Dart and Justin Zobel. A regular type language for logic pro-
578 grams. In Frank Pfenning, editor, *Types in Logic Programming*, pages 157–
579 187. The MIT Press, 1992.
- 580 FD92. Mário Florido and Luís Damas. Types as theories. In *Proc. of post-*
581 *conference workshop on Proofs and Types, Joint International Conference*
582 *and Symposium on Logic Programming*, 1992.
- 583 FSVY91. Thom W. Frühwirth, Ehud Y. Shapiro, Moshe Y. Vardi, and Eyal Yardeni.
584 Logic programs as types for logic programs. In *Proc. of the Sixth Annual*
585 *Symposium on Logic in Computer Science (LICS '91), Netherlands, 1991*,
586 pages 300–309, 1991.
- 587 GdW94. John P. Gallagher and D. Andre de Waal. Fast and precise regular approx-
588 imations of logic programs. In *Logic Programming, International Conference*
589 *on Logic Programming, Italy, 1994*, pages 599–613, 1994.
- 590 Han13. Michael Hanus. Functional logic programming: From theory to Curry. In
591 *Programming Logics - Essays in Memory of Harald Ganzinger*, pages 123–
592 168, 2013.
- 593 Hen93. Fritz Henglein. Type inference with polymorphic recursion. *ACM Trans.*
594 *Program. Lang. Syst.*, 15(2):253–289, 1993.
- 595 HJ92. Nevin Heintze and Joxan Jaffar. Semantic types for logic programs. In
596 Frank Pfenning, editor, *Types in Logic Programming*, pages 141–155. The
597 MIT Press, 1992.
- 598 HL94. Patricia M. Hill and John W. Lloyd. *The Gödel programming language*.
599 MIT Press, 1994.

- 600 LR91. T. L. Lakshman and Uday S. Reddy. Typed Prolog: A semantic recon-
601 struction of the Mycroft-O’Keefe type system. In *Logic Programming, Pro-*
602 *ceedings of the 1991 International Symposium, San Diego, California, USA,*
603 1991.
- 604 Lu01. Lunjin Lu. On Dart-Zobel algorithm for testing regular type inclusion.
605 *SIGPLAN Not.*, 36(9):81–85, 2001.
- 606 Mis84. Prateek Mishra. Towards a theory of types in Prolog. In *Proceedings of the*
607 *1984 International Symposium on Logic Programming, Atlantic City, New*
608 *Jersey, USA, February 6-9, 1984*, pages 289–298. IEEE-CS, 1984.
- 609 MO84. Alan Mycroft and Richard A. O’Keefe. A polymorphic type system for
610 Prolog. *Artif. Intell.*, 23(3):295–307, 1984.
- 611 Nai92. Lee Naish. Types and the intended meaning of logic programs. In Frank
612 Pfenning, editor, *Types in Logic Programming*, pages 189–216. The MIT
613 Press, 1992.
- 614 PCPH08. Pawel Pietrzak, Jesús Correas, Germán Puebla, and Manuel V. Hermene-
615 gildo. A practical type analysis for verification of modular Prolog programs.
616 In *Proceedings of the ACM SIGPLAN Symposium on Partial Evaluation and*
617 *Semantics-Based Program Manipulation*, pages 61–70, 01 2008.
- 618 PR89. Changwoo Pyo and Uday S. Reddy. Inference of polymorphic types for
619 logic programs. In *Logic Programming, Proceedings of the North American*
620 *Conference 1989, USA, 1989. 2 Volumes*, pages 1115–1132, 1989.
- 621 SBG08. Tom Schrijvers, Maurice Bruynooghe, and John P. Gallagher. From mono-
622 morphic to polymorphic well-typings and beyond. In *Logic-Based Program*
623 *Synthesis and Transformation, 18th International Symposium, LOPSTR*
624 *2008, Spain, July 17-18, 2008*, pages 152–167, 2008.
- 625 SCWD08. Tom Schrijvers, Vítor Santos Costa, Jan Wielemaker, and Bart Demoen.
626 Towards typed Prolog. In *Logic Programming, 24th International Confer-*
627 *ence, ICLP 2008, Udine, Italy, Proceedings*, pages 693–697, 2008.
- 628 SG95. Hüseyin Sağlam and John P. Gallagher. Approximating constraint logic
629 programs using polymorphic types and regular descriptions. In Manuel
630 Hermenegildo and S. Doaitse Swierstra, editors, *Programming Languages:*
631 *Implementations, Logics and Programs*, pages 461–462, Berlin, Heidelberg,
632 1995. Springer Berlin Heidelberg.
- 633 SHC96. Zoltan Somogyi, Fergus Henderson, and Thomas C. Conway. The execu-
634 tion algorithm of Mercury, an efficient purely declarative logic programming
635 language. *J. Log. Program.*, 29(1-3):17–64, 1996.
- 636 TTD97. J. M. Talbot, S. Tison, and P. Devienne. Set-based analysis for logic pro-
637 gramming and tree automata. In Pascal Van Hentenryck, editor, *Static*
638 *Analysis*, pages 127–140. Springer Berlin Heidelberg, 1997.
- 639 Ull88. Jeffrey D. Ullman. *Principles of Database and Knowledge-base Systems.*
640 Computer Science Press, Inc., 1988.
- 641 VB02. Claudio Vaucheret and Francisco Bueno. More precise yet efficient type
642 inference for logic programs. In *Proceedings of the 9th International Sym-*
643 *posium on Static Analysis, SAS ’02*, pages 102–116. Springer-Verlag, 2002.
- 644 VR90. Peter Lodewijk Van Roy. *Can Logic Programming Execute as Fast as Im-*
645 *perative Programming?* PhD thesis, EECS Department, University of Cali-
646 fornia, Berkeley, Nov 1990.
- 647 YFS92. Eyal Yardeni, Thom W. Frühwirth, and Ehud Shapiro. Polymorphically
648 typed logic programs. In Frank Pfenning, editor, *Types in Logic Program-*
649 *ming*, pages 63–90. The MIT Press, 1992.

650 Zob87. Justin Zobel. Derivation of polymorphic types for Prolog programs. In
651 *Logic Programming, Proceedings of the Fourth International Conference,*
652 *Melbourne, 1987, 1987.*

653 **A Decidability**

654 **Lemma 1 (Equality Constraints).** *solve_eq* always terminates and when it
655 does, either it fails or the output is in normal form.

656 *Proof.* We will define the following metrics for *solve_eq*:

- 657 – NVRS: number of variables on the right-hand side of equalities, that occur
658 somewhere in another equality.
- 659 – NSE: number of symbols in the equalities.
- 660 – NENNF: number of equalities not in normal form.

661 We will prove termination by showing that NENNF reduces to zero. Ter-
662 mination of *solve_eq* is proven by a measure function that maps the constraint
663 set to a tuple (NVRS,NSE,NENNF). The following table shows that each step
664 decreases the tuple w.r.t. the lexicographical order of the tuple.

665

	NVRS	NSE	NENNF
1.	\geq	$>$	
2.	\geq	$>$	
666 3.	$=$	$=$	$>$
4.	$=$	$>$	
667 5.	0	0	0

668 **Lemma 2 (Subtyping).** *solve_ineq* always terminates.

669 *Proof.* We will define the following metrics for *solve_ineq*:

- 670 – NPC: number of possible comparisons between types that have not been
671 made yet.
- 672 – NVRSI: number of variables on the right-hand side of inequalities.
- 673 – NSI: number of symbols in the inequalities.
- 674 – NI: number of inequalities.

675 We will prove termination by showing that NI reduces to zero. Termination
676 of *solve_ineq* is proven by a measure function that maps the constraint set to a
677 tuple (NPC,NVRSI,NSI,NI). The following table shows that each step decreases
678 the tuple w.r.t. the lexicographical order of the tuple.

679

NPC NVRSI NSI NI

1. = ≥ >
2. = = >
3. = ≥ ≥ >
4. = ≥ >
5. = = >
6. = ≥ >
7. >
8. = ≥ >
9. = ≥ >
10. = = >
11. >
12. 0 0 0 0
12. = 0 0 0

680

681 **Theorem 1 (Termination).** *solve_eq* and *solve_ineq* always terminate. When
682 *solve_eq* terminates, it either fails or the output is in solved form. When *solve_ineq*
683 terminates, it either fails or the output is a pair with zero subtyping constraints.

684 *Proof.* By lemma 1 and lemma 2, we prove this theorem.