

Novel Frameworks for Coded Caching via Cartesian Product with Reduced Subpacketization

Jinyu Wang, Minquan Cheng, Kai Wan, *Member, IEEE*,
and Giuseppe Caire, *Fellow, IEEE*

Abstract

Caching prefetches some library content at users' memories during the off-peak times (i.e., *placement phase*), such that the number of transmissions during the peak-traffic times (i.e., *delivery phase*) are reduced. A coded caching strategy was originally proposed by Maddah-Ali and Niesen (MN) leading to a multicasting gain compared to the conventional uncoded caching, where each message in the delivery phase is useful to multiple users simultaneously. However, the MN coded caching scheme suffers from the high subpacketization which makes it impractical. In order to reduce the subpacketization while retain the multicast opportunities in the delivery phase, Yan et al. proposed a combinatorial structure called placement delivery array (PDA) to design coded caching schemes. In this paper, we propose two novel frameworks for constructing PDA via Cartesian product, which constructs a PDA for mK_1 users by the m -fold Cartesian product of a PDA for K_1 users. By applying the proposed frameworks to some existing PDAs, three novel caching schemes are obtained which can significantly reduce the subpacketization of the MN scheme while slightly increasing the needed number of transmissions. For instance, for the third scheme which works for any number of users and any memory regime, while reducing the coded caching gain by one, the needed subpacketization is at most $O\left(\sqrt{\frac{K}{q}}2^{-\frac{K}{q}}\right)$ of that of the MN scheme, where K is the number of users, $0 < z/q < 1$ is the memory ratio of each user, and q, z are coprime.

J. Wang and M. Cheng are with Guangxi Key Lab of Multi-source Information Mining & Security, Guangxi Normal University, Guilin 541004, China (e-mail: mathwjy@163.com, chengqinshi@hotmail.com). J. Wang is also with College of Mathematics and Statistics, Guangxi Normal University, Guilin 541004, China.

K. Wan and G. Caire are with the Electrical Engineering and Computer Science Department, Technische Universität Berlin, 10587 Berlin, Germany (e-mail: kai.wan@tu-berlin.de, caire@tu-berlin.de). The work of K. Wan and G. Caire was partially funded by the European Research Council under the ERC Advanced Grant N. 789190, CARENET.

Index Terms

Coded caching, placement delivery array, Cartesian product.

I. INTRODUCTION

Caching is an efficient technique to reduce peak-time traffic by prefetching contents near end-users during off-peak times, thereby reducing the transmission delay or equivalently increasing the bandwidth in communication networks. Conventional uncoded caching techniques focus on predicting the user demands for making an appropriate prefetching strategy, thus realizing a “local caching gain”, which scales with the amount of local memory [1]. Maddah-Ali and Niesen (MN) showed that in addition to a local caching gain, coded caching can also attain a “global caching gain”, which scales with the global amount of memory in the network [2], since each transmission of the MN scheme can serve a number of users simultaneously.

The MN coded caching problem considers a (K, M, N) caching system, where a server has a library of N equal-sized files and broadcasts to K users through an error-free shared-link. Each user has a cache of size M files. A coded caching scheme consists of two phases: *placement* and *delivery*. In the placement phase, each file is divided into F packets and each user’s cache is filled without knowledge of the user’s future demands. If packets are directly stored in each user’s cache without coding, we call it uncoded placement. The quantity F is referred to as the *subpacketization*. In the delivery phase, each user requests one arbitrary file and the server broadcasts coded packets such that each user can recover its desired file. The worst-case load over all possible demands is defined as the *transmission load* (or simply load) R , that is, the number of files that must be communicated so that any demands can be satisfied. The coded caching gain of a coded caching scheme is defined as $\frac{K(1-\frac{M}{N})}{R}$, where $K(1 - \frac{M}{N})$ is the load of the conventional uncoded caching scheme. The objective of the MN coded caching problem is to minimize the load, i.e., maximize the coded caching gain.

The MN coded caching scheme, with a combinatorial design in the placement phase and a linear coding in the delivery phase, achieves a coded caching gain equal to $t + 1$, where $t = \frac{KM}{N}$ is an integer. If $\frac{KM}{N}$ is not an integer, then the lower convex envelope of the memory-load tradeoff can be achieved by memory sharing. The achieved load of the MN scheme is optimal under the constraint of uncoded placement and $N \geq K$ [3], [4], and generally order optimal within a factor of 4 [5]. When a file is requested multiple times, by removing the redundant

transmissions in the MN scheme, Yu, Maddah-Ali, and Avestimehr (YMA) designed a scheme which is optimal under the constraint of uncoded placement for $K > N$ [6] and is order optimal to within a factor of 2 [7]. There are some other studies focusing on the load. For example, by using an optimization framework under a specific caching rule, Jin. et al. [8] derived the average load under conditions such as non-uniform file popularity and various demand patterns. When $K \leq N$ and all files have the same popularity, they also showed that the minimum load is exactly that of the MN scheme.

However, a main practical issue of the MN scheme is its subpacketization which increases exponentially with the number of users. A number of works in the literature were devoted to reduce the subpacketization of the MN scheme while increasing the load as the tradeoff. The first scheme with lower subpacketization compared with the MN scheme was proposed by Shanmugam et al. by dividing the users into groups and let the users in the same group have the same cache [9]. Yan et al. [10] proposed a combinatorial structure called placement delivery array (PDA), which covers the MN scheme as a special case, referred to as the MN PDA. Subsequently, Shangguan et al. [11] showed that many previously existing coded caching schemes can be represented by PDA. Based on the concept of PDA, various caching schemes with lower subpacketization than the MN scheme were proposed in [10], [12]–[14], some of which are listed in Table I. Other combinatorial construction structures to reduce the subpacketization in the literature include the linear block codes [15], the special $(6, 3)$ -free hypergraphs [11], the (r, t) Ruzsa-Szemerédi graphs [16], the strong edge coloring of bipartite graphs [17], the projective space [18], and other combinatorial designs such as [19].

A. Contributions

In this paper, we propose two frameworks for constructing PDA via Cartesian product. As applications of the frameworks, three new coded caching schemes are obtained and their performance analysis is subsequently provided. Specifically, the following results are obtained.

- **Novel frameworks for constructing PDA:** Given a PDA \mathbf{P} with number of users K_1 , coded caching gain g and subpacketization F_1 , if it satisfies some special conditions, i.e., Condition 1 with parameter λ given in Section III-A, for any positive integer m , a new PDA with number of users mK_1 can be obtained by Construction 1 in Section III-A via Cartesian product, whose memory ratio is the same as \mathbf{P} , coded caching gain is mg and

TABLE I: Some existing PDA schemes.

| Scheme | Number of users K | Memory ratio $\frac{M}{N}$ | Coded caching gain g | Load R | Subpacketization F |
|---|---------------------|------------------------------------|--|--|---|
| MN scheme in [2], any $t = 1, \dots, k-1$ | k | $\frac{t}{k}$ | $t+1$ | $\frac{k-t}{t+1}$ | $\binom{k}{t}$ |
| Grouping method in [9], any $n, k, t \in \mathbb{Z}^+$, $t < k$ | nk | $\frac{t}{k}$ | $t+1$ | $\frac{n(k-t)}{t+1}$ | $\binom{k}{t}$ |
| Partition PDA scheme in [10], any $n, k \in \mathbb{Z}^+$ | $(n+1)k$ | $\frac{1}{k}$ | $n+1$ | $k-1$ | k^n |
| | | $\frac{k-1}{k}$ | $(n+1)(k-1)$ | $\frac{1}{k-1}$ | $(k-1)k^n$ |
| Scheme in [11], any $n, k, b \in \mathbb{Z}^+$, $b \leq n$ | $\binom{n}{b}k^b$ | $1 - \left(\frac{k-1}{k}\right)^b$ | $\binom{n}{b}$ | $(k-1)^b$ | k^n |
| | | $1 - \frac{1}{k^b}$ | $(k-1)^b \binom{n}{b}$ | $\frac{1}{(k-1)^b}$ | $(k-1)^b k^n$ |
| Scheme in [12], any $n, k, t, b \in \mathbb{Z}^+$, $t < k$, $b \leq n$ | $(n+1)k$ | $\frac{t}{k}$ | $(n+1)\lfloor \frac{k-1}{k-t} \rfloor$ | $\frac{k-t}{\lfloor \frac{k-1}{k-t} \rfloor}$ | $\lfloor \frac{k-1}{k-t} \rfloor k^n$ |
| | $\binom{n}{b}k^b$ | $1 - \left(\frac{k-t}{k}\right)^b$ | $\lfloor \frac{k-1}{k-t} \rfloor^b \binom{n}{b}$ | $\left(\frac{k-t}{\lfloor \frac{k-1}{k-t} \rfloor}\right)^b$ | $\lfloor \frac{k-1}{k-t} \rfloor^b k^n$ |
| Scheme in [15], any $n, l \in \mathbb{Z}^+$, some $x, k \in \mathbb{Z}^+$ with $n < l$ and $(n+1) lx$ | lk | $\frac{1}{k}$ | $n+1$ | $\frac{l}{n+1}(k-1)$ | $k^n x$ |
| | | $1 - \frac{n+1}{lk}$ | $l(k-1)$ | $\frac{n+1}{l(k-1)}$ | $(k-1)k^n \frac{lx}{n+1}$ |

subpacketization is $\lambda\left(\frac{F_1}{\lambda}\right)^m$. Otherwise, if it satisfies some weaker conditions, i.e., Condition 2 in Section IV-A, which all previously existing PDAs satisfy, for any positive integer m , a new PDA with number of users mK_1 can be obtained by Construction 2 in Section IV-A via Cartesian product, whose memory ratio is the same as \mathbf{P} , coded caching gain is $m(g-1)$ and subpacketization is $(g-1)F_1^m$.

Consequently, if we want to construct a class of PDAs with good performance so then obtain a good coded caching scheme, we only need to find a good base PDA. Moreover, if the base PDA \mathbf{P} has the minimum load, such as the MN PDA, a class of PDAs with approximate minimum load can be obtained.

- **Applications of the novel frameworks:** Three new coded caching schemes are obtained by using the above frameworks. The first scheme, referred to as Scheme A, has smaller load and much smaller subpacketization than the schemes in [9], [12] under some parameters. The second scheme, referred to as Scheme B, has much smaller subpacketization than the grouping method in [9] when their loads are almost the same; it also has smaller load than the scheme in [12] when their subpacketizations are of the same level. Most of all, for any number of users K and for any memory ratio $\frac{M}{N} = \frac{z}{q}$, where q and z are coprime, the coded

caching gain of the third scheme (referred to as Scheme C) is only one less than that of the K -user MN scheme, while the subpacketization of Scheme C is at most $O\left(\sqrt{\frac{K}{q}}2^{-\frac{K}{q}}\right)$ of that of the MN scheme.

The rest of this paper is organized as follows. In Section II, the (K, M, N) caching system and the definition of PDA are introduced. In Section III, two frameworks for constructing PDA via Cartesian product are proposed. In Section IV, three novel caching schemes with low subpacketization are obtained by using the proposed frameworks. Finally, Section V concludes the paper while some proofs are provided in the Appendices.

Notations: In this paper, the following notations will be used unless otherwise stated.

- $[a : b] := \{a, a + 1, \dots, b\}$.
- $|\cdot|$ denotes the cardinality of a set.
- $\text{mod}(a, q)$ denotes the least non-negative residue of a modulo q .
- $\langle a \rangle_q := \begin{cases} \text{mod}(a, q) & \text{if } \text{mod}(a, q) \neq 0, \\ q & \text{if } \text{mod}(a, q) = 0. \end{cases}$
- $[a : b]_q := \{\langle a \rangle_q, \langle a + 1 \rangle_q, \dots, \langle b \rangle_q\}$.
- Let $B = \{b_1, b_2, \dots, b_n\}$ be a set with $b_1 < b_2 < \dots < b_n$, for any $i \in [1 : n]$, $B[i]$ denotes the i -th smallest element of B , i.e., $B[i] = b_i$.
- Let $T = \{(t_{1,1}, t_{1,2}), (t_{2,1}, t_{2,2}), \dots, (t_{n,1}, t_{n,2})\}$ be a set of 2-length vectors with $t_{1,2} < t_{2,2} < \dots < t_{n,2}$, for any $i \in [1 : n]$, $T[i]$ denotes the element of T whose second coordinate is the i -th smallest in the second coordinate of all elements, i.e., $T[i] = (t_{i,1}, t_{i,2})$.
- Let \mathbf{a} be a vector with length n , for any $i \in [1 : n]$, $\mathbf{a}[i]$ denotes the i -th coordinate of \mathbf{a} . For any subset $\mathcal{T} \subseteq [1 : n]$, $\mathbf{a}[\mathcal{T}]$ denotes a vector with length $|\mathcal{T}|$ obtained by taking only the coordinates with subscript $i \in \mathcal{T}$.
- For any positive integers n and t with $t < n$, let $\binom{[1:n]}{t} = \{\mathcal{T} \mid \mathcal{T} \subseteq [1 : n], |\mathcal{T}| = t\}$, i.e., $\binom{[1:n]}{t}$ is the collection of all t -sized subsets of $[1 : n]$.
- For any two vectors \mathbf{x} and \mathbf{y} with the same length, $d(\mathbf{x}, \mathbf{y})$ is the number of coordinates in which \mathbf{x} and \mathbf{y} differ.
- For any array \mathbf{P} with dimension $m \times n$, $\mathbf{P}(i, j)$ represents the element located in the i -th row and the j -th column of \mathbf{P} .
- Let \mathbf{P} be an array composed of a specific symbol “ $*$ ” and S integers, for any integer a , $\mathbf{P} + a$ denotes a new $F \times K$ array which is obtained by adding each element in \mathbf{P} by a ,

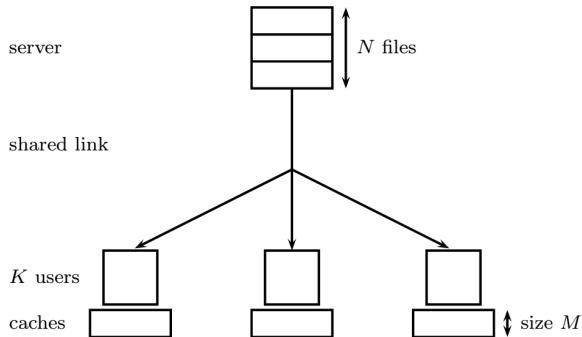


Fig. 1: A (K, M, N) caching system with $K = 3, M = 1, N = 3$

where by contention $* + a = *$.

II. SYSTEM MODEL

In this paper, we focus on a (K, M, N) caching system, illustrated in Fig. 1. A server containing N equal sized files is connected to K users through an error-free shared-link. Each user has a cache memory of size M files where $0 \leq M \leq N$. Denote the N files and K users by $\mathcal{W} = \{W_1, W_2, \dots, W_N\}$ and $\mathcal{K} = \{1, 2, \dots, K\}$ respectively. For such a system, an F -division coded caching scheme consists of two phases [2]:

- **Placement phase:** Each file W_n is divided equally into F packets, i.e., $W_n = \{W_{n,j} | j = 1, 2, \dots, F\}$. Then some packets (or coded packets) are cached by each user from the server. If packets are cached directly without coding, we call it uncoded placement. Let \mathcal{Z}_k denote the contents cached by user k . The placement phase is done without knowledge of the demands in the delivery phase.
- **Delivery phase:** Each user requests one arbitrary file from the server. Assume that the demand vector is $\mathbf{d} = (d_1, d_2, \dots, d_K)$, which represents that user k requests W_{d_k} , where $d_k \in [1 : N]$ and $k \in [1 : K]$. Then the server broadcasts coded messages of total size $R_{\mathbf{d}}F$ packets to the users, such that each user can recover its desired file.

The load of a coded caching scheme is defined as $R := \max_{\mathbf{d} \in [1:N]^K} R_{\mathbf{d}}$, that is, the maximal normalized number of transmissions over all possible demands.

Placement delivery array proposed by Yan et al. [10] is a combinatorial structure, which designs coded caching schemes with uncoded placement and clique-covering delivery phase,

i.e., each multicast message transmitted in the delivery phase is a linear combination of some file packets and useful to a subset of users, each of which caches all except one packets in this multicast message.

Definition 1: ([10]) For positive integers K, F, Z and S , an $F \times K$ array \mathbf{P} composed of a specific symbol “*” and S integers in $[1 : S]$, is called a (K, F, Z, S) placement delivery array (PDA) if it satisfies the following conditions:

- C1:** The symbol “*” appears Z times in each column;
- C2:** Each integer in $[1 : S]$ occurs at least once in the array;
- C3:** For any two distinct entries $\mathbf{P}(j_1, k_1)$ and $\mathbf{P}(j_2, k_2)$, if $\mathbf{P}(j_1, k_1) = \mathbf{P}(j_2, k_2) = s \in [1 : S]$, then $\mathbf{P}(j_1, k_2) = \mathbf{P}(j_2, k_1) = *$, i.e., the corresponding 2×2 subarray formed by rows j_1, j_2 and columns k_1, k_2 must be of the following form

$$\begin{pmatrix} s & * \\ * & s \end{pmatrix} \text{ or } \begin{pmatrix} * & s \\ s & * \end{pmatrix}.$$

□

A (K, F, Z, S) PDA \mathbf{P} is said to be a g -regular (K, F, Z, S) PDA, g - (K, F, Z, S) PDA or g -PDA for short, if each integer in $[1 : S]$ appears exactly g times in \mathbf{P} .

Based on a (K, F, Z, S) PDA, an F -division coded caching scheme for the (K, M, N) caching system, where $M/N = Z/F$, can be obtained by using Algorithm 1.

Example 1: It is easy to verify that the following array is a $(4, 4, 2, 4)$ PDA,

$$\mathbf{P}_1 = \begin{pmatrix} * & * & 3 & 1 \\ 2 & * & * & 4 \\ 1 & 3 & * & * \\ * & 2 & 4 & * \end{pmatrix}. \quad (1)$$

Based on the above PDA \mathbf{P}_1 , a 4-division $(4, 2, 4)$ coded caching scheme can be obtained by using Algorithm 1.

- **Placement Phase:** From Line 2 of Algorithm 1, each file W_n is split into 4 packets, i.e., $W_n = \{W_{n,1}, W_{n,2}, W_{n,3}, W_{n,4}\}$, $n \in [1 : 4]$. Then by Lines 3-5, the contents cached by

Algorithm 1 Coded caching scheme based on PDA in [10]

```

1: procedure PLACEMENT( $\mathbf{P}, \mathcal{W}$ )
2:   Split each file  $W_n \in \mathcal{W}$  into  $F$  packets, i.e.,  $W_n = \{W_{n,j} \mid j \in [1 : F]\}$ .
3:   for  $k \in [1 : K]$  do
4:      $\mathcal{Z}_k \leftarrow \{W_{n,j} \mid \mathbf{P}(j, k) = *, j \in [1 : F], n \in [1 : N]\}$ 
5:   end for
6: end procedure
7: procedure DELIVERY( $\mathbf{P}, \mathcal{W}, \mathbf{d}$ )
8:   for  $s = 1, 2, \dots, S$  do
9:     Server sends  $\bigoplus_{\mathbf{P}(j,k)=s, j \in [1:F], k \in [1:K]} W_{d_k, j}$ .
10:  end for
11: end procedure

```

each user are

$$\mathcal{Z}_1 = \{W_{n,1}, W_{n,4} \mid n \in [1 : 4]\}, \mathcal{Z}_2 = \{W_{n,1}, W_{n,2} \mid n \in [1 : 4]\},$$

$$\mathcal{Z}_3 = \{W_{n,2}, W_{n,3} \mid n \in [1 : 4]\}, \mathcal{Z}_4 = \{W_{n,3}, W_{n,4} \mid n \in [1 : 4]\}.$$

- **Delivery Phase:** Assume that the request vector is $\mathbf{d} = (1, 2, 3, 4)$. By Lines 8-10, the messages sent by the server are listed in Table II. Then each user can recover its requested file. For example, user 1 requests the file $W_1 = \{W_{1,1}, W_{1,2}, W_{1,3}, W_{1,4}\}$ and has cached $W_{1,1}$ and $W_{1,4}$. At time slot 1, it can receive $W_{1,3} \oplus W_{4,1}$, then it can recover $W_{1,3}$ since it has cached $W_{4,1}$. At time slot 2, it can receive $W_{1,2} \oplus W_{2,4}$, then it can recover $W_{1,2}$ since it has cached $W_{2,4}$. The load is $R = \frac{4}{4} = 1$.

TABLE II: Delivery steps in Example 1

| Time Slot | Transmitted Signal |
|-----------|--------------------------|
| 1 | $W_{1,3} \oplus W_{4,1}$ |
| 2 | $W_{1,2} \oplus W_{2,4}$ |
| 3 | $W_{2,3} \oplus W_{3,1}$ |
| 4 | $W_{3,4} \oplus W_{4,2}$ |

□

A (K, F, Z, S) PDA \mathbf{P} is an $F \times K$ array composed of a specific symbol “*” and S integers, where columns represent the user indexes and rows represent the packet indexes. If $\mathbf{P}(j, k) = *$, then user k caches the j -th packet of all files. The condition C1 of Definition 1 implies that all the users have the same memory size and the memory ratio is $\frac{M}{N} = \frac{Z}{F}$. If $\mathbf{P}(j, k) = s$ is an integer, it means that the j -th packet of all files is not stored by user k . Then the server broadcasts a multicast message (i.e. the XOR of all the requested packets indicated by s) to the users at time slot s . The condition C3 of Definition 1 guarantees that each user can recover its requested packet, since it has cached all the other packets in the multicast message except its requested one. The occurrence number of integer s in \mathbf{P} , denoted by g_s , is the coded caching gain at time slot s , since the coded packet broadcasted at time slot s is useful for g_s users. The condition C2 of Definition 1 implies that the number of multicast messages transmitted by the server is exactly S , so the load is $R = \frac{S}{F}$.

Lemma 1: ([10]) If there exists a (K, F, Z, S) PDA, there always exists an F -division (K, M, N) coded caching scheme with the memory ratio $\frac{M}{N} = \frac{Z}{F}$ and load $R = \frac{S}{F}$. \square

III. FRAMEWORKS FOR CONSTRUCTING PDA VIA CARTESIAN PRODUCT

In this section, we propose two novel frameworks to construct a PDA for mK_1 users based on the m -fold Cartesian product of some existing PDA for K_1 users. The grouping method in [9] directly replicates any existing PDA for K_1 users by m times, which results in a new PDA for mK_1 users whose coded caching gain is exactly the same as that of the original PDA. In the contrast, by taking the m -fold Cartesian product, the resulting PDA in our construction has a coded caching gain is either equal to mg (if the original PDA satisfies Condition 1) or equal to $m(g - 1)$ (if the original PDA satisfies Condition 2), where g is the coded caching gain of the original PDA.

The rest of this section is organized as follows. We first list the main theorems of these two novel construction frameworks, and then provide the descriptions of the two construction frameworks in Section III-A and III-B, respectively.

The first PDA construction framework is given in the following theorem.

Theorem 1: For any positive integers K_1, F_1, Z_1, S_1 with $Z_1 < F_1$, if there exists a (K_1, F_1, Z_1, S_1) PDA satisfying Condition 1 with parameter λ which will be given in Section III-A, then for any positive integer m , there always exists an $(mK_1, \lambda(\frac{F_1}{\lambda})^m, Z_1(\frac{F_1}{\lambda})^{m-1}, S_1(\frac{F_1}{\lambda})^{m-1})$ PDA,

which leads to a (K, M, N) coded caching scheme with number of users $K = mK_1$, memory ratio $\frac{M}{N} = \frac{Z_1}{F_1}$, subpacketization $F = \lambda \left(\frac{F_1}{\lambda}\right)^m$ and load $R = \frac{S_1}{F_1}$. \square

Condition 1 has some strong constraints, which parts of existing PDAs do not satisfy. Hence, we propose the following construction framework, where the original PDA should satisfy a weaker version of the constraints, i.e., Condition 2 in Section III-B, which all previously existing PDAs satisfy.

Theorem 2: For any positive integers K_1, F_1, Z_1 and S_1 with $Z_1 < F_1$, $g = \frac{K_1(F_1 - Z_1)}{S_1} \in \mathbb{Z}$ and $g \geq 2$, if there exists a g - (K_1, F_1, Z_1, S_1) PDA satisfying Condition 2 which will be given in Section III-B, then for any positive integer $m \geq 2$, there always exists an $m(g-1)$ - $(mK_1, (g-1)F_1^m, (g-1)Z_1F_1^{m-1}, gS_1F_1^{m-1})$ PDA, which leads to a (K, M, N) coded caching scheme with number of users $K = mK_1$, memory ratio $\frac{M}{N} = \frac{Z_1}{F_1}$, subpacketization $F = (g-1)F_1^m$ and load $R = \frac{g}{g-1} \frac{S_1}{F_1}$. \square

A. Construction of PDA in Theorem 1

The Cartesian product of two sets A and B is defined as $A \times B = \{(x, y) | x \in A, y \in B\}$. Similarly, we define the Cartesian product of two arrays as follows.

Definition 2: Let $\mathbf{P}_1 = \begin{pmatrix} \mathbf{a}_1 \\ \mathbf{a}_2 \\ \vdots \\ \mathbf{a}_{F_1} \end{pmatrix}$ be an $F_1 \times K_1$ array, and $\mathbf{P}_2 = \begin{pmatrix} \mathbf{b}_1 \\ \mathbf{b}_2 \\ \vdots \\ \mathbf{b}_{F_2} \end{pmatrix}$ be an $F_2 \times K_2$

array. The Cartesian product of \mathbf{P}_1 and \mathbf{P}_2 is an $F_1F_2 \times (K_1 + K_2)$ array, defined as

$$\mathbf{P}_1 \times \mathbf{P}_2 = \begin{pmatrix} \mathbf{a}_1 & \mathbf{b}_1 \\ \vdots & \vdots \\ \mathbf{a}_{F_1} & \mathbf{b}_1 \\ \vdots & \vdots \\ \mathbf{a}_1 & \mathbf{b}_{F_2} \\ \vdots & \vdots \\ \mathbf{a}_{F_1} & \mathbf{b}_{F_2} \end{pmatrix}.$$

In particular, for any positive integer m , the m -fold Cartesian product of \mathbf{P}_1 is an $F_1^m \times mK_1$ array, defined as

$$\mathbf{P}_1^m = \underbrace{\mathbf{P}_1 \times \mathbf{P}_1 \times \dots \times \mathbf{P}_1}_m.$$

□

Next we will use an example to illustrate the main idea of the construction.

Example 2: Let us consider the PDA \mathbf{P}_1 in (1) again. Based on \mathbf{P}_1 , we will construct a 16×8 PDA \mathbf{P}_2 , as illustrated in Fig 2. The construction contains two steps. In the first step, by taking the Cartesian product of \mathbf{P}_1 and \mathbf{P}_1 , a 16×8 array $\mathbf{P}_1 \times \mathbf{P}_1$ can be obtained. It can be seen that $\mathbf{P}_1 \times \mathbf{P}_1$ does not satisfy Condition C3 of the definition of PDA (see Definition 1); for example, integer 1 appears twice in the first row of $\mathbf{P}_1 \times \mathbf{P}_1$, which contradicts Condition C3. So in the second step, we adjust the integers in $\mathbf{P}_1 \times \mathbf{P}_1$ as follows, such that the resulting array satisfies Condition C3:

- In the first four columns of $\mathbf{P}_1 \times \mathbf{P}_1$, there are exactly four replicas of \mathbf{P}_1 . We replace the second, third, and last replicas by $\mathbf{P}_1 + 4$, $\mathbf{P}_1 + 8$, and $\mathbf{P}_1 + 12$ respectively.¹
- For the last four columns, we replace $(2 \ 2 \ 2 \ 2)^\top$, $(3 \ 3 \ 3 \ 3)^\top$, $(4 \ 4 \ 4 \ 4)^\top$, and $(1 \ 1 \ 1 \ 1)^\top$ by $(2 \ 3 \ 4 \ 1)^\top$, $(6 \ 7 \ 8 \ 5)^\top$, $(10 \ 11 \ 12 \ 9)^\top$, and $(14 \ 15 \ 16 \ 13)^\top$, respectively.

The resulting array is denoted by \mathbf{P}_2 , which is an $(8, 16, 8, 16)$ PDA and leads to an 8-user coded caching scheme with the same memory ratio and load as the 4-user coded caching scheme from \mathbf{P}_1 . □

Inspired from Example 2, the intuition of our general construction for Theorem 1 could be explained as follows. Given a base PDA \mathbf{P}_1 , for any positive integer m , we first take the m -fold Cartesian product of \mathbf{P}_1 (i.e., \mathbf{P}_1^m) and then adjust the non-star entries in \mathbf{P}_1^m , such that the resulting array (denoted by \mathbf{P}_m) satisfies Condition C3 of PDA. Thus we can obtain an mK_1 -user coded caching scheme from the PDA \mathbf{P}_m , which has the same memory ratio and load as the K_1 -user coded caching scheme from \mathbf{P}_1 . If the coded caching gain of the base PDA \mathbf{P}_1 is g , then the coded caching gain of \mathbf{P}_m is mg .

However, not all PDAs can serve as a base PDA in the above construction. In order to characterize the conditions which a base PDA should satisfy for our construction, we introduce the following definitions.

Definition 3: For a (K_1, F_1, Z_1, S_1) PDA \mathbf{P}_1 and an integer s , we say that the i -th row of \mathbf{P}_1 is a star row for s if each column of \mathbf{P}_1 containing s has $*$ in the i -th row. i.e., for any

¹ Recall that for any integer a , $\mathbf{P}_1 + a$ denotes an array $(\mathbf{P}_1(j, k) + a)$, where $* + a = *$.

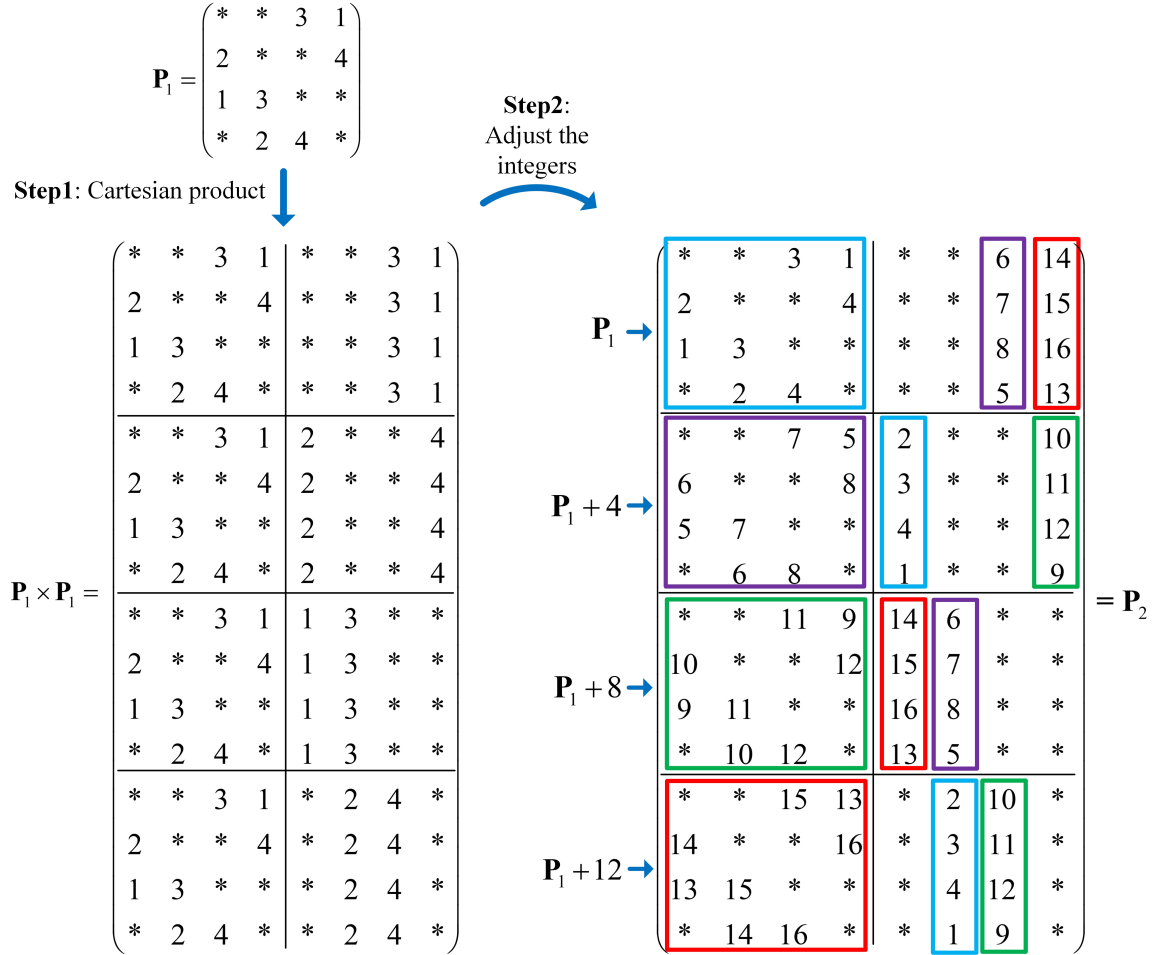


Fig. 2: The process of generating \mathbf{P}_2 from \mathbf{P}_1 .

$\mathbf{P}_1(j, k) = s$ with $j \in [1 : F_1]$ and $k \in [1 : K_1]$, we have $\mathbf{P}_1(i, k) = *$. \square

For example, let us focus on the PDA \mathbf{P}_1 in (1). Integer 1 appears twice in \mathbf{P}_1 , i.e., $\mathbf{P}_1(3, 1) = \mathbf{P}_1(1, 4) = 1$. Since $\mathbf{P}_1(4, 1) = \mathbf{P}_1(4, 4) = *$, the fourth row of \mathbf{P}_1 is a star row for integer 1. Similarly, the i -th row of \mathbf{P}_1 is a star row for integer $i + 1$, where $i \in \{1, 2, 3\}$. So each row of \mathbf{P}_1 is a star row for exactly one integer in $[1 : 4]$.

There may exist more than one star rows for an integer, in this case we need to assign exactly one star row for this integer among its possible star rows; thus there may be some degree of freedom in defining a one-to-one correspondence between this integer and the corresponding star rows. For a (K_1, F_1, Z_1, S_1) PDA \mathbf{P}_1 , if we can assign exactly one star row for each integer in $[1 : S_1]$ such that each row of \mathbf{P}_1 is assigned to the same number of integers (i.e., to S_1/F_1

integers), then \mathbf{P}_1 can serve as a base PDA for our construction.

More generally, if \mathbf{P}_1 is vertically composed of λ arrays (denoted by $\mathbf{P}_1^{(1)}, \mathbf{P}_1^{(2)}, \dots, \mathbf{P}_1^{(\lambda)}$) each with dimension $\frac{F_1}{\lambda} \times K_1$ and the stars are placed in the same way in each $\mathbf{P}_1^{(i)}$ where $i \in [1 : \lambda]$, and if we can assign a star row among the first $\frac{F_1}{\lambda}$ rows for each integer in $[1 : S_1]$ such that each of the first $\frac{F_1}{\lambda}$ rows is assigned to the same number of integers (i.e., to $\lambda S_1 / F_1$ integers), then \mathbf{P}_1 can serve as a base PDA for our construction. It is worth noting that if $\lambda > 1$, we will take the m -fold Cartesian product of each $\frac{F_1}{\lambda} \times K_1$ array $\mathbf{P}_1^{(i)}$ where $i \in [1 : \lambda]$ instead of the m -fold Cartesian product of the entire \mathbf{P}_1 . Mathematically, any (K_1, F_1, Z_1, S_1) PDA \mathbf{P}_1 satisfying the following constraint can serve as a base PDA.

- Condition 1:**
- 1) There exists a positive integer λ by which F_1 and Z_1 are dividable, such that $\mathbf{P}_1(j, k) = *$ if and only if $\mathbf{P}_1(\langle j \rangle_{\frac{F_1}{\lambda}}, k) = *$ for any $j \in [1 : F_1]$ and $k \in [1 : K_1]$.
 - 2) There exists a mapping ϕ from $[1 : S_1]$ to $[1 : \frac{F_1}{\lambda}]$ such that:
 - for each integer $s \in [1 : S_1]$, the $\phi(s)$ -th row of \mathbf{P}_1 is a star row for s ;
 - for each $j \in [1 : \frac{F_1}{\lambda}]$, by defining $B_j = \{s | \phi(s) = j, s \in [1 : S_1]\}$ in ascending order, it holds that $|B_j| = \frac{\lambda S_1}{F_1}$.

□

Let us return to PDA \mathbf{P}_1 in (1), we will show that it satisfies Condition 1 with $\lambda = 1$. \mathbf{P}_1 satisfies the first item of Condition 1 obviously. Since there is only one star row for each integer, we have $\phi(1) = 4, \phi(2) = 1, \phi(3) = 2, \phi(4) = 3$; thus $B_1 = \{2\}, B_2 = \{3\}, B_3 = \{4\}, B_4 = \{1\}$. Consequently, $|B_j| = 1$ for each $j \in [1 : 4]$. \mathbf{P}_1 satisfies the second item of Condition 1. So the PDA \mathbf{P}_1 in (1) satisfies Condition 1, then it can serve as a base PDA for our construction. Let us go back to Example 2 and explain Condition 1 intuitively. Focus on integer 1 in \mathbf{P}_2 . Since $\phi(1) = 4$, we have $\mathbf{P}_2(4, 1) = \mathbf{P}_2(4, 4) = *$. Similarly, by our construction, we have $\mathbf{P}_2(8, 1) = \mathbf{P}_2(8, 4) = \mathbf{P}_2(16, 1) = \mathbf{P}_2(16, 4) = *$. In addition, since integer 1 is the smallest element of B_4 and the size of each B_j is the same, the smallest integer for which the assigned star row is the first row must exist, i.e., $B_1[1] = 2$, then we have $\mathbf{P}_2(1, 1) = \mathbf{P}_2(1, 2) = *$. Hence, by our construction, we have $\mathbf{P}_2(1, 5) = \mathbf{P}_2(1, 6) = \mathbf{P}_2(3, 5) = \mathbf{P}_2(3, 6) = *$. Hence, Condition 1 guarantees that \mathbf{P}_2 satisfies Condition C3 of Definition 1.

We are now ready to describe the construction for Theorem 1. Recall that $B[i]$ denotes the i -th smallest element of the set B .

TABLE III: The mapping ψ

| | | | | | | | | |
|--------------------|--------|--------|--------|--------|--------|--------|--------|--------|
| \mathbf{e} | (1, 2) | (2, 2) | (3, 2) | (4, 2) | (1, 3) | (2, 3) | (3, 3) | (4, 3) |
| $\psi(\mathbf{e})$ | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| \mathbf{e} | (1, 4) | (2, 4) | (3, 4) | (4, 4) | (1, 1) | (2, 1) | (3, 1) | (4, 1) |
| $\psi(\mathbf{e})$ | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |

Construction 1: Given a (K_1, F_1, Z_1, S_1) PDA \mathbf{P}_1 satisfying Condition 1 with parameter λ , for any positive integer $m \geq 2$, let the row index set

$$\mathcal{F} = \bigcup_{i \in [1:\lambda]} \left[(i-1) \frac{F_1}{\lambda} + 1 : i \frac{F_1}{\lambda} \right]^m \quad (2)$$

and the column index set $\mathcal{K} = [1 : m] \times [1 : K_1]$, a $\lambda \left(\frac{F_1}{\lambda}\right)^m \times mK_1$ array

$$\mathbf{P}_m = (\mathbf{P}_m(\mathbf{f}, (\delta, b)) | \mathbf{f} = (f_1, f_2, \dots, f_m) \in \mathcal{F}, (\delta, b) \in \mathcal{K})$$

is defined as

$$\mathbf{P}_m(\mathbf{f}, (\delta, b)) = \begin{cases} * & \text{if } \mathbf{P}_1(f_\delta, b) = *, \\ \mathbf{e} & \text{if } \mathbf{P}_1(f_\delta, b) = B_i[\mu], \end{cases} \quad (3)$$

where $\mathbf{e} = (e_1, e_2, \dots, e_m)$ such that

$$e_h = \begin{cases} \mathbf{P}_1(f_\delta, b) & \text{if } h = \delta, \\ B_{\langle f_h \rangle_{\frac{F_1}{\lambda}}}[\mu] & \text{otherwise.} \end{cases} \quad (4)$$

□

Example 3: For the PDA \mathbf{P}_1 in (1), we have $\lambda = 1$, $F_1 = 4$ and

$$B_1 = \{2\}, B_2 = \{3\}, B_3 = \{4\}, B_4 = \{1\}.$$

When $m = 2$, the array generated by Construction 1 based on \mathbf{P}_1 in (1) is given in (5). When $\mathbf{f} = (1, 1)$ and $(\delta, b) = (1, 1)$, we have $\mathbf{P}_2(\mathbf{f}, (\delta, b)) = *$ from (3), since $\mathbf{P}_1(f_\delta, b) = \mathbf{P}_1(f_1, b) = \mathbf{P}_1(1, 1) = *$. When $\mathbf{f} = (2, 1)$ and $(\delta, b) = (1, 1)$, since $\mathbf{P}_1(f_\delta, b) = \mathbf{P}_1(f_1, b) = \mathbf{P}_1(2, 1) = 2 = B_1[1]$, we have $\mathbf{P}_2(\mathbf{f}, (\delta, b)) = (\mathbf{P}_1(f_1, b), B_{\langle f_2 \rangle_{F_1}}[1]) = (2, B_1[1]) = (2, 2)$ from (3) and (4). The other entries in (5) can be obtained from (3) and (4) similarly. By replacing the non-star entries in (5) by integers according to the mapping ψ illustrated in Table III, i.e., replacing \mathbf{e} by $\psi(\mathbf{e})$, the resulting array is exactly the array \mathbf{P}_2 in Fig. 2.

$$\begin{array}{c}
(1,1) \quad (1,2) \quad (1,3) \quad (1,4) \quad (2,1) \quad (2,2) \quad (2,3) \quad (2,4) \\
\left(\begin{array}{cccccccc}
(1,1) & * & * & (3,2) & (1,2) & * & * & (2,3) & (2,1) \\
(2,1) & (2,2) & * & * & (4,2) & * & * & (3,3) & (3,1) \\
(3,1) & (1,2) & (3,2) & * & * & * & * & (4,3) & (4,1) \\
(4,1) & * & (2,2) & (4,2) & * & * & * & (1,3) & (1,1) \\
(1,2) & * & * & (3,3) & (1,3) & (2,2) & * & * & (2,4) \\
(2,2) & (2,3) & * & * & (4,3) & (3,2) & * & * & (3,4) \\
(3,2) & (1,3) & (3,3) & * & * & (4,2) & * & * & (4,4) \\
(4,2) & * & (2,3) & (4,3) & * & (1,2) & * & * & (1,4) \\
(1,3) & * & * & (3,4) & (1,4) & (2,1) & (2,3) & * & * \\
(2,3) & (2,4) & * & * & (4,4) & (3,1) & (3,3) & * & * \\
(3,3) & (1,4) & (3,4) & * & * & (4,1) & (4,3) & * & * \\
(4,3) & * & (2,4) & (4,4) & * & (1,1) & (1,3) & * & * \\
(1,4) & * & * & (3,1) & (1,1) & * & (2,2) & (2,4) & * \\
(2,4) & (2,1) & * & * & (4,1) & * & (3,2) & (3,4) & * \\
(3,4) & (1,1) & (3,1) & * & * & * & (4,2) & (4,4) & * \\
(4,4) & * & (2,1) & (4,1) & * & * & (1,2) & (1,4) & *
\end{array} \right)
\end{array} \tag{5}$$

□

By Construction 1, we have the following lemma, whose proof could be found in Appendix A.

Lemma 2: The array \mathbf{P}_m generated by Construction 1 is an $(mK_1, \lambda \left(\frac{E_1}{\lambda}\right)^m, Z_1 \left(\frac{E_1}{\lambda}\right)^{m-1}, S_1 \left(\frac{E_1}{\lambda}\right)^{m-1})$ PDA. □

Hence, from Lemma 2 we can prove Theorem 1.

If there exists a g -PDA satisfying Condition 1 with parameter λ , the following result can be obtained from Theorem 1, whose proof could be found in Appendix B.

Corollary 1: Given a g - (K_1, F_1, Z_1, S_1) PDA satisfying Condition 1 with parameter λ where $g = \frac{K_1(F_1 - Z_1)}{S_1}$ is a positive integer, there always exists an mg - $(mK_1, \lambda(\frac{F_1}{\lambda})^m, Z_1(\frac{F_1}{\lambda})^{m-1}, S_1(\frac{F_1}{\lambda})^{m-1})$ PDA, for any positive integer m . \square

In general, we need the exhaustive search to check whether a PDA \mathbf{P}_1 satisfies Condition 1 or not. However, for some specific PDAs, such as the PDAs in [17] and [14], we can prove that they satisfy Condition 1 with $\lambda = 1$ by their constructions.

Proposition 1: For any positive integers H, a, b, r satisfying $\max\{a, b\} < H, r < \min\{a, b\}$ and $a + b \leq H + r$, the $\binom{H-a-b+2r}{r} - \left(\binom{H}{a}, \binom{H}{b}, \binom{H}{b} - \binom{a}{r} \binom{H-a}{b-r}, \binom{H}{a+b-2r} \binom{a+b-2r}{a-r} \right)$ PDA in [17] satisfies Condition 1 with $\lambda = 1$ when $a = b + r$. \square

Proposition 2: For any positive integers m, q, t with $t < m$ and $q \geq 2$, the $\binom{m}{t} - \left(\binom{m}{t} q^t, q^{m-1}, q^{m-1} - (q-1)^t q^{m-t-1}, (q-1)^t q^{m-1} \right)$ PDA in [14] satisfies Condition 1 with $\lambda = 1$ when $t \geq 2$. \square

The detailed proofs of Proposition 1 and 2 could be found in Appendices C and D, respectively.

B. Construction of PDA in Theorem 2

Given a PDA \mathbf{P} , if it satisfies Condition 1, for any positive integer m , Construction 1 can be used to generate a PDA, which leads to an mK_1 -user coded caching scheme with the same memory ratio and load as the K_1 -user coded caching scheme from \mathbf{P} . However, Condition 1 has some strong constraints, which some existing PDAs do not satisfy. In the following, based on a g -PDA \mathbf{P} ($g \geq 2$) satisfying some weaker constraints than Condition 1, which all previously existing PDAs satisfy, we propose a novel framework to construct a new PDA \mathbf{P}_m by two steps. In the first step, we transform \mathbf{P} into a $(g-1)$ -PDA \mathbf{P}_1 satisfying Condition 1 with $\lambda = g-1$. In the second step, based on the resulting PDA \mathbf{P}_1 , we use Construction 1 to generate an $m(g-1)$ -PDA \mathbf{P}_m , which leads to an mK_1 -user coded caching scheme with the same memory ratio as the K_1 -user coded caching scheme from \mathbf{P} . The achieved load of the scheme from \mathbf{P}_m is $\frac{g}{g-1}$ times of that of the scheme from \mathbf{P} .

Next we will use an example to illustrate the detailed steps.

Example 4: The following array \mathbf{P} is a 4-(5, 10, 6, 5) PDA, which is exactly the 5-user MN

PDA with memory ratio $\frac{M}{N} = \frac{3}{5}$ and load $R = \frac{1}{2}$,

$$\mathbf{P} = \begin{pmatrix} * & * & * & 1 & 2 \\ * & * & 1 & * & 3 \\ * & * & 2 & 3 & * \\ * & 1 & * & * & 4 \\ * & 2 & * & 4 & * \\ * & 3 & 4 & * & * \\ 1 & * & * & * & 5 \\ 2 & * & * & 5 & * \\ 3 & * & 5 & * & * \\ 4 & 5 & * & * & * \end{pmatrix}. \quad (6)$$


Each row of \mathbf{P} has three stars. For integer 1, there is no star row, so \mathbf{P} does not satisfy Condition 1. Our construction contains the following two steps, as illustrated in Fig 3.

Step 1. \mathbf{P} is transformed into a $(g-1)$ -PDA \mathbf{P}_1 with dimension 30×5 as follows. It can be seen that each integer s appears 4 times in \mathbf{P} . We copy \mathbf{P} three times. For integer $s \in [1 : 5]$, we generate 4 consecutive integers $(4(s-1)+1, 4(s-1)+2, 4(s-1)+3, 4s)$, and replace the 4 integer s 's in each replica by a different rotation of $(4(s-1)+1, 4(s-1)+2, 4(s-1)+3, 4s)$. The three updated replicas are denoted by $\mathbf{P}_1^{(1)}$, $\mathbf{P}_1^{(2)}$ and $\mathbf{P}_1^{(3)}$. For example, we replace the 4 integer 1's in the first replica by $(1, 2, 3, 4)$, from left to right, to generate $\mathbf{P}_1^{(1)}$; we replace the 4 integer 1's in the second replica by $(2, 3, 4, 1)$ to generate $\mathbf{P}_1^{(2)}$; we replace the 4 integer 1's in the third replica by $(3, 4, 1, 2)$ to generate $\mathbf{P}_1^{(3)}$. By merging $\mathbf{P}_1^{(1)}$, $\mathbf{P}_1^{(2)}$ and $\mathbf{P}_1^{(3)}$ vertically into one array, the resulting array is denoted by \mathbf{P}_1 .

It is easy to verify that \mathbf{P}_1 is a 3-(5, 30, 18, 20) PDA. Moreover, we will show that \mathbf{P}_1 satisfies Condition 1 with $\lambda = 3$. \mathbf{P}_1 satisfies the first item of Condition 1 obviously. Let us focus on integer 1 in \mathbf{P}_1 . From Fig. 3, we have

$$\mathbf{P}_1^{(1)}(7, 1) = \mathbf{P}_1^{(2)}(1, 4) = \mathbf{P}_1^{(3)}(2, 3) = 1.$$

Since 1 appears 4 times in \mathbf{P} , there is exactly one position (assumed to be $(p, q) \in [1 : 10] \times [1 : 5]$) where $\mathbf{P}(p, q) = 1$ and none of $\mathbf{P}_1^{(1)}(p, q)$, $\mathbf{P}_1^{(2)}(p, q)$, $\mathbf{P}_1^{(3)}(p, q)$ is equal to 1. Obviously, $(p, q) = (4, 2)$ in this example. We set the $p = 4$ -th row of \mathbf{P}_1 as the star row for integer 1. Similarly, we can assign exactly one star row among the first ten rows for each integer in \mathbf{P}_1 ,

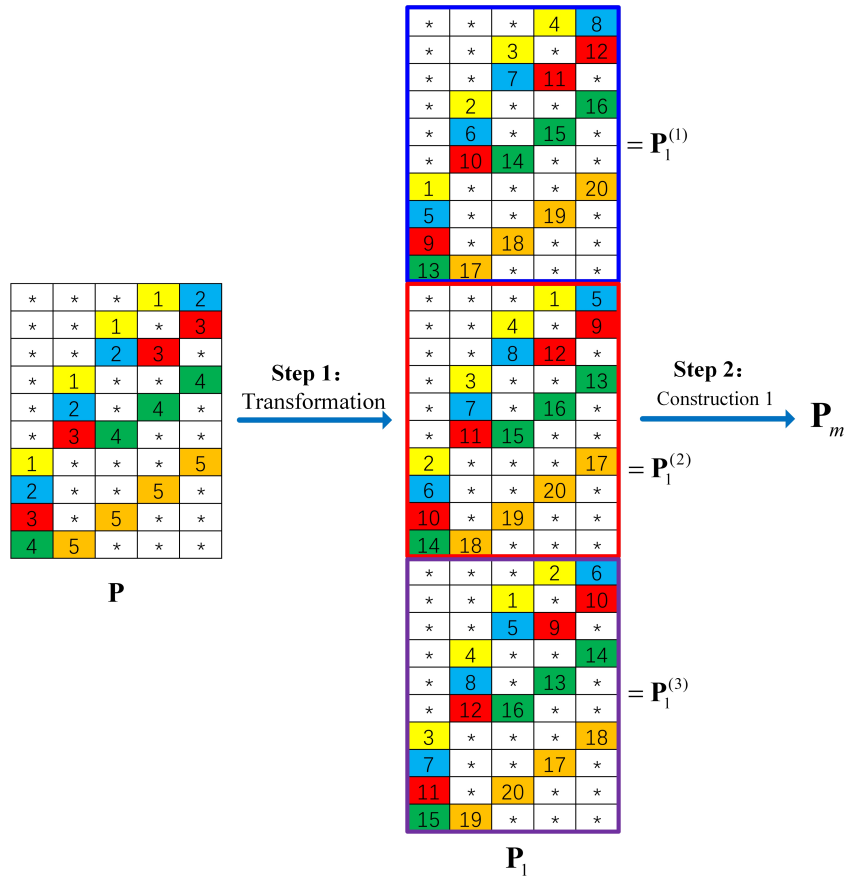Fig. 3: The process of generating \mathbf{P}_m from \mathbf{P} TABLE IV: The mapping ϕ for assigning exactly one star row for each integer in \mathbf{P}_1

| s | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
|------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|
| The star row $\phi(s)$ | 4 | 2 | 1 | 7 | 5 | 3 | 1 | 8 | 6 | 3 | 2 | 9 | 6 | 5 | 4 | 10 | 9 | 8 | 7 | 10 |

as shown in Table IV. Recall that for any $j \in [1 : 10]$, the set of integers for which the assigned star row is the j -th row, is denoted by B_j , which is illustrated in Table V. From Table V, we have $|B_j| = 2$ for each $j \in [1 : 10]$. \mathbf{P}_1 satisfies the second item of Condition 1. So \mathbf{P}_1 satisfies Condition 1 with $\lambda = 3$, then it can serve as a base PDA for Construction 1.

Step 2. For any positive integer m , based on \mathbf{P}_1 , Construction 1 is used to generate a $3m$ - $(5m, 3 \cdot 10^m, 18 \cdot 10^{m-1}, 2 \cdot 10^m)$ PDA \mathbf{P}_m , which leads to a (K, M, N) coded caching scheme with number of users $K = 5m$, memory ratio $\frac{M}{N} = \frac{3}{5}$, coded caching gain $g = 3m$ and subpacketization $F = 3 \cdot 10^m$.

TABLE V: The sets B_1, B_2, \dots, B_{10} for \mathbf{P}_1

| B_1 | B_2 | B_3 | B_4 | B_5 | B_6 | B_7 | B_8 | B_9 | B_{10} |
|--------|---------|---------|---------|---------|---------|---------|---------|----------|----------|
| {3, 7} | {2, 11} | {6, 10} | {1, 15} | {5, 14} | {9, 13} | {4, 19} | {8, 18} | {12, 17} | {16, 20} |

It is worth noting that when $K = 5m$ and $\frac{M}{N} = \frac{3}{5}$, the coded caching gain and subpacketization of the MN scheme are $g_{MN} = 3m + 1$ and $F_{MN} = \binom{5m}{3m}$, respectively. From Stirling's Formula $n! \approx \sqrt{2\pi n} \left(\frac{n}{e}\right)^n$ ($n \rightarrow \infty$), we have $F_{MN} = \frac{(5m)!}{(3m)!(2m)!} \approx \frac{\sqrt{5}}{\sqrt{12\pi m}} \left(\frac{5^5}{3^3 \cdot 2^2}\right)^m \approx \frac{\sqrt{5}}{\sqrt{12\pi m}} 29^m$ when $m \rightarrow \infty$. Hence, for the same number of users and memory ratio, the coded caching gain of the proposed scheme is only one less than that of the MN scheme, while we reduce the subpacketization from $\frac{\sqrt{5}}{\sqrt{12\pi m}} 29^m$ to $3 \cdot 10^m$. \square

We are now ready to generalize our construction in Example 4, which contains two steps.

- **Step 1.** For any g -(K_1, F_1, Z_1, S_1) PDA \mathbf{P} , we transform \mathbf{P} into a $(g-1)$ -($K_1, (g-1)F_1, (g-1)Z_1, gS_1$) PDA, denoted by \mathbf{P}_1 . The construction of \mathbf{P}_1 can be intuitively explained as follows. We copy \mathbf{P} vertically $g-1$ times. For integer $s \in [1 : S_1]$, we replace the g integer s 's in each replica by g consecutive integers $(g(s-1)+1, g(s-1)+2, \dots, gs)$ in a different rotation order, from left to right. Mathematically, the $(g-1)F_1 \times K_1$ array \mathbf{P}_1 is defined as

$$\mathbf{P}_1(j, k) = \begin{cases} *, & \text{if } \mathbf{P}(\langle j \rangle_{F_1}, k) = *, \\ g(s-1) + v, & \text{if } \mathbf{P}(\langle j \rangle_{F_1}, k) = s, T_s[\eta] = (\langle j \rangle_{F_1}, k), \\ & i = \lceil \frac{j}{F_1} \rceil, v = \Phi_{i-1}((1, 2, \dots, g))[\eta], \end{cases} \quad (7)$$

where

$$\begin{aligned} T_s &= \{(j, k) | \mathbf{P}(j, k) = s, j \in [1 : F_1], k \in [1 : K_1]\} \\ &= \{(j_{s,1}, k_{s,1}), (j_{s,2}, k_{s,2}), \dots, (j_{s,g}, k_{s,g})\} \end{aligned} \quad (8)$$

with $k_{s,1} < k_{s,2} < \dots < k_{s,g}$. Φ_i is a rotation function, defined as

$$\Phi_i((a_1, a_2, \dots, a_g)) = (a_{i+1}, \dots, a_g, a_1, \dots, a_i) \quad (9)$$

for any g -length vector (a_1, a_2, \dots, a_g) . Recall that $T_s[\eta]$ denotes the element of T_s whose second coordinate is the η -th smallest in the second coordinate of all elements, i.e., $T_s[\eta] = (j_{s,\eta}, k_{s,\eta})$; $\mathbf{a}[\eta]$ denotes the η -th coordinate of the vector \mathbf{a} .

Let us go back to Example 4, we have $F_1 = 10$ and $g = 4$. Let us consider $\mathbf{P}_1(1, 4)$, $\mathbf{P}_1(11, 4)$ and $\mathbf{P}_1(21, 4)$ in Fig. 3. Since $\langle 1 \rangle_{10} = \langle 11 \rangle_{10} = \langle 21 \rangle_{10} = 1$, $\mathbf{P}(1, 4) = s = 1$

and $T_1 = \{(j, k) | \mathbf{P}(j, k) = 1, j \in [1 : 10], k \in [1 : 5]\} = \{(7, 1), (4, 2), (2, 3), (1, 4)\}$, we have $(1, 4) = T_1[4]$. So from (7) we have $\mathbf{P}_1(1, 4) = g(s - 1) + v = 4$, since $i = \lceil \frac{1}{10} \rceil = 1$ and $v = \phi_{i-1}((1, 2, 3, 4))[4] = \phi_0((1, 2, 3, 4))[4] = (1, 2, 3, 4)[4] = 4$; $\mathbf{P}_1(11, 4) = g(s - 1) + v = 1$, since $i = \lceil \frac{11}{10} \rceil = 2$ and $v = \phi_{i-1}((1, 2, 3, 4))[4] = \phi_1((1, 2, 3, 4))[4] = (2, 3, 4, 1)[4] = 1$; $\mathbf{P}_1(21, 4) = g(s - 1) + v = 2$, since $i = \lceil \frac{21}{10} \rceil = 3$ and $v = \phi_{i-1}((1, 2, 3, 4))[4] = \phi_2((1, 2, 3, 4))[4] = (3, 4, 1, 2)[4] = 2$.

We then introduce the following condition, which is a sufficient condition on \mathbf{P} for our construction.

Condition 2: Each row has the same number of stars. □

With the above condition, we have the following proposition, which will be proved in Appendix F.

Proposition 3: If \mathbf{P} is a g - (K_1, F_1, Z_1, S_1) PDA satisfying Condition 2, the array \mathbf{P}_1 defined in (7) is a $(g - 1)$ - $(K_1, (g - 1)F_1, (g - 1)Z_1, gS_1)$ PDA satisfying Condition 1 with $\lambda = g - 1$. □

- **Step 2.** Since the PDA \mathbf{P}_1 defined in (7) can serve as a base PDA for Construction 1, for any positive integer m , based on \mathbf{P}_1 , Construction 1 is used to generate a new PDA \mathbf{P}_m .

To summarize, the construction for Theorem 2 is given as follows.

Construction 2: Given a g - (K_1, F_1, Z_1, S_1) PDA \mathbf{P} satisfying Condition 2 where $g = \frac{K_1(F_1 - Z_1)}{S_1} \in \mathbb{Z}$ and $g \geq 2$, for any positive integer $m \geq 2$, we construct \mathbf{P}_m by Construction 1, based on \mathbf{P}_1 defined in (7). □

From Proposition 3 and Corollary 1, we have the following lemma, from which Theorem 2 is proved.

Lemma 3: The array \mathbf{P}_m generated by Construction 2 is an $m(g - 1)$ - $(mK_1, (g - 1)F_1^m, (g - 1)Z_1F_1^{m-1}, gS_1F_1^{m-1})$ PDA. □

IV. APPLICATIONS OF THE NOVEL PDA CONSTRUCTION FRAMEWORKS

A. Applications of Theorem 1

Two novel coded caching schemes are obtained from Theorem 1. First, when $a = b + r$, the PDA in [17] is an $\binom{H-2b+r}{r}$ - $\left(\binom{H}{b+r}, \binom{H}{b}, \binom{H}{b} - \binom{b+r}{r} \binom{H-b-r}{b-r}, \binom{H}{2b-r} \binom{2b-r}{b}\right)$ PDA satisfying

Condition 1 with $\lambda = 1$ from Proposition 1. So the following result can be obtained from Corollary 1.

Corollary 2: For any positive integers H, b, r and m with $r < b \leq \frac{H}{2}$, there always exists an $m \binom{H-2b+r}{r} - \left(m \binom{H}{b+r}, \binom{H}{b}^m, \left(\binom{H}{b} - \binom{b+r}{r} \binom{H-b-r}{b-r} \right) \binom{H}{b}^{m-1}, \binom{H-b}{b-r} \binom{H}{b}^m \right)$ PDA, which leads to a (K, M, N) coded caching scheme with number of users $K = m \binom{H}{b+r}$, memory ratio $\frac{M}{N} = 1 - \frac{\binom{b+r}{r} \binom{H-b-r}{b-r}}{\binom{H}{b}}$, subpacketization $F = \binom{H}{b}^m$ and load $R = \binom{H-b}{b-r}$. \square

Second, for any positive integer g , we construct a $g - (\lceil \frac{g^2}{2} \rceil + g, \lceil \frac{g^2}{2} \rceil + g, \lceil \frac{g^2}{2} \rceil, \lceil \frac{g^2}{2} \rceil + g)$ PDA satisfying Condition 1 with $\lambda = 1$, by Construction 5 in Appendix E. So the following result can be obtained from Corollary 1.

Theorem 3: For any positive integers g and m , there always exists an $mg - (m(\lceil \frac{g^2}{2} \rceil + g), (\lceil \frac{g^2}{2} \rceil + g)^m, \lceil \frac{g^2}{2} \rceil (\lceil \frac{g^2}{2} \rceil + g)^{m-1}, (\lceil \frac{g^2}{2} \rceil + g)^m)$ PDA, which leads to a (K, M, N) coded caching scheme with number of users $K = m(\lceil \frac{g^2}{2} \rceil + g)$, memory ratio $\frac{M}{N} = \frac{\lceil \frac{g^2}{2} \rceil}{\lceil \frac{g^2}{2} \rceil + g}$, subpacketization $F = (\lceil \frac{g^2}{2} \rceil + g)^m$ and load $R = 1$. \square

Note that when $g = 2$, the $2 - (4, 4, 2, 4)$ PDA generated by Construction 5 is exactly the PDA in (1); thus the illustration of the 8-user coded caching scheme in Theorem 3 could be found in Example 2.

B. Applications of Theorem 2

For any positive integers q, z with $z < q$, the authors in [10] showed that the MN PDA is a $(z+1) - (q, \binom{q}{z}, \binom{q-1}{z-1}, \binom{q}{z+1})$ PDA where the number of users $K = q$ and memory ratio $\frac{M}{N} = \frac{z}{q}$. Since the MN PDA satisfies Condition 2, we can obtain the following coded caching scheme from Theorem 2.

Theorem 4: For any positive integers q, z, m with $z < q$ and $m \geq 2$, there exists an $mz - \left(mq, z \binom{q}{z}^m, z \binom{q-1}{z-1} \binom{q}{z}^{m-1}, (z+1) \binom{q}{z+1} \binom{q}{z}^{m-1} \right)$ PDA, which leads to a (K, M, N) coded caching scheme with the number of users $K = mq$, memory ratio $\frac{M}{N} = \frac{z}{q}$, subpacketization $F = z \binom{q}{z}^m$ and load $R = \frac{q-z}{z}$. \square

When $q = 5$ and $z = 3$, the PDA in Theorem 4 is exactly the $3m - (5m, 3 \cdot 10^m, 18 \cdot 10^{m-1}, 2 \cdot 10^m)$ PDA \mathbf{P}_m in Example 4.

It is worth noting that all previously existing PDAs are g -PDAs satisfying Condition 2. For

any positive integer m , based on each of these PDAs, an mK_1 -user coded caching scheme can be obtained from Theorem 2, which has the same memory ratio as the base PDA and the load equal to $\frac{g}{g-1}$ times the load of the base PDA. For the sake of simplicity, we do not list them here.

C. Performance Analysis

To avoid the heavy notations, the novel schemes in Corollary 2, Theorem 3, 4 are referred to as Schemes A, B, C respectively. In the following, we compare them with the existing PDA schemes listed in Table I. Since the scheme in [12] is a generalization of the schemes in [10], [11], Schemes A and B are only compared with the schemes in [9], [12], [15]. Under the constraint of uncoded placement and $N \geq K$, the achieved load of the MN scheme, denoted by R_{MN} , is optimal. For a scheme, if the ratio of the achieved load and the optimal load R_{MN} tends to 1 when the number of users tends to infinity, the scheme is called *asymptotically optimal*. The partition PDA scheme in [10] is asymptotically optimal. So Scheme C is compared with the MN scheme in [2] and the partition PDA scheme in [10].

- **Scheme A in Corollary 2.** Since it is difficult to provide an analytic comparison, some numerical results are provided in Table VI. It can be seen from Table VI that under some parameters, Scheme A has a lower load and a much lower subpacketization than the schemes in [9], [12] for the same number of users and memory ratio. Compared to the scheme in [15], Scheme A has a significant reduction on the subpacketization.

- **Scheme B in Theorem 3.**

- *Comparison to the scheme in [12].* For any positive integers m, g , by letting $K = m(\lceil \frac{g^2}{2} \rceil + g)$ and $\frac{M}{N} = \frac{\lceil \frac{g^2}{2} \rceil}{\lceil \frac{g^2}{2} \rceil + g}$, let $k = \lceil \frac{g^2}{2} \rceil + g$, $t = \lceil \frac{g^2}{2} \rceil$ and $n = m - 1$, we have $\lfloor \frac{k-1}{k-t} \rfloor = \lceil \frac{g}{2} \rceil$. Then the coded caching gain and subpacketization of the scheme in [12] listed in the third row of Table I are

$$g_{CJ} = (n+1) \left\lfloor \frac{k-1}{k-t} \right\rfloor = m \left\lceil \frac{g}{2} \right\rceil \quad \text{and} \quad F_{CJ} = \left\lfloor \frac{k-1}{k-t} \right\rfloor k^n = \left\lceil \frac{g}{2} \right\rceil \left(\left\lceil \frac{g^2}{2} \right\rceil + g \right)^{m-1},$$

respectively. While the coded caching gain and subpacketization of Scheme B are

$$g_{Th3} = mg \quad \text{and} \quad F_{Th3} = \left(\left\lceil \frac{g^2}{2} \right\rceil + g \right)^m,$$

respectively. Then

$$\frac{F_{Th3}}{F_{CJ}} = \frac{\lceil \frac{g^2}{2} \rceil + g}{\lceil \frac{g}{2} \rceil}.$$

TABLE VI: Numerical comparison of Scheme A in Corollary 2 with the schemes in [9], [12], [15]

| K | $\frac{M}{N}$ | Scheme | R | F |
|--------|-----------------|--|-------------------|-------------------------------|
| $56m$ | $\frac{13}{28}$ | Scheme A in Corollary 2 $H = 8, b = 3, r = 2$ | 5 | 56^m |
| | | Grouping method in [9] and memory sharing $\frac{M}{N} = \frac{3}{7} : n = 8, k = 7m, t = 3m$ $\frac{M}{N} = \frac{4}{7} : n = 8, k = 7m, t = 4m$ | ≈ 9.5 | $O(\frac{1}{\sqrt{m}}119^m)$ |
| | | Scheme in [12] $k = 28, t = 13, n = 2m - 1$ | 15 | $\frac{1}{28}784^m$ |
| | | Scheme in [15] and memory sharing $\frac{M}{N} = \frac{1}{4} : k = 4, l = 14m,$ $n = 14m - 1, x = 1$ $\frac{M}{N} = \frac{1}{2} : k = 2, l = 28m,$ $n = 28m - 1, x = 1$ | 1.1429 | $O(16384^{2m})$ |
| $165m$ | $\frac{31}{55}$ | Scheme A in Corollary 2 $H = 11, b = 2, r = 1$ | 9 | 55^m |
| | | Grouping method in [9] and memory sharing $\frac{M}{N} = \frac{6}{11} : n = 15, k = 11m, t = 6m$ $\frac{M}{N} = \frac{7}{11} : n = 15, k = 11m, t = 7m$ | ≈ 11.7143 | $O(\frac{1}{\sqrt{m}}1957^m)$ |
| | | Scheme in [12] $k = 55, t = 31, n = 3m - 1$ | 12 | $\frac{2}{55}55^{3m}$ |
| | | Scheme in [15] and memory sharing $\frac{M}{N} = \frac{1}{3} : k = 3, l = 55m,$ $n = 55m - 1, x = 1$ $\frac{M}{N} = \frac{37}{55} : k = 3, l = 55m,$ $n = 54m - 1, x = 54$ | 0.976 | $O(177147^{5m})$ |

In this case, the coded caching gain of Scheme B is almost twice as much as that of the scheme in [12], while their subpacketizations are of almost the same order of magnitude.

- *Numerical comparison.* The numerical comparison of Scheme B with the schemes in [9], [12], [15] is presented in Table VII. It can be seen that Scheme B has a much lower subpacketization than the grouping method in [9] while their loads are almost the same;

TABLE VII: Numerical comparison of Scheme B in Theorem 3 with the schemes in [9], [12], [15]

| K | $\frac{M}{N}$ | Scheme | R | F |
|-------|-----------------|---|-------------|-----------------------------|
| $24m$ | $\frac{3}{4}$ | Scheme B in Theorem 3 $g = 6$ | 1 | 24^m |
| | | Grouping method in [9] $n = 3, k = 8m, t = 6m$ | ≈ 1 | $O(\frac{1}{\sqrt{m}}90^m)$ |
| | | Scheme in [12] $k = 4, t = 3, n = 6m - 1$ | 0.3333 | $\frac{3}{4}4096^m$ |
| | | Scheme in [15] $k = 3, l = 8m, n = 6m - 1, x = 3$ | 0.375 | $\frac{8}{3}729^m$ |
| $32m$ | $\frac{25}{32}$ | Scheme B in Theorem 3 $g = 7$ | 1 | 32^m |
| | | Grouping method in [9] and memory sharing $\frac{M}{N} = \frac{6}{8} : n = 4, k = 8m, t = 6m$ $\frac{M}{N} = \frac{7}{8} : n = 4, k = 8m, t = 7m$ | ≈ 1 | $O(\frac{1}{\sqrt{m}}90^m)$ |
| | | Scheme in [12] $k = 32, t = 25, n = m - 1$ | 1.75 | $\frac{1}{8}32^m$ |
| | | Scheme in [15] $k = 4, l = 8m, n = 7m - 1, x = 7$ | 0.2917 | $6 * 16384^m$ |

Scheme B has a lower load than the scheme in [12] while their subpacketizations are of the same order of magnitude when g is odd; Scheme B has a significant advantage in the subpacketization compared to the schemes in [12], [15] when g is even.

• **Scheme C in Theorem 4.**

- *Comparison to the MN scheme in [2].* For any positive integers q, z, m with $z < q$ and $m \geq 2$, by letting $K = mq$ and $\frac{M}{N} = \frac{z}{q}$, the coded caching gain, subpacketization, and load of the MN scheme are

$$g_{MN} = mz + 1, \quad F_{MN} = \binom{mq}{mz}, \quad \text{and} \quad R_{MN} = \frac{mq(1 - \frac{z}{q})}{mz + 1},$$

respectively. In this case, the coded caching gain, subpacketization, and load of Scheme C are

$$g_{Th4} = mz, \quad F_{Th4} = z \binom{q}{z}^m, \quad \text{and} \quad R_{Th4} = \frac{q - z}{z},$$

respectively. Hence, there is only one additive loss in the coded caching gain for Scheme C compared to the MN scheme. When $m \rightarrow \infty$, the ratio of the loads

$$\frac{R_{ThA}}{R_{MN}} = \frac{mz + 1}{mz}$$

tends to 1, so Scheme C is asymptotically optimal. In addition, from Stirling's Formula $n! \approx \sqrt{2\pi n} \left(\frac{n}{e}\right)^n$ (with $n \rightarrow \infty$), when $m \rightarrow \infty$ we have

$$\begin{aligned} F_{MN} &= \frac{(mq)!}{(mz)!(mq-mz)!} \\ &\approx \frac{\sqrt{2\pi(mq)}\left(\frac{mq}{e}\right)^{mq}}{\sqrt{2\pi(mz)}\left(\frac{mz}{e}\right)^{mz} \sqrt{2\pi(mq-mz)}\left(\frac{mq-mz}{e}\right)^{mq-mz}} \\ &= \sqrt{\frac{q}{2\pi z(q-z)m}} \left(\frac{q^q}{z^z(q-z)^{q-z}}\right)^m. \end{aligned}$$

Then the ratio of the subpacketizations is

$$\frac{F_{ThA}}{F_{MN}} \approx z \sqrt{\frac{2\pi z(q-z)m}{q}} \left(\frac{q^q}{\binom{q}{z} z^z (q-z)^{q-z}}\right)^{-m}.$$

From binomial expansion, we have

$$\begin{aligned} q^q &= ((q-z) + z)^q \\ &= (q-z)^q + \binom{q}{1}(q-z)^{q-1}z + \dots + \binom{q}{z}(q-z)^{q-z}z^z + \dots + z^q \\ &\geq \binom{q}{z-1}(q-z)^{q-z+1}z^{z-1} + \binom{q}{z}(q-z)^{q-z}z^z + \binom{q}{z+1}(q-z)^{q-z-1}z^{z+1}. \end{aligned}$$

Since

$$\begin{aligned} &\binom{q}{z-1}(q-z)^{q-z+1}z^{z-1} + \binom{q}{z+1}(q-z)^{q-z-1}z^{z+1} \\ &= \binom{q}{z}(q-z)^{q-z}z^z \left(\frac{q-z}{q-z+1} + \frac{z}{z+1}\right) \end{aligned}$$

and

$$\frac{q-z}{q-z+1} + \frac{z}{z+1} = \frac{2(q-z)z + q}{(q-z)z + q + 1} \geq 1,$$

we have $q^q \geq 2\binom{q}{z}(q-z)^{q-z}z^z$, i.e.,

$$\frac{q^q}{\binom{q}{z} z^z (q-z)^{q-z}} \geq 2.$$

Hence, we have

$$\begin{aligned}
\frac{F_{ThA}}{F_{MN}} &\approx z \sqrt{\frac{2\pi z(q-z)m}{q}} \left(\frac{q^q}{\binom{q}{z} z^z (q-z)^{q-z}} \right)^{-m} \\
&\leq z \sqrt{\frac{2\pi z(q-z)m}{q}} 2^{-m} \\
&= O(\sqrt{m} 2^{-m}) \\
&= O\left(\sqrt{\frac{K}{q}} 2^{-\frac{K}{q}}\right).
\end{aligned}$$

- *Comparison to the partition PDA scheme in [10].* For any positive integers m, q with $q \geq 2$, when $K = mq$ and $\frac{N}{M} = \frac{1}{q}$, the load and subpacketization of the partition PDA scheme are

$$R_{YC} = q - 1 \quad \text{and} \quad F_{YC} = q^{m-1},$$

respectively. While the load and subpacketization of Scheme C are

$$R_{ThA} = q - 1 \quad \text{and} \quad F_{ThA} = q^m,$$

respectively. By letting $K = mq$ and $\frac{N}{M} = \frac{q-1}{q}$, the load and subpacketization of the partition PDA scheme are

$$R_{YC} = \frac{1}{q-1} \quad \text{and} \quad F_{YC} = (q-1)q^{m-1}$$

respectively. In this case, the load and subpacketization of Scheme C are

$$R_{ThA} = \frac{1}{q-1} \quad \text{and} \quad F_{ThA} = (q-1)q^m,$$

respectively. Hence, when $K = mq$ and $\frac{M}{N} = \frac{1}{q}$ or $\frac{q-1}{q}$, Scheme C has the same load as the partition PDA scheme while its subpacketization is q times of that of the partition PDA scheme. However, the partition PDA scheme can be used only when $\frac{M}{N} = \frac{1}{q}$ or $\frac{q-1}{q}$, while Scheme C can be used for any memory ratio satisfying $\frac{KM}{N} \in \mathbb{Z}$. For example, when $K = 7843$, the memory-load and memory-subpacketization tradeoffs are given in Fig. 4 and Fig. 5, respectively. It can be seen that Scheme C has a significant advantage in subpacketization compared to the MN scheme and has a significant advantage in load compared to the partition PDA scheme.

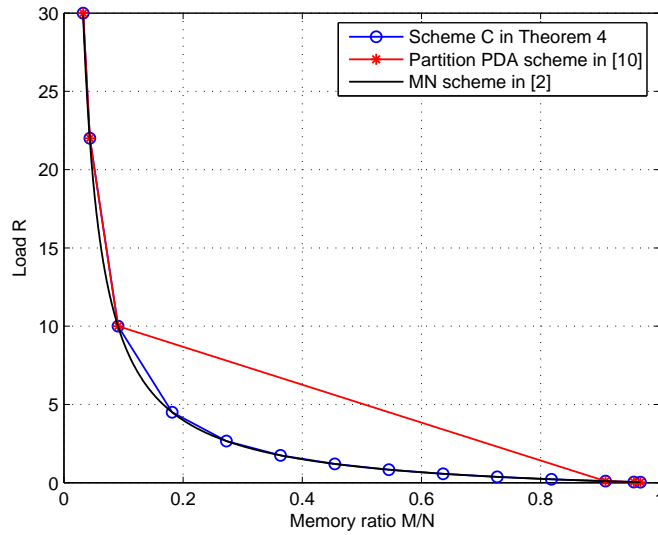


Fig. 4: The load versus memory ratio for Scheme C in Theorem 4, the partition PDA scheme in [10] and the MN scheme in [2] when $K = 7843$.

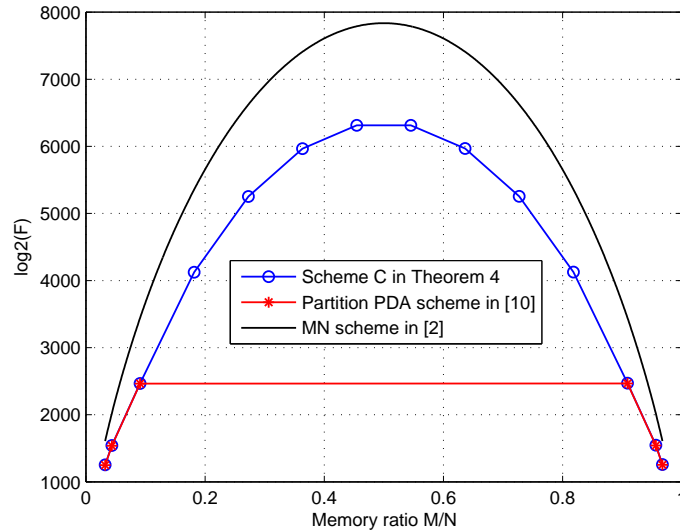


Fig. 5: The base 2 logarithm of subpacketization versus memory ratio for Scheme C in Theorem 4, the partition PDA scheme in [10] and the MN scheme in [2] when $K = 7843$.

V. CONCLUSION

In this paper, we studied the shared-link coded caching problem based on the PDA construction. We first proposed two novel frameworks for constructing a PDA for mK_1 users via Cartesian product based on some existing PDA for K_1 users satisfying some constraints, where the resulting PDA achieves a similar load as the original K_1 -users PDA with a significantly reduced subpacketization compared to the direction extension of the original K_1 -users PDA to the mK_1 -users system. As applications of the two frameworks, three new coded caching schemes were obtained, each of which has a significant advantage in the subpacketization and simultaneously has a lower or almost the same load, compared with previously known coded caching schemes. Especially, for the third scheme which works for any number of users and any memory regime, it has an exponential reduction on the subpacketization compared to the MN scheme, while its coded caching gain is only one less than that of the MN scheme.

Further work includes the generalization of the proposed frameworks to heterogeneous caches by taking Cartesian product of different PDAs.

APPENDIX A

PROOF OF LEMMA 2

Proof. We will prove that the array \mathbf{P}_m generated by Construction 1 satisfies the definition of PDA (i.e., Definition 1).

- For any $(\delta, b) \in \mathcal{K}$ and any $i \in [1 : \lambda]$, for column (δ, b) of \mathbf{P}_m , there are $\frac{Z_1}{\lambda} (\frac{F_1}{\lambda})^{m-1}$ stars in the rows indexed by $[(i-1)\frac{F_1}{\lambda} + 1 : i\frac{F_1}{\lambda}]^m$ from (3), since for each column of \mathbf{P}_1 , there are $\frac{Z_1}{\lambda}$ stars in the rows indexed by $[(i-1)\frac{F_1}{\lambda} + 1 : i\frac{F_1}{\lambda}]$ from the first item of Condition 1. Hence, there are $Z = \lambda \frac{Z_1}{\lambda} (\frac{F_1}{\lambda})^{m-1} = Z_1 (\frac{F_1}{\lambda})^{m-1}$ stars in column (δ, b) of \mathbf{P}_m from (2). Condition C1 of Definition 1 holds.
- For any non-star entry in \mathbf{P}_m , say $\mathbf{P}_m(\mathbf{f}, (\delta, b)) = \mathbf{e}$, we will prove that for any $\delta' \in [1 : m]$ with $\delta \neq \delta'$, there exist $\mathbf{f}' \in \mathcal{F}$ and $b' \in [1 : K_1]$, such that $\mathbf{P}_m(\mathbf{f}', (\delta', b')) = \mathbf{e}$. From (3) and (4) we have

$$\mathbf{e} = (B_{\langle f_1 \rangle_{\frac{F_1}{\lambda}}}[\mu], \dots, B_{\langle f_{\delta-1} \rangle_{\frac{F_1}{\lambda}}}[\mu], \mathbf{P}_1(f_\delta, b), B_{\langle f_{\delta+1} \rangle_{\frac{F_1}{\lambda}}}[\mu], \dots, B_{\langle f_m \rangle_{\frac{F_1}{\lambda}}}[\mu]),$$

where $\mathbf{P}_1(f_\delta, b) = B_l[\mu]$. Let $s' = B_{\langle f_{\delta'} \rangle_{\frac{F_1}{\lambda}}}[\mu]$, then $s' \in [1 : S_1]$ and there exist $j \in [1 : F_1]$ and $k \in [1 : K_1]$, such that $\mathbf{P}_1(j, k) = s'$. Let $f'_{\delta'} = j$, $b' = k$. Assume that

$j \in [(i-1)\frac{F_1}{\lambda} + 1 : i\frac{F_1}{\lambda}]$ with some $i \in [1 : \lambda]$, let $f'_h = (i-1)\frac{F_1}{\lambda} + \langle f_h \rangle_{\frac{F_1}{\lambda}}$ for any $h \in [1 : m] \setminus \{\delta, \delta'\}$ and $f'_\delta = (i-1)\frac{F_1}{\lambda} + l$, then we have $\mathbf{f}' \in \mathcal{F}$ and $\mathbf{P}_m(\mathbf{f}', (\delta', b')) = \mathbf{e}$ from (3) and (4). So the total number of different vectors in \mathbf{P}_m is the number of different vectors in columns $(1, a)$ of \mathbf{P}_m with all $a \in [1 : K_1]$.

For any $s \in [1 : S_1]$, assume that $\mathbf{P}_1(j, k) = s$, $s = B_l[\mu]$ and $j \in [(i-1)\frac{F_1}{\lambda} + 1 : i\frac{F_1}{\lambda}]$ with some $i \in [1 : \lambda]$. Let $f_1 = j$ and $b = k$, for any $f_2, f_3, \dots, f_m \in [(i-1)\frac{F_1}{\lambda} + 1 : i\frac{F_1}{\lambda}]$, we have

$$\mathbf{P}_m(\mathbf{f}, (1, b)) = (s, B_{\langle f_2 \rangle_{\frac{F_1}{\lambda}}}[\mu], \dots, B_{\langle f_m \rangle_{\frac{F_1}{\lambda}}}[\mu])$$

from (3) and (4). It implies that there are $(\frac{F_1}{\lambda})^{m-1}$ different vectors \mathbf{e} appearing in \mathbf{P}_m satisfying $e_1 = s$. Hence, there are totally $S = S_1(\frac{F_1}{\lambda})^{m-1}$ different vectors in \mathbf{P}_m . Condition C2 of Definition 1 holds.

- For any two distinct entries $\mathbf{P}_m(\mathbf{f}, (\delta, b))$ and $\mathbf{P}_m(\mathbf{f}', (\delta', b'))$, if $\mathbf{P}_m(\mathbf{f}, (\delta, b)) = \mathbf{P}_m(\mathbf{f}', (\delta', b')) = \mathbf{e} \neq *$, we will prove that $\mathbf{P}_m(\mathbf{f}, (\delta', b')) = \mathbf{P}_m(\mathbf{f}', (\delta, b)) = *$. From (3) and (4) we have

$$\begin{aligned} \mathbf{e} &= (B_{\langle f_1 \rangle_{\frac{F_1}{\lambda}}}[\mu], \dots, B_{\langle f_{\delta-1} \rangle_{\frac{F_1}{\lambda}}}[\mu], \mathbf{P}_1(f_\delta, b), B_{\langle f_{\delta+1} \rangle_{\frac{F_1}{\lambda}}}[\mu], \dots, B_{\langle f_m \rangle_{\frac{F_1}{\lambda}}}[\mu]) \\ &= (B_{\langle f'_1 \rangle_{\frac{F_1}{\lambda}}}[\mu'], \dots, B_{\langle f'_{\delta'-1} \rangle_{\frac{F_1}{\lambda}}}[\mu'], \mathbf{P}_1(f'_{\delta'}, b'), B_{\langle f'_{\delta'+1} \rangle_{\frac{F_1}{\lambda}}}[\mu'], \dots, B_{\langle f'_m \rangle_{\frac{F_1}{\lambda}}}[\mu']), \end{aligned} \quad (10)$$

where $\mathbf{P}_1(f_\delta, b) = B_l[\mu]$ and $\mathbf{P}_1(f'_{\delta'}, b') = B_{l'}[\mu']$.

- If $\delta = \delta'$, we have $\langle f_h \rangle_{\frac{F_1}{\lambda}} = \langle f'_h \rangle_{\frac{F_1}{\lambda}}$ for any $h \in [1 : m] \setminus \{\delta\}$, $\mu = \mu'$ and $\mathbf{P}_1(f_\delta, b) = \mathbf{P}_1(f'_{\delta'}, b') \neq *$ from (10). Then $f_\delta = f'_{\delta'}$, $b = b'$ or $\mathbf{P}_1(f_\delta, b') = \mathbf{P}_1(f'_{\delta'}, b) = *$ from Condition C3 of Definition 1. If $f_\delta = f'_{\delta'}$, $b = b'$ hold, assume that $f_\delta \in [(i-1)\frac{F_1}{\lambda} + 1 : i\frac{F_1}{\lambda}]$ with some $i \in [1 : \lambda]$, then from (2) we have $f_h, f'_h \in [(i-1)\frac{F_1}{\lambda} + 1 : i\frac{F_1}{\lambda}]$ for any $h \in [1 : m]$, which implies that $\lceil \frac{f_h}{F_1/\lambda} \rceil = \lceil \frac{f'_h}{F_1/\lambda} \rceil = i$. Hence, we have $\mathbf{f} = \mathbf{f}'$, which contradicts the hypothesis that $\mathbf{P}_m(\mathbf{f}, (\delta, b))$ and $\mathbf{P}_m(\mathbf{f}', (\delta, b'))$ are two distinct entries. So $\mathbf{P}_1(f_\delta, b') = \mathbf{P}_1(f'_{\delta'}, b) = *$ holds, which implies $\mathbf{P}_m(\mathbf{f}, (\delta, b')) = \mathbf{P}_m(\mathbf{f}', (\delta, b)) = *$ from (3).
- If $\delta \neq \delta'$, we have $\mathbf{P}_1(f_\delta, b) = B_{\langle f'_\delta \rangle_{\frac{F_1}{\lambda}}}[\mu']$ and $\mathbf{P}_1(f'_{\delta'}, b') = B_{\langle f_{\delta'} \rangle_{\frac{F_1}{\lambda}}}[\mu]$ from (10), which implies that the $\langle f'_\delta \rangle_{\frac{F_1}{\lambda}}$ -th and $\langle f_{\delta'} \rangle_{\frac{F_1}{\lambda}}$ -th row of \mathbf{P}_1 are star rows for $\mathbf{P}_1(f_\delta, b)$ and $\mathbf{P}_1(f'_{\delta'}, b')$ respectively, i.e., $\mathbf{P}_1(\langle f'_\delta \rangle_{\frac{F_1}{\lambda}}, b) = \mathbf{P}_1(\langle f_{\delta'} \rangle_{\frac{F_1}{\lambda}}, b') = *$, then we have $\mathbf{P}_1(f'_\delta, b) = \mathbf{P}_1(f_{\delta'}, b') = *$ from the first item of Condition 1. Hence, we have $\mathbf{P}_m(\mathbf{f}', (\delta, b)) = \mathbf{P}_m(\mathbf{f}, (\delta', b')) = *$ from (3).

Condition C3 of Definition 1 holds.

So \mathbf{P}_m is an $(mK_1, \lambda(\frac{F_1}{\lambda})^m, Z_1(\frac{F_1}{\lambda})^{m-1}, S_1(\frac{F_1}{\lambda})^{m-1})$ PDA. \square

APPENDIX B
PROOF OF COROLLARY 1

Proof. For the array \mathbf{P}_m generated by Construction 1, from the proof of Theorem 1, we know that for any non-star entry, say $\mathbf{P}_m(\mathbf{f}, (\delta, b)) = \mathbf{e} \neq *$, for any $\delta' \in [1 : m]$ with $\delta' \neq \delta$, there exist $\mathbf{f}' \in \mathcal{F}$ and $b' \in [1 : K_1]$, such that $\mathbf{P}_m(\mathbf{f}', (\delta', b')) = \mathbf{e}$. So it is sufficient to prove that for any non-star entry in \mathbf{P}_m , say $\mathbf{P}_m(\mathbf{f}, (\delta, b)) = \mathbf{e}$, \mathbf{e} appears g times in columns (δ, a) of \mathbf{P}_m with all $a \in [1 : K_1]$. Since $\mathbf{P}_m(\mathbf{f}, (\delta, b)) = \mathbf{e}$, we have $\mathbf{P}_1(f_\delta, b) \neq *$ from (3). Let $\mathbf{P}_1(f_\delta, b) = s$, then s appears g times in \mathbf{P}_1 , since \mathbf{P}_1 is a g -PDA. Assume that $\mathbf{P}_1(j_{s,1}, k_{s,1}) = \mathbf{P}_1(j_{s,2}, k_{s,2}) = \dots = \mathbf{P}_1(j_{s,g}, k_{s,g}) = s$. For any $h \in [1 : g]$, assume that $j_{s,h} \in [(i_h - 1)\frac{F_1}{\lambda} + 1 : i_h\frac{F_1}{\lambda}]$ with some $i_h \in [1 : \lambda]$, then we have $\mathbf{P}_m(((i_h - 1)F_1 + < f_1 >_{\frac{F_1}{\lambda}}, \dots, (i_h - 1)F_1 + < f_{\delta-1} >_{\frac{F_1}{\lambda}}, j_{s,h}, (i_h - 1)F_1 + < f_{\delta+1} >_{\frac{F_1}{\lambda}}, \dots, (i_h - 1)F_1 + < f_m >_{\frac{F_1}{\lambda}}), (\delta, k_{s,h})) = \mathbf{e}$ from (3) and (4). The proof is complete. \square

APPENDIX C
PROOF OF PROPOSITION 1

Proof. The PDA in [17] is constructed as follows.

Construction 3: ([17]) For any positive integers H, a, b, r satisfying $\max\{a, b\} < H, r < \min\{a, b\}$ and $a + b \leq H + r$, let the row index set $\mathcal{F} = \binom{[1:H]}{b}$ and the column index set $\mathcal{K} = \binom{[1:H]}{a}$. There exists an $\binom{H-a-b+2r}{r} - \left(\binom{H}{a}, \binom{H}{b}, \binom{H}{b} - \binom{a}{r} \binom{H-a}{b-r}, \binom{H}{a+b-2r} \binom{a+b-2r}{a-r} \right)$ PDA $\mathbf{P} = (\mathbf{P}(B, A) | B \in \mathcal{F}, A \in \mathcal{K})$, defined as

$$\mathbf{P}(B, A) = \begin{cases} ((A \cup B) - (A \cap B), A - B) & \text{if } |A \cap B| = r, \\ * & \text{Otherwise.} \end{cases} \quad (11)$$

When $a = b + r$, we will prove the PDA \mathbf{P} generated by Construction 3 satisfies Condition 1 with $\lambda = 1$. Firstly, \mathbf{P} satisfies the first item of Condition 1 obviously. Secondly, for each non-star entry in \mathbf{P} , say $\mathbf{P}(B, A) = ((A \cup B) - (A \cap B), A - B)$, it implies that $|A \cap B| = r$ and $|A - B| = a - r = b$. Hence, we have $A - B \in \mathcal{F}$. Moreover, $\mathbf{P}(A - B, A) = *$ since $|(A - B) \cap A| = |A - B| = b > r$. So the row $A - B$ is a star row for the non-star entry $((A \cup B) - (A \cap B), A - B)$. Let $\phi : ((A \cup B) - (A \cap B), A - B) \mapsto A - B$, then for each row $B' \in \mathcal{F}$, there are $\binom{H-b}{b-r}$ different non-star entries for which the assigned star row is the row B' , since the number of sets $(A \cup B) - (A \cap B) = (A - B) \cup (B - A)$ satisfying $A - B = B'$ is

$\binom{H-b}{b-r}$. \mathbf{P} satisfies the second item of Condition 1. So \mathbf{P} satisfies Condition 1 with $\lambda = 1$. The proof is complete. \square

APPENDIX D

PROOF OF PROPOSITION 2

Proof. The $\binom{m}{t}$ - $\binom{m}{t}q^t, q^{m-1}, q^{m-1} - (q-1)^t q^{m-t-1}, (q-1)^t q^{m-1}$ PDA in [14] is constructed as follows.

Construction 4: ([14]) For any positive integers m, q, t with $t < m$ and $q \geq 2$, let the column index set $\mathcal{K} = \binom{[1:m]}{t} \times [1:q]^t$ and the row index set

$$\mathcal{F} = \left\{ \left(f_1, f_2, \dots, f_{m-1}, \left\langle \sum_{i=1}^{m-1} f_i \right\rangle_q \right) \mid f_1, f_2, \dots, f_{m-1} \in [1:q] \right\},$$

There exists an $\binom{m}{t}$ - $\binom{m}{t}q^t, q^{m-1}, q^{m-1} - (q-1)^t q^{m-t-1}, (q-1)^t q^{m-1}$ PDA $\mathbf{P} = (\mathbf{P}(\mathbf{f}, \mathbf{k}))$ with $\mathbf{f} = (f_1, f_2, \dots, f_m) \in \mathcal{F}$ and $\mathbf{k} = (\mathcal{T}, \mathbf{b}) = (\{\delta_1, \delta_2, \dots, \delta_t\}, (b_1, b_2, \dots, b_t)) \in \mathcal{K}$ satisfying $1 \leq \delta_1 < \delta_2 < \dots < \delta_t \leq m$, defined as

$$\mathbf{P}(\mathbf{f}, \mathbf{k}) = \begin{cases} (\mathbf{e}, n_{\mathbf{e}}) & \text{if } d(\mathbf{f}[\mathcal{T}], \mathbf{b}) = t, \\ * & \text{otherwise,} \end{cases} \quad (12)$$

where $\mathbf{e} = (e_1, e_2, \dots, e_m) \in [1:q]^m$ such that

$$e_i = \begin{cases} b_h & \text{if } i = \delta_h, h \in [1:t], \\ f_i & \text{otherwise} \end{cases} \quad (13)$$

and $n_{\mathbf{e}}$ is the occurrence order of \mathbf{e} occurring in column \mathbf{k} . If $(\mathbf{e}, n_{\mathbf{e}})$ occurs in \mathbf{P} , we also say \mathbf{e} occurs in \mathbf{P} .

Proposition 4: For the array \mathbf{P} generated by Construction 4, when $t \geq 2$, for each vector $\mathbf{e} \in [1:q]^m$, if $\mathbf{e} \in \mathcal{F}$, then \mathbf{e} appears $(q-1)^{t-1} - (q-1)^{t-2} + \dots + (-1)^t (q-1)$ times in each column where it appears; if $\mathbf{e} \notin \mathcal{F}$, then \mathbf{e} appears $(q-1)^{t-1} - (q-1)^{t-2} + \dots + (-1)^{t+1}$ times in each column where it appears.

Proof. Here mathematical induction will be used. Firstly, Lemma 1 in [14] showed that for any non-star entry $(\mathbf{e}, n_{\mathbf{e}})$ appearing in \mathbf{P} , the occurrence number of \mathbf{e} in each column where it appears is the same.

- When $t = 2$, for each vector $\mathbf{e} \in [1 : q]^m$, if $\mathbf{e} \in \mathcal{F}$, without loss of generality, assume that $\mathbf{e} = (q, q, \dots, q)$, let us consider the occurrence number of \mathbf{e} in each column where it appears, such as column $\mathbf{k} = (\{1, 2\}, (q, q))$. From Construction 4 we have

$$\begin{aligned} \mathbf{P}((1, q-1, q, \dots, q), \mathbf{k}) &= (\mathbf{e}, 1), \\ \mathbf{P}((2, q-2, q, \dots, q), \mathbf{k}) &= (\mathbf{e}, 2), \\ &\vdots \\ \mathbf{P}((q-1, 1, q, \dots, q), \mathbf{k}) &= (\mathbf{e}, q-1). \end{aligned}$$

So \mathbf{e} occurs $q-1$ times in column \mathbf{k} . If $\mathbf{e} \notin \mathcal{F}$, without loss of generality, assume that $\mathbf{e} = (q, \dots, q, 1)$, let us consider the occurrence number of \mathbf{e} in each column where it appears, such as column $\mathbf{k} = (\{1, 2\}, (q, q))$. From Construction 4 we have

$$\begin{aligned} \mathbf{P}((2, q-1, q, \dots, q, 1), \mathbf{k}) &= (\mathbf{e}, 1), \\ \mathbf{P}((3, q-2, q, \dots, q, 1), \mathbf{k}) &= (\mathbf{e}, 2), \\ &\vdots \\ \mathbf{P}((q-1, 2, q, \dots, q, 1), \mathbf{k}) &= (\mathbf{e}, q-2). \end{aligned}$$

So \mathbf{e} occurs $q-2 = (q-1) - 1$ times in column \mathbf{k} . The proposition holds when $t = 2$.

- Assume that the proposition holds when $t = n$, i.e., for each vector $\mathbf{e} \in [1 : q]^m$, if $\mathbf{e} \in \mathcal{F}$, assume that $\mathbf{e} = (q, q, \dots, q)$, \mathbf{e} appears $(q-1)^{n-1} - (q-1)^{n-2} + \dots + (-1)^n(q-1)$ times in column $\mathbf{k} = (\{1, 2, \dots, n\}, (q, q, \dots, q))$, which implies that the number of vectors $(f_1, \dots, f_n, q, \dots, q)$ satisfying $f_i \in [1 : q-1]$ for any $i \in [1 : n]$ and $\langle \sum_{i=1}^n f_i \rangle_{q= q} >_q = q$ is $(q-1)^{n-1} - (q-1)^{n-2} + \dots + (-1)^n(q-1)$. If $\mathbf{e} \notin \mathcal{F}$, assume that $\mathbf{e} = (q, q, \dots, q, \alpha)$ where $\alpha \in [1 : q-1]$, \mathbf{e} appears $(q-1)^{n-1} - (q-1)^{n-2} + \dots + (-1)^{n+1}$ times in column $\mathbf{k} = (\{1, 2, \dots, n\}, (q, q, \dots, q))$, which implies that the number of vectors $(f_1, \dots, f_n, q, \dots, q, \alpha)$ satisfying $f_i \in [1 : q-1]$ for any $i \in [1 : n]$ and $\langle \sum_{i=1}^n f_i \rangle_{q= \alpha} >_q = \alpha$ is $(q-1)^{n-1} - (q-1)^{n-2} + \dots + (-1)^{n+1}$.
- When $t = n+1$, for each vector $\mathbf{e} \in [1 : q]^m$, if $\mathbf{e} \in \mathcal{F}$, assume that $\mathbf{e} = (q, q, \dots, q)$, the occurrence number of \mathbf{e} in column $\mathbf{k} = (\{1, 2, \dots, n+1\}, (q, q, \dots, q))$ is equal to the number of vectors $(f_1, \dots, f_{n+1}, q, \dots, q)$ satisfying $f_i \in [1 : q-1]$ for any $i \in [1 : n+1]$ and $\langle \sum_{i=1}^{n+1} f_i \rangle_{q= q} >_q = q$. For any $\beta \in [1 : q-1]$, when $f_{n+1} = \beta$, the number of vectors $(f_1, \dots, f_n, \beta, q, \dots, q)$ with $f_i \in [1 : q-1]$ for any $i \in [1 : n]$ and $\langle \sum_{i=1}^{n+1} f_i \rangle_{q= q} >_q = q$ is the

number of vectors $(f_1, \dots, f_n, \beta, q, \dots, q)$ satisfying $f_i \in [1 : q-1]$ for any $i \in [1 : n]$ and $\langle \sum_{i=1}^n f_i \rangle_q = q - \beta$, which is $(q-1)^{n-1} - (q-1)^{n-2} + \dots + (-1)^{n+1}$ by hypothesis. Hence, the occurrence number of \mathbf{e} in column \mathbf{k} is $(q-1)((q-1)^{n-1} - (q-1)^{n-2} + \dots + (-1)^{n+1}) = (q-1)^n - (q-1)^{n-1} + \dots + (-1)^{n+1}(q-1)$.

If $\mathbf{e} \notin \mathcal{F}$, assume that $\mathbf{e} = (q, \dots, q, 1)$, the occurrence number of \mathbf{e} in column $\mathbf{k} = (\{1, 2, \dots, n+1\}, (q, q, \dots, q))$ is equal to the number of vectors $(f_1, \dots, f_{n+1}, q, \dots, q, 1)$ satisfying $f_i \in [1 : q-1]$ for any $i \in [1 : n+1]$ and $\langle \sum_{i=1}^{n+1} f_i \rangle_q = 1$. When $f_{n+1} = 1$, the number of vectors $(f_1, \dots, f_n, 1, q, \dots, q, 1)$ satisfying $f_i \in [1 : q-1]$ for any $i \in [1 : n]$ and $\langle \sum_{i=1}^{n+1} f_i \rangle_q = 1$ is equal to the number of vectors $(f_1, \dots, f_n, 1, q, \dots, q, 1)$ satisfying $f_i \in [1 : q-1]$ for any $i \in [1 : n]$ and $\langle \sum_{i=1}^n f_i \rangle_q = q$, which is $(q-1)^{n-1} - (q-1)^{n-2} + \dots + (-1)^n(q-1)$ by hypothesis. For any $\beta \in [2 : q-1]$, when $f_{n+1} = \beta$, the number of vectors $(f_1, \dots, f_n, \beta, q, \dots, q, 1)$ satisfying $f_i \in [1 : q-1]$ for any $i \in [1 : n]$ and $\langle \sum_{i=1}^{n+1} f_i \rangle_q = 1$ is equal to the number of vectors $(f_1, \dots, f_n, \beta, q, \dots, q, 1)$ with $f_i \in [1 : q-1]$ for any $i \in [1 : n]$ and $\langle \sum_{i=1}^n f_i \rangle_q = q - \beta + 1$, which is $(q-1)^{n-1} - (q-1)^{n-2} + \dots + (-1)^{n+1}$ by hypothesis. Hence the occurrence number of \mathbf{e} in column \mathbf{k} is $(q-1)^{n-1} - (q-1)^{n-2} + \dots + (-1)^n(q-1) + (q-2)((q-1)^{n-1} - (q-1)^{n-2} + \dots + (-1)^{n+1}) = (q-1)^n - (q-1)^{n-1} + \dots + (-1)^{n+2}$. The proposition holds when $t = n+1$.

□

Next we will prove that the PDA \mathbf{P} generated by Construction 4 satisfies Condition 1 with $\lambda = 1$ when $t \geq 2$. Firstly, \mathbf{P} satisfies the first item of Condition 1 obviously. Secondly, for any non-star entry $(\mathbf{e}, n_{\mathbf{e}})$ in \mathbf{P} , define a mapping

$$\phi((\mathbf{e}, n_{\mathbf{e}})) = \begin{cases} \mathbf{e} & \text{if } \mathbf{e} \in \mathcal{F}, \\ (e_1, e_2, \dots, e_{m-1}, \langle \sum_{i=1}^{m-1} e_i \rangle_q) & \text{otherwise,} \end{cases} \quad (14)$$

then $\phi((\mathbf{e}, n_{\mathbf{e}})) \in \mathcal{F}$. Moreover, if $\mathbf{P}(\mathbf{f}, (\mathcal{T}, \mathbf{b})) = (\mathbf{e}, n_{\mathbf{e}})$, we have $\mathbf{e}[\mathcal{T}] = \mathbf{b}$ from (13). If $\mathbf{e} \in \mathcal{F}$, we have $d(\phi((\mathbf{e}, n_{\mathbf{e}}))[\mathcal{T}], \mathbf{b}) = d(\mathbf{e}[\mathcal{T}], \mathbf{b}) = 0 < t$, then $\mathbf{P}(\phi((\mathbf{e}, n_{\mathbf{e}})), (\mathcal{T}, \mathbf{b})) = *$ from (12). If $\mathbf{e} \notin \mathcal{F}$, we have $d(\phi((\mathbf{e}, n_{\mathbf{e}}))[\mathcal{T}], \mathbf{b}) = d((e_1, e_2, \dots, e_{m-1}, \langle \sum_{i=1}^{m-1} e_i \rangle_q)[\mathcal{T}], \mathbf{b}) \leq 1 < t$, then $\mathbf{P}(\phi((\mathbf{e}, n_{\mathbf{e}})), (\mathcal{T}, \mathbf{b})) = *$ from (12). Hence, the row $\phi((\mathbf{e}, n_{\mathbf{e}}))$ is a star row for $(\mathbf{e}, n_{\mathbf{e}})$. For any $\mathbf{f} = (f_1, f_2, \dots, f_m) \in \mathcal{F}$, $B_{\mathbf{f}}$ denotes the set of non-star entries $(\mathbf{e}, n_{\mathbf{e}})$ in \mathbf{P} satisfying $\phi((\mathbf{e}, n_{\mathbf{e}})) = \mathbf{f}$. Next we will prove that $|B_{\mathbf{f}}| = (q-1)^t$ for each $\mathbf{f} \in \mathcal{F}$. From (14), $B_{\mathbf{f}}$ is a collection of $(\mathbf{e}, n_{\mathbf{e}})$ with $\mathbf{e} = \mathbf{f}$ or $\mathbf{e} = (f_1, \dots, f_{m-1}, \beta)$ with $\beta \neq f_m$. If $\mathbf{e} = \mathbf{f}$, then $\mathbf{e} \in \mathcal{F}$, so \mathbf{e} appears $(q-1)^{t-1} - (q-1)^{t-2} + \dots + (-1)^t(q-1)$ times in

each column where it appears from Proposition 4. If $\mathbf{e} = (f_1, \dots, f_{m-1}, \beta)$ with $\beta \neq f_m$, then $\mathbf{e} \notin \mathcal{F}$, so \mathbf{e} appears $(q-1)^{t-1} - (q-1)^{t-2} + \dots + (-1)^{t+1}$ times in each column where it appears from Proposition 4. Hence, $|B_{\mathbf{f}}| = (q-1)^{t-1} - (q-1)^{t-2} + \dots + (-1)^t(q-1) + (q-1)((q-1)^{t-1} - (q-1)^{t-2} + \dots + (-1)^{t+1}) = (q-1)^t$. \mathbf{P} satisfies the second item of Condition 1. Hence, when $t \geq 2$, the array \mathbf{P} generated by Construction 4 satisfies Condition 1 with $\lambda = 1$. \square

APPENDIX E

PROOF OF THEOREM 3

In order to prove Theorem 3, we first construct a PDA satisfying Condition 1 with $\lambda = 1$.

Construction 5: For any positive integer g , let $q = \lceil \frac{g^2}{2} \rceil + g$ and $z = \lceil \frac{g^2}{2} \rceil$. Then a $q \times q$ array \mathbf{P} is defined as

$$\mathbf{P}(j, k) = \begin{cases} * & \text{if } j \in [k - z + 1 : k]_q, \\ \langle j - (h - 1)(g + 2) \rangle_q & \text{if } j = \langle k + h \rangle_q, 1 \leq h \leq \lceil \frac{g}{2} \rceil, \\ \langle k - (g - h)(g + 2) \rangle_q & \text{if } j = \langle k + h \rangle_q, \lceil \frac{g}{2} \rceil < h \leq g. \end{cases} \quad (15)$$

Example 5: If $g = 2$, then $q = \lceil \frac{g^2}{2} \rceil + g = 4$ and $z = \lceil \frac{g^2}{2} \rceil = 2$. The 4×4 array defined in (15) is as follows, which is exactly the PDA in (1),

$$\mathbf{P} = \begin{pmatrix} * & * & 3 & 1 \\ 2 & * & * & 4 \\ 1 & 3 & * & * \\ * & 2 & 4 & * \end{pmatrix}.$$

Let us consider the first column. When $k = 1$, if $j \in [k - z + 1 : k]_q = [1 - 2 + 1 : 1]_4 = \{\langle 0 \rangle_4, \langle 1 \rangle_4\} = \{4, 1\}$, we have $\mathbf{P}(j, 1) = *$ from (15); if $j = 2$, from $j = \langle k + h \rangle_q$ we have $h = 1 = \lceil \frac{g}{2} \rceil$, so $\mathbf{P}(2, 1) = \langle j - (h - 1)(g + 2) \rangle_q = \langle 2 \rangle_4 = 2$; if $j = 3$, from $j = \langle k + h \rangle_q$ we have $h = 2 > \lceil \frac{g}{2} \rceil$, so $\mathbf{P}(3, 1) = \langle k - (g - h)(g + 2) \rangle_q = \langle 1 \rangle_4 = 1$. The other columns can be obtained similarly. \square

Lemma 4: The array \mathbf{P} generated by Construction 5 is a $g - (\lceil \frac{g^2}{2} \rceil + g, \lceil \frac{g^2}{2} \rceil + g, \lceil \frac{g^2}{2} \rceil, \lceil \frac{g^2}{2} \rceil + g)$ PDA satisfying Condition 1 with $\lambda = 1$. \square

Proof. Firstly, we will prove that the array \mathbf{P} generated by Construction 5 is a $g - (\lceil \frac{g^2}{2} \rceil + g, \lceil \frac{g^2}{2} \rceil + g, \lceil \frac{g^2}{2} \rceil, \lceil \frac{g^2}{2} \rceil + g)$ PDA.

- Since $\mathbf{P}(j, k) = *$ if $j \in [k - z + 1 : k]_q$ from (15), there are $z = \lceil \frac{g^2}{2} \rceil$ stars in each column. Condition C1 of Definition 1 holds.
- For any $s \in [1 : \lceil \frac{g^2}{2} \rceil + g]$, we have $\mathbf{P}(s, \langle s - 1 \rangle_q) = s$ from (15). Condition C2 of Definition 1 holds.
- For any two distinct entries $\mathbf{P}(j_1, k_1)$ and $\mathbf{P}(j_2, k_2)$, if $\mathbf{P}(j_1, k_1) = \mathbf{P}(j_2, k_2) = s \in [1 : \lceil \frac{g^2}{2} \rceil + g]$, we will prove $\mathbf{P}(j_1, k_2) = \mathbf{P}(j_2, k_1) = *$. Let $j_1 = \langle k_1 + h_1 \rangle_q$ and $j_2 = \langle k_2 + h_2 \rangle_q$. Since

$$\mathbf{P}(j, k) = * \text{ if } j \in \left[k - \left\lceil \frac{g^2}{2} \right\rceil + 1 : k \right]_q = \left[k + g + 1 : k + \left\lceil \frac{g^2}{2} \right\rceil + g \right]_q \quad (16)$$

from (15), we have $h_1, h_2 \in [1 : g]$.

- If $h_1, h_2 \in [1 : \lceil \frac{g}{2} \rceil]$, then $s = \langle j_1 - (h_1 - 1)(g + 2) \rangle_q = \langle j_2 - (h_2 - 1)(g + 2) \rangle_q$ from (15). Consequently, we have $\langle j_1 - (h_1 - 1)(g + 2) \rangle_q = \langle k_2 + h_2 - (h_2 - 1)(g + 2) \rangle_q$, then

$$j_1 = \langle k_2 + h_1(g + 2) - h_2(g + 1) \rangle_q. \quad (17)$$

In addition, we have $h_1 \neq h_2$. Otherwise if $h_1 = h_2$, we have $j_1 = j_2$ and $k_1 = k_2$, which contradicts the hypothesis that $\mathbf{P}(j_1, k_1)$ and $\mathbf{P}(j_2, k_2)$ are two distinct entries.

◇ If $h_1 > h_2$, then

$$\begin{aligned} h_1(g + 2) - h_2(g + 1) &\geq (h_2 + 1)(g + 2) - h_2(g + 1) \\ &= g + 2 + h_2 \\ &> g + 1. \end{aligned}$$

On the other hand,

$$\begin{aligned} h_1(g + 2) - h_2(g + 1) &\leq \left\lceil \frac{g}{2} \right\rceil (g + 2) - (g + 1) \\ &\leq \frac{g + 1}{2} (g + 2) - (g + 1) \\ &= \frac{g^2}{2} + \frac{g}{2} \\ &< \left\lceil \frac{g^2}{2} \right\rceil + g. \end{aligned}$$

So we have $\mathbf{P}(j_1, k_2) = *$ from (16) and (17).

◇ If $h_1 < h_2$, then

$$\begin{aligned}
 h_2(g+1) - h_1(g+2) &\leq \left\lceil \frac{g}{2} \right\rceil (g+1) - (g+2) \\
 &\leq \frac{(g+1)^2}{2} - (g+2) \\
 &= \frac{g^2}{2} - \frac{3}{2} \\
 &< \left\lceil \frac{g^2}{2} \right\rceil.
 \end{aligned}$$

On the other hand,

$$\begin{aligned}
 h_2(g+1) - h_1(g+2) &\geq (h_1+1)(g+1) - h_1(g+2) \\
 &= g+1 - h_1 \\
 &> 0.
 \end{aligned}$$

So we have $\mathbf{P}(j_1, k_2) = *$ from (16) and (17).

– If $h_1, h_2 \in \left[\left\lceil \frac{g}{2} \right\rceil + 1 : g \right]$, then $s = \langle k_1 - (g - h_1)(g + 2) \rangle_q = \langle k_2 - (g - h_2)(g + 2) \rangle_q$ from (15). Consequently, we have $\langle j_1 - h_1 - (g - h_1)(g + 2) \rangle_q = \langle k_2 - (g - h_2)(g + 2) \rangle_q$, then

$$j_1 = \langle k_2 + h_2(g + 2) - h_1(g + 1) \rangle_q. \quad (18)$$

In addition, we also have $h_1 \neq h_2$.

◇ If $h_1 > h_2$, then

$$\begin{aligned}
 h_1(g+1) - h_2(g+2) &\leq g(g+1) - \left(\left\lceil \frac{g}{2} \right\rceil + 1 \right) (g+2) \\
 &\leq g(g+1) - \left(\frac{g}{2} + 1 \right) (g+2) \\
 &= \frac{g^2}{2} - g - 2 \\
 &< \left\lceil \frac{g^2}{2} \right\rceil.
 \end{aligned}$$

On the other hand,

$$\begin{aligned}
 h_1(g+1) - h_2(g+2) &\geq (h_2+1)(g+1) - h_2(g+2) \\
 &= g+1 - h_2 \\
 &> 0.
 \end{aligned}$$

So we have $\mathbf{P}(j_1, k_2) = *$ from (16) and (18).

◇ If $h_1 < h_2$, then

$$\begin{aligned} h_2(g+2) - h_1(g+1) &\leq g(g+2) - \left(\left\lceil \frac{g}{2} \right\rceil + 1\right)(g+1) \\ &\leq g(g+2) - \left(\frac{g}{2} + 1\right)(g+1) \\ &= \frac{g^2}{2} + \frac{g}{2} - 1 \\ &< \left\lceil \frac{g^2}{2} \right\rceil + g. \end{aligned}$$

On the other hand,

$$\begin{aligned} h_2(g+2) - h_1(g+1) &\geq (h_1+1)(g+2) - h_1(g+1) \\ &= h_1 + g + 2 \\ &> g + 1. \end{aligned}$$

So we have $\mathbf{P}(j_1, k_2) = *$ from (16) and (18).

- If $h_1 \in [1 : \lceil \frac{g}{2} \rceil]$ and $h_2 \in [\lceil \frac{g}{2} \rceil + 1 : g]$, then $s = \langle j_1 - (h_1 - 1)(g + 2) \rangle_q = \langle k_2 - (g - h_2)(g + 2) \rangle_q$ from (15). Consequently,

$$j_1 = \langle k_2 + (h_1 + h_2 - g - 1)(g + 2) \rangle_q. \quad (19)$$

◇ If $h_1 + h_2 > g + 1$, we have $h_1 + h_2 - g - 1 \geq 1$, then

$$\begin{aligned} g+2 &\leq (h_1 + h_2 - g - 1)(g+2) \leq \left(\left\lceil \frac{g}{2} \right\rceil + g - g - 1\right)(g+2) \\ &\leq \left(\frac{g+1}{2} - 1\right)(g+2) = \frac{g^2}{2} + \frac{g}{2} - 1 \\ &< \left\lceil \frac{g^2}{2} \right\rceil + g. \end{aligned}$$

So we have $\mathbf{P}(j_1, k_2) = *$ from (16) and (19).

◇ If $h_1 + h_2 \leq g + 1$, then

$$\begin{aligned} 0 &\leq (g+1 - h_1 - h_2)(g+2) \\ &\leq \left(g+1 - 1 - \left\lceil \frac{g}{2} \right\rceil - 1\right)(g+2) \\ &\leq \left(\frac{g}{2} - 1\right)(g+2) = \frac{g^2}{2} - 2 \\ &< \left\lceil \frac{g^2}{2} \right\rceil. \end{aligned}$$

So we have $\mathbf{P}(j_1, k_2) = *$ from (16) and (19).

Similarly, we can prove that $\mathbf{P}(j_2, k_1) = *$. Condition C3 of Definition 1 holds.

Next we will prove that for any $s \in [1 : \lceil \frac{g^2}{2} \rceil + g]$, s appears exactly g times in \mathbf{P} . For any $h \in [1 : g]$, if $h \leq \lceil \frac{g}{2} \rceil$, we have

$$\mathbf{P}(\langle (h-1)(g+2) + s \rangle_q, \langle (h-1)(g+2) + s - h \rangle_q) = s$$

from (15); if $h > \lceil \frac{g}{2} \rceil$, we have

$$\mathbf{P}(\langle (g-h)(g+2) + s + h \rangle_q, \langle (g-h)(g+2) + s \rangle_q) = s$$

from (15). So s appears exactly g times in \mathbf{P} . Hence, \mathbf{P} is a $g - (\lceil \frac{g^2}{2} \rceil + g, \lceil \frac{g^2}{2} \rceil + g, \lceil \frac{g^2}{2} \rceil, \lceil \frac{g^2}{2} \rceil + g)$ PDA.

Secondly, we will prove that \mathbf{P} satisfies Condition 1 with $\lambda = 1$. \mathbf{P} satisfies the first item of Condition 1 obviously. For each $s \in [1 : \lceil \frac{g^2}{2} \rceil + g]$, let $\phi(s) = \langle s - 1 \rangle_q$, we will prove that the $\phi(s)$ -th row is a star row for s , i.e., for any $j, k \in [1 : q]$, if $\mathbf{P}(j, k) = s$, then $\mathbf{P}(\phi(s), k) = *$. Let $j = \langle k + h \rangle_q$, then $h \in [1 : g]$.

- If $h \in [1 : \lceil \frac{g}{2} \rceil]$, then $s = \langle j - (h-1)(g+2) \rangle_q = \langle k + h - (h-1)(g+2) \rangle_q$ from (15).

Consequently,

$$\phi(s) = \langle s - 1 \rangle_q = \langle k - (g+1)(h-1) \rangle_q.$$

Since

$$\begin{aligned} 0 &\leq (g+1)(h-1) \\ &\leq (g+1) \left(\left\lceil \frac{g}{2} \right\rceil - 1 \right) \\ &\leq (g+1) \left(\frac{g+1}{2} - 1 \right) \\ &= \frac{g^2}{2} - \frac{1}{2} \\ &< \left\lceil \frac{g^2}{2} \right\rceil, \end{aligned}$$

we have $\mathbf{P}(\phi(s), k) = *$ from (16).

- If $h \in [\lceil \frac{g}{2} \rceil + 1 : g]$, then $s = \langle k - (g-h)(g+2) \rangle_q$ from (15). Consequently,

$$\phi(s) = \langle s - 1 \rangle_q = \langle k - (g-h)(g+2) - 1 \rangle_q.$$

Since

$$\begin{aligned}
1 &\leq (g-h)(g+2) + 1 \\
&\leq \left(g - \left\lceil \frac{g}{2} \right\rceil - 1\right)(g+2) + 1 \\
&\leq \left(g - \frac{g}{2} - 1\right)(g+2) + 1 \\
&= \frac{g^2}{2} - 1 \\
&< \left\lceil \frac{g^2}{2} \right\rceil,
\end{aligned}$$

we have $\mathbf{P}(\phi(s), k) = *$ from (16).

So the $\phi(s)$ -th row is a star row for s .

For any $j \in [1 : q]$, the set of integers s satisfying $\phi(s) = j$ is denoted by B_j , then $B_j = \{< j + 1 >_q\}$. So $|B_j| = 1$ for each $j \in [1 : q]$. \mathbf{P} satisfies the second item of Condition 1. Hence, \mathbf{P} satisfies Condition 1 with $\lambda = 1$. \square

From Lemma 4, for any positive integer g , there exists a g - $(\lceil \frac{g^2}{2} \rceil + g, \lceil \frac{g^2}{2} \rceil + g, \lceil \frac{g^2}{2} \rceil, \lceil \frac{g^2}{2} \rceil + g)$ PDA satisfying Condition 1 with $\lambda = 1$, then Theorem 3 is proved from Corollary 1.

APPENDIX F

PROOF OF PROPOSITION 3

Proof. Firstly, we will prove that the array \mathbf{P}_1 defined in (7) is a $(g-1)$ - $(K_1, (g-1)F_1, (g-1)Z_1, gS_1)$ PDA.

- If $\mathbf{P}(j, k) = *$, we have $\mathbf{P}_1(j, k) = \mathbf{P}_1(j + F_1, k) = \dots = \mathbf{P}_1(j + (g-2)F_1, k) = *$ from (7). Since there are Z_1 stars in each column of \mathbf{P} , there are $Z = (g-1)Z_1$ stars in each column of \mathbf{P}_1 . The condition C1 of Definition 1 holds.
- For any $s' \in [1 : gS_1]$, let $< s' >_g = v$ and $\frac{s'-v}{g} + 1 = s$, then $s \in [1 : S_1]$ and s appears g times in \mathbf{P} , assume that $\mathbf{P}(j_{s,1}, k_{s,1}) = \dots = \mathbf{P}(j_{s,g}, k_{s,g}) = s$ with $j_{s,1} < \dots < j_{s,g}$, then

we have $T_s = \{(j_{s,1}, k_{s,1}), \dots, (j_{s,g}, k_{s,g})\}$ from (8). Consequently, we have

$$\begin{aligned}
\mathbf{P}_1(j_{s,v}, k_{s,v}) &= s', \\
\mathbf{P}_1(j_{s,v-1} + F_1, k_{s,v-1}) &= s', \\
&\vdots \\
\mathbf{P}_1(j_{s,1} + (v-1)F_1, k_{s,1}) &= s', \\
\mathbf{P}_1(j_{s,g} + vF_1, k_{s,g}) &= s', \\
\mathbf{P}_1(j_{s,g-1} + (v+1)F_1, k_{s,g-1}) &= s', \\
&\vdots \\
\mathbf{P}_1(j_{s,v+2} + (g-2)F_1, k_{s,v+2}) &= s'
\end{aligned}$$

from (7). That is, each integer in $[1 : gS_1]$ occurs at least $g-1$ times in \mathbf{P}_1 . The condition C2 of Definition 1 holds. Moreover, since the average occurrence number of each integer in \mathbf{P}_1 is $\frac{K_1(g-1)(F_1-Z_1)}{gS_1} = g-1$, each integer in $[1 : gS_1]$ occurs exactly $g-1$ times in \mathbf{P}_1 .

- For any two distinct entries $\mathbf{P}_1(j_1, k_1)$ and $\mathbf{P}_1(j_2, k_2)$, if $\mathbf{P}_1(j_1, k_1) = \mathbf{P}_1(j_2, k_2) = s' \in [1 : gS_1]$, we will show that $\mathbf{P}_1(j_1, k_2) = \mathbf{P}_1(j_2, k_1) = *$. Let $\langle s' \rangle_g = v$ and $\frac{s'-v}{g} + 1 = s$, then we have $\mathbf{P}(\langle j_1 \rangle_{F_1}, k_1) = \mathbf{P}(\langle j_2 \rangle_{F_1}, k_2) = s$ from (7), which implies $\langle j_1 \rangle_{F_1} = \langle j_2 \rangle_{F_1}, k_1 = k_2$ or $\mathbf{P}(\langle j_1 \rangle_{F_1}, k_2) = \mathbf{P}(\langle j_2 \rangle_{F_1}, k_1) = *$. If $\langle j_1 \rangle_{F_1} = \langle j_2 \rangle_{F_1}, k_1 = k_2$ hold, let $T_s[\eta] = (\langle j_1 \rangle_{F_1}, k_1) = (\langle j_2 \rangle_{F_1}, k_2)$, $i_1 = \lceil \frac{j_1}{F_1} \rceil$ and $i_2 = \lceil \frac{j_2}{F_1} \rceil$, then we have $v = \Phi_{i_1-1}((1, 2, \dots, g))[\eta] = \Phi_{i_2-1}((1, 2, \dots, g))[\eta]$ from (7), which implies $i_1 = i_2$, i.e., $\lceil \frac{j_1}{F_1} \rceil = \lceil \frac{j_2}{F_1} \rceil$. Since $\langle j_1 \rangle_{F_1} = \langle j_2 \rangle_{F_1}$, we have $j_1 = j_2$, which contradicts the hypothesis that $\mathbf{P}_1(j_1, k_1)$ and $\mathbf{P}_1(j_2, k_2)$ are two distinct entries. Hence, $\mathbf{P}(\langle j_1 \rangle_{F_1}, k_2) = \mathbf{P}(\langle j_2 \rangle_{F_1}, k_1) = *$ holds, which leads to $\mathbf{P}_1(j_1, k_2) = \mathbf{P}_1(j_2, k_1) = *$ from (7). The condition C3 of Definition 1 holds.

Hence, \mathbf{P}_1 is a $(g-1)$ - $(K_1, (g-1)F_1, (g-1)Z_1, gS_1)$ PDA.

Next we will show that \mathbf{P}_1 satisfies Condition 1 with $\lambda = g-1$. If $\mathbf{P}_1(j, k) = *$, we have $\mathbf{P}(\langle j \rangle_{F_1}, k) = *$ then $\mathbf{P}_1(\langle j \rangle_{F_1}, k) = *$ from (7). Conversely, if $\mathbf{P}_1(\langle j \rangle_{F_1}, k) = *$, we have $\mathbf{P}(\langle j \rangle_{F_1}, k) = *$ then $\mathbf{P}_1(j, k) = *$ from (7). \mathbf{P}_1 satisfies the first item of Condition 1.

For any $s' \in [1 : gS_1]$, let $v = \langle s' \rangle_g$ and $s = \frac{s'-v}{g} + 1$, then $v \in [1 : g]$ and $s \in [1 : S_1]$. Let $\phi(s') = j_{s, \langle v+1 \rangle_g}$, we will show that the $\phi(s')$ -th row of \mathbf{P}_1 is a star row for s' . For any

$\mathbf{P}_1(j, k) = s'$ where $j \in [1 : F_1]$ and $k \in [1 : K_1]$, we have $\mathbf{P}(\langle j \rangle_{F_1}, k) = s$ from (7). Let $(\langle j \rangle_{F_1}, k) = T_s[\eta]$, i.e., $k = k_{s,\eta}$, let $i = \lceil \frac{j}{F_1} \rceil$, we have

$$v = \Phi_{i-1}((1, 2, \dots, g))[\eta] = \begin{cases} \eta + i - 1, & \text{if } \eta \leq g - i + 1, \\ \eta - g + i - 1, & \text{otherwise,} \end{cases}$$

which implies $\langle v + 1 \rangle_g \neq \eta$ since $i \in [1 : g - 1]$. Consequently, we have $\mathbf{P}_1(\phi(s'), k) = \mathbf{P}_1(j_{s, \langle v+1 \rangle_g}, k_{s,\eta}) = *$ from the condition C3 of Definition 1. Hence, the $\phi(s')$ -th row of \mathbf{P}_1 is a star row for s' .

For any $j \in [1 : F_1]$, let $B_j = \{s' | \Phi(s') = j, s' \in [1 : gS_1]\}$, we will show that $|B_j| = \frac{gS_1}{F_1}$. For any $i \in [1 : g - 1]$, for any integer s' in the $(j + (i - 1)F_1)$ -th row of \mathbf{P}_1 , say $\mathbf{P}_1(j + (i - 1)F_1, k) = s'$, let $v = \langle s' \rangle_g$ and $s = \frac{s'-v}{g} + 1$, then $\mathbf{P}(j, k) = s$ from (7). Let $T_s[\eta] = (j, k)$, $v' = \langle \eta - 1 \rangle_g$, η' be the integer satisfying $\Phi_{i-1}((1, 2, \dots, g))[\eta'] = v'$ and $(j', k') = T_s[\eta']$, then $\mathbf{P}_1(j' + (i - 1)F_1, k') = (s - 1)g + v'$ from (7). Moreover, we have $\phi((s - 1)g + v') = j_{s, \langle v'+1 \rangle_g} = j_{s,\eta} = j$. It implies that for any integer s' in the $(j + (i - 1)F_1)$ -th row of \mathbf{P}_1 , there exists an integer $(s - 1)g + v'$ such that $(s - 1)g + v' \in B_j$.

For any $j \in [1 : F_1]$ and any $i \in [1 : g - 1]$, for any two different integers in the $(j + (i - 1)F_1)$ -th row of \mathbf{P}_1 , say $\mathbf{P}_1(j + (i - 1)F_1, k_1) = s'_1$ and $\mathbf{P}_1(j + (i - 1)F_1, k_2) = s'_2$, let $v_1 = \langle s'_1 \rangle_g$, $s_1 = \frac{s'_1 - v_1}{g} + 1$, $v_2 = \langle s'_2 \rangle_g$ and $s_2 = \frac{s'_2 - v_2}{g} + 1$, then we have

$$\mathbf{P}(j, k_1) = s_1 \text{ and } \mathbf{P}(j, k_2) = s_2 \quad (20)$$

from (7). Let $T_{s_1}[\eta_1] = (j, k_1)$, $T_{s_2}[\eta_2] = (j, k_2)$, $v'_1 = \langle \eta_1 - 1 \rangle_g$ and $v'_2 = \langle \eta_2 - 1 \rangle_g$, then both $(s_1 - 1)g + v'_1$ and $(s_2 - 1)g + v'_2$ belong to B_j . Since $k_1 \neq k_2$, we have $s_1 \neq s_2$ from (20) and the condition C3 of Definition 1. Without loss of generality, assume that $s_1 < s_2$, then we have $(s_1 - 1)g + v'_1 \neq (s_2 - 1)g + v'_2$. Otherwise if $(s_1 - 1)g + v'_1 = (s_2 - 1)g + v'_2$, we have $v'_1 = (s_2 - s_1)g + v'_2 \geq g + v'_2 > g$, which contradicts $v'_1 \in [1 : g]$. It implies that different integers in the $(j + (i - 1)F_1)$ -th row correspond to different integers belonging to B_j .

On the other hand, since \mathbf{P} satisfies Condition 2, i.e., each row has the same number of stars, assume that there are t_1 stars in each row of \mathbf{P} , then there are $K_1 - t_1$ integers in each row of \mathbf{P} . Consequently, there are $K_1 - t_1$ integers in each row of \mathbf{P}_1 from (7). So we have $|B_j| \geq K_1 - t_1$ for any $j \in [1 : F_1]$. Since $\sum_{j=1}^{F_1} |B_j| = gS_1 = \frac{(g-1)F_1(K_1 - t_1)}{g-1} = F_1(K_1 - t_1)$, we have $\frac{\sum_{j=1}^{F_1} |B_j|}{F_1} = K_1 - t_1$, then $|B_j| = K_1 - t_1 = \frac{gS_1}{F_1}$. \mathbf{P}_1 satisfies the second item of Condition 1. Hence, \mathbf{P}_1 satisfies Condition 1 with $\lambda = g - 1$.

REFERENCES

- [1] S. Borst, V. Gupta, and A. Walid, "Improving bicm performance of qam constellation for broadcasting applications," in *Int. Symp. on Turbo Codes and Related Topics*, Sept. 2008, pp. 55–60.
- [2] M. A. Maddah-Ali and U. Niesen, "Fundamental limits of caching," *IEEE Trans. Infor. Theory*, vol. 60, no. 5, pp. 2856–2867, 2014.
- [3] K. Wan, D. Tuninetti, and P. Piantanida, "On the optimality of uncoded cache placement," in *IEEE ITW*, 2016, pp. 161–165.
- [4] —, "An index coding approach to caching with uncoded cache placement," *IEEE Trans. Infor. Theory*, vol. 66, no. 3, pp. 1318–1332, 2020.
- [5] H. Ghasemi and A. Ramamoorthy, "Improved lower bounds for coded caching," in *IEEE ISIT*, 2015, pp. 1696–1700.
- [6] Q. Yu, M. A. Maddah-Ali, and A. S. Avestimehr, "The exact rate-memory tradeoff for caching with uncoded prefetching," *IEEE Trans. Infor. Theory*, vol. 64, no. 2, pp. 1281–1296, 2018.
- [7] —, "Characterizing the rate-memory tradeoff in cache networks within a factor of 2," *IEEE Trans. Infor. Theory*, vol. 65, no. 1, pp. 647–663, 2019.
- [8] S. Jin, Y. Cui, H. Liu, and G. Caire, "Uncoded placement optimization for coded delivery," in *IEEE WiOpt*, May 2018, pp. 1–8.
- [9] K. Shanmugam, M. Ji, A. M. Tulino, J. Llorca, and A. G. Dimakis, "Finite-length analysis of caching-aided coded multicasting," *IEEE Trans. Infor. Theory*, vol. 62, no. 10, pp. 5524–5537, 2016.
- [10] Q. Yan, M. Cheng, X. Tang, and Q. Chen, "On the placement delivery array design for centralized coded caching scheme," *IEEE Trans. Infor. Theory*, vol. 63, no. 9, pp. 5821–5833, 2017.
- [11] C. Shangguan, Y. Zhang, and G. Ge, "Centralized coded caching schemes: A hypergraph theoretical approach," *IEEE Trans. Infor. Theory*, vol. 64, no. 8, pp. 5755–5766, 2018.
- [12] M. Cheng, J. Jiang, Q. Yan, and X. Tang, "Coded caching schemes for flexible memory sizes," *IEEE Trans. Commun.*, vol. 67, no. 6, pp. 4166–4176, 2019.
- [13] M. Cheng, J. Jiang, Q. Wang, and Y. Yao, "A generalized grouping scheme in coded caching," *IEEE Trans. Commun.*, vol. 67, no. 5, pp. 3422–3430, 2019.
- [14] M. Cheng, J. Wang, X. Zhong, and Q. Wang, "A framework of constructing placement delivery arrays for centralized coded caching," *arXiv:1908.05865v3*, May 2021.
- [15] L. Tang and A. Ramamoorthy, "Coded caching schemes with reduced subpacketization from linear block codes," *IEEE Trans. Infor. Theory*, vol. 64, no. 4, pp. 3099–3120, 2018.
- [16] K. Shanmugam, A. M. Tulino, and A. G. Dimakis, "Coded caching with linear subpacketization is possible using ruzsa-szeméredi graphs," in *IEEE ISIT*, Jun. 2017, pp. 1237–1241.
- [17] Q. Yan, X. Tang, Q. Chen, and M. Cheng, "Placement delivery array design through strong edge coloring of bipartite graphs," *IEEE Commun. Lett.*, vol. 22, no. 2, pp. 236–239, 2018.
- [18] P. Krishnan, "Coded caching via line graphs of bipartite graphs," in *IEEE ITW*, Nov. 2018, pp. 1–5.
- [19] S. Agrawal, K. V. S. Sree, and P. Krishnan, "Coded caching based on combinatorial designs," in *IEEE ISIT*, 2019, pp. 1227–1231.