

# ELYSIUM: Automagically Healing Vulnerable Smart Contracts Using Context-Aware Patching

Christof Ferreira Torres  
*SnT, University of Luxembourg*  
Luxembourg, Luxembourg  
christof.torres@uni.lu

Hugo Jonker  
*Open University of the Netherlands*  
Heerlen, Netherlands  
hugo.jonker@ou.nl

Radu State  
*SnT, University of Luxembourg*  
Luxembourg, Luxembourg  
radu.state@uni.lu

**Abstract**—Smart contracts are programs that are deployed and executed on the blockchain. Typically, smart contracts govern assets; popular smart contracts can govern assets worth millions. Just like traditional programs, smart contracts are subject to programming mistakes. However, a major difference is that smart contracts cannot be patched once deployed. Several approaches have been studied to improve smart contract security, by detecting bugs prior to deployment, allowing contracts to be updated, or modifying clients to prevent attacking transactions. The most elegant solution would be to automatically eliminate bugs prior to deployment. Merely identifying bugs is not enough. This became evident when the Parity wallet was hacked a second time after being manually patched following a security audit.

Automatic pre-deployment patching offers a powerful promise to strengthen smart contract defenses. Current approaches are limited in the types of vulnerabilities that can be patched, in the flexibility of the patching process, and in scalability. In this paper we propose ELYSIUM, a scalable approach towards automatic smart contract repair, that combines template-based patching with semantic patching by inferring context information from the bytecode. ELYSIUM can currently automatically patch 7 known vulnerabilities in smart contracts using external bug-finding tools, and it can easily be extended with new templates and new bug-finding tools. We evaluate effectiveness and correctness of ELYSIUM using 3 different datasets by replaying more than 500K transactions against patched contracts. We find that ELYSIUM outperforms existing tools by patching at least 30% more contracts. Finally, we compare the overhead in terms of deployment and transaction cost increase. In comparison to other tools, ELYSIUM minimizes transaction cost (up to a factor of 1.9), for only a marginally higher deployment cost.

## I. INTRODUCTION

Smart contracts became popular with the release of Ethereum in 2015. Smart contracts are programs deployed and executed on the blockchain. One common use case for smart contracts is to govern assets; there are multiple smart contracts that govern the equivalent of millions. This makes them an appetizing target for attackers. Moreover, since the underlying blockchain guarantees that the past cannot be changed, it is not possible to update the code of a smart contract, even if bugs are found. And since their code is publicly available through the blockchain, anyone can inspect their code for bugs.

In the past few years, several high-profile attacks on smart contracts have occurred. The first publicly documented attack is the 2016 DAO hack. Attackers exploited a reentrancy bug that allowed them to steal over \$60 million worth of ether

(Ethereum’s own cryptocurrency) from the DAO smart contract. This was ultimately resolved by “rewinding” Ethereum’s past history to undo the hacking transactions, which is a gross violation of the premise of any blockchain system.

Since then, various ways to mitigate the problem of insecure smart contracts have been studied. Some works have focused on adding updateability to smart contracts by using a “proxy” contract that separates data from code by forwarding calls to the most up-to-date version of the code [31], [51]. While this separation solves the issue of updateability, it opens up new issues regarding the unintentional overwriting of existing state variables. Other works have focused on modifying clients to block at runtime transactions that might result in hacks (e.g., [9], [16], [39]). Moreover, various works investigated identifying and correcting bugs prior to deployment. Many studies have used symbolic execution to this end (e.g., [12], [13], [23], [25], [26], [29]). Other studies proposed tools based on abstract interpretation and model checking (e.g., [2], [14], [21], [40], [43]), including fuzzing (e.g., [11], [17], [20]). Further additions in this arsenal are tools to detect and study attacks (e.g., [4], [10]). Despite all these efforts, well-studied bugs such as reentrancy, with widely discussed countermeasures, not only still occur in high-value contracts, but attacks against these bugs continue to be successful.

For example, in 2017, an access control bug in the Parity wallet smart contract allowed a hacker to steal roughly \$30 million [50]. Following an external audit, an updated version of the contract was launched the same year. Unfortunately, it had a similar but different access control bug, that has been found by coincidence via an individual trying to test the new version of the contract for the previous bug. This test resulted in locking up \$150 million in cryptocurrency [35]. In 2018, the Spankchain smart contract had a reentrancy bug that was exploited, affecting \$38 thousand [32]. In 2020, both the Uniswap and Lendf.me contracts were victims to reentrancy bugs, affecting \$25 million [37].

Ideally, smart contracts are deployed bug-free – or, at least, free of any bugs for which detection tools are available. However, currently this requires a priori analysis and manual patching. But manual auditing and patching is cumbersome, time consuming and, as illustrated by the second Parity hack, it does not guarantee the absence of known classes of bugs. Automation is thus needed. While there have been efforts in

this direction [28], [38], [48], [49], existing work on automatically patching smart contracts is still limited: current tools only address some vulnerabilities, leaving other well-known vulnerabilities undetected and unpatched; they use inflexible hard-coded templates that do not scale well; they add a large overhead in terms of deployment and transaction costs.

We propose a methodology to address these shortcomings by automatically generating context-aware bytecode patches tailored to each contract. For each contract, we perform a number of analyses such as integer type inference and storage space inference to sufficiently understand the context of the smart contract to be able to create more tailored and effective patches. We patch at the bytecode level, to remain independent of the used source code language and to have more control over the added costs that are introduced during patching. While we also make use of a template-based approach, our templates are different as they contain place holders where contract-related information is placed during patch generation. Finally, since our approach leverages existing bug-finding tools, it can easily be extended to incorporate newly developed bug-finding tools, giving it the flexibility to handle currently unknown bugs and future bugs.

**Contributions.** We summarize our contributions as follows:

- We present a novel context-aware patching approach that combines template-based patching with semantic patching to create patches that are tailored to the smart contracts in case.
- We propose ELYSIUM, a tool that implements our approach to automatically patch 7 different types of vulnerabilities in smart contracts at the bytecode level.
- We compare our tool to existing works using 3 different datasets and replaying more than 500K transactions, and demonstrate that ELYSIUM not only patches more bugs (at least 30% more), but that it is also more efficient in terms of gas consumption (up to 1.9 times less gas).

## II. BACKGROUND

In this section, we provide background on smart contracts, Ethereum bytecode, and the Ethereum virtual machine.

### A. Smart Contracts

The concept of smart contracts has been first introduced by Nick Szabo in 1997 [42]. He described the concept of a trustless system consisting of self-executing computer programs that would facilitate the digital verification and enforcement of legal contracts. Smart contracts only became a reality with the release of Ethereum in 2015 [47]. Ethereum proposes two types of accounts: *externally owned accounts* (EOA) and *contract accounts* (i.e., smart contracts). Both account types, EOAs and smart contracts, are identifiable via a unique 160-bit address and both contain a balance that keeps track of the amount of ether owned by the respective account. While EOAs are controlled via private keys and have no associated code, smart contracts are the opposite, they have associated code but are not controlled via private keys. As a result, smart contracts operate as fully-fledged

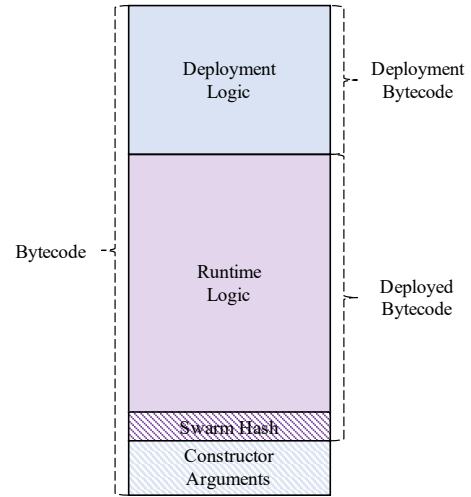


Fig. 1: An illustrative example of the anatomy of Ethereum bytecode. Bytecode consists of two main parts: deployment bytecode and deployed bytecode.

programs that are stored and executed across the Ethereum blockchain. They are different from traditional programs in many ways. Smart contracts are deterministic as they must be executed across a network of mutually distrusting nodes. Once deployed, smart contracts cannot be removed or updated, unless they have been explicitly designed to do so. Moreover, smart contracts have a key-value store that allows them to persist state across executions. The deployment of smart contracts and the invocation of individual functions occurs via transactions. A transaction contains besides a sender and a receiver, also a gas limit and a gas price as well as an amount of ether and a data field. Transactions may only be initiated by EOAs. Smart contracts are deployed by leaving a transaction’s receiver field empty and adding the code of the contract to be deployed to a transaction’s data field. After deployment, smart contract functions can then be invoked by encoding the function signature and arguments in a transaction’s data field. A so-called *fallback* function is executed whenever the provided function name is not implemented. Smart contracts may also call other smart contracts during execution. Thus, a single transaction may trigger further transactions, so-called *internal transactions*. Smart contracts are usually developed using a high-level programming language. Despite a plethora of programming languages (e.g., Vyper [45], LLL [24], Bamboo [6], and Obsidian [5]), Solidity [15] remains the most prominent programming language for developing smart contracts in Ethereum. However, independently of the chosen programming language, the high-level source code must be translated into a low-level representation, so-called Ethereum bytecode, before it can be deployed and interpreted by the Ethereum Virtual Machine (EVM).

### B. Ethereum Bytecode

Ethereum bytecode consists of a sequence of bytes, where each byte either encodes an instruction or a byte of data.

Fig. 1 depicts the anatomy of Ethereum bytecode. Ethereum bytecode consists of two main parts: *deployment bytecode* and *deployed bytecode*. Deployment bytecode includes the deployment logic of the smart contract. This logic is responsible for initializing state variables as well as reading constructor arguments appended at the end of the Ethereum bytecode, but it also in charge of extracting the deployed bytecode from the Ethereum bytecode and copying it to persistent storage. This is achieved via the combination of a `COPECOPY` instruction and a `RETURN` instruction. The `COPECOPY` instruction will first copy the code running in the current environment to memory starting from a given offset and for a given size. Afterwards, the `RETURN` instruction will return the code copied in memory to the EVM. As a result, the EVM will create a new contract by generating a new 160-bit address and persisting the returned code with this address. The deployed bytecode contains the *runtime logic* (i.e., runtime bytecode) and an optional *swarm hash*. The runtime logic is the bytecode that is ultimately associated with the smart contract and executed whenever a transaction is sent to the smart contract. Some compilers, such as the Solidity compiler, also append a Swarm hash of the contract’s metadata to the end of the runtime bytecode. This metadata includes the compiler version used, the source code, and the Application Binary Interface (ABI) of the smart contract. Developers can publish this metadata to Swarm (Ethereum’s distributed preimage archive) such that others can access it and use it to verify the deployed bytecode.

### C. Ethereum Virtual Machine

The EVM is a stack-based, register-less virtual machine that runs low-level bytecode and supports a Turing-complete set of instructions. Every instruction is represented by a one-byte opcode. The instruction set currently consists of 142 instructions and provides a variety of operations, ranging from basic operations, such as arithmetic operations or control-flow statements, to more specific ones, such as the modification of a contract’s storage or the querying of properties related to the executing transaction (e.g., sender) or the current blockchain state (e.g., block number). The EVM follows the Harvard architecture model by separating code and data into different address spaces. The EVM possesses four different address spaces: an immutable code address space, which contains the smart contract’s bytecode, a mutable but persistent storage address space that allows smart contracts to persist their data across executions, a mutable but volatile memory address space that acts as a temporary data storage for smart contracts during execution, and finally a stack address space that allows smart contracts to pass arguments to instructions at runtime. Moreover, the EVM employs a gas mechanism that assigns a cost to each instruction. This mechanism prevents denial-of-service attacks and ensures termination. When issuing a transaction, the sender has to specify a gas limit and a gas price. The gas limit is specified in gas units and must be large enough to cover the amount of gas consumed by the instructions during a contract’s execution. Otherwise, the execution will terminate, and its effects will be rolled back.

TABLE I: Decentralized Application Security Project Top 5

Rank	Category	Associated Vulnerabilities
1	Reentrancy	Same- and Cross-Function Reentrancy
2	Access Control	Transaction Origin, Suicidal, Leaking, Unsafe Delegatecall
3	Arithmetic	Integer Overflows and Underflows
4	Unchecked Low Level Calls	Unhandled Exceptions
5	Denial of Services	Unhandled Exceptions, Transaction Origin, Suicidal, Leaking, Unsafe Delegatecall

The gas price defines the amount of ether that the sender is willing to pay per unit of gas used. During execution, the EVM holds a machine state  $\mu = (g, pc, m, i, s)$ , where  $g$  is the gas available,  $pc$  is the current program counter,  $m$  represents the memory contents,  $i$  is the active number of words in memory, and  $s$  is the content of the stack. The EVM can essentially be seen as a transaction-based state machine.

### D. Smart Contract Vulnerabilities

In the last years, a plethora of smart contract vulnerabilities have been identified and studied [1], [34]. The NCC Group initiated the Decentralized Application Security Project (DASP) with the goal of grouping the most common smart contract vulnerabilities into categories and ranking them based on their real-world impact [27]. Table I, lists the top 5 categories and their associated vulnerabilities. Although more categories and vulnerabilities exist, our work primarily focuses on the vulnerabilities associated with the top 5 for two reasons: 1) bytecode level detection tools exist for detecting those vulnerabilities 2) those vulnerabilities can be patched by changing the bytecode.

## III. METHODOLOGY

In this section, we describe different approaches and individual challenges towards patching vulnerabilities at the bytecode level, related to reentrancy, access control, arithmetic, and unchecked low level calls.

### A. Patching Reentrancy Bugs

The DAO hack in 2016, became the most prominent example of a reentrancy attack. The consequences of this attack led to a loss of 60 million USD as well as a hard-fork causing a split of the Ethereum blockchain [7]. The code snippet in Fig. 2a, provides an example of a function that is vulnerable to reentrancy at line 5. The function `withdrawBalance` transfers the balance of a user to the calling address. However, a transfer is nothing else than a call to an address. Hence, if `msg.sender` is a contract, then the transfer will trigger the code that is associated to `msg.sender`. This code can be malicious and call back the `withdrawBalance` function, thus reentering the function `withdrawBalance` while the first invocation has not finished executing yet. The issue here is that `userBalances[msg.sender]` has not been set to zero at that moment in time, and therefore an attacker can repeatedly withdraw its balance from the contract. This is clearly a concurrency issue and it can be addressed in several

ways. One solution, is to ensure that all state changes, such as the setting of `userBalances[msg.sender]` to zero, are performed before the call. However, this requires correctly identifying all state variable assignments that are affected by the call as well as occurring after the call, and moving them before the call. Unfortunately, this process is rather tedious and error-prone, as it might break the semantics of a contract. A far more simple and less invasive approach, is to make use of *mutual exclusion*, a well studied paradigm from concurrent computing with the purpose of preventing race conditions [8]. The idea is to introduce a so-called *mutex* variable that locks the execution state and prevents concurrent access to a given resource. Fig. 2b depicts a patched version of the function `withdrawBalance` using mutual exclusion. A new state variable called `locked` has been introduced at line 2. The variable is used as a mutex variable and is initially set to `false`. The condition at line 6 first checks if `locked` is set to `false` before executing the call at line 8. Then, before executing the call, the variable `locked` is set to `true` and when the call has finished executing, the variable is set back to `false`. This mechanism ensures that the call at line 8 is not re-executed when the function `withdrawBalance` is reentered. Nevertheless, special care needs to be taken when working with mutexes. One has to make sure that there is no possibility for a lock to be claimed and never released, otherwise a so-called *deadlock* might occur and render the smart contract unusable. However, the greatest challenge of this approach is the introduction of a new state variable at the bytecode level. While this is straightforward when working at the source code level, it becomes more challenging when working at the bytecode level, where high level information such as state variable declarations are missing. Our idea is to use bytecode level taint analysis in order to learn about occupied storage space and infer which storage space is still available for inserting a new state variable (cf. Section IV for more details on free storage space inference). It is crucial that we only introduce mutex variables on free storage space as otherwise we will overwrite already used storage space and break the semantics of the contract. Please note that the code presented in Fig. 2a is an example of a so-called *same-function* reentrancy. However, Rodler et al. [39] presented another type of reentrancy called *cross-function* reentrancy. The idea is that an attacker can take advantage of a different function that shares the same state with the reentrancy vulnerable function. Thus, for a contract to be safe against cross-function reentrancy, we have to apply the same locking mechanism to every function that shares state with the reentrancy vulnerable function. We achieve this by searching the bytecode for writes to the same state variable used inside the reentrancy vulnerable function and by guarding them using the same mutex variable used in the reentrancy vulnerable function.

### B. Patching Access Control Bugs

Access control includes several vulnerabilities: transaction origin, suicidal, leaking, and unsafe `delegatecall`. However,

```

1 mapping (address => uint) public userBalances;
2 ...
3 function withdrawBalance() public {
4     uint amount = userBalances[msg.sender];
5     msg.sender.call.value(amount)("");
6     userBalances[msg.sender] = 0;
7 }

```

(a) Before Patching

```

1 mapping (address => uint) public userBalances;
2 ...
3 function withdrawBalance() public {
4     uint amount = userBalances[msg.sender];
5     msg.sender.call.value(amount)("");
6     userBalances[msg.sender] = 0;
7 }

```

(b) After Patching

Fig. 2: (a) Example of a function vulnerable to reentrancy due to an unguarded external call. (b) Example of a function not vulnerable to reentrancy due to a state variable guarding the external call.

```

1 address public owner;
2 ...
3 function withdraw(address receiver) public {
4     require(tx.origin == owner);
5     receiver.transfer(this.balance);
6 }

```

(a) Before Patching

```

1 address public owner;
2 ...
3 function withdraw(address receiver) public {
4     receiver.transfer(this.balance);
5 }

```

(b) After Patching

Fig. 3: (a) Example of a function vulnerable to transaction origin due to the use of `tx.origin`. (b) Example of a function not vulnerable to transaction origin due to the use of `msg.sender`.

while the former requires its own approach, the latter three can be patched using the same approach.

*Patching Transaction Origin.* The function `withdraw` in Fig. 3a makes use of `tx.origin` to check if the calling address is equivalent to the owner. However, as `tx.origin` does not return the last calling address but the address that initiated the transaction, an attacker can try to forward a transaction initiated by the owner in order to impersonate itself as the owner and bypass the check at line 4. The process of patching a transaction origin vulnerability is rather simple. Fig. 3b depicts a patched version of the function `withdraw`. The patch simply replaces `tx.origin` with `msg.sender`, which returns the latest calling address instead of the origin.



```

1 contract Suicidal {
2   ...
3   function kill() public {
4     selfdestruct(msg.sender);
5   }
6 }

```

(a) Before Patching

```

1 contract NonSuicidal {
2   ...
3   ...
4   function kill() public {
5     selfdestruct(msg.sender);
6   }
7 }

```

(b) After Patching

Fig. 4: (a) Example of a suicidal contract due to an unprotected `selfdestruct`. (b) Example of a non-suicidal contract due to a protected `selfdestruct`.

*Patching Suicidal, Leaking, and Unsafe Delegatecall.* One prominent example of these three vulnerabilities are the two Parity wallet hacks that occurred in 2017 [35], [50]. The contract in Fig. 4a is suicidal, since the function `kill` does not verify the calling address. As a result, anyone can destroy the contract. The vulnerabilities leaking and unsafe delegatecall are similar, although they relate to contracts that allow anyone to either withdraw ether or control the destination of a delegatecall. These three vulnerabilities share the same issue, namely the unprotected access to a critical operation. The idea is therefore to add the missing logic that limits the access to a critical operation to only a single identity, for example, the creator of the smart contract. Fig. 4b depicts a patched version of the function `kill`. A new state variable `owner` has been added (line 2) as well as a constructor (lines 4-6) in order to initialize the variable `owner` during deployment with the address of the contract creator. Finally, a check has been added at line 9 to verify if `msg.sender` is equivalent to the address stored in the variable `owner`. Similar to reentrancy, this approach requires the identification of free storage space to be able to introduce the new state variable `owner`. Nevertheless, a new challenge arises, namely the necessity to not only modify the runtime bytecode but also the deployment bytecode in order to be able to initialize the variable `owner` at deployment (cf. Section IV for more details on modifying the deployment bytecode).

### C. Patching Arithmetic Bugs

Arithmetic bugs such as integer overflows and underflows are a common issue in smart contracts. In 2018, several ERC-20 token smart contracts have been victims to attacks due to integer overflows [33]. The code snippet in Fig. 5a, provides an example of a function that is vulnerable to an integer overflow at line 5. The function `buy` is missing a check

```

1 mapping (address => uint32) public tokens;
2 ...
3 function buy(uint32 amount) public {
4   require(msg.value == amount);
5   tokens[msg.sender] += amount;
6 }

```

(a) Before Patching

```

1 mapping (address => uint32) public tokens;
2 ...
3 function buy(uint32 amount) public {
4   require(msg.value == amount);
5   tokens[msg.sender] += amount;
6 }

```

(b) After Patching

Fig. 5: (a) Example of a function vulnerable to an integer overflow due to a missing bounds check guarding the update of `tokens[msg.sender]`. (b) Example of a function not vulnerable to integer overflows due to an added bounds check guarding the update of `tokens[msg.sender]`.

that verifies if the value contained in `tokens[msg.sender]` would overflow if `amount` would be added. A common way to ensure that unsigned integer operations do not wrap, is to use the *SafeMath* library provided by OpenZeppelin [30]. For example, in the case of addition, the library performs a post-condition test, where it first computes the result of  $a + b$  and then checks if the result is smaller than  $a$ . If this is the case, then an overflow has happened and the library halts and reverts the execution. However, Solidity allows developers to make use of smaller types (e.g., `uint32`, `uint16`, etc.) in order to use less storage space and therefore reduce costs, despite the EVM being able to operate only on 256-bit values. As a result, the Solidity compiler artificially enforces the wrapping of integers on these smaller types to be consistent with the wrapping performed by the EVM on types of 256-bit. Unfortunately, the checks provided by the *SafeMath* library only work with values of type `uint256` and do not protect the developers from integer overflows caused by variables of smaller types. Moreover, Solidity enables integer variables to be unsigned or signed, but *SafeMath* only checks for unsigned integers. Therefore, in order to be able to patch any type of integer overflow, we need to be capable of inferring the size and the signedness (i.e., signed or unsigned) of an integer variable. While this is trivial when working with source code, it becomes challenging when working with bytecode, where high-level information such as size and signedness are not directly accessible. The idea of our approach is to leverage bytecode level taint analysis in order to infer the size as well as the signedness of integer variables (cf. Section IV for more details on integer type inference). Once the size and the signedness are determined, we can generate a patch that verifies if an arithmetic operation is in bounds with respect to size and signedness. For example, Fig. 5b depicts a patched version of the function `buy`. First, we compute the

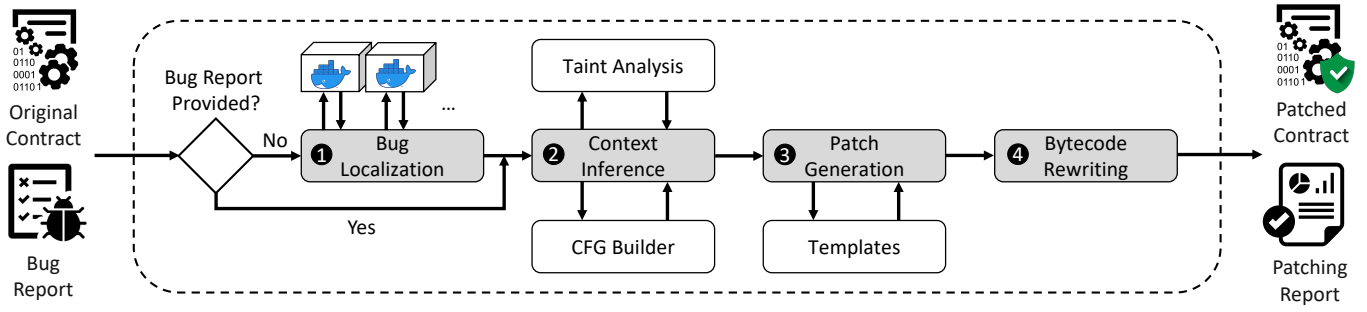


Fig. 6: Architecture of ELYSIUM. The shaded boxes represent the four main steps of ELYSIUM.

bounds by subtracting the value of `tokens[msg.sender]` from the largest possible value of an unsigned 32-bit integer (i.e.,  $2^{32} - 1$ ) (line 5). Afterwards, we check if `amount` is smaller or equal to the computed bounds (line 6). If `amount` is not within the computed bounds, then we halt and revert the execution. Otherwise, the addition at line 7 is considered safe and we continue the execution.

#### D. Patching Unchecked Low Level Calls Bugs

```

1 uint public prize;
2 address public winner;
3 bool public claimed = false;
4 ...
5 function claimPrize() public {
6     require(!claimed && msg.sender == winner);
7     msg.sender.send(prize);
8     claimed = true;
9 }

```

(a) Before Patching

```

1 uint public prize;
2 address public winner;
3 bool public claimed = false;
4 ...
5 function claimPrize() public {
6     require(!claimed && msg.sender == winner);
7     claimed = true;
8 }

```

(b) After Patching

Fig. 7: (a) Example of a function vulnerable to an unhandled exception due to a missing return value check on `send`. (b) Example of a function not vulnerable to unhandled exceptions due to an added return value check on `send`.

An unchecked low level call, also known as an unhandled exception, occurs whenever the return value of a call is not checked. A call can fail due to several reasons: an out-of-gas exception, a revert triggered by the called contract, etc.. A developer should therefore never assume that a call is always successful, but should always check the return value and handle the case when the call fails. A prominent example of an unhandled exception is the "King of the Ether Throne" smart contract, which did not check if payments had failed

and continued processing, making callers of the contract King despite the compensation payment not having been sent to the previous monarch [22]. The function `claimPrize()` in Fig. 7a does not check if `prize` has been rightfully sent to `msg.sender` (cf. line 7). As a result, the variable `claimed` is set to `true`, while `msg.sender` has not received the prize. Fortunately, patching an unchecked low level call is rather trivial. A patched version of the function is shown in Fig. 7b. The patch surrounds the `send` with a `require`, which will halt the execution and revert the state in case `send` is not successful. Please note that, while this patches the unchecked low level call, the use of `require` can make in this case the contract vulnerable to denial-of-service attacks if calling `msg.sender` will always fail.

## IV. DESIGN AND IMPLEMENTATION

In this section, we provide details on the overall design and implementation of ELYSIUM.

### A. Design and Implementation Overview

An overview of ELYSIUM's architecture is depicted in Fig. 6. ELYSIUM takes as input a smart contract as well as an optional bug report and outputs a patched smart contract together with a patching report. The input smart contract can be either bytecode or Solidity source code. The latter, will be compiled into bytecode before performing any analysis or patching. The patched smart contract consists of the patched version of the bytecode of the original smart contract. The patching report contains information about execution time and the individual patches that have been applied. ELYSIUM's patching process follows four main steps: ① *bug localization*, ② *context inference*, ③ *patch generation*, and ④ *bytecode rewriting*. The bug localization step is responsible for detecting and localizing bugs in the bytecode. This step is skipped in case a bug report is provided. The context inference step is in charge of building the Control-Flow Graph (CFG) from the bytecode and inferring from the CFG context related information, such as integer types and free storage space, by leveraging taint analysis. The patch generation step is responsible for creating patches by inserting previously inferred context information within given patching templates. Finally, as a last step, the bytecode rewriting is in charge of injecting the generated patches into the original CFG and translating it

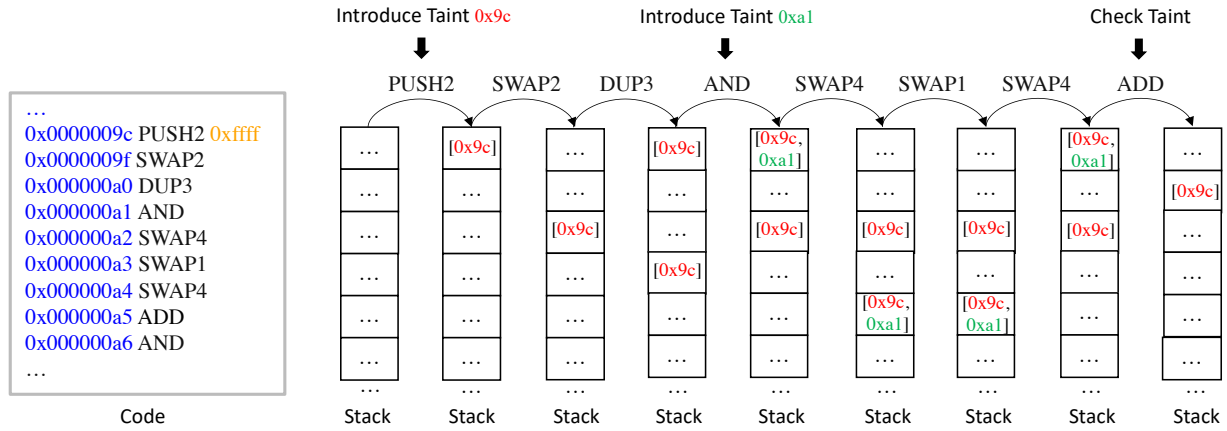


Fig. 8: An example on the usage of taint analysis to infer integer types from bytecode.

back to bytecode. ELYSIUM is written in Python and consists of roughly 1,600 lines of code<sup>1</sup>. In the following, we describe each of the four steps in more detail.

### B. Bug Localization

In order to be able to patch bugs, ELYSIUM first needs to know the exact location of a bug as well as its type. One option is to implement our own bug detection solution. However, this option is time consuming and error-prone. Another option is to make use of already existing bug detection solutions for smart contracts and to simply incorporate them into ELYSIUM. This approach has the advantage of bringing in modularity by decoupling the detection process from the patching process. This also makes it easy to extend ELYSIUM with other or future security analysis tools. ELYSIUM leverages the following three well-known smart contract analysis tools to detect and localize bugs: OSIRIS [12] to detect integer overflows, OYENTE [25] to detect reentrancy, and MYTHRIL [26] to detect unhandled exceptions, transaction origin, suicidal contracts, leaking ether, and unsafe delegatecalls. These tools are provided to ELYSIUM as Docker images. ELYSIUM spawns each tool as a separate Docker container, and once a tool has finished running, the output of the tool is parsed and bug information such as the exact location in the bytecode where the vulnerability is located (i.e., program counter) and the type of vulnerability (e.g., reentrancy, integer overflow due to subtraction, etc.) is extracted. This information is then added to a bug report and used by the subsequent steps. Please note that, one can also directly provide a manually crafted bug report to ELYSIUM. In such a case, ELYSIUM will skip the bug localization step and will directly forward the bug report to the subsequent steps. A user only has to ensure that the bug report follows ELYSIUM’s JSON format and that it contains the aforementioned information: *bug location* and *bug type*.

### C. Context Inference

To effectively patch vulnerabilities related to reentrancy, access control, and integer overflows, we require some context related information. We gather this information by traversing the CFG and leveraging taint analysis to infer information about integer types and free storage space. We build the CFG by using the *EVM CFG Builder* python library [18].

*Integer Type Inference.* Integer type information is composed of a size (e.g., 32-bit for type `uint32`) and a signedness (e.g., signed for type `int` and unsigned for type `uint`). Both are essential in order to correctly check whether the result of an arithmetic operation is either in-bound or out-of-bound. However, type information is usually lost during compilation and it is therefore only available at the source code level. Fortunately, we can leverage some behavioral patterns of the Solidity compiler in order to infer the size as well as the signedness of integers. For example, for unsigned integers, we know that the compiler introduces an AND bitmask in order to “mask off” bits that are not in-bounds with the integer’s size (i.e., a zero will mask off the bit, whereas a one will leave the bit set). Thus, a variable of type `uint32` will result in the compiler adding to the bytecode a PUSH instruction that pushes a bitmask with the value `0xffffffff` onto the stack followed by an AND instruction. Hence, from the AND instruction we infer that it is an unsigned integer and from the bitmask we infer that its size is 32-bit, since  $0xffffffff = 2^{32} - 1$ . For signed integers, the compiler will introduce a sign extension via the `SIGNEXTEND` instruction. A sign extension is the operation of increasing the number of bits of a binary number while preserving the number’s sign and value. The EVM uses two’s complement to represent signed integers. In two’s complement, a sign extension is achieved by appending ones to the most significant side of the number. The number of ones is computed using  $256 - 8(x + 1)$ , where  $x$  is the first value passed to `SIGNEXTEND`. For example, a variable of type `int32` will result in the compiler adding to the bytecode a PUSH instruction that pushes the value 3 onto the stack followed by a `SIGNEXTEND`. Hence, from the

<sup>1</sup>ELYSIUM will be publicly released under an open source license.

TABLE II: Patch templates currently provided by ELYSIUM.

Vulnerability	Patch Template	Source Code Representation
Reentrancy	<pre>{ "delete": "", "insert": "free_storage_location SLOAD PUSH1_0x1 EQ ISZERO PUSH_jump_loc_1 JUMPI PUSH1_0x1 DUP1 REVERT JUMPDEST_jump_loc_1 PUSH1_0x1 free_storage_location SSTORE", "insert_mode": "before" } ... { "delete": "", "insert": "PUSH1_0x0 free_storage_location SSTORE", "insert_mode": "after" }</pre>	...
Transaction Origin	<pre>{ "delete": "ORIGIN", "insert": "CALLER", "insert_mode": "before" }</pre>	
Suicidal, Leaking & Unsafe Delegatecall	<pre>{ "delete": "", "insert": "CALLER free_storage_location SSTORE", "insert_mode": "after" } ... { "delete": "", "insert": "free_storage_location SLOAD PUSH20_0xffffffffffffffffffffffffffffffff ffffffff AND CALLER EQ PUSH_jump_loc_1 JUMPI PUSH1_0x1 DUP1 REVERT JUMPDEST_jump_loc_1", "insert_mode": "before" }</pre>	...
Integer Overflow (Addition)	<pre>{ "delete": "", "insert": "DUP2 DUP2 integer_bounds SUB LT ISZERO PUSH_jump_loc_1 JUMPI PUSH1_0x1 DUP1 REVERT JUMPDEST_jump_loc_1", "insert_mode": "before" }</pre>	
Integer Overflow (Multiplication)	<pre>{ "delete": "", "insert": "DUP2 DUP2 MUL integer_bounds AND DUP3 ISZERO DUP1 PUSH_jump_loc_1 JUMPI POP DUP3 SWAP1 DIV DUP2 EQ JUMPDEST_jump_loc_1 PUSH_jump_loc_2 JUMPI PUSH1_0x1 DUP1 REVERT JUMPDEST_jump_loc_2", "insert_mode": "before" }</pre>	
Integer Underflow	<pre>{ "delete": "", "insert": "DUP2 DUP2 LT ISZERO PUSH_jump_loc_1 JUMPI PUSH1_0x1 DUP1 REVERT JUMPDEST_jump_loc_1", "insert_mode": "before" }</pre>	
Unhandled Exception	<pre>{ "delete": "", "insert": "DUP1 ISZERO ISZERO PUSH_jump_loc_1 JUMPI PUSH1_0x1 DUP1 REVERT JUMPDEST_jump_loc_1", "insert_mode": "after" }</pre>	

SIGNEXTEND instruction we infer that it is a signed integer and from the value 3 we infer that its size is 32-bit, by solving the following equation:  $y = 8(x+1)$ , where in this case  $x = 3$ . Knowing these patterns, we can use taint analysis to infer integer type information at the bytecode level. First, we iterate in a Breadth First Search (BFS) manner through the CFG until we find the basic block that contains the instruction that is labeled as the bug location. In the case of integer overflows, the instruction at the bug location can either be an ADD, a SUB, or a MUL. Afterwards, we use recursion to iterate from the basic block containing the bug back to the root of the CFG, thereby creating along the way a list of all visited instructions. This list of instructions reflects the execution path that has to be taken in order to reach the bug location. Using this execution path, we can apply taint analysis on it, by executing instruction by instruction and simulating in an abstract manner the effects of each instruction on a shadowed stack, memory, and storage. The idea is to introduce taint whenever we come across a PUSH, AND, or SIGNEXTEND instruction. Finally, when we arrive at the instruction of the bug location, we check which tainted values have been propagated up to this

instruction. For example, if the tainted values that reached the bug location include a PUSH and an AND instruction, then we know that it is an unsigned integer and we know its size from the value introduced by the PUSH instruction. Fig. 8 provides an illustrative example on how taint is introduced at address 0x9c and 0xa1, and how it is propagated throughout the stack until it reaches the vulnerable instruction ADD at the address 0xa6.

*Free Storage Space Inference.* Patching reentrancy and access control bugs requires the introduction of an additional state variables at the bytecode level. State variables are associated with EVM storage, a key-value store, where both keys and values are of size 256-bit. In Solidity, statically-sized variables (e.g., everything except mappings and dynamically-sized array types) are laid out contiguously in storage starting from key zero. Moreover, whenever possible, the Solidity compiler packs multiple, contiguous items that need less than 256-bit into a single storage slot. To not collude with existing state variables we need to find which storage keys are already used. To do this, we first extract all the possible execution



paths from the CFG by iterating through it in a Depth First Search (DFS) manner and adding each visited instruction to a list. Each list represents one execution path contained in the CFG. An execution path is terminated whenever we come across a STOP, a RETURN, a SUICIDE, a SELFDESTRUCT, a REVERT, an ASSERTFAIL, or an INVALID instruction. Moreover, whenever we run into a JUMPI instruction we split the execution by creating a copy of the list of instructions visited so far and continue iterating first on one branch and then on the other branch. The EVM provides two different instructions to interact with storage: SLOAD and SSTORE. The former takes as input a storage key from the stack and pushes onto the stack the value stored at that key. The latter takes as input a storage key and a value, and stores the value at the given key. Storage keys are usually pushed onto the stack as constants. Hence, whenever a storage instruction is executed (i.e., SLOAD or SSTORE), a PUSH instruction will be executed before at some point in the execution with the goal of pushing the storage key onto the stack for the storage instruction to use. Our idea is therefore to run our taint analysis on all the collected execution paths and to introduce taint whenever we execute a PUSH instruction. The taint includes the PUSH instruction and will be propagated across stack as well as memory. Eventually, we will reach a storage instruction, where we then simply check the taint and infer the used storage key from the propagated PUSH instruction. Afterwards, we add the inferred key to the list of identified storage keys  $sk$ . Finally, after having analyzed all execution paths, we can compute the next available free storage key as  $k = \max(sk) + 1$ . This approach ensures that we do not collide with existing storage keys and it preserves the contiguous layout of state variables in Ethereum smart contract.

#### D. Patch Generation

To generate patches, we use a combination of template-based and semantic patching. TABLE II provides an overview of all templates currently offered. A patch template is selected according to the vulnerability type that is to be patched. ELYSIUM includes templates for seven vulnerability types. Moreover, existing templates can be modified or new ones added in order to patch vulnerabilities that are not supported yet by ELYSIUM. We developed our own domain-specific language (DSL) that enables users to write their own context-aware patch templates. The structure of a patch template consists of a sequence of instructions to be deleted, a sequence of instructions to be inserted, and an insert mode. The latter determines whether the instruction sequence to be inserted should be inserted before or after the bug location. Our DSL is a combination of the mnemonic representation of EVM instructions and custom keywords that act as place holders for context dependent information. We leverage the *pyevmasm* library [19] to translate the mnemonic representation of EVM instructions into EVM bytecode. The following four keywords exist: `free_storage_location`, `integer_bounds`, `PUSH_jump_loc_{x}`, and `JUMPDEST_jump_loc_{x}`. The `free_storage_location` keyword is used to get

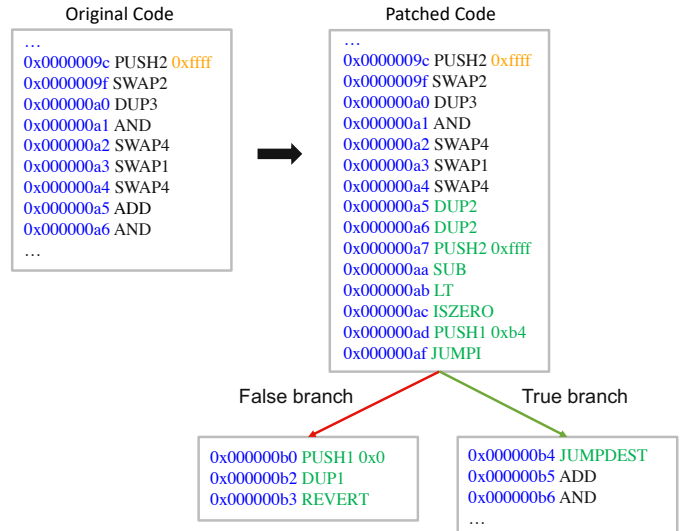


Fig. 9: An example on bytecode rewriting, where a guard is added to an unguarded ADD instruction using the *integer overflow (addition)* patch template.

the current free storage location and it is automatically replaced with a PUSH instruction that pushes the current free storage location onto the stack when generating the patch. The `integer_bounds` keyword is used to get the integer bounds on the instruction at the bug location and it is automatically replaced with a PUSH instruction that pushes the inferred integer bounds onto the stack when generating the patch. The `PUSH_jump_loc_{x}` and `JUMPDEST_jump_loc_{x}` keywords work in conjunction. They are used to mark jumps across instructions within a template. The `PUSH_jump_loc_{x}` keyword is replaced in the bytecode rewriting step with a PUSH instruction that pushes the jump address of the `JUMPDEST_jump_loc_{x}` keyword. The `JUMPDEST_jump_loc_{x}` keyword simply acts as a marker and is afterwards replaced with a normal JUMPDEST instruction.

#### E. Bytecode Rewriting

Ethereum smart contracts are always statically linked, meaning that the bytecode already includes all the necessary library code that is needed at runtime. This makes EVM bytecode rewriting easier than compared to traditional programs. Nonetheless, rewriting EVM bytecode still poses some challenges. Similar to traditional programs, EVM bytecode uses addresses to reference code and data in the bytecode. Thus, when modifying the bytecode, one must ensure that the addresses that reference code and data are either adjusted or preserved. There are two popular ways to deal with this issue. One solution is to preserve the layout of the existing bytecode by copying the basic block that is to be modified at the end of the bytecode. Afterwards, we replace the code of the original basic block with a jump to the copied basic block, and if needed we fill up the original basic block with useless

instructions (e.g., `INVALID`, `JUMPDEST`, etc.) to preserve the original size. The modifications are then performed on the copied basic block that resides at the end of the bytecode. At the end of the modified basic block, we jump back to the end of the original basic block such that the rest of the original bytecode can be further executed. This technique is known as "trampoline" technique and it is the least invasive, since no address references need to be adjusted. However, one of the disadvantages is that the original basic block needs to be large enough to at least hold the logic to jump to the end of the bytecode. Another disadvantage, is the tremendous size increase of the bytecode. While this is less important in traditional programs, for smart contracts this has a monetary impact. The technique will add useless instructions, so-called "dead code", to preserve the layout, however, this will also result in higher deployment costs. We decided to opt for a more efficient solution in terms of deployment and transaction costs, by modifying the bytecode directly at the bug location. However, this technique requires the correct identification of broken address references and the subsequent adjustment according to the new bytecode layout. Before patching the bytecode, we create a so-called shadow address, a copy of the current address that is associated with each instruction in the CFG. Then, we scan the CFG for the basic block that is associated with the bug location. Afterwards, we modify the basic block by either deleting and/or inserting instructions according to the generated patch. Fig. 9 depicts an example of an original basic block (left hand side) that is vulnerable to an integer overflow at address `0xa5`, and how it is patched (right hand side) by inserting a patch in the form of a guard ranging from address `0xa5` to address `0xb4`. After modifying the basic block, we update all the shadow addresses of all instructions in the CFG whose address is larger than the address of the bug location, with the size of the newly added instructions. For example, for the instruction `ADD` in Fig. 9, we keep track of the original address with the value `0xa5` and update the shadow address to the value `0xb5` (`0xa5 + 16` bytes of newly added instructions). After having patched all the vulnerable basic blocks, we still have to adjust the jump addresses that are pushed onto the stack since some of these might be broken (e.g., not reference to a `JUMPDEST` instruction anymore). We do this in two steps. In the first step, we localize broken jump addresses by iterating through each basic block contained in the CFG and scanning each basic block for `JUMPDEST` instructions where the original address is different than the shadow address. In the second step, we iterate through each basic block contained in the CFG and scan each basic block for `PUSH` instructions whose push value is equivalent to the original address and replace the push value with the shadow address. Finally, we convert the patched CFG back to bytecode, by first sorting the basic blocks in ascending order according to their starting, and then translating each EVM instruction within the basic block to their bytecode representation. However, remember that the deployment bytecode copies during deployment the entire runtime bytecode of the smart contract into memory. Thus, as the size of the

runtime bytecode has changed, the deployment bytecode also needs to be adapted to copy the new amount of runtime bytecode. We do so by scanning the deployment bytecode for the following consecutive sequence of instructions: `PUSH DUP1 PUSH PUSH CODECOPY`. The first `PUSH` instruction determines the amount of bytes to be copied, the second `PUSH` instruction determines the offset from where the bytes should be copied, and the third `PUSH` instruction determines to which offset destination in memory the bytes should be copied. We update the deployment bytecode by replacing the value of the first `PUSH` instruction with the new size of the runtime bytecode. The second `PUSH` instruction is only updated if the deployment bytecode has also been patched (e.g., constructor code has been added as part of a patch template).

## V. EVALUATION

In this section, we evaluate the effectiveness, correctness, and efficiency of ELYSIUM by answering the following three research questions:

- RQ1: Effectiveness.** How effective is Elysium in eliminating vulnerabilities from vulnerable smart contracts?
- RQ2: Correctness.** Can Elysium assure the correct and intended execution of the patched smart contract?
- RQ3: Costs.** What are the additional costs introduced by Elysium in terms of bytecode size and gas consumption?

### A. Experimental Setup

*Baselines.* We compare ELYSIUM to the tools listed in Table III. Most tools, including ELYSIUM, have their bug localization outsourced, meaning that they leverage existing security analysis tools to detect and localize bugs. SGUARD is the only tool that leverages its own bug localization. While ELYSIUM, EVMPATCH, and SMARTSHIELD insert their patches at the bytecode level, other tools such as SCREPAIR and SGUARD insert their patches at the source code level. Almost all tools, except for SCREPAIR, use a template-based approach to introduce their patches. However, some tools such as ELYSIUM, SMARTSHIELD, and SGUARD use a combination of template-based and semantic-aware patching. The source code of EVMPATCH is not publicly available. Nonetheless, the authors released a public dataset with their results for comparison [44]. SMARTSHIELD is only available upon request. While the source code of SCREPAIR is publicly available, we did not manage to compile it. Both ELYSIUM and SGUARD are (will be) publicly available under an open source license. None of the aforementioned tools, except ELYSIUM, are able to patch all the vulnerabilities mentioned in this paper. For example, while SMARTSHIELD and SCREPAIR provide means to patch integer overflows, reentrancy, and unhandled exceptions, they do not provide means to patch access control related bugs such as transaction origin or unsafe `delegatecall`. Moreover, some tools only provide partial patching capabilities for a given type of vulnerability. For instance, all tools, except ELYSIUM, only support the patching of 256-bit unsigned integers and do not support integers of

TABLE III: A comparison of the individual patching tools evaluated in this work.

Toolname	Bug Localization	Patching Level	Approach	Availability	Vulnerabilities						
					IO	RE	UE	TO	SU	LE	UD
EVMPATCH [38]	Outsourced	Bytecode	Template	Not Available	●	○	○	○	●	●	●
SMARTSHIELD [49]	Outsourced	Bytecode	Template/Semantics	On Request	●	●	●	○	○	○	○
SCREPAIR [48]	Outsourced	Source Code	Mutation	Open Source <sup>†</sup>	●	●	○	○	○	○	○
SGUARD [28]	Insourced	Source Code	Template/Semantics	Open Source	●	●	○	●	○	○	○
ELYSIUM	<b>Outsourced</b>	<b>Bytecode</b>	Template/Semantics	<b>Open Source</b>	●	●	●	●	●	●	●

<sup>†</sup> Publicly available source code does not compile. ○ Not supported. ● Patching partially supported. ● Patch template must be specified manually. ● Fully automatic patching supported. **IO**: integer overflow, **RE**: reentrancy, **UE**: unhandled exception, **SU**: suicidal, **LE**: leaking, **UD**: unsafe delegatecall.

TABLE IV: CVE dataset overview.

Contract	CVE	Bugs	Transactions		
			Total	Benign	Attacks
BEC	2018-10299	1	409,837	409,836	1
SMT	2018-10376	1	34,164	34,163	1
UET	2018-10468	8	23,725	23,670	55
SCA	2018-10706	9	281	280	1
HXG	2018-11239	4	1,284	1,274	10

TABLE V: SMARTBUGS dataset overview.

Category	Contracts	Vulnerabilities		
		Annotated	Detected	Overlap
Reentrancy	31	32	29	<b>28</b>
Access Control	18	19	12	<b>12</b>
Integer Overflow	15	23	20	<b>15</b>
Unhandled Exception	52	75	21	<b>21</b>
<b>Total</b>	<b>116</b>	<b>149</b>	<b>82</b>	<b>76</b>

TABLE VI: HORUS dataset overview.

Category	Contracts	Transactions		
		Total	Benign	Attacks
Reentrancy	46	11,529	9,021	2,508
Access Control	589	4,385	2,533	1,852
– Parity Wallet Hack 1	585	4,123	2,509	1,614
– Parity Wallet Hack 2	238	710	472	238
Integer Overflow	125	52,167	51,724	443
Unhandled Exception	1,068	93,268	90,168	3,100
<b>Total Unique</b>	<b>1,823</b>	<b>160,657</b>	<b>152,845</b>	<b>7,823</b>

smaller size. Another example is reentrancy, where tools such as SMARTSHIELD and SCREPAIR only provide support for patching same-function reentrancy. Furthermore, some tools such as EVMPATCH require developers to write contract specific patches for access control related bugs and therefore do not provide generic fully automatic patching. ELYSIUM on the other hand, provides complete support and fully automatic patching for all vulnerabilities.

*Datasets.* We run our experiments leveraging three different datasets. The first dataset is the CVE dataset [44] used by Rodler et al. We chose this dataset in order to be able to compare our tool with EVMPATCH. It consists of real-world ERC-20 token contracts that were victims of integer overflow

attacks. Moreover, the dataset also provides a list of attacking and benign transactions (see TABLE IV). However, the dataset is limited to integer overflows and only contains 5 contracts. The second dataset is the SMARTBUGS dataset [41]. This dataset consists of 116 manually crafted contracts with 149 annotated vulnerabilities across 4 different vulnerabilities (see TABLE V). While the dataset brings in a large diversity of vulnerabilities, it does not contain a list of benign or attacking transactions. The third dataset that we used is the HORUS dataset [3]. The dataset consists of 1,823 unique real-world contracts vulnerable to one of 4 different vulnerabilities, with 160,657 annotated transactions, where 152,845 transactions are benign and 7,823 transactions are attacks (see TABLE VI).

## B. Experimental Results

*RQ1: Effectiveness.* We first measure the effectiveness of ELYSIUM and the other tools on the SMARTBUGS dataset. The dataset only consists of annotated contracts and does not contain attacking nor benign transactions. We therefore first run the bug-finding tools (i.e., OSIRIS, OYENTE, and MYTHRIL) on the contracts and match the reported bugs with the annotated bugs. The overlap marks the validated ground truth (see overlap in TABLE V). From the 149 annotated bugs, only 76 bugs are detected by the bug-finding tools. Moreover, the bug-finding tools reported 6 falsely detected bugs. Next, we patch the contracts by running each of the patching tools and rerun the bug-finding tools on the patched version returned by each patching tool, and mark a bug as successfully patched if the bug-finding tool does not report a bug anymore. TABLE VII shows that ELYSIUM is able to patch 74 out of 76 bugs, whereas SMARTSHIELD and SGUARD can only patch 43 and 32, respectively. We see that SMARTSHIELD has issues in patching reentrancy, whereas SGUARD has issues in patching integer overflows. When

TABLE VII: Results on running bug detection tools on patched contracts from the SMARTBUGS dataset.

Category	SMARTSHIELD	SGUARD	ELYSIUM
Reentrancy	7	28	28
Access Control	-	2	10
Integer Overflow	15	2	15
Unhandled Exception	21	-	21
<b>Total</b>	<b>43</b>	<b>32</b>	<b>74</b>

TABLE VIII: Results on replayed benign and attack transactions from the CVE dataset.

Contract	Benign Transactions			Attack Transactions		
	EVMPATCH	SMARTSHIELD	ELYSIUM	EVMPATCH	SMARTSHIELD	ELYSIUM
BEC	409,836	409,836	409,836	1	1	1
SMT	34,163	34,163	34,163	1	1	1
UET	17,947	17,947	17,947	55	55	55
SCA	280	280	280	1	1	1
HXG	1,248	1,248	1,248	10	10	10

TABLE IX: Results on replayed benign and attack transactions from the HORUS dataset.

Category	Benign Transactions		Attack Transactions	
	SMARTSHIELD	ELYSIUM	SMARTSHIELD	ELYSIUM
Reentrancy	721	7,898	1,883	1,980
Access Control	-	2,048	-	1,850
- Parity Wallet Hack 1	-	2,031	-	1,614
- Parity Wallet Hack 2	-	216	-	236
Integer Overflow	50,394	45,095	397	402
Unhandled Exception	82,341	86,080	2,727	2,900
<b>Total Unique</b>	<b>132,860</b>	<b>140,525</b>	<b>4,965</b>	<b>7,087</b>

considering only the bug types that all three tools have in common, then we count 22, 30, and 43 patched bugs, for SMARTSHIELD, SGuard, and ELYSIUM, respectively. This means that ELYSIUM patches at least 30% more bugs than the other tools. To measure the effectiveness of ELYSIUM and the other tools on the CVE and HORUS datasets, we re-execute the attack transactions of each dataset, once on the original bytecode and once on the patched bytecode returned by each tool. We mark an attack as successfully blocked if the patched bytecode resulted in the transaction being reverted. TABLE VIII shows that EVMPATCH, SMARTSHIELD, and ELYSIUM successfully blocked all attacks for all the contracts within the CVE dataset. TABLE IX shows that ELYSIUM is able to successfully block more attacks than SMARTSHIELD on the HORUS dataset.

*RQ2: Correctness.* We measure correctness by replaying benign transactions on the patched contracts and considering them successful if the result is identical to the result of the original unpatched transaction (with the exception of the patched one using more gas). TABLE VIII shows that EVMPATCH, SMARTSHIELD, and ELYSIUM correctly executed the same number of benign transactions. However, some transactions were not counted because they resulted in an out-of-gas error due to the patched contracts consuming now more gas than originally provided to the transaction. TABLE IX shows for the HORUS dataset, that despite ELYSIUM not being able to correctly execute as much benign transactions on integer overflow as SMARTSHIELD, overall ELYSIUM still executes more benign transactions successfully than SMARTSHIELD.

*RQ3: Costs.* We differentiate between *deployment cost* and *transaction cost*. Deployment cost is associated to the cost when deploying a contract on the blockchain. It is computed

based on the size of the bytecode. The larger the bytecode, the higher the cost. Transaction cost is associated to the cost when executing a function of a smart contract. It is computed based on the gas consumed by the executed instructions. The more expensive instructions executed, the higher the cost. While deployment cost is a one-time cost, transaction cost is a repeating cost. Our goal is therefore to primarily minimize transaction cost when introducing patches. Fig. 10 highlights the deployment cost increase for all datasets. The deployment cost is measured by computing the difference in terms of size between the patched and the original bytecode. We state that the patches introduced by EVMPATCH and SGuard add the largest deployment cost. This is because those tools use templates that have been generated from source code. In contrast, ELYSIUM and SMARTSHIELD, use manually crafted and optimized bytecode level templates that use less instructions. SMARTSHIELD is in most cases the cheapest in terms of deployment cost. For example, SMARTSHIELD only adds on average 4 bytes of overhead for reentrancy on the HORUS dataset, whereas ELYSIUM adds 25 bytes. This is because SMARTSHIELD does not introduce new logic but rather tries to move writes to storage in the code. However, ELYSIUM is still by far more efficient than EVMPATCH and SGuard. Moreover, for unhandled exceptions, ELYSIUM is more efficient than SMARTSHIELD, because of its highly optimized patch template. Fig. 11 highlights the transaction cost increase measured for each dataset. The transaction cost is measured by computing the gas usage difference between the patched and original contract for all successfully executed benign transactions. We state that ELYSIUM adds in almost all cases the smallest overhead in terms of transaction costs. For instance, in the HORUS dataset, ELYSIUM only adds on average 32 gas units of overhead when patching integer overflows, whereas SMARTSHIELD adds 60 gas units (i.e., up to a factor of 1.9). However, we also see that ELYSIUM adds 25,838 gas units on average to patch reentrancy, whereas SMARTSHIELD adds none. This is because ELYSIUM adds two writes to storage that consume together 25,000 gas units.

## VI. RELATED WORK

Framing code patching as a search and optimization problem has led several authors [36], [46] to leverage well-established heuristics and search algorithms to patch smart contracts. SCREPAIR [48] uses a genetic algorithm to find a patch. There are inherent limits in terms of quality and depth of the results. For instance, complex reentrancy patterns,

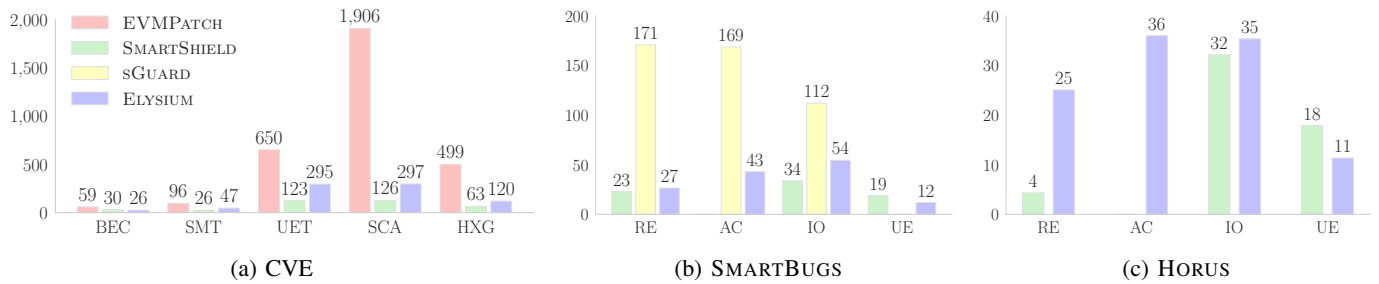


Fig. 10: Deployment cost increase in terms of bytes.

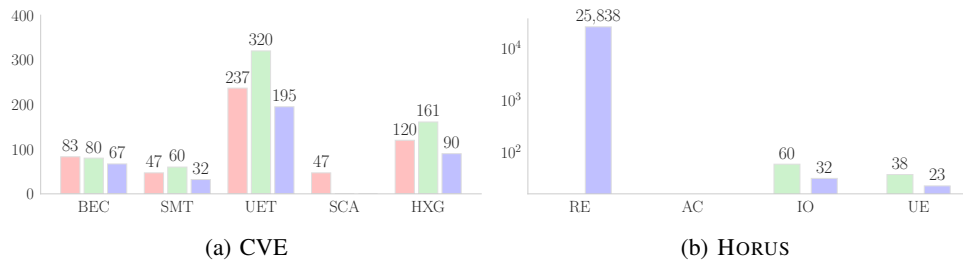


Fig. 11: Transaction cost increase in terms of gas.

such as cross-function reentrancy or faulty access control, cannot be trivially patched and contrary to claims made by SCREPAIR, patches linked to transaction order dependency are not addressed. Moreover, genetic algorithms are notoriously slow since a population of solutions needs to be evolved and this process is entirely random. Several techniques from automated program repair research have been applied to smart contracts. Nguyen et al. [28] present a tool called SGUARD, that patches smart contract vulnerabilities at the source code level. The disadvantage of this approach is that the compiler often adds unnecessary/unoptimized code, increasing bytecode size and thus causing increased deployment and transaction costs. The main difference with our work is that we patch directly at the bytecode level and can highly optimize our patches. Moreover, our tool is language independent, while SGUARD only works for Solidity. Recently, the academic community has shifted its interest to automated patching of EVM level bytecode. For instance, EVMPATCH [38] can patch integer overflow and access control patterns at bytecode level. Integer overflows are patched through hard-coded patches restricted to type `uint256` overflows and underflows. In order to patch access control patterns, the developer is required to use a custom domain-specific language for specifying a contract specific patch. Thus, patching is not fully automated anymore and the developer is required to understand and fix the bug manually. Claims that unhandled exceptions can be patched are not backed by experiments and patching access control bugs (such as suicidal contracts and leaking contracts), is manual and tailored to the specific contract. Our approach is fully automated, covers more classes of bugs, and does not require the kind of manual preparation reported in [38]. Targeting more complex bugs, Zhang et al. [49] presented SMARTSHIELD, which automatically patches integer

overflows, reentrancy bugs, and unhandled exceptions at the bytecode level. The tool is limited to only use hard-coded patches for integer overflows of type `uint256`. We observed in our experiments that SMARTSHIELD has issues in patching reentrancy bugs due the complexity of identifying data and control dependencies across bytecode. Our approach addresses these challenges by leveraging taint analysis at the bytecode level to infer contract related information (e.g., integer bounds and free storage space) and use it to generate automatically contract specific patches.

## VII. CONCLUSION

In this work, we proposed ELYSIUM, a tool to automatically patch smart contracts using context-related information that is inferred at the bytecode level. ELYSIUM is currently able to patch 7 types of vulnerabilities. It can easily be extended by adding further vulnerability detectors and by writing new patch templates using our custom DSL. ELYSIUM has several use cases, e.g., it can be integrated into existing compilers, or it can help developers avoid overwriting existing storage variables when patching an upgradeable smart contract. We compared ELYSIUM to existing tools by patching almost 2,000 contracts and replaying more than 500K transactions. Our results show that ELYSIUM is able to effectively and correctly patch at least 30% more contracts than existing tools. Moreover, when compared to existing tools, the resulting transaction overhead is reduced by up to a factor of 1.9. We leave it to future work, to further optimize the overhead in terms of deployment costs.

## ACKNOWLEDGMENT

We gratefully acknowledge the support from the Ripple University Blockchain Research Initiative (UBRI) and the



## REFERENCES

- [1] N. Atzei, M. Bartoletti, and T. Cimoli, "A Survey of Attacks on Ethereum Smart Contracts (SoK)," in *International conference on principles of security and trust*. Springer, 2017, pp. 164–186.
- [2] L. Brent, A. Jurisevic, M. Kong, E. Liu, F. Gauthier, V. Gramoli, R. Holz, and B. Scholz, "Vandal: A scalable security analysis framework for smart contracts," *arXiv preprint arXiv:1809.03981*, 2018.
- [3] C. Torres, "Horus: A framework to detect attacks and trace stolen assets across Ethereum (FC 2021)," January 2021. [Online]. Available: <https://github.com/christoftorres/Horus>
- [4] T. Chen, R. Cao, T. Li, X. Luo, G. Gu, Y. Zhang, Z. Liao, H. Zhu, G. Chen, Z. He *et al.*, "Soda: A generic online detection framework for smart contracts," in *Proceedings of the Network and Distributed System Security Symposium (NDSS'20)*, 2020.
- [5] M. Coblenz, "Obsidian: a safer blockchain programming language," in *2017 IEEE/ACM 39th International Conference on Software Engineering Companion (ICSE-C)*. IEEE, 2017, pp. 97–99.
- [6] Cornell Blockchain, "Bamboo: a language for morphing smart contracts," May 2018, <https://github.com/CornellBlockchain/bamboo>.
- [7] Cryptopedia, "The DAO: What Was the DAO Hack?" April 2021. [Online]. Available: <https://www.gemini.com/cryptopedia/the-dao-hack-makerdao#section-what-is-a-dao>
- [8] E. W. Dijkstra, "Solution of a problem in concurrent programming control," in *Pioneers and Their Contributions to Software Engineering*. Springer, 2001, pp. 289–294.
- [9] C. Ferreira Torres, M. Baden, R. Norvill, B. B. Fiz Pontiveros, H. Jonker, and S. Mauw, "ÆGIS: Shielding vulnerable smart contracts against attacks," in *Proceedings of the 15th ACM Asia Conference on Computer and Communications Security*, 2020, pp. 584–597.
- [10] C. Ferreira Torres, A. K. Iannillo, A. Gervais, and R. State, "The Eye of Horus: Spotting and Analyzing Attacks on Ethereum Smart Contracts," in *International Conference on Financial Cryptography and Data Security*, 2021.
- [11] C. Ferreira Torres, A. K. Iannillo, A. Gervais, and R. State, "ConFuzzius: A Data Dependency-Aware Hybrid Fuzzer for Smart Contracts," in *2021 IEEE European Symposium on Security and Privacy (EuroS&P)*. IEEE, 2021.
- [12] C. Ferreira Torres, J. Schütte, and R. State, "Osiris: Hunting for integer bugs in ethereum smart contracts," in *Proceedings of the 34th Annual Computer Security Applications Conference*, 2018, pp. 664–676.
- [13] C. Ferreira Torres, M. Steichen, and R. State, "The Art of The Scam: Demystifying Honey pots in Ethereum Smart Contracts," in *28th USENIX Security Symposium (USENIX Security 19)*. Santa Clara, CA: USENIX Association, Aug. 2019, pp. 1591–1607. [Online]. Available: <https://www.usenix.org/conference/usenixsecurity19/presentation/ferreira>
- [14] J. Frank, C. Aschermann, and T. Holz, "ETHBMC: A bounded model checker for smart contracts," in *29th USENIX Security Symposium (USENIX Security 20)*, 2020.
- [15] G. Wood, "Solidity – Solidity 0.8.6 documentation," June 2021, <https://docs.soliditylang.org/en/v0.8.6/>.
- [16] S. Grossman, I. Abraham, G. Golan-Gueta, Y. Michalevsky, N. Rinetzky, M. Sagiv, and Y. Zohar, "Online detection of effectively callback free objects with applications to smart contracts," *Proceedings of the ACM on Programming Languages*, vol. 2, no. POPL, pp. 1–28, 2017.
- [17] J. He, M. Balunović, N. Ambroladze, P. Tsankov, and M. Vechev, "Learning to fuzz from symbolic execution with application to smart contracts," in *Proceedings of the 2019 ACM SIGSAC Conference on Computer and Communications Security*, ser. CCS '19. New York, NY, USA: ACM, 2019, pp. 531–548. [Online]. Available: <http://doi.acm.org/10.1145/3319535.3363230>
- [18] J. Feist, "EVM CFG BUILDER – EVM CFG recovery," March 2021, [https://github.com/crytic/evm\\_cfg\\_builder](https://github.com/crytic/evm_cfg_builder).
- [19] J. Little, "pyevmasm – Ethereum Virtual Machine (EVM) disassembler and assembler," May 2020, <https://github.com/crytic/pyevmasm>.
- [20] B. Jiang, Y. Liu, and W. Chan, "Contractfuzzer: Fuzzing smart contracts for vulnerability detection," in *Proceedings of the 33rd ACM/IEEE International Conference on Automated Software Engineering*. ACM, 2018, pp. 259–269.
- [21] S. Kalra, S. Goel, M. Dhawan, and S. Sharma, "Zeus: Analyzing safety of smart contracts," in *NDSS*, 2018.
- [22] King of the Ether Throne, "KotET - Post-Mortem Investigation," February 2016. [Online]. Available: <https://www.kingoftheether.com/postmortem.html>
- [23] J. Krupp and C. Rossow, "teether: Gnawing at ethereum to automatically exploit smart contracts," in *27th USENIX Security Symposium (USENIX Security 18)*, 2018, pp. 1317–1333.
- [24] LLL, "Ethereum Low-level Lisp-like Language," August 2021, <https://lll-docs.readthedocs.io/en/latest/index.html>.
- [25] L. Luu, D.-H. Chu, H. Olickel, P. Saxena, and A. Hobor, "Making smart contracts smarter," in *Proceedings of the 2016 ACM SIGSAC Conference on Computer and Communications Security*, ser. CCS '16. New York, NY, USA: ACM, 2016, pp. 254–269. [Online]. Available: <http://doi.acm.org/10.1145/2976749.2978309>
- [26] B. Mueller, "Smashing ethereum smart contracts for fun and real profit," in *9th annual HITB Security Conference*, 2018.
- [27] NCC Group, "Decentralized Application Security Project (DASP) Top 10," November 2018. [Online]. Available: <https://dasp.co/index.html>
- [28] T. D. Nguyen, L. H. Pham, and J. Sun, "sGuard: Towards Fixing Vulnerable Smart Contracts Automatically," *arXiv preprint arXiv:2101.01917*, 2021.
- [29] I. Nikolic, A. Kolluri, I. Sergey, P. Saxena, and A. Hobor, "Finding the greedy, prodigal, and suicidal contracts at scale," *arXiv preprint arXiv:1802.06038*, 2018.
- [30] OpenZeppelin, "openzeppelin-contracts/contracts/utils/math/SafeMath," August 2021, <https://github.com/OpenZeppelin/openzeppelin-contracts/blob/master/contracts/utils/math/SafeMath.sol>.
- [31] OpenZeppelin Docs, "Writing Upgradeable Contracts," August 2021, <https://docs.openzeppelin.com/upgrades-plugins/1.x/writing-upgradeable>.
- [32] D. Palmer, "SpankChain Loses \$40K in Hack Due to Smart Contract Bug," October 2018, <https://www.coindesk.com/spankchain-loses-40k-in-hack-due-to-smart-contract-bug>.
- [33] PeckShield Inc, "Peckshield inc. - advisories," August 2021. [Online]. Available: <https://blog.peckshield.com/advisories.html>
- [34] D. Perez and B. Livshits, "Smart contract vulnerabilities: Does anyone care?" *arXiv preprint arXiv:1902.06710*, pp. 1–15, 2019.
- [35] S. Petrov, "Another Parity Wallet hack explained," November 2017, <https://medium.com/@Pr0Ger/another-parity-wallet-hack-explained-847ca46a2e1c>.
- [36] Y. Qi, X. Mao, Y. Lei, Z. Dai, and C. Wang, "The strength of random search on automated program repair," in *Proceedings of the 36th International Conference on Software Engineering*, 2014, pp. 254–265.
- [37] D. Riley, "\$25M in cryptocurrency stolen in hack of Lendf.me and Uniswap," April 2020, <https://siliconangle.com/2020/04/19/25m-cryptocurrency-stolen-hack-lendf-uniswap/>.
- [38] M. Rodler, W. Li, G. Karame, and L. Davi, "EVMPatch: Timely and automated patching of ethereum smart contracts," in *30th USENIX Security Symposium (USENIX Security '21) [To be published]*. Vancouver, B.C.: USENIX Association, Aug. 2021. [Online]. Available: <https://www.usenix.org/conference/usenixsecurity21/presentation/rodler>
- [39] M. Rodler, W. Li, G. O. Karame, and L. Davi, "Sereum: Protecting existing smart contracts against re-entrancy attacks," *arXiv preprint arXiv:1812.05934*, 2018.
- [40] C. Schneidewind, I. Grishchenko, M. Scherer, and M. Maffei, "eThor: Practical and provably sound static analysis of ethereum smart contracts," in *Proceedings of the 2020 ACM SIGSAC Conference on Computer and Communications Security*, 2020, pp. 621–640.
- [41] SmartBugs, "SmartBugs: A Framework to Analyze Solidity Smart Contracts," August 2021. [Online]. Available: <https://github.com/smartbugs/smartbugs>
- [42] N. Szabo, "Formalizing and Securing Relationships on Public Networks," *First Monday*, vol. 2, no. 9, 1997.
- [43] P. Tsankov, A. Dan, D. Drachler-Cohen, A. Gervais, F. Buenzli, and M. Vechev, "Securify: Practical security analysis of smart contracts," in *Proceedings of the 2018 ACM SIGSAC Conference on Computer and Communications Security*. ACM, 2018, pp. 67–82.
- [44] UDE Secure Software System Research Group, "EVMPatch Evaluation Data," December 2020, <https://github.com/uni-due-syssec/evmpatch-eval-data>.
- [45] Vyper, "Pythonic Smart Contract Language for the EVM," August 2021, <https://github.com/ethereum/vyper>.
- [46] W. Weimer, T. Nguyen, C. Le Goues, and S. Forrest, "Automatically finding patches using genetic programming," in *2009 IEEE 31st International Conference on Software Engineering*. IEEE, 2009, pp. 364–374.

- [47] G. Wood, "Ethereum: A secure decentralised generalised transaction ledger," *Ethereum Project - Yellow Paper*, vol. 151, no. 2014, pp. 1–32, 2014.
- [48] X. L. Yu, O. Al-Bataineh, D. Lo, and A. Roychoudhury, "Smart Contract Repair," *ACM Transactions on Software Engineering and Methodology (TOSEM)*, vol. 29, no. 4, pp. 1–32, 2020.
- [49] Y. Zhang, S. Ma, J. Li, K. Li, S. Nepal, and D. Gu, "Smartshield: Automatic smart contract protection made easy," in *2020 IEEE 27th International Conference on Software Analysis, Evolution and Reengineering (SANER)*. IEEE, 2020, pp. 23–34.
- [50] W. Zhao, "\$30 Million: Ether Reported Stolen Due to Parity Wallet Breach," July 2017, <https://www.coindesk.com/30-million-ether-reported-stolen-parity-wallet-breach>.
- [51] G. Zheng, L. Gao, L. Huang, and J. Guan, "Upgradable contract," in *Ethereum Smart Contract Development in Solidity*. Springer, 2021, pp. 197–213.