

A modified limited memory Nesterov's accelerated quasi-Newton

S. Indrapriyadarsini[†], Shahrzad Mahboubi[‡], Hiroshi Ninomiya[‡], Takeshi Kamio[§] and Hideki Asai[†]
 Shizuoka University [†], Shonan Institute of Technology[‡], Hiroshima City University[§]
[†]indra.ipd@gmail.com

I. INTRODUCTION

The Nesterov's accelerated quasi-Newton (L)NAQ [1] method has shown to accelerate the conventional (L)BFGS quasi-Newton method using the Nesterov's accelerated gradient in several neural network (NN) applications. However, the calculation of two gradients per iteration increases the computational cost. An approximation to the Nesterov's accelerated gradient was proposed in [2]. This paper extends the study in [2] by applying the approximation to limited memory NAQ.

II. PROPOSED ALGORITHM (L-MOQ)

The weight update in NAQ is given as $\mathbf{w}_{k+1} = \mathbf{w}_k + \mu_k \mathbf{v}_k + \alpha_k \mathbf{g}_k$, where \mathbf{g}_k is the search direction as in (1).

$$\mathbf{g}_k = \mathbf{H}_k \nabla \mathbf{E}(\mathbf{w}_k + \mu_k \mathbf{v}_k). \quad (1)$$

MoQ [2] showed that (1) can be approximated as

$$\mathbf{g}_k = \mathbf{H}_k [(1 + \mu_k) \nabla \mathbf{E}(\mathbf{w}_k) - \mu_k \nabla \mathbf{E}(\mathbf{w}_{k-1})]. \quad (2)$$

The μ_k value is updated using (3) where θ_{k+1} is obtained by solving (4) with $\theta_0 = 1$ and $\gamma = 10^{-5}$.

$$\mu_k = \theta_k (1 - \theta_k) / (\theta_k^2 + \theta_{k+1}), \quad (3)$$

$$\theta_{k+1}^2 = (1 + \theta_{k+1}) \theta_k^2 + \gamma \theta_{k+1}. \quad (4)$$

In this paper, we propose limited-memory MoQ (L-MoQ) in which (2) is evaluated by the two-loop recursion using the last m curvature pairs (\mathbf{s}, \mathbf{y}) given by,

$$\mathbf{s}_k = \mathbf{w}_{k+1} - (\mathbf{w}_k + \mu_k \mathbf{v}_k) \quad \text{and}$$

$$\mathbf{y}_k = \nabla \mathbf{E}(\mathbf{w}_{k+1}) - [(1 + \mu_k) \nabla \mathbf{E}(\mathbf{w}_k) - \mu_k \nabla \mathbf{E}(\mathbf{w}_{k-1})]. \quad (5)$$

Algorithm 1 Proposed Algorithm

- 1: Calculate $\nabla \mathbf{E}(\mathbf{w}_k)$
 - 2: **while** $\|\nabla \mathbf{E}(\mathbf{w}_k)\| > \epsilon$ and $k < k_{max}$ **do**
 - 3: Calculate α_k using linesearch and μ_k using (4)
 - 4: $\mathbf{r}_k = (1 + \mu_k) \nabla \mathbf{E}(\mathbf{w}_k) - \mu_k \nabla \mathbf{E}(\mathbf{w}_{k-1})$
 - 5: **for** $i = k-1, k-2, \dots, k-m$ **do**
 - 6: $\sigma_i = (\mathbf{s}_i^T \mathbf{r}_k) / (\mathbf{y}_i^T \mathbf{s}_i)$
 - 7: $\mathbf{r}_k = \mathbf{r}_k - \sigma_i \mathbf{y}_i$
 - 8: **end for**
 - 9: $\mathbf{g}_k = \mathbf{H}_k^{(0)} \mathbf{r}_k$
 - 10: **for** $i = k-m, k-m+1, \dots, k-1$ **do**
 - 11: $\beta = (\mathbf{y}_i^T \mathbf{g}_k) / (\mathbf{y}_i^T \mathbf{s}_i)$
 - 12: $\mathbf{g}_k = \mathbf{g}_k - (\sigma_i - \beta) \mathbf{s}_i$
 - 13: **end for**
 - 14: Update $\mathbf{v}_{k+1} = \mu_k \mathbf{v}_k + \alpha_k \mathbf{g}_k$
 - 15: Update $\mathbf{w}_{k+1} = \mathbf{w}_k + \mathbf{v}_{k+1}$
 - 16: Store $\nabla \mathbf{E}(\mathbf{w}_k)$ and calculate $\nabla \mathbf{E}(\mathbf{w}_{k+1})$
 - 17: **end while**
-

TABLE I

SUMMARY OF RESULTS AVERAGED OVER 50 TRIALS.

Method	$E(\mathbf{w})$	iters (k)	fev	gev	time(s)
L-BFGS	0.000091	10000	28398	10001	81.95
L-NAQ	0.000025	9927	20848	19854	95.21
L-MoQ	0.000022	9961	20918	9962	73.73

III. SIMULATION RESULTS

$$f(x_1 \dots x_n) = \frac{\pi}{n} \left\{ \sum_{i=1}^{n-1} [(x_i - 1)^2 (1 + 10 \sin^2(\pi x_{i+1}))] + 10 \sin^2(\pi x_1) + (x_n - 1)^2 \right\}, x_i \in [-4, 4], \forall i. \quad (6)$$

The performance of L-MoQ is evaluated on Levy function (6) using a 5 – 50 – 1 NN with $k_{max} = 10000$, $\epsilon = 10^{-6}$ and $m = 16$. The number of parameters is $d = 351$. Fig. 1 and Table 1 show the average results of 50 trials. The number of function and gradient evaluations are denoted as fev and gev , respectively. The results confirm that the proposed L-MoQ is a good approximation to L-NAQ while having fewer gev and maintaining the same computational cost of L-BFGS i.e., $nd + 4md + 2d + \zeta nd$ and storage cost of $(2m + 1)d$.

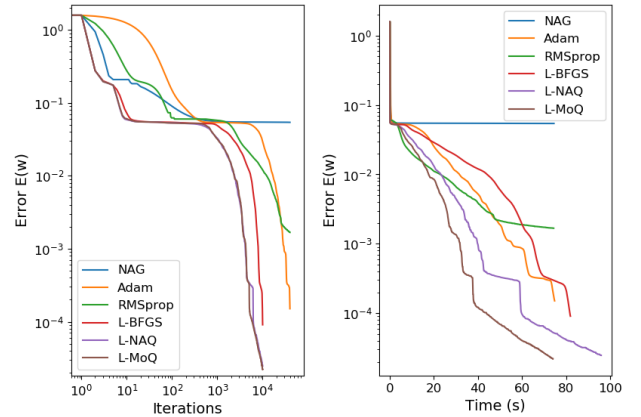


Fig. 1. Average training error over 50 trials.

REFERENCES

- [1] S. Mahboubi et. al., "A novel training algorithm based on limited-memory quasi-Newton method with Nesterov's accelerated gradient in neural networks and its application to highly-nonlinear modeling of microwave circuit." *IARIA Intl' Journal on Adv. in Software*, 11(3-4), pp. 323-334 (2018)
- [2] S. Mahboubi, et. al., "Momentum Acceleration of Quasi-Newton Training for Neural Networks." *Proc. of PRICAI*, Springer, pp. 268-281 (2019).